




---

**RAYCHEM**

# Elexant 4010i

Installation Instructions

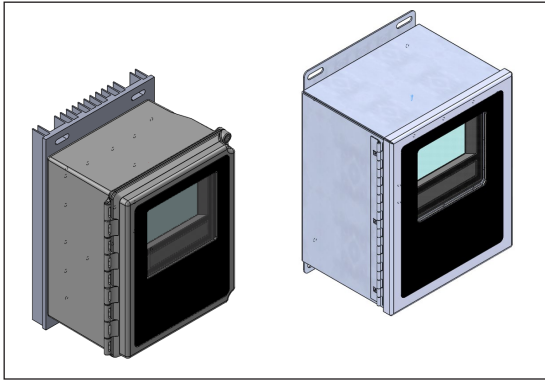

## DESCRIPTION

The nVent RAYCHEM Elexant 4010i is a compact, full-featured, touch screen based, single-point heat-tracing controller. It provides control and monitoring of Electric Heat Tracing (EHT) circuits for both freeze protection and process temperature maintenance. This controller can monitor and alarm on high and low temperature, high and low current, ground-fault levels, voltage, and supports a host of additional features to offer the utmost in control and monitoring of EHT.

## TOOLS REQUIRED

- 3 mm head flat blade screwdriver for IO terminal
- 5 mm head flat blade screwdriver for power terminals

## APPROVALS

### Hazardous Locations (SSR Variants)



Class I, Division 2, Group A,B,C,D T4 Type 4X  
Class I, Zone 2, AEx nA nC [ia Ga] IIC T4 Gc  
Ex ec nC [ia Ga] IIC T4 Gc  
IP64 (FW) IP66 (SW)



DEMKO 18 ATEX 2091 X  
IECEX UL 18 .0098X  
II 3 (1)G Ex ec nC [ia Ga] IIC T4 Gc  
IP64 (FW) IP66 (SW)



### Non-Hazardous Locations (EMR & SSR Variants)



Enclosure Type 4X  
IP64 (FW) IP66 (SW)

### I.S Temperature Sensor Inputs (Optional)

#### Associated Apparatus

#### Entity Parameters

Um = 305VAC  
Uo = 5.4V  
Io = 0.083A  
Ca = 65uF  
La = 2mH

## VARIANTS (NOT ALL VARIANTS ARE AVAILABLE IN ALL REGIONS)

Type	Description
4010i-EMR-FW	Elexant 4010i controller in an 8 in x 10 in FRP enclosure with window and 2-pole 32A EMR. Controls a single circuit with a 2-pole electromechanical relay. (Approved for non-hazardous locations only)
4010i-SSR-FW	Elexant 4010i controller in an 8 in x 10 in FRP enclosure with window and 2-pole 32A 277V SSR. Controls a single circuit with a 2-pole solid-state relay. (Approved for Class I, Div. 2/Zone 2 locations)
4010i-EMR-SW	Elexant 4010i controller in an 8 in x 10 in stainless steel enclosure with window and 2-pole 32A EMR. Controls a single circuit with a 2-pole electromechanical relay. (Approved for non-hazardous locations only)
4010i-SSR-SW	Elexant 4010i controller in an 8 in x 10 in stainless steel enclosure with window and 2-pole 32A 277V SSR. Controls a single circuit with a 2-pole solid-state relay. (Approved for Class I, Div. 2/Zone 2 locations)
4010i-EMR-IS-FW	Elexant 4010i controller in an 8 in x 10 in FRP enclosure with window and 2-pole 32A EMR. Controls a single circuit with a 2-pole electromechanical relay. Includes intrinsically safe barriers on RTD inputs. (Approved for non-hazardous locations only. RTDs may be placed in Class I, Div.2/Zone 2, Div.1/Zone 1 locations)
4010i-SSR-IS-FW	Elexant 4010i controller in an 8 in x 10 in FRP enclosure with window and 2-pole 32A 277V SSR. Controls a single circuit with a 2-pole solid state relay. Includes intrinsically safe barriers on RTD inputs. (Approved for Class I, Div. 2 / Zone 2 locations, RTDs may be placed in Class I, Div. 2/Zone 2, Div. 1/Zone 1 locations)
4010i-EMR-IS-SW	Elexant 4010i controller in an 8 in x 10 in stainless steel enclosure with window and 2-pole 32A EMR. Controls a single circuit with a 2-pole electromechanical relay. Includes intrinsically safe barriers on RTD inputs. (Approved for non-hazardous locations only. RTDs may be placed in Class I, Div. 2/Zone 2, Div. 1/Zone 1 locations)
4010i-SSR-IS-SW	Elexant 4010i controller in an 8 in x 10 in stainless steel enclosure with window and 2-pole 32A 277V SSR. Controls a single circuit with a 2-pole solid-state relay. Includes intrinsically safe barriers on RTD inputs. (Approved for Class I, Div. 2 /Zone 2 locations, RTDs may be placed in Class I, Div. 2/Zone 2, Div.1/Zone 1 locations)
4010i-Mod	Elexant 4010i Module (replacement)
4010i-Mod-IS	Elexant 4010i Module with IS Barrier (replacement)

## WARNING:

This component is an electrical device that must be installed correctly to ensure proper operation and to prevent shock or fire.

## GENERAL

---

Supply voltage	100Vac to 277Vac, +/-10%, 50-60Hz
Internal power consumption	< 24W
Electromagnetic Compatibility	IEC 61326-1:2012 / EN 61326-1:2013

## ENVIRONMENTAL

---

Protection	Type 4X, IP64 (FRP enclosure) Type 4X, IP66 (stainless steel enclosure)
Materials	Fiber-Reinforced Plastic (FRP) or stainless steel (SS304)
Ambient operating temperature	-40°C to 60°C (-40°F to 140°F)
Ambient storage temperature	-55°C to 85°C (-67°F to 185°F)
Relative humidity	0% to 90%, noncondensing
Environment	PD2, CAT III
Max altitude	2,000 m (6,562 ft)

## CONTROL

---

Relay Type	Double-pole, mechanical (EMR versions) Double-pole, solid-state (SSR versions)
Voltage, maximum	277Vac nominal, 50/60Hz
Current, maximum	32A @ 40°C, de-rated to 24A @ 50°C and further de-rated to 16A @ 60°C (EMR) 32A @ 40°C, de-rated to 24A @ 50°C and further de-rated to 16A @ 60°C (SSR)

## TEMPERATURE SENSOR INPUTS

---

Quantity	Three temperature inputs each of which can be individually set to one of the types below.
----------	---

### Types

100Ω platinum RTD	3-wire, $\alpha=0.00385$ ohms/ohm/°C Can be extended with a 3-conductor shielded cable of 20Ω maximum per conductor
100Ω nickel iron RTD	2-wire, $\alpha=0.00599$ ohms/ohm/°C Can be extended with a 2-conductor shielded cable of 20Ω maximum per conductor
100Ω nickel RTD	2-wire, $\alpha=0.00618$ ohms/ohm/°C Can be extended with a 2-conductor shielded cable of 20Ω maximum per conductor
Thermocouple	Requires external 4-20mA converter 4-20mA current loop, $\pm 0.05$ mA, 24Vdc loop power provided in device, external loop power can also be used

Intrinsic Safety Barriers included on RTD Inputs when using IS models.

## RTD Intrinsic Safety Associated Apparatus Entity Parameters

U<sub>o</sub> (Maximum Output Voltage): 5.4V      L<sub>a</sub> (Maximum External Inductance): 2mH  
I<sub>o</sub> (Maximum Output Current): 0.083A      C<sub>a</sub> (Maximum External Capacitance): 65uF  
P<sub>o</sub> (Maximum Output Power): 0.449W

## DIGITAL INPUTS

---

Quantity      Two multi-purpose inputs for connection to external dry (voltage free) contact or DC voltage  
Rating      100 Ω max loop resistance or 5-24Vdc @ 1mA maximum

## OUTPUTS

---

Alarm Relay      Form-C dry contact:      100Vac to 277Vac, 3A, 50/60Hz  
Auxiliary Output      24Vdc, max load of 250mA @ 40°C, de-rated to 165mA @ 60°C

## CONNECTION TERMINALS

---

Power Supply Input      Screw terminals, 24 – 5 AWG (0.2 – 16.8mm<sup>2</sup>)  
Heating Cable output      Screw terminals, 24 – 5 AWG (0.2 – 16.8mm<sup>2</sup>)  
Torque Range for Screw Terminals      1.2 – 1.5 Nm  
Ground (Earth)      Three box lugs, 14 – 2 AWG (2.0 – 33.6 mm<sup>2</sup>)  
Sensor / Other terminals      Cage clamp terminals, 28 – 12 AWG (0.08 – 3.3 mm<sup>2</sup>)  
Minimum Conductor Temp. Rating      80°C

## MOUNTING

---

FRP enclosure with EMR      Surface mounting with four holes on 6.0 in x 10.9 in (152 mm x 278 mm) centers  
Hole diameter: 0.3 in (8 mm)  
FRP enclosure with SSR      Surface mounting with four holes on 5.6 in x 11.0 in (143 mm x 279 mm) centers  
Hole diameter: 0.3 in (8 mm)  
Stainless steel enclosure with EMR      Surface mounting with four holes on 6.0 in x 11.0 in (152 mm x 279 mm) centers  
Hole diameter: 0.3 in (8 mm)  
Stainless steel enclosure with SSR      Surface mounting with four holes on 5.6 in x 11.0 in (143 mm x 279 mm) centers  
Hole diameter: 0.3 in (8 mm)

## CONNECTIONS AND INDICATORS

### A. TB1 Wiring

Terminals	Function
1	TS1 (White)
2	TS1 (Red)
3	TS1 (Red)
4	TS2 (White)
5	TS2 (Red)
6	TS2 (Red)
7	TS3 (White)
8	TS3 (Red)
9	TS3 (Red)
10	No Connect
11	No Connect
12	No Connect

### B. TB2 Wiring

Terminals	Function
1	TC3+
2	TC2+
3	TC1+
4	TC3-
5	TC2-
6	TC1-
7	- No Connect
8	SSR-
9	SSR+
10	DIGITAL INPUT COM
11	DIGITAL INPUT 1
12	DIGITAL INPUT 2
13	RS485 IN+
14	RS485 IN-
15	RS485 COM
16	RS485 OUT+
17	RS485 OUT-
18	RS485 COM


### C. TB3 Wiring

Terminals	Function
1	24V+ OUT
2	⚠ - No Connect
3	⚠ Output Relay
4	24V COM
5	External Jumper Required
6	External Jumper Required
7	⚠ Alarm_NC
8	⚠ Alarm_COM
9	⚠ Alarm_NO

### D. TB4 Wiring

Terminals	Function
1	⚠ EGND
2	⚠ POWER IN (L1)
3	⚠ Power IN (L2/N)
4	⚠ LOAD OUT (L1)
5	⚠ LOAD OUT (L2/N)

**⚠ WARNING: Shock Hazard.**  
Disconnect from live voltage prior to accessing terminals

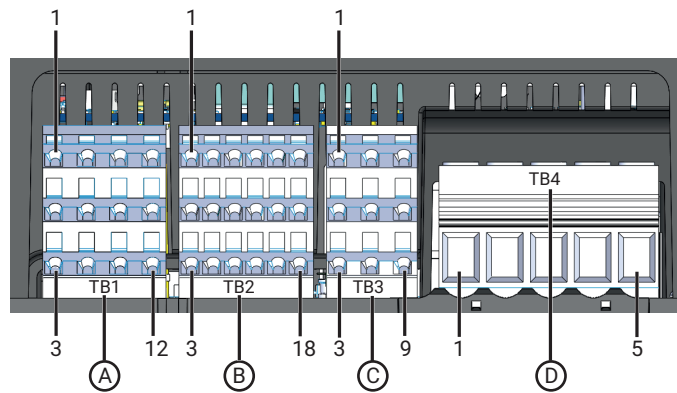

### E. Status LEDs

Status:	Indicates status of Elexant 4010i module
Off	No power
Green	Normal operation, no internal faults
Red	Device Reset
Flash R/G	Unlocked/Calibrated

**Output** Shows status of switched output

### COMM


Flash Green	Receive Active
Flash Red	Transmit Active

### Alarm

Red Illuminates when an alarm is present

### F. USB Connector

### G. Ethernet Connection

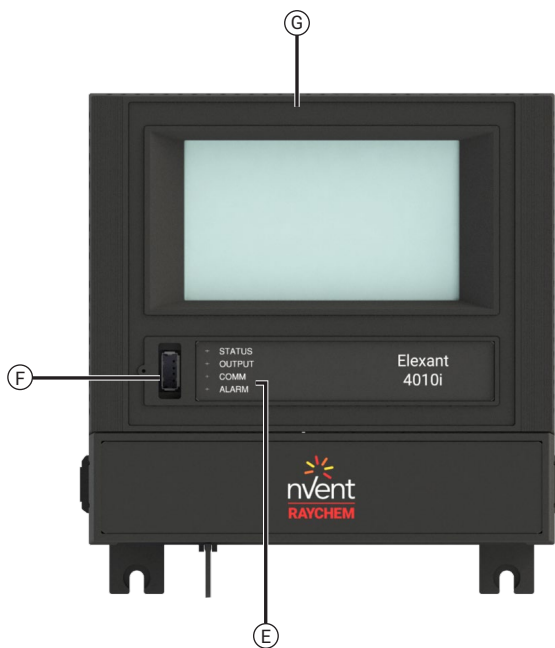

## MOUNTING THE ELEXANT 4010i CONTROLLER

- SSR version should ideally be mounted to channel strut to maximize heat sink ventilation.
- EMR version can be mounted against a flat surface using the attached mounting feet.
- Secure the enclosure using the upper and lower mounting slots in the heat sink or the mounting feet using hex head screws, flat & lock-washers washers or equivalent hardware.

### SSR version

SAE ¼" x 2" long (Grade 2, 5, 8 : Torque to 4 ft-lb, 7 ft-lb, 9ft-lb respectively)


Metric 6mm x 50mm (Grade 4.6, 8.8 : Torque to 6-Nm 12-Nm respectively)

### EMR version


SAE ¼" x ¾" long

Metric 6mm x 20mm


[inches] mm

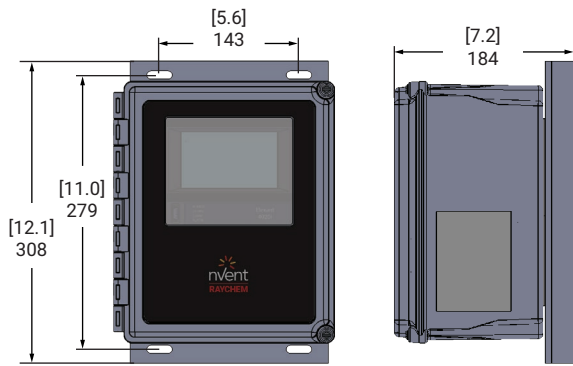


Fiber-Reinforced Plastic (FRP) Enclosure with SSR

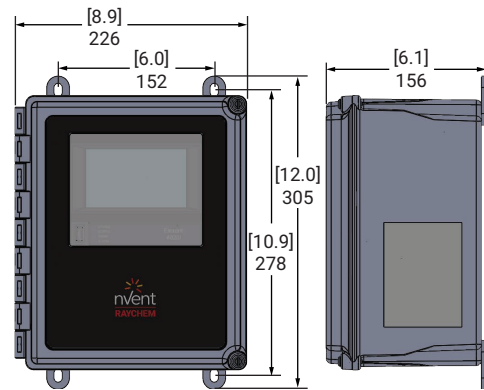

Fiber-Reinforced Plastic (FRP) Enclosure with EMR

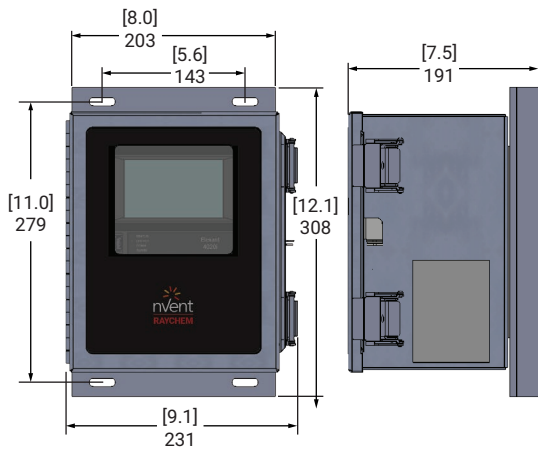

Stainless Steel Enclosure with SSR

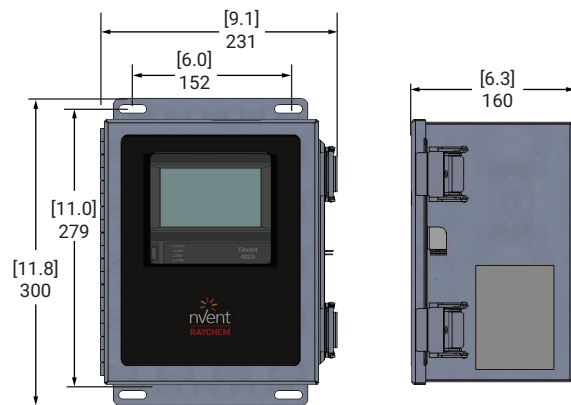


Stainless Steel Enclosure with EMR

## 1. INPUT POWER

The input power connection is made at the screw terminals on TB-4.

Refer to the Connections section on page 3 for terminal block details.

The incoming ground connection should be terminated on the field terminal block located on the mounting plate.

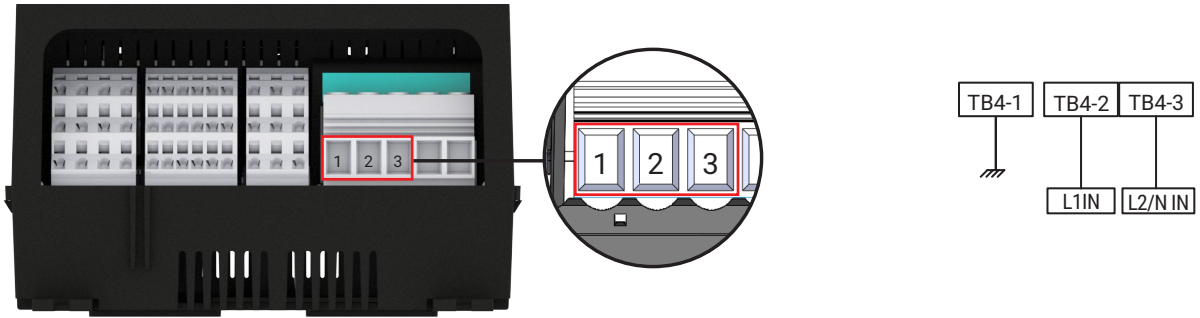


## 2. LOAD CONNECTIONS

Connections made to the load using screw terminals on TB4.

All variants use the same output connection.


Refer to the Connections section on page 3 for terminal block details.

Load ground terminations are to be made on the field terminal block located on the mounting plate.

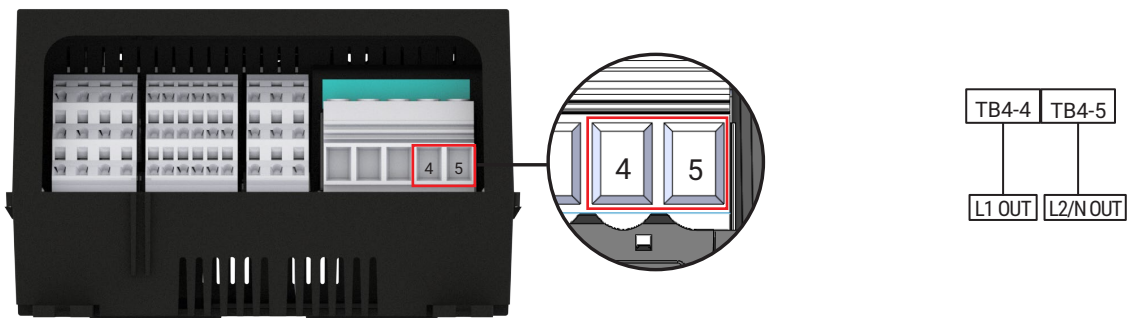


### 3. 3-WIRE RTD CONNECTIONS

Terminate RTD field wires to terminal block TB1.  
Refer to the Connections section on page 3 for terminal block details.  
Terminate cable shields on the field terminal block located on the mounting plate.

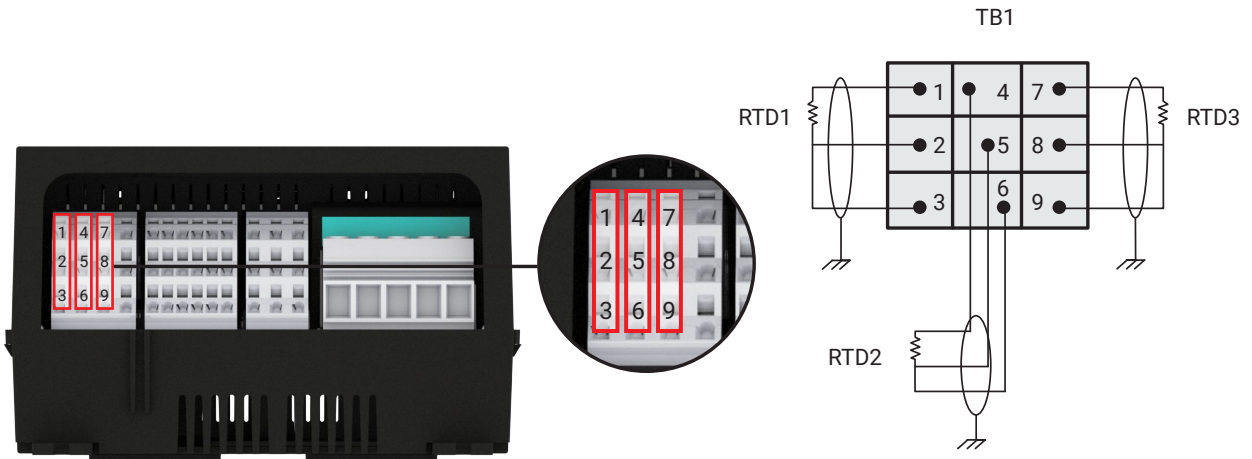

### 4. 2-WIRE RTD CONNECTIONS


Terminate RTD field wires to terminal block TB1.  
Refer to the Connections section on page 3 for terminal block details.  
Terminate cable shields on the field terminal block located on the mounting plate.

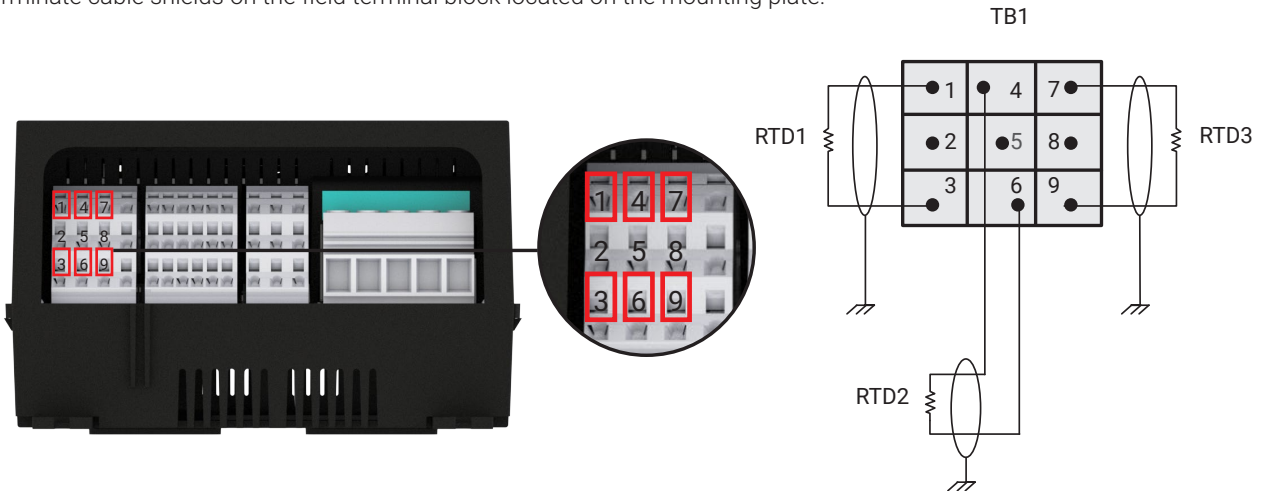



## 5. 4-20 MA CONNECTIONS


Wiring for 4-20mA connections are made directly to the terminal block TB2.  
Refer to the CONNECTIONS section on page 3 for terminal block details.  
Terminate cable shields on the field terminal block located on the mounting plate.

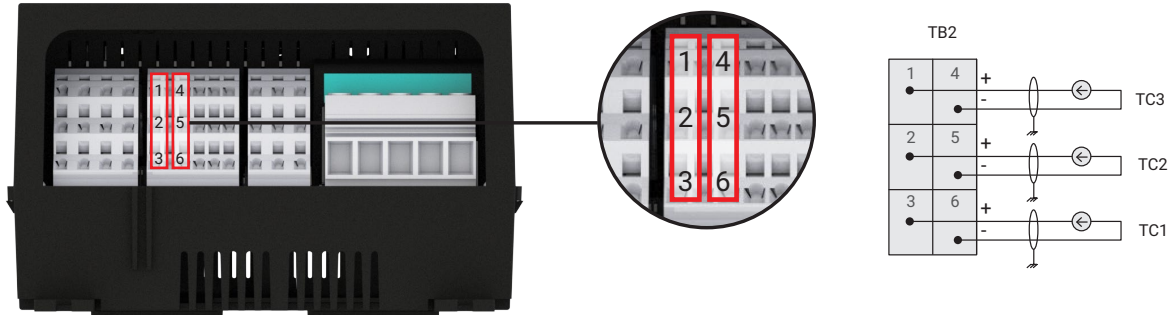

## 6. ALARM RELAY





The multi-purpose alarm relay is energized in the normal state (No Alarms) and is configured as Fail Safe.  
The alarm relay connections provide a Form-C dry contact, rated at 277 V max (3 A).

Refer to the CONNECTIONS section on page 3 for terminal block details.

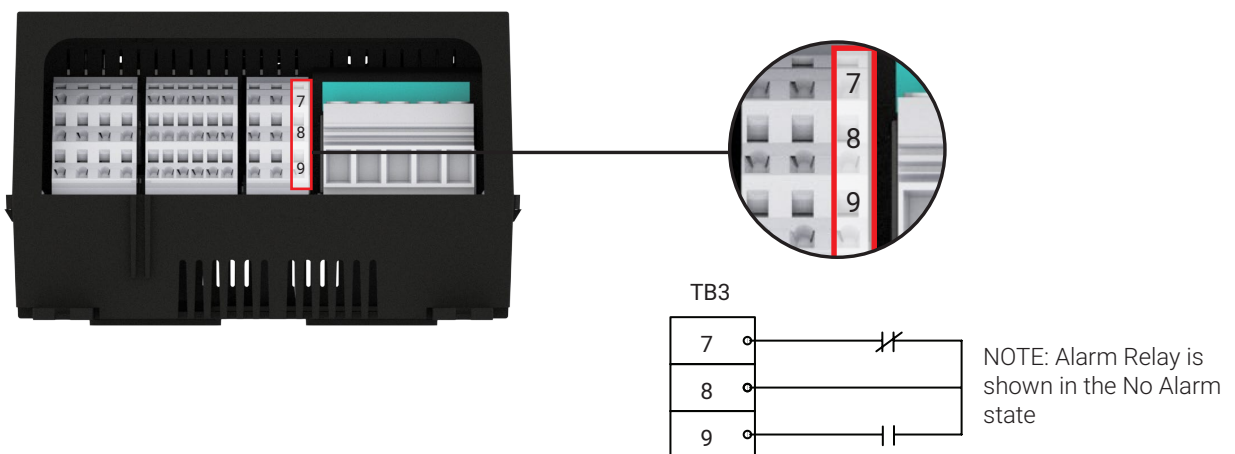

## 7. RS-485 IN




Wiring for RS-485 communications must be made directly to the terminal block TB2.  
No shield wires should be terminated on the terminals of TB2.  
Refer to the Connections section on page 3 for terminal block details.  
Terminate cable shields on the field terminal block located on the mounting plate.

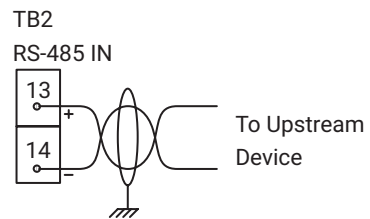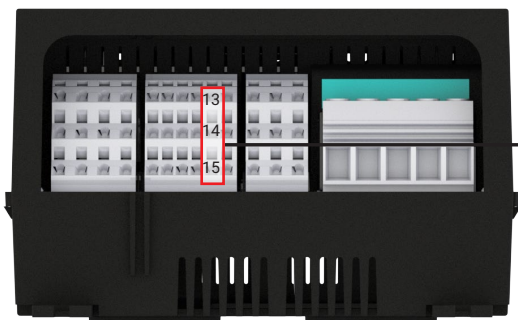

For best performance, an additional third signal ground wire is connected between COM and the signal ground of the upstream device. This wiring method will reduce noise induced through ground potential differences.

## 8. RS-485 OUT


Wiring for RS-485 communications must be made directly to the terminal block TB2.  
No shield wires should be terminated on the terminals of TB2.  
Refer to the Connections section on page 3 for terminal block details.  
Terminate cable shields on the field terminal block located on the mounting plate.

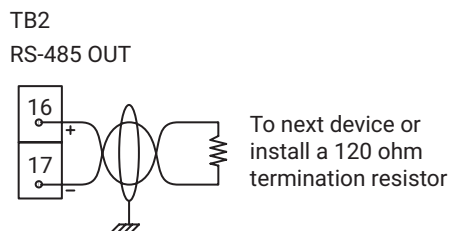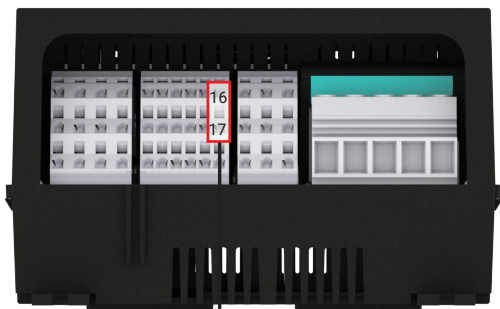

Note: Install a 120 ohm termination resistor as shown if this is the last device in the communications bus

## 9. ETHERNET





An Ethernet connection is made via the RJ45 connector using a CAT 5E cable, terminated with an RJ45 connector.

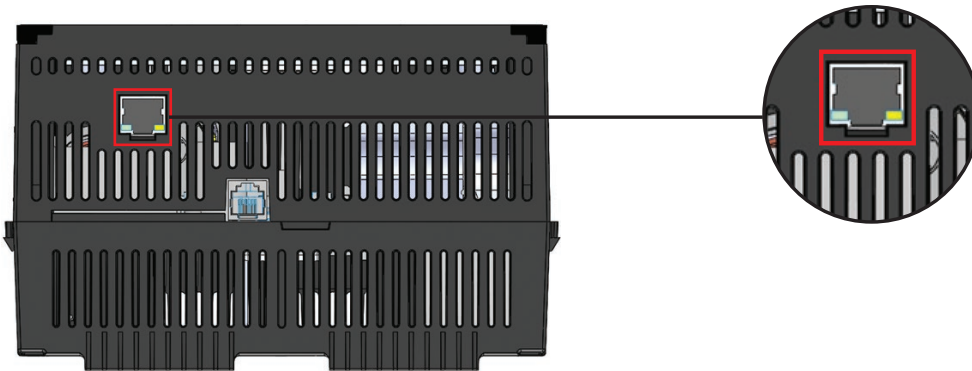

## 10. DIGITAL INPUTS

Digital Inputs      Multi-purpose input for connection to external dry (voltage free) contact or DC voltage.  
 Rating                100  $\Omega$  max loop resistance or 5-24 Vdc @ 1mA maximum


Refer to the CONNECTIONS section for terminal block details.

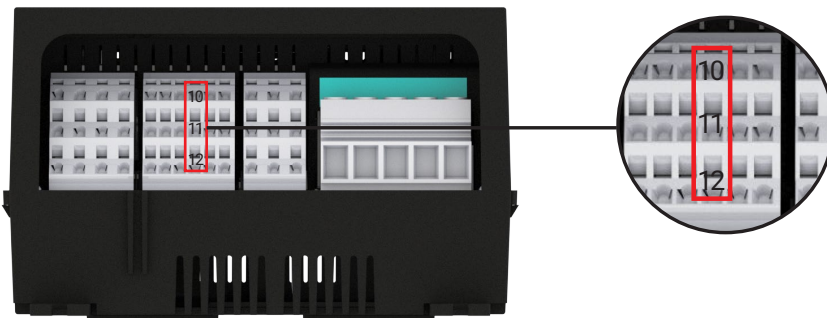

## 11. AUX 24V OUTPUT

This 24VDC output may be used to power peripheral equipment if required. The connection is made using TB3.

Refer to the CONNECTIONS section on page 3 for terminal block details.

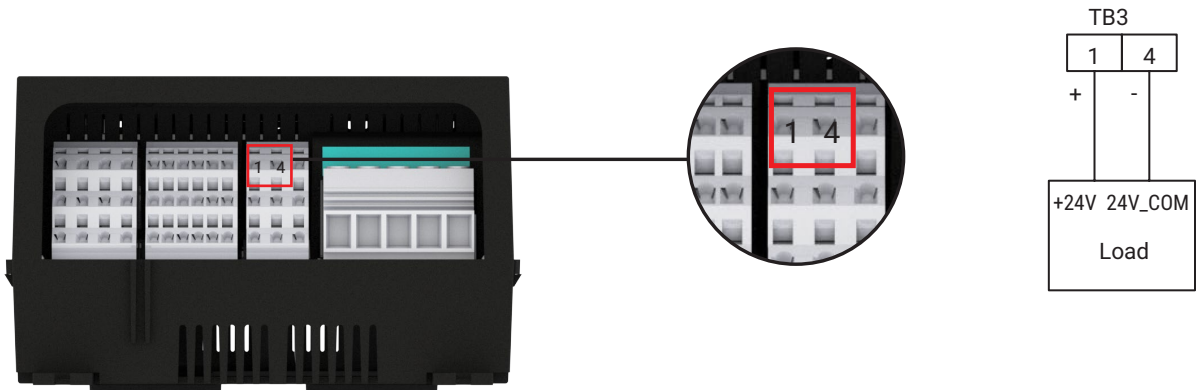

## 12. USB CONNECTOR

The USB connector on the front of the unit can be used to import and export User setting configurations for ease of programming units and uploading of new firmware.



### 13. INTRINSIC SAFETY RTD CONNECTIONS – IF EQUIPPED

For models that include Intrinsic Safety barriers for the RTD connections, the terminal block TB1 will be blue. Each RTD wiring pair is to be considered a separate circuit.

RTD1 Circuit: TB1-1, TB1-2, TB1-3

RTD2 Circuit: TB1-4, TB1-5, TB1-6

RTD3 Circuit: TB1-7, TB1-8, TB1-9

#### Associated Apparatus Entity Parameters

Uo (Maximum Output Voltage): 5.4V


Io (Maximum Output Current): 0.083A

Po (Maximum Output Power): 0.449W

La (Maximum External Inductance): 2mH

Ca (Maximum External Capacitance): 65uF

The output current of this associated apparatus is limited by a resistor such that the output voltage-current plot is a straight line drawn between open-circuit voltage and short-circuit current.

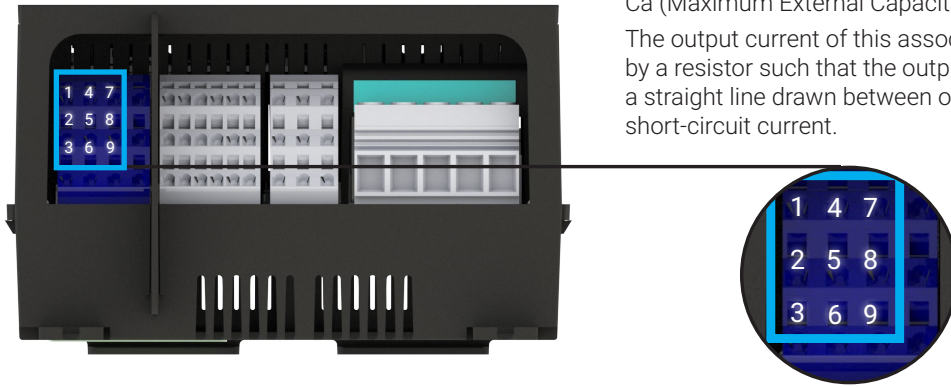

Intrinsically Safe RTD Terminal Connection

**Class I, Division 2, Group A,B,C,D**

**Class I, Zone 2, Group IIC**

**IEC EX/ATEX Zone 2**



**Class I, Div 1, Group A, B, C, D**

**Class I, Zone 1, Group IIC**

**Class I, Zone 0, Group IIC**

**IEC EX/ATEX Zone 1, Zone 0**

RTD

### **Specific Conditions of Use**

This associated apparatus is intended for connection only to simple apparatus as defined in:

- Article 504.2 and installed and temperature classified in accordance with Article 504.10(D) of the National Electrical Code (ANSI/NFPA 70)
- Clause 3.5.5 and installed and temperature classified in accordance with Clause 16.4 of IEC 60079-14
- Section F3 in Appendix F and installed and temperature classified in accordance with Section F4.2 in Appendix F of the Canadian Electrical Code, Part 1 (C22.1)
- Or other local codes, as applicable.

When connecting to simple apparatus, the cable length shall not exceed 3000m (9842ft).

Associated apparatus must be installed in an enclosure suitable for the application in accordance with the National Electrical Code (ANSI/NFPA 70) for installation in the United States, the Canadian Electrical Code for installations in Canada, or other local codes, as applicable.

The associated apparatus must be connected to a suitable ground electrode per the National Electrical Code (ANSI/NFPA 70), the Canadian Electrical Code or other local installation codes, as applicable. The resistance of the ground path must be less than 1 ohm.

Where multiple circuits extend from the same piece of associated apparatus, they must be installed in separate cables or in one cable having suitable insulation. Refer to Article 504.30(B) of the National Electrical Code (ANSI/NFPA 70) and Instrument Society of America Recommended Practice ISA RP12.06 for installing intrinsically safe equipment.


Intrinsically safe circuits must be wired and separated in accordance with:

- Article 504.20 of the National Electrical Code (ANSI/NFPA 70)
- Clause 16.2 of IEC 60079-14
- Section F4.2 in Appendix F of the Canadian Electrical Code, Part 1 (C22.1)
- or other local codes, as applicable.


This associated apparatus has not been evaluated for use in combination with another associated apparatus.

Control equipment must not use or generate more than 305 V rms ( $U_m$ ) or dc with respect to earth.


- The enclosure of the device shall be fitted with a locking mechanism such that it is only accessible with the use of a tool.
- Provisions shall be made, external to the apparatus, to provide the transient protection device to be set at a level not exceeding 140% of the rated voltage at the input terminals of this apparatus.
- To maintain an internal pollution degree 2 environment, after opening the enclosure, make sure there is no visible condensation or dust. Power the device and let it heat up for 5 minutes before closing the enclosure door.
- Only install in areas with low risk of mechanical impact.
- 4010i-Mod and 4010i-Mod-IS replacement modules must be installed into existing ATEX/IECEx Zone 2 certified Elexant 4010i enclosures.

 **WARNING: Explosion Hazard - Substitution of components may impair suitability for Class I, Division 2 hazardous and nonhazardous locations**

 **AVERTISSEMENT - Risque D'explosion - La substitution de composants peut rendre ce matériel inacceptable pour les emplacements de Classe I, Division 2**

 **WARNING: Explosion Hazard - Do not disconnect equipment unless power has been switched off or the area is known to be nonhazardous**

 **AVERTISSEMENT - Risque D'explosion - Avant de débrancher l'équipement, couper le courant ou s'assurer que l'emplacement est désigné non dangereux**

 **WARNING: Explosion Hazard – To prevent the risk of electrostatic discharge, only clean the equipment enclosure with a damp cloth**

 **AVERTISSEMENT - Risque D'explosion - Pour éviter tout risque de décharge électrostatique, ne nettoyez le boîtier de l'appareil qu'avec un chiffon humide**

The Elexant 4010i contains no user serviceable parts. Contact your nVent representative for service and a Return Authorization number if required.

**North America**

nVent  
899 Broadway  
Redwood City, CA 94063  
United States  
Tel +1.800.545.6258  
Fax +1.800.527.5703  
thermal.info@nvent.com

**Europe, Middle East, Africa**

nVent  
Romeinse straat 14  
3001 Leuven  
Belgium  
Tel +32.16.213.511  
Fax +32.16.213.604  
thermal.info@nvent.com

**North America**

Tel +1.800.545.6258  
Fax +1.800.527.5703  
thermal.info@nvent.com

**Europe, Middle East, Africa**

Tel +32.16.213.511  
Fax +32.16.213.604  
thermal.info@nvent.com

**Asia Pacific**

Tel +86.21.5426.2937  
Fax +86.21.2412.1688  
cn.thermal.info@nvent.com

**Latin America**

Tel +1.713.868.4800  
Fax +1.713.868.2333  
thermal.info@nvent.com



[nVent.com/RAYCHEM](https://www.nvent.com/RAYCHEM)