

## Berkeley Garden, Dwight Alley Fence Construction South End, Boston

## **Scope of Work:**


- 1. Remove and dispose of existing fence material
- 2. Excavate fence area to a depth of 3'
- 3. Install cast in place concrete footing
- 4. Install welded wire mesh fence and gates
- 5. Install chain-link fence and gates


## Existing Fence from Dwight Alley [1]





## Existing Fence from Dwight Alley [2]



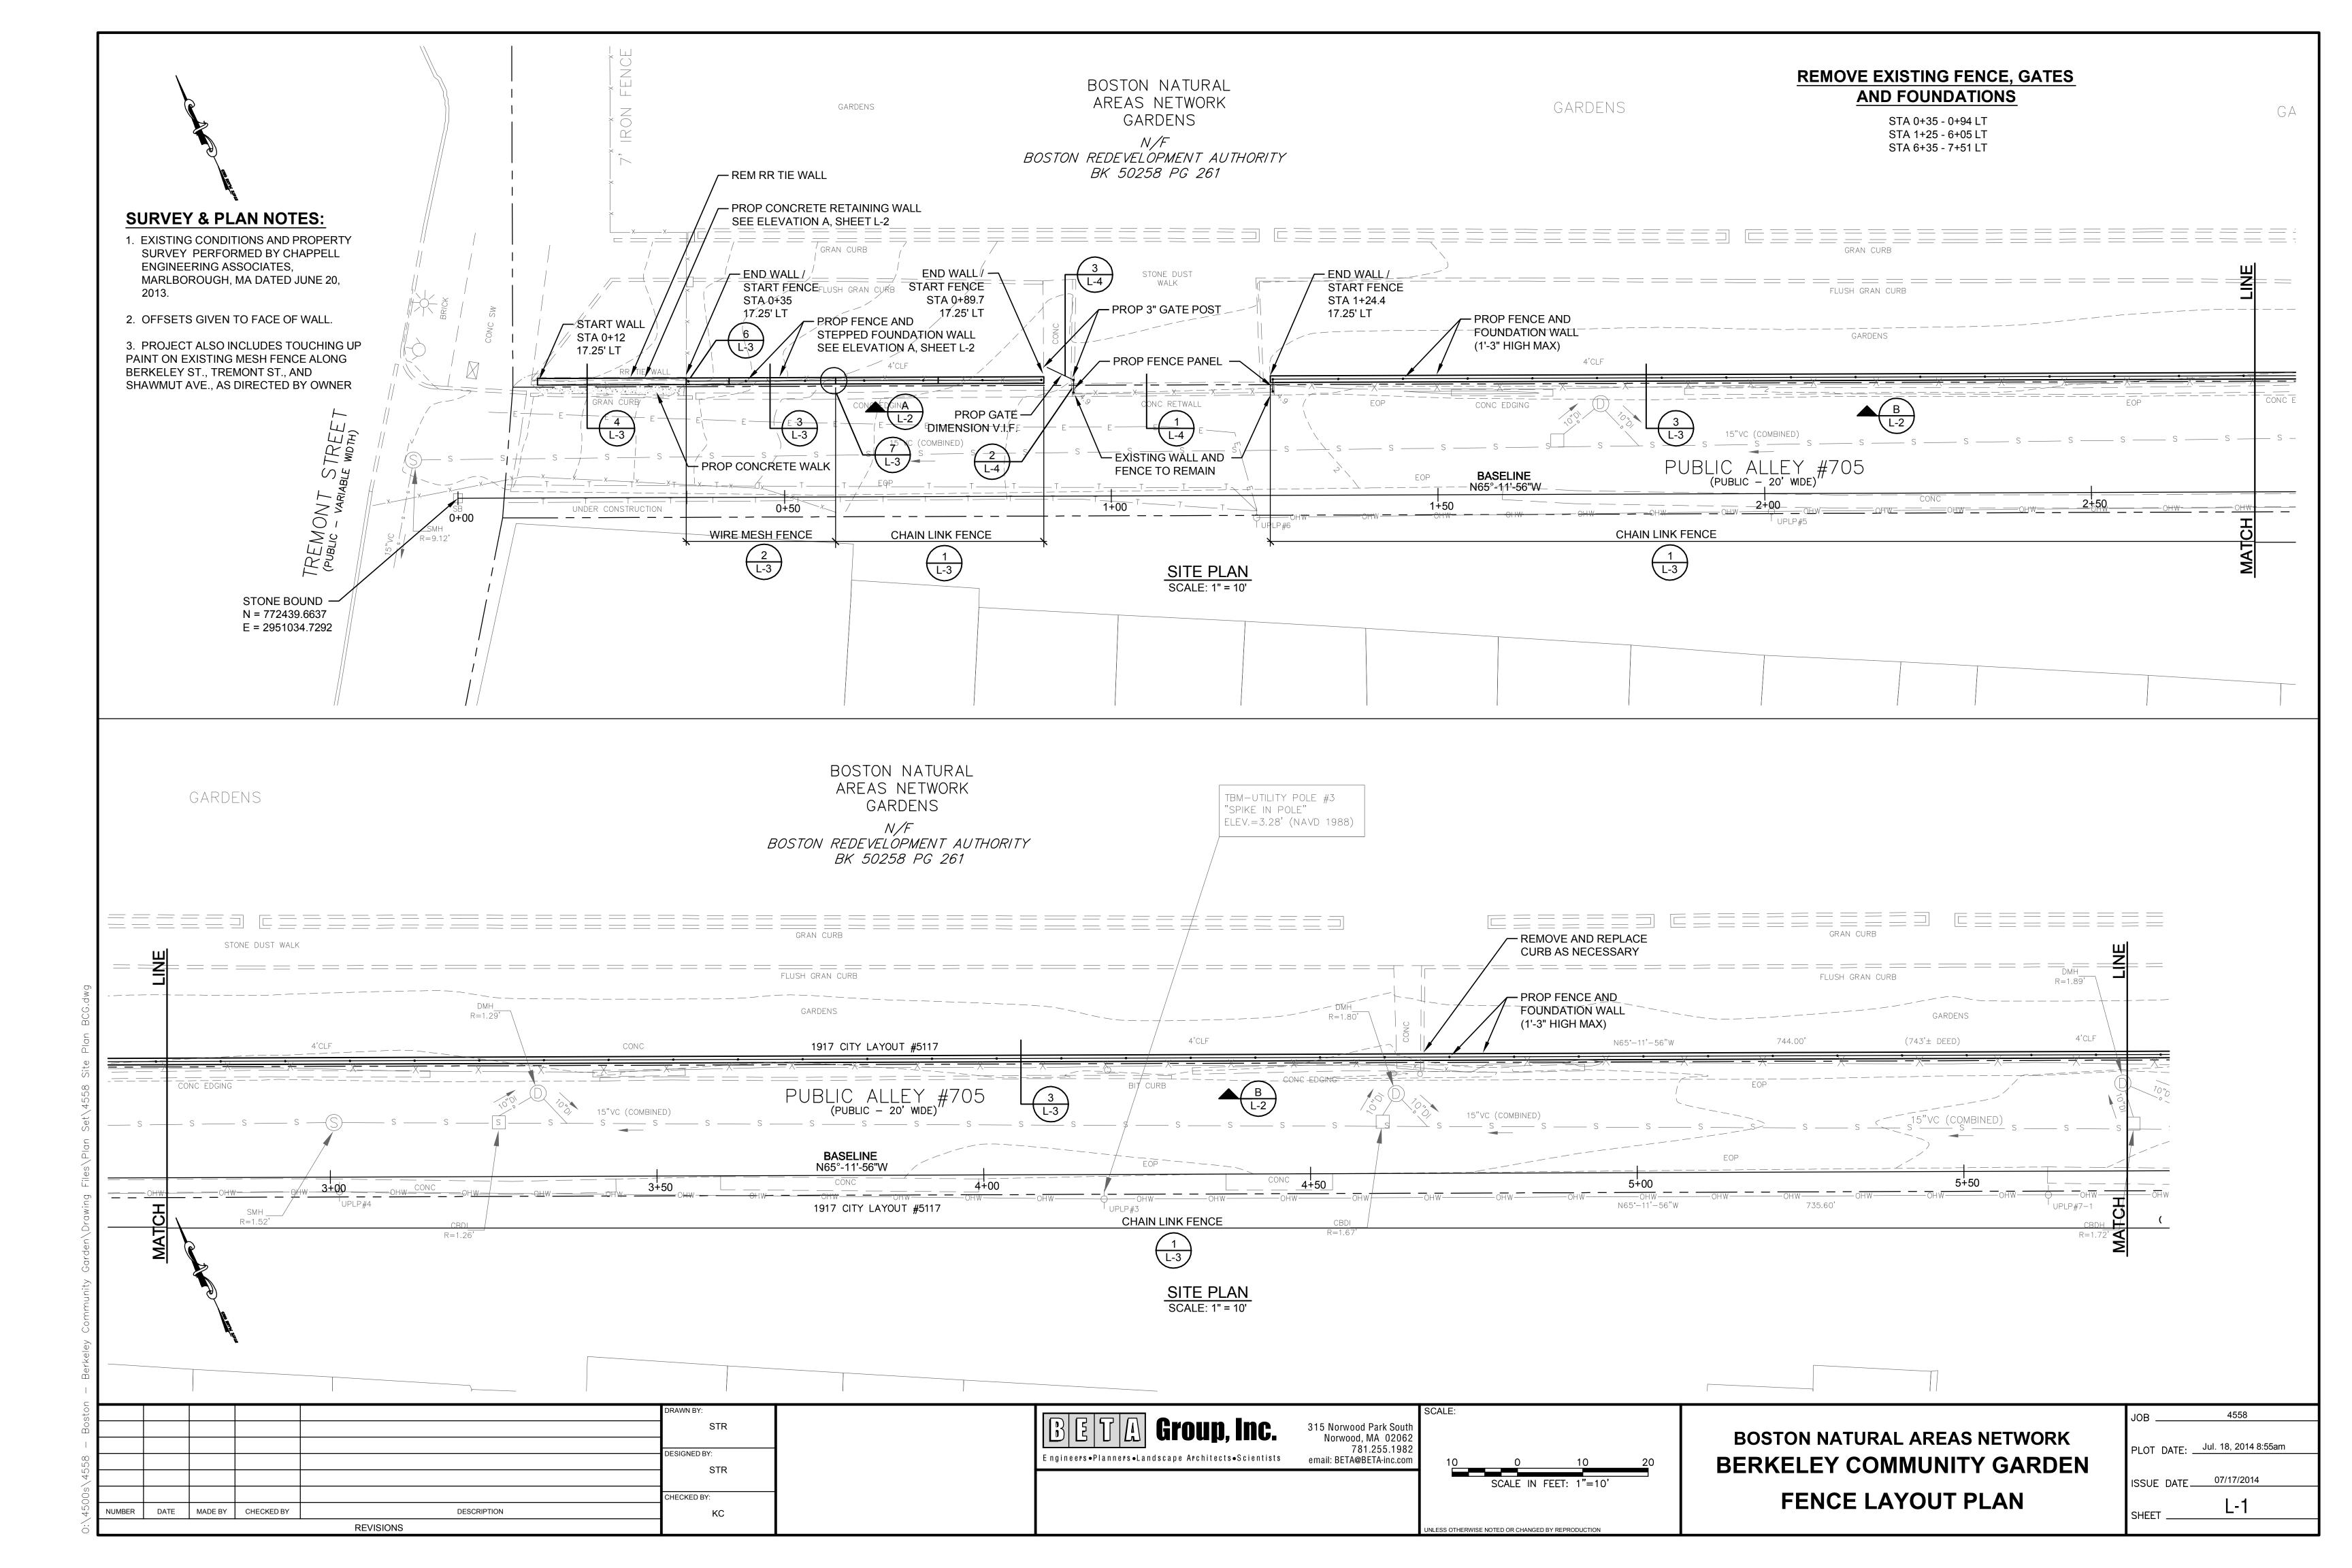

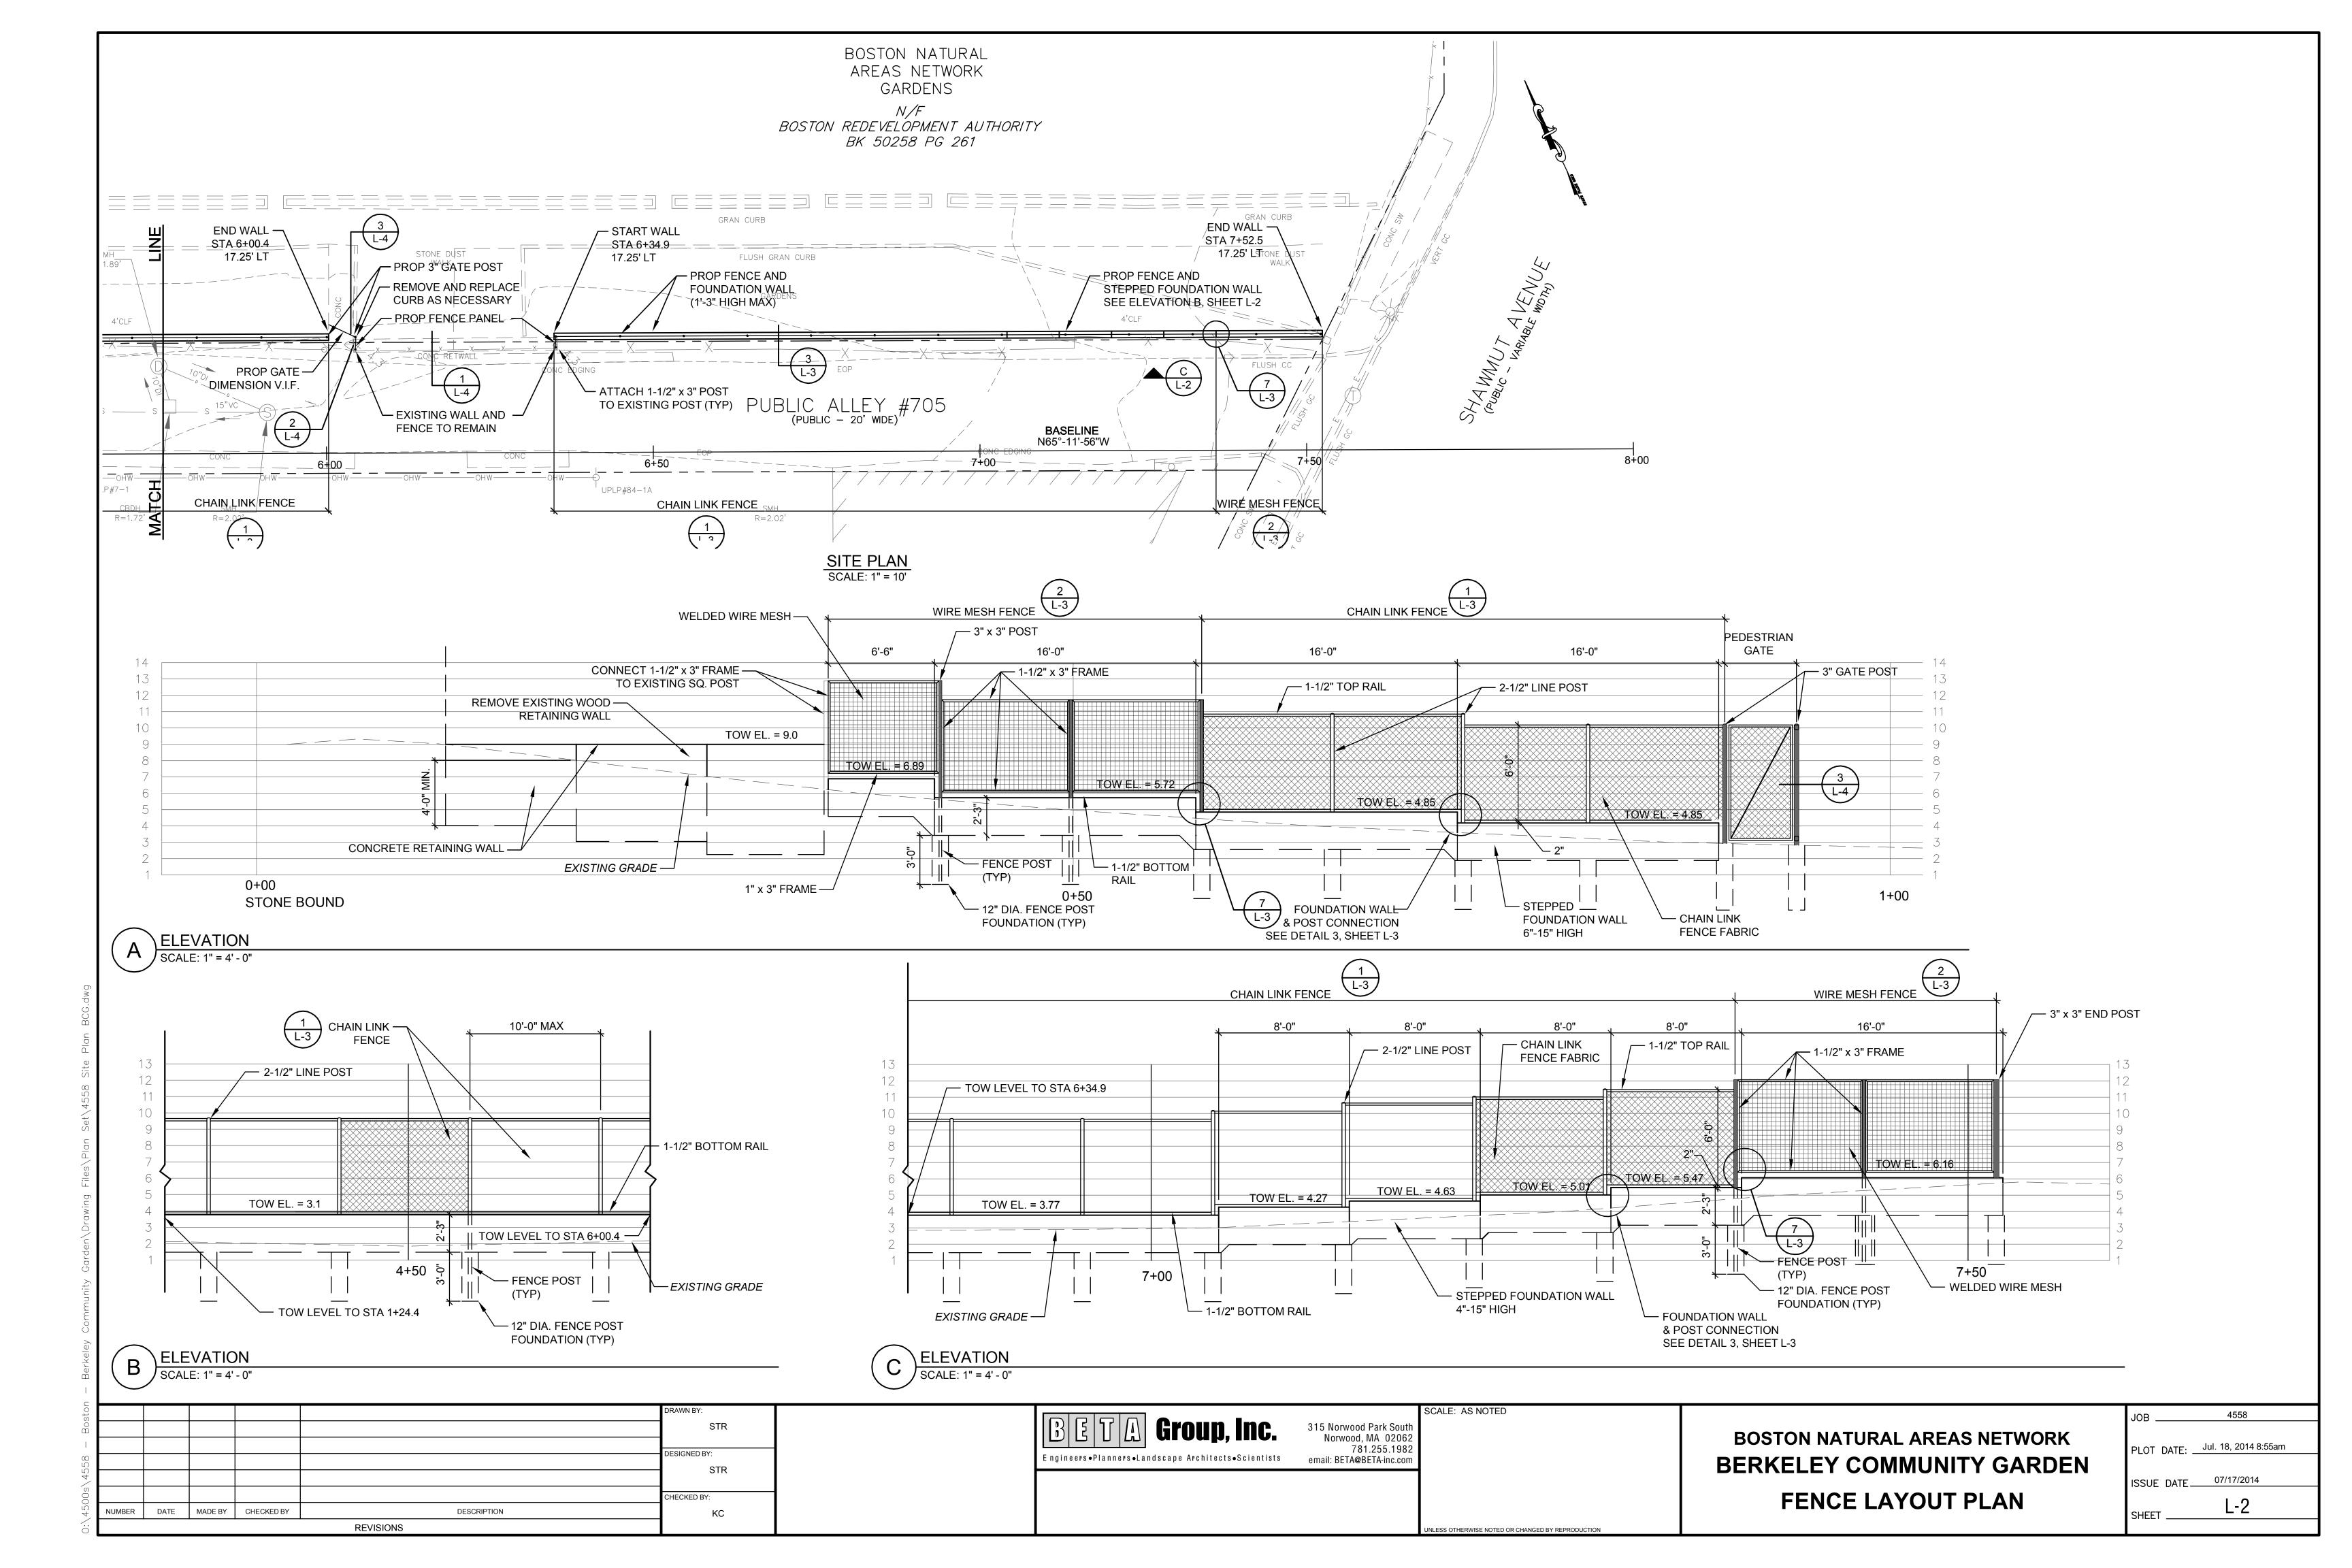

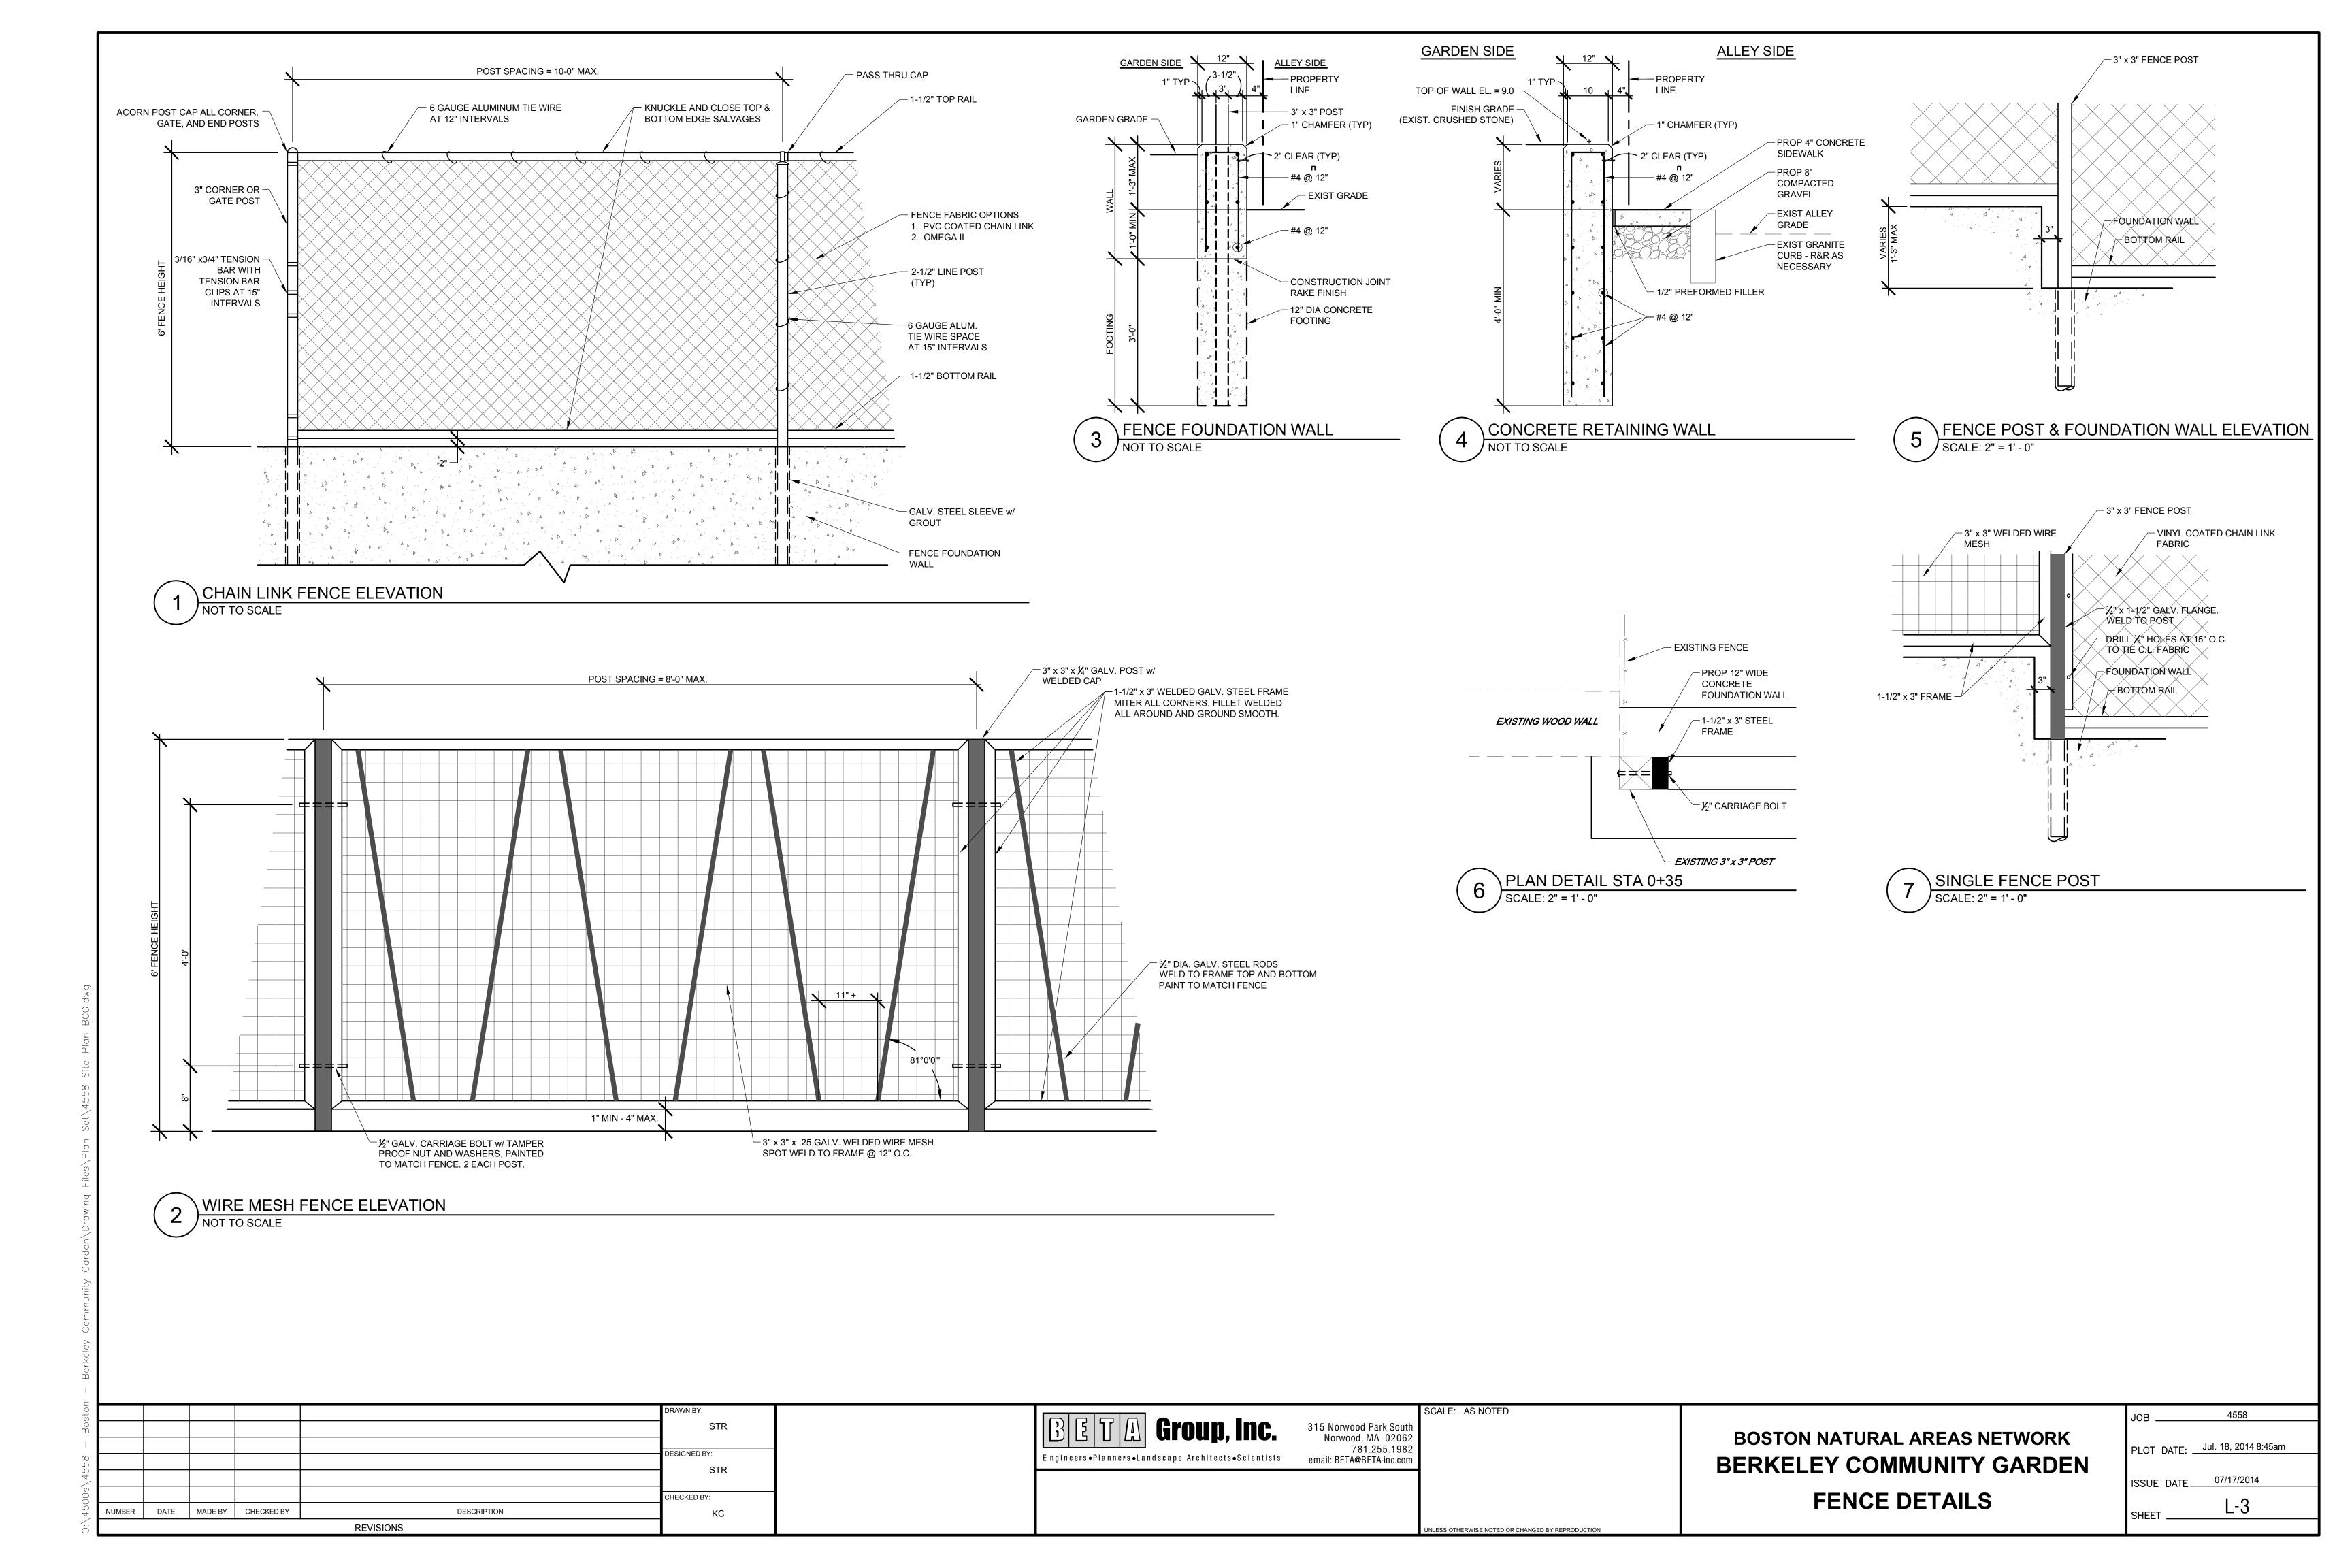

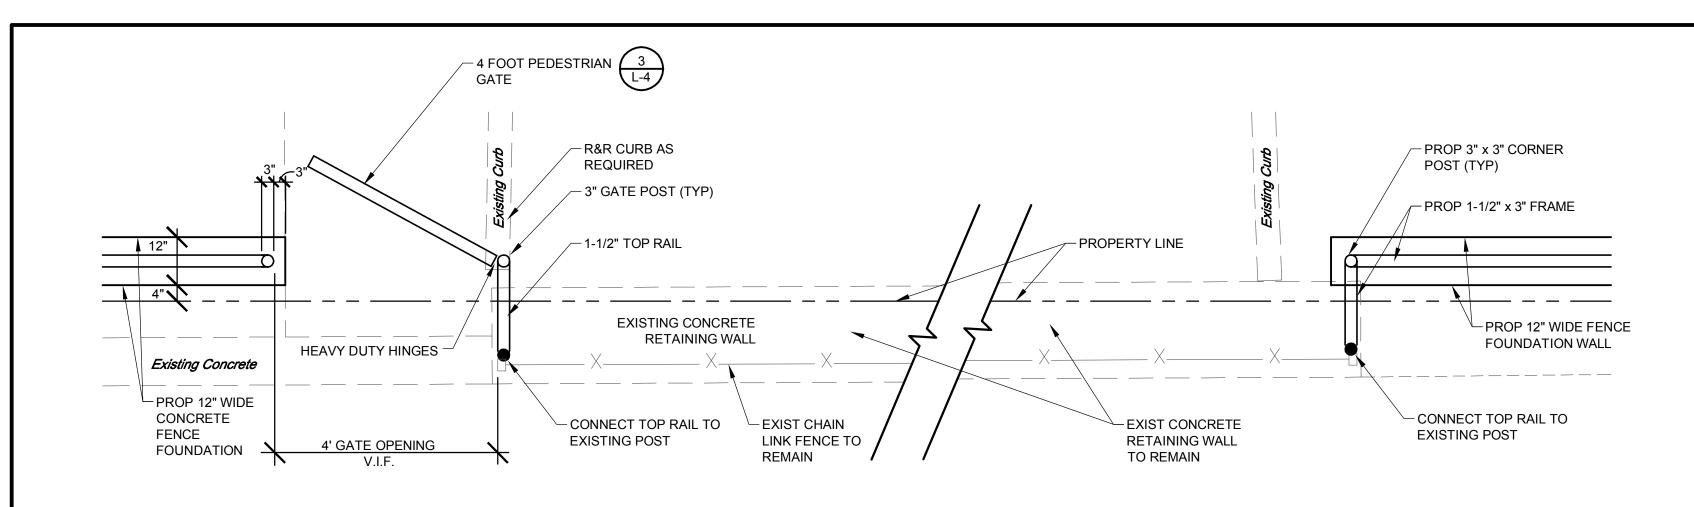

3/16" x3/4" TENSION BAR WITH -TENSION BAR CLIPS AT 12" - 3" O.D. ROUND SCHED. 40 GATE INTERVALS FULCRUM LATCH WITH STRIKE TRUSS ROD -3/16" x3/4" TENSION -BAR WITH **TENSION BAR** CLIPS AT 12" INTERVALS ALL JOINTS WELDED TO — MAKE A CONTINUOUS SOLID - CHAIN LINK FABRIC -2" DIAMOND MESH GALV. STEEL FRAME (TYP.) WIRE (9GAUGE) KNUCKLE AND CLOSE TOP AND BOTTOM EDGE SELVAGES FINISHED GRADE --11/8" O.D. SCHED. 40 GATE FRAME

1 PLAN DETAIL STA 0+75 THRU 1+25 & STA 6+00 THRU 6+35

EXISTING FENCE POST
TO REMAIN

PROPERTY LINE
1-1/2" TOP RAIL
CORNER POST

CORNER POST

GARDEN SIDE

3" CORNER POST

VINYL COATED
PVC FENCE FABRIC

TENSION WIRE

EXISTING CONCRETE
RETAINING WALL
TO REMAIN

2 END OF RETAINING WALL SIDE ELEVATION

SCALE: 1" = 1' - 0"

tor						DRAWN BY:	
Bos						STR	
I						DESIGNED BY:	
558						STR	
4						SIIX	
800						CHECKED BY:	
450	NUMBER	DATE	MADE BY	CHECKED BY	DESCRIPTION	KC	
\. .:	REVISIONS						



SCALE: AS NOTED

315 Norwood Park South
Norwood, MA 02062
781.255.1982
email: BETA@BETA-inc.com

BOSTON NATURAL AREAS NETWORK
BERKELEY COMMUNITY GARDEN
FENCE DETAILS

JOB	4558	
PLOT DATE: _	Jul. 18, 2014 8:45am	
ISSUE DATE_	07/17/2014	
SHEET	L-4	

4 FOOT PEDESTRIAN GATE