

# CharmPro®



## JUMPSTARTER & DEVICE CHARGER

MODEL NO: JSM180

PART NO: 6238900

## OPERATING & MAINTENANCE INSTRUCTIONS

UK  
CA | CE



ORIGINAL INSTRUCTIONS

DL03/21 REV 2

---

## INTRODUCTION

---

Thank you for purchasing this CLARKE Power Pack & Jump Starter

Before attempting to use this product, please read this manual thoroughly and follow the instructions carefully. In doing so you will ensure the safety of yourself and that of others around you, and you can look forward to your purchase giving you long and satisfactory service.

Please keep these instructions in a safe place for future reference.

---

## GUARANTEE

---

This product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission.

This guarantee does not effect your statutory rights.

---

## ENVIRONMENTAL RECYCLING POLICY

---

**Lithium Ion Polymer Battery - Recycle in accordance with WEEE regulations.**



Through purchase of this product, the customer is taking on the obligation to deal with the WEEE in accordance with the WEEE regulations in relation to the treatment, recycling & recovery and environmentally sound disposal of the WEEE.





In effect, this means that this product must not be disposed of with general household waste. It must be disposed of according to the laws governing Waste Electrical and Electronic Equipment (WEEE) at a recognised disposal facility.

# CONTENTS AND OVERVIEW



1	Jump Starter Power Pack	3	3 - 1 USB Charging Cable, Lightning/Micro USB/C-Type
2	12V Battery Jump Starter Lead		

## OVERVIEW

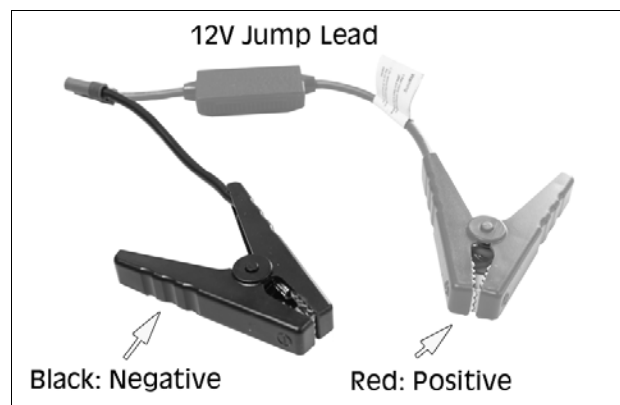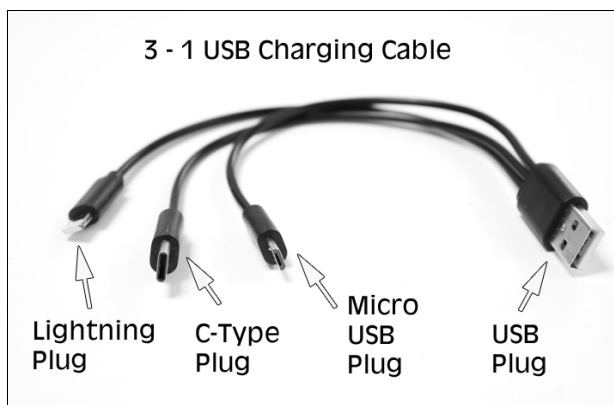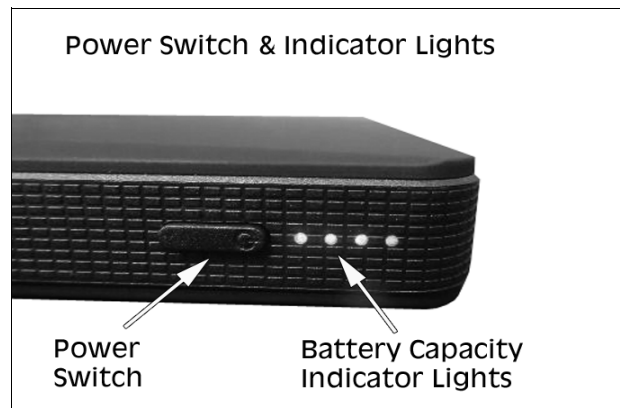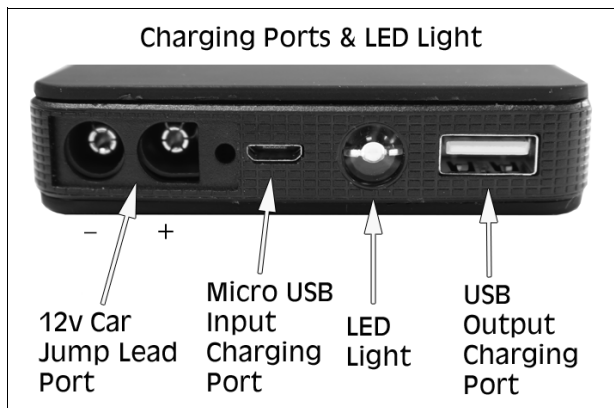

---

## GENERAL SAFETY RULES

---



**WARNING: ALL LEAD ACID BATTERIES GENERATE HYDROGEN GAS DURING NORMAL OPERATION. THIS PROCESS INCREASES DURING A PERIOD OF RAPID DISCHARGE. HYDROGEN GAS AND BATTERY ACID (SULPHURIC ACID) CAN BE EXPLOSIVE, CORROSIVE TO SKIN, EYES AND HAIR, DAMAGING TO CLOTHING AND METALS, FLAMMABLE, POISONOUS TO BREATHE.**

---

1. ALWAYS ensure when jump starting that there is air circulating around the device.
2. NEVER allow the negative and positive leads on this unit, to touch each other or to touch the same metal object.
3. Although the jump starter is water resistant and may be used outdoors, DO NOT leave it exposed to the elements. Avoid direct sunlight, direct heat, rain/moisture etc.
4. The jump starter is designed for use on petrol cars up to 3L/3000cc with 12V batteries.
5. DO NOT operate the jump starter if any of the cables are damaged. Consult your CLARKE dealer for repair or replacement of the parts.
6. DO NOT operate the jump starter if the case is damaged. Consult your CLARKE dealer or a qualified person for inspection and repair.
7. Ensure the vehicle battery posts and battery clamps are perfectly clean before use.
8. When connecting the jump starter leads to a battery, ensure the device is switched OFF, and ALWAYS connect the RED (positive '+') output conductor to the UNEARTHED (+) battery terminal FIRST, then connect the BLACK, (negative '-') conductor to a suitable earthing point on the chassis or battery, well away from any fuel lines.
9. To prevent the battery overheating and consequent damage, DO NOT exceed our recommendations for the duration of jump starting.
10. This jump starter is NOT designed to be used as a replacement for the vehicle battery.
11. DO NOT attempt to BOOST CHARGE the jump starter's sealed battery.
12. NEVER attempt any repairs yourself. If you have a problem with the jump starter contact your local CLARKE dealer.
13. NEVER jump start the engine whilst the jump starter is being charged.
14. ALWAYS store the jump starter out of reach of children.

---

## POWER PACK CHARGING

---

1. Fully charge your jump starter battery unit before using it for the first time.
2. Recharge the jump starter battery unit after every occasion of use if possible, and thereafter, at least every 6 months.
3. ALWAYS AVOID leaving your jump starter unit in a discharged state.

FOLLOW THE ABOVE POINTS TO ENSURE MAXIMUM LIFE FROM THE BATTERY.

### BATTERY CAPACITY INDICATOR LIGHTS

Pressing the power switch, the indicator lights will show as follows:

Indicator Light	1 Light On	2 Lights On	3 Lights On	4 Lights On
Capacity	25%	50%	75%	100%

During the charging of the power pack, the power indicator lights will flash and turn on one by one. When all four lights remain on, it means the unit is fully charged.


During the discharging of the unit, if the first indicator light is flashing, it means the unit is short of power and needs recharging.

There are three means of charging the power pack:

1. Via a 230V USB mains adaptor (not supplied), using the USB charging cable
2. Via a PC's USB terminal, using the USB charging cable.
3. Via a 12V auxiliary vehicle adapter (not supplied), with the USB charging cable.

### CHARGING USING A 230V USB MAINS ADAPTOR OR PC TERMINAL


1. Plug the Micro USB end of the charging cable into the Micro USB port on the Jump Starter power pack.
2. Plug the USB plug end of the charging cable into a USB mains adaptor (not supplied) or a PC's USB terminal and switch on.

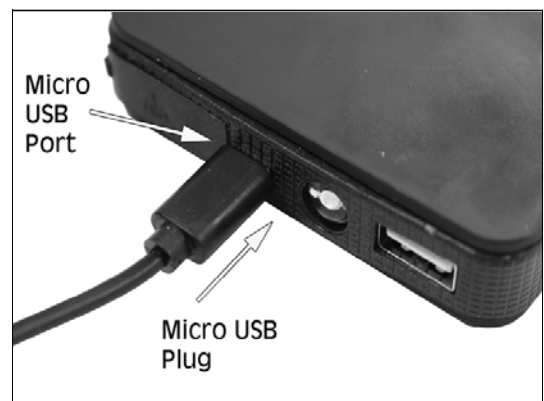

- The BLUE charging/indicator lights on the jump starter will come on and start flashing to indicate charging is in progress.

3. Continue to charge until all 4 BLUE charging lights stop flashing and stay on.

It is important to note that this could take up to 4 hours, dependant upon the state of charge of the battery.

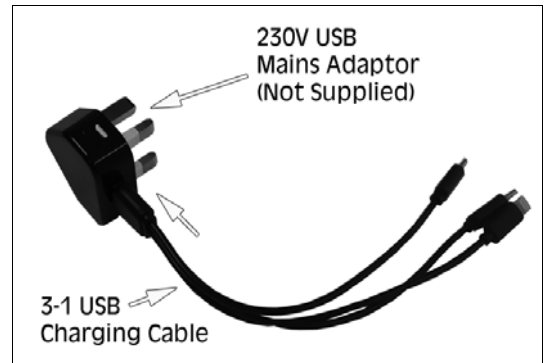


## CHARGING USING A 12V AUXILIARY ADAPTOR

1. Plug the Micro USB end of the charging cable into the Micro USB port on the Jump Starter power pack.
2. Plug the USB end of the charging cable into a USB 12V auxiliary adaptor (not supplied) and insert the 12V adaptor into your car 12V auxiliary port.



- The BLUE charging/indicator lights on the jump starter will come on and start flashing to indicate charging is in progress.

3. Continue to charge until all 4 BLUE charging lights stop flashing and stay on. It is important to note that this could take up to 4 hours, dependant upon the state of charge of the battery.

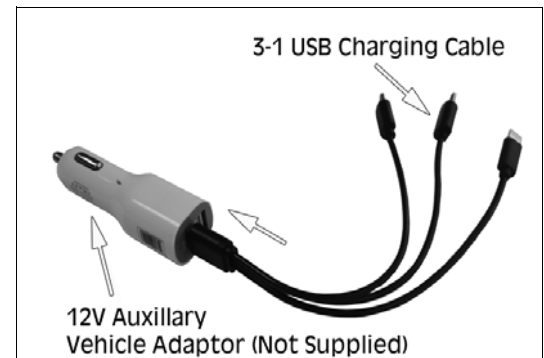


---

## MAINTENANCE

---

Always ensure the cables & clamps are in good condition and the clamps are clean and corrosion free. If damaged they should be replaced. Keep the unit clean by wiping with a dry cloth. DO NOT use solvents as a cleaning agent.

NEVER attempt any repair unless you are a qualified technician. Your CLARKE jump starter has been designed to give long and trouble free service. If, however, having followed the instructions in this booklet carefully, you encounter problems, take the unit to your local CLARKE dealer.

---

## OPERATION

---



**WARNING: FAILURE TO FOLLOW THE INSTRUCTIONS BELOW AND THE SAFETY INSTRUCTIONS ON PAGE 6 MAY RESULT IN PERSONAL INJURY, DAMAGE TO THE VEHICLE, OR THE POSSIBILITY OF AN EXPLOSION**

---

### LED LIGHT

The power pack has an LED light that has 3 settings and can be used as a torch or safety lighting as follows.

1. Press and hold the power switch for 3 seconds to turn on the torch setting.
2. Press the power switch again to turn on the LED flashing strobe effect lighting.
3. Press the power switch for a third time to turn on the LED SOS flashing effect lighting.
4. Press the power switch for a fourth time to turn the LED light off.

### CHARGING MOBILE PRODUCTS

1. Choose the appropriate mobile charging adaptor on the charging cable, Lightning, Micro USB or USB-C type, and connect to the device to be charged.
2. Insert the USB end of the charging lead into the USB output charging port on the power pack.
3. Press the power switch for charging to begin.

**NOTE:** The blue indicator lights will keep bright when charging. If the device doesn't start charging after 3 seconds the indicator lights and device will turn off.

### JUMP STARTING A 12V CAR (PETROL ONLY)



**WARNING: IT IS POSSIBLE THAT SOME ELECTRONIC EQUIPMENT COULD BE DAMAGED BY JUMP STARTING. ALWAYS CHECK WITH THE CAR MANUFACTURER'S HANDBOOK TO DETERMINE WHAT PRECAUTIONS IF ANY SHOULD BE TAKEN.**

---


ALWAYS carry out the following preliminary checks before connecting the jump starter to the car battery:

- Ensure the vehicle ignition and ALL ancillary equipment - lighting, radio etc, are switched off.


- Ensure the vehicle battery is rated at 12V and is not damaged in any way. If the battery is damaged, replace battery, DO NOT try and recharge.
- Ensure the battery terminals are clean and the clamps are firm and secure.
- Ensure the area is well ventilated.
- Take great care not to touch the red positive (+) clamp against the black negative (-) clamp.

1. Make sure two or more power indicator lights are showing on the jump starter.

2. Connect the red positive (+) clamp to the positive (+) battery terminal first. Take care the clamp does not contact any moving parts or fuel lines.

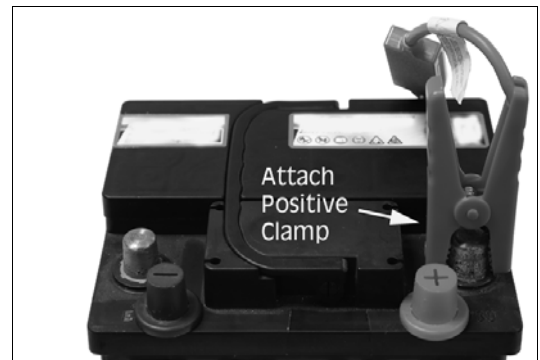

3. Connect the black negative (-) clamp to the negative (-) battery terminal or to a suitable earthing point on the vehicle chassis ensuring the connections are firm and secure.

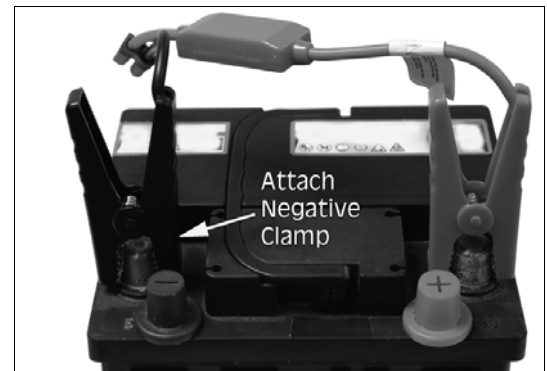

4. Insert the blue plug end of the battery jump starter lead into the 12v car jump port on the battery unit, making sure the lead is firmly and correctly inserted, otherwise it may affect the starting function.



5. Switch the car ignition to start for no more than 6 seconds. If car doesn't start, switch off and wait 3 minutes before trying again.

6. If the car fails to start on the first attempt, make sure all lead connections are correctly positioned. If, after 3 attempts to jump-start the car have failed, STOP, as this may damage the car and/or its electrical systems.





7. Once the car has started, remove the jump starter lead from the power pack, before removing the clamps from the battery.

## SPECIFICATIONS

Item	Specification
Model No.	JSM180
Max Engine Capacity	Under 3.0L (Petrol Only)
Battery Type	Lithium Ion Polymer (Li-Po)
Battery Capacity	1800 mAh
Input (Micro USB)	5V/1A
Output for Mobile Devices (USB)	5V/1A
Output for Car Jump	12V
Start Current Start/Peak	180A/360A
Cycles after Full Charge	5-10
Lifetime	> 1000 Cycles
Charging Time	4 Hours
Discharge Operating Temperature	-20°C - 60°C
IP Rating	IPX0
Light	5V, 1.5W, Single LED
Size (L x W x D)	140mm x 80mm x 20mm
Weight	260g

## SYMBOLS DISPLAYED

	Read the manual and safety instructions before use
	Electrical hazard due to exposed live terminals

# DECLARATION OF CONFORMITY



**Clarke**<sup>®</sup>  
**INTERNATIONAL**

Fitzwilliam Hall, Fitzwilliam Place, Dublin 2

## DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following directive(s):

- 2014/30/EU      *Electromagnetic Compatibility Directive.*
- 2014/35/EU      *Low Voltage Equipment Directive.*
- 2011/65/EU      *Restriction of Hazardous Substances, (amended by 2015/863).*

The following standards have been applied to the product(s):

- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013, EN 55022:2010, EN 55024:2010,*
- EN 61000-3-2:2014, EN 61000-3-3:2013.*

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned directive(s) has been compiled and is available for inspection by the relevant enforcement authorities.

The CE mark was first applied in: 2020

<b>Product Description:</b>	Jump Starter
<b>Model number(s):</b>	JSM180
<b>Serial / batch Number:</b>	N/A
<b>Date of Issue:</b>	04/03/2021

Signed:

**J.A. Clarke**  
**Director**



Hemncill Street, Epping, Essex CM16 4LG

## DECLARATION OF CONFORMITY

**This is an important document and should be retained.**

**We hereby declare that this product(s) complies with the following UK legislation:**

*Electromagnetic Compatibility Regulations 2016.*

*Electrical Equipment (Safety) Regulations 2016.*

*The Restriction of the Use of Certain Hazardous Substances*

*in Electrical and Electronic Equipment Regulations 2012.*

**The following standards have been applied to the product(s):**

*EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013, EN 55022:2010, EN 55024:2010,*

*EN 61000-3-2:2014, EN 61000-3-3:2013.*

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

This product was placed onto the market: 2020

<b>Product Description:</b>	Jump Starter
<b>Model number(s):</b>	JSM180
<b>Serial / batch Number:</b>	N/A
<b>Date of issue:</b>	04/03/2021

**Signed:**

**J.A. Clarke**  
**Director**

# A SELECTION FROM THE VAST RANGE OF

# Clarke®

## QUALITY PRODUCTS



### **AIR COMPRESSORS**

From DIY to industrial, Plus air tools, spray guns and accessories.

### **GENERATORS**

Prime duty or emergency standby for business, home and leisure.

### **POWER WASHERS**

Hot and cold, electric and engine driven - we have what you need

### **WELDERS**

Mig, Arc, Tig and Spot. From DIY to auto/industrial.

### **METALWORKING**

Drills, grinders and saws for DIY and professional use.

### **WOODWORKING**

Saws, sanders, lathes, mortisers and dust extraction.

### **HYDRAULICS**

Cranes, body repair kits, transmission jacks for all types of workshop use.

### **WATER PUMPS**

Submersible, electric and engine driven for DIY, agriculture and industry.

### **POWERTOOLS**

Angle grinders, cordless drill sets, saws and sanders.

### **STARTERS/CHARGERS**

All sizes for car and commercial use.



## **PARTS & SERVICE: 0208 988 7400**

**Parts Enquiries**  
[Parts@clarkeinternational.com](mailto:Parts@clarkeinternational.com)

**Servicing & Technical Enquiries**  
[Service@clarkeinternational.com](mailto:Service@clarkeinternational.com)

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

**Clarke** INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG  
[www.clarkeinternational.com](http://www.clarkeinternational.com)