

# TD iWL252 and 255 Quick Start Guide



**For the:**

- iWL252 (Bluetooth)
- iWL255 (3G Wireless)



COPYRIGHT © 2016 by The Toronto-Dominion Bank

*This publication is confidential and proprietary to The Toronto-Dominion Bank and is intended solely for the use of Merchant customers of TD Merchant Solutions. This publication may not be reproduced or distributed, in whole or in part, for any other purpose without the written permission of an authorized representative of The Toronto-Dominion Bank.*

*This publication may not be reproduced or distributed, in whole or in part, for any other purpose without the written permission of an authorized representative of The Toronto-Dominion Bank.*

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by TD is under license. Other trademarks and trade names are those of their respective owners.*

**NOTICE**

*The Toronto-Dominion Bank reserves the right to make changes to specifications at any time and without notice. The Toronto-Dominion Bank assumes no responsibility for the use by the Merchant customers of the information furnished in this publication, including without limitation for infringements of intellectual property rights or other rights of third parties resulting from its use.*

**MERCHANT INFORMATION**

**Merchant Name** .....

**Merchant Number** .....

# Contents

<b>About this Guide .....</b>	<b>1</b>
<b>Merchant Welcome Kit Contents .....</b>	<b>1</b>
<b>The TD iWL252 / 255 Solution .....</b>	<b>1</b>
Default shortcut keys .....	2
Idle screen and icons .....	2
<i>TD iWL252</i> .....	2
<i>TD iWL255</i> .....	3
Main menu screen .....	3
Admin menu screen .....	4
Navigation .....	4
Changing the paper roll .....	4
<b>The Bluetooth Base .....</b>	<b>4</b>
Ports .....	5
<b>Cardholder Privacy and Security .....</b>	<b>5</b>
Terminal security .....	5
Fraud prevention .....	5
<i>Force post fraud prevention</i> .....	5
<i>Call for authorization fraud prevention</i> .....	6
<b>Financial Transactions .....</b>	<b>6</b>
Accepted card types .....	6
Sale (credit card) .....	6
Sale (debit card) .....	8
Sale (phone or mail) .....	8
Force post (sale or phone / mail) .....	9
Void .....	9
Transaction recall .....	10
Return .....	10
<b>Receipts .....</b>	<b>11</b>
Reprinting receipts .....	11
Receipt examples .....	12
<b>Business Day Functions .....</b>	<b>13</b>
Performing a day close .....	13

*Continued on next page*

<b>Administration</b> .....	<b>14</b>
Changing the terminal communication method .....	14
More features and functionality .....	14
<b>Reporting</b> .....	<b>15</b>
Business day reports.....	15
Batch reports .....	15
<b>Troubleshooting</b> .....	<b>16</b>
What problems can I easily resolve? .....	16
Why don't I see a connection icon on the Idle screen? .....	16
Signal Strength.....	17
What can interfere with Bluetooth connectivity? .....	17
What can interfere with 3G connectivity?.....	18
Why isn't my terminal charging? .....	18
What do I do if there's a power outage? .....	18
<b>Menu structure</b> .....	<b>19</b>
<b>Reference</b> .....	<b>22</b>
Entering letters and special characters.....	22
Maintaining the terminal .....	22
Storing the terminal.....	22

# About this Guide

This Guide provides an introduction to your TD iWL252 / 255 solution, hardware functionality, performing financial transactions, administration features and troubleshooting. For further information regarding its use and available features, please review our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

## Merchant Welcome Kit Contents

### Quick Start Guide Pamphlets

- *How to Help Prevent Fraud*
- *Payment Card Industry Data*
- *If you have a problem or concern*

### Information sheets

- *What you need to know about chargebacks*
- *Payment card industry data security standard (PCI DSS)*

### Miscellaneous

- Paper rolls (3 + 1 in the terminal)
- Cleaning card and instructions
- Charging cord
- Card acceptance decals (Visa®, MasterCard®, Discover®, American Express®, Interac® Direct Payment, etc.)

## The TD iWL252 / 255 Solution

The terminal is solely for you, the Merchant. You will use the terminal to initiate transactions for customer's using credit or debit cards. Depending on your settings, some card types may not be accepted by your terminal. Please please go to our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre) to learn how to use other cards.

The two terminals look virtually identical and have very similar functionality. There is an easy way to determine which one you are using.

### TD iWL252 and Bluetooth® base



This terminal is the short range wireless version. It connects wirelessly to the Bluetooth charging base.

### TD iWL255





This terminal is the long range wireless version. It connects to the mobile phone network.

# The TD iWL252/255 Terminals

## 1. Paper chamber flap

## 2. Function keys

The  / **F1** and  / **F4** keys can be used as shortcuts and to select onscreen options. See below for more information.


## 3. Navigation keys

Use the arrow keys to navigate the screens and menus.

## 4. Command keys

 / **Cancel**

 / **Correction** or **Paper advance**

 / **OK** and shortcut to the *Main Menu* screen.

## 5. Card readers










- Insert chipped cards
- Swipe cards
- Contactless cards



\* TD iWL252 screen shown

## Default shortcut keys

To access a specific menu or function, use the following shortcuts:


- |                                 |   |                        |   |
|---------------------------------|---|------------------------|---|
| • Sale (default)                |  / <b>F1</b> | • Main Menu            |  / <b>OK</b>         |
| • Pre-Auth Initiation (default) |  / <b>F2</b> | • Admin Menu           |  / <b>Admin</b>      |
| • Navigation / scroll key       |              | • Reprint last receipt |  / <b>0</b>          |
| • Pre-Auth Completion (default) |  / <b>F3</b> | • Advance paper        |  / <b>Correction</b> |
| • Phone / Mail Sale (default)   |  / <b>F4</b> |                        |   |

## Idle screen and icons

### TD iWL252

The default screen is called the *Idle* screen. On it there are numerous important icons. They are, left to right:






## 1. Lock (security)

The  icon will be closed or open. If the lock is open, do not use this terminal and contact the TD Merchant Solutions Help Desk to report it has been tampered with.



## 2. Bluetooth connection icons

The terminal's Bluetooth connection is indicated by a group of icons:

-  Terminal is connected to the Bluetooth base but not responding.
-  Terminal is searching for connection.
-  Terminal is connected to the Bluetooth base.
-  Indicates the terminal Bluetooth signal strength.
- The number under these icons is the associated Bluetooth base serial number.
-  Indicates whether the terminal is connected to the network. It will be one of two colours: green (connected) or white (disconnected).

## 3. Power



The battery icon in the top-right corner indicates that the terminal battery level. When the lightning bolt appears on top of the battery, it means it is charging.

## TD iWL255

The default screen is called the *Idle* screen. On it there are numerous important icons. They are, left to right:


### 1. Wireless connection icons

The terminal's wireless connection is indicated by a group of icons:

-  Indicates the terminal 3G wireless signal strength.
-  Indicates whether the terminal is connected to the 3G wireless network. It will be one of two colours: green (connected) or grey (disconnected).



### Lock (security)

The  icon will be closed or open. If the lock is open, do not use this terminal and contact the TD Merchant Solutions Help Desk to report that it has been tampered with.


### 2. Power

The battery icon in the top-right corner indicates that the terminal battery level. When the lightning bolt appears on top of the battery, it means it is charging.

## Main menu screen

From the *Idle* screen, press **OK** and the *Main Menu* screen appears. The *Main Menu* screen displays the following transactions:


- Return
- Void
- Force Post
- Phone / Mail Sale

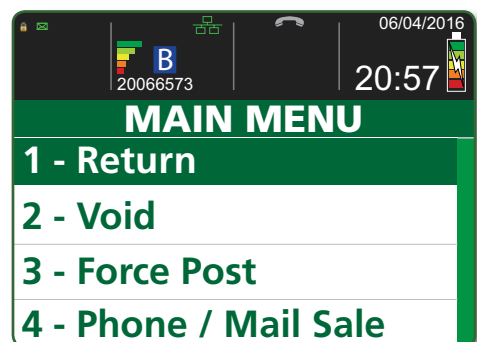

## Admin menu screen

From the *Idle* screen, press **[\*#]** / **Admin** key and the *Admin Menu* screen appears. It displays the following options:

- Logon / Logoff
- Business Day Menu
- Trans Recall Menu
- Setup Menu
- Reprint Menu
- Maintenance
- Other Functions

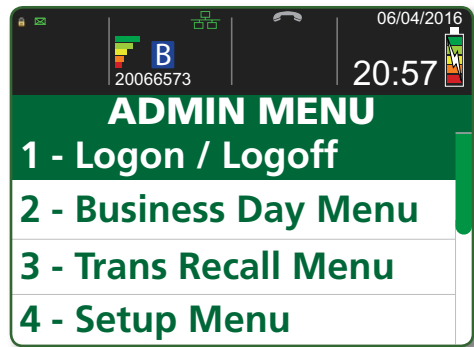

\* TD iWL252 screen shown

For a list of all the admin functions on available on the terminal, refer to page 19 for a complete menu breakdown.

## Navigation

Once you get to the desired screen, use the following keys to navigate it:

- Press the **up / down arrow** key to scroll down or up one menu selection.
- Press **Cancel** to go back one screen.
- Press **Correction** to change an entry.
- Press **OK** to confirm your menu selection or entry.
- Press the number associated with the desired menu item.

## Changing the paper roll

1. Gently pull up on the **paper chamber panel** along the top of terminal and remove the old paper roll.
2. Unwrap a new paper roll and place it in the paper chamber so that the loose end of the paper feeds up from under the paper roll towards you.
3. Press down on the panel until it clicks shut and ensure there is a enough paper sticking out from the chamber that it touches the top of the terminal screen.
4. Press **Correction** to advance the paper to ensure it is loaded properly.

## The Bluetooth Base

The Bluetooth base is only used with the TD iWL252. It acts as a connection to the payment network and as a short range wireless base for your TD iWL252 terminal. This base also acts as a charging station for the terminal.





## Ports

The base has four ports on the back but you are only using the network adapter port and the power port:

1. Ethernet port
2. Power port



If you use a dial up connection, there is a panel on the bottom of the base that you can open and plug your phone line into.

### Communication options

The TD iWL252 solution offers two options for communications: dial-up or Ethernet. You can set this however you wish to suit your existing place of business' setup. To learn more about communication options see page 14.

## Cardholder Privacy and Security

Please refer to the *Cardholder Privacy* sheet in your Merchant welcome kit. It contains important information about your responsibilities to your customers and their personal and transaction information.

### Terminal security

It is the Merchant's responsibility to secure the terminal, any user IDs or passwords and to prevent unauthorized use. In any event the Merchant will be liable for any unauthorized use of the terminal or any user IDs or passwords. There are three user security settings:

#### No security (Default)

- No access restriction to the terminal functionality listed below.

#### Medium Security

- Access is restricted to certain features by a supervisor or manager ID and password.

#### High Security

- Access is restricted to certain features by a manager ID and password.

The following functions can be protected by a supervisor ID and password:

- End of Day
- Manual Account #
- Batch Reports
- B.Day reports
- Customized Reports
- Batch Close
- Recent Error Report

### Fraud prevention

Please refer to the *How to Help Prevent Fraud* pamphlet in your Merchant welcome kit. You can also reduce fraudulent transactions on your terminal by enabling:

#### Force post fraud prevention

The Force Post function allows prior authorization numbers to be manually keyed in. For your protection, this capability is disabled by default on your terminal. If you need to process a Force Post, please call the TD Merchant Solutions Help Desk at **1-800-363-1163** to enable the capability after being authenticated.

## Call for authorization fraud prevention

You can enable/disable call for authorization transactions.

If you want to use either of these fraud prevention features, you must enable them on each of your terminals. To do so, please call the TD Merchant Solutions Help Desk at **1-800-363-1163**.

# Financial Transactions

The terminals can perform the following transactions:


- Sale (purchase)
- Phone / Mail sale
- Force post
- Return (refund)
- Void
- Pre-authorization\*
- Partial authorization\*

\* These optional transactions and others, such as tips, are covered in our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

## Accepted card types

Your terminal(s) will accept whatever cards you indicated when you signed your contract with TD Merchant Solutions. If you wish to adjust your accepted card list, please call the TD Merchant Solutions Help Desk at **1-800-363-1163** to change the security level on your terminal.

## Sale (credit card)

1. Press  / **F1**.
2. Enter the **total dollar amount** for the sale and press **OK**.
3. Customer confirms the dollar amount.
4. Perform one of the following payment methods: **Insert, Swipe, Contactless** or **Manual Entry**.

### Contactless

- a) The customer **taps** their contactless-enabled credit card on the contactless card reader.

The customer may be required to **swipe** or **insert** their card in some cases.

- b) Ask the customer if they would like a receipt: **Yes** or **No**.
- c) The screen shows that authorization number, the transaction total and the receipts print if requested. Go to step 5.

### Insert

- a) The customer inserts their credit card.
- b) The customer enters their **PIN** and presses **OK**.
- c) The screen shows that authorization number, the transaction total and the receipts print. Go to step 5.


### Swipe

- a) The customer swipes their credit card.
- b) Verify the card info with what is on the terminal screen and press **OK**.

- c) The screen shows that authorization number, the transaction total and the receipts print. The customer **must** sign the signature field on the merchant copy. Go to step 5.

**Manual entry**

- a) Enter the **account number** and press **OK**.
  - b) Enter the **expiry date** and press **OK**.
  - c) A manual imprint of the credit card is required. Make the imprint and press **OK**.
  - d) Enter the **CVD number** and press **OK**. This number is generally located on the back of the credit card. This is can be an optional step depending on your settings.
  - e) Indicate if the card was present for the transaction: **Yes** or **No**.
  - f) The screen shows that authorization number, the transaction total and the receipts print. The customer **must** sign the signature field on the merchant copy. Go to step 5.
5. The screen shows that authorization number, the transaction total and the receipts print if requested. If the card was swiped or manually entered, the customer **must** sign the signature field on the merchant copy.

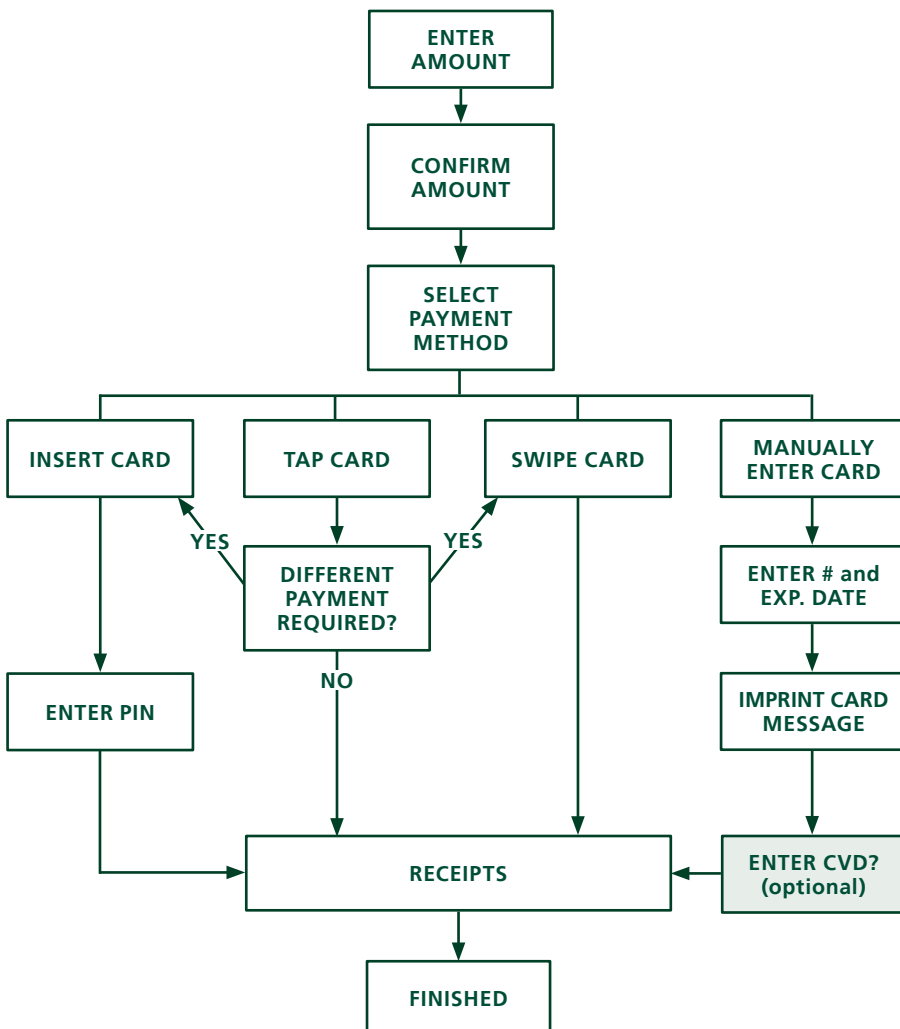

## Sale (debit card)

1. Press **ESC** / **F1**.
2. Enter the **dollar amount** and press **OK**.
3. Customer confirms the dollar amount.
4. Perform one of the following payment methods: **Insert / Swipe** or **Contactless**.

### Contactless


- a) The customer **taps** their contactless-enabled debit card.

The customer may be required to **swipe** or **insert** their card in some cases.

- b) Ask the customer if they would like a receipt: **Yes** or **No**.
- c) The screen shows that authorization number, the transaction total and the receipts print if requested. Go to step 5.

### Insert / swipe

- a) The customer selects the account to use: **CHQ** or **SAV**.
  - b) The customer enters their **PIN** and presses **OK**.
  - c) The screen shows that authorization number, the transaction total and the receipts print. Go to step 5.
5. The screen shows that authorization number, the transaction total and the receipts print if requested.

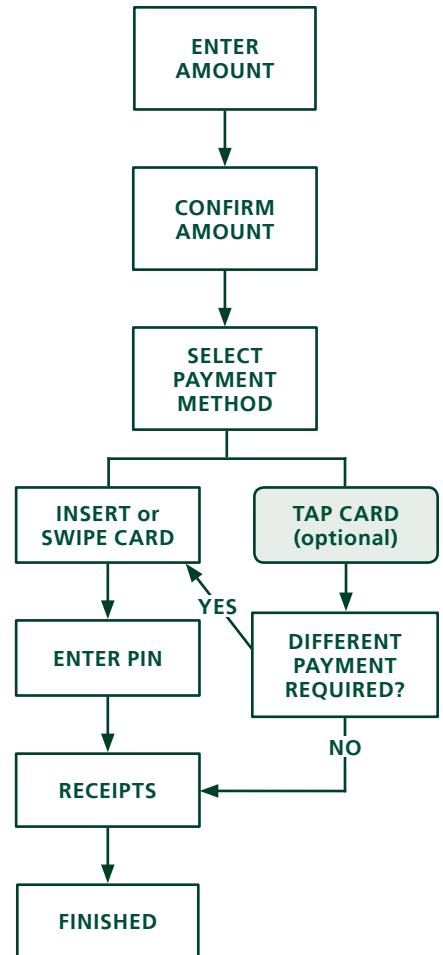

## Sale (phone or mail)

- These instructions are used for sales where the card is **not** present. If the card is present at sale, see *Credit card sale*. If you use the incorrect sale transaction you could incur extra charges.
- There are risks performing transactions when the credit card is not present. Ensure that you perform all of the available security checks for phone / mail sale.

1. Press **ESC** / **F4** → Phone / Mail Sale.
2. Enter the **dollar amount** and press **OK**.
3. Enter the **account number** and press **OK**.
4. Enter the **expiry date** and press **OK**.
5. Enter the **CVD number** and press **OK**. This step is dependent upon your settings.
6. The screen shows that authorization number, the transaction total and the receipts print.

## Force post (sale or phone / mail)

This option is only used when you can't process a credit card sale normally through the network whether due to communication problem or that the force post is requested via the terminal.

Before you perform this transaction you must call the TD Merchant Help Desk at **1-800-363-1163** and receive an authorization number.

1. Press **OK** → Force Post → Force Sale or Force Ph/Mail.
2. Enter the **dollar amount** and press **OK**.
3. Perform one of the following payment methods for the credit card in question: **Swipe** (only for Sale transactions) or **Manual entry**.

### Swipe

- a) Verify the card info with what is on the screen and press **OK**. Go to step 4.

### Manual entry

- a) Enter the **account number** and press **OK**.
  - b) Enter the **expiry date** and press **OK**.
  - c) A manual imprint of the credit card is required. Make the imprint and press **OK**.
  - d) Enter the **CVD number** and press **OK**. Go to step 4.
4. Then enter the authorization number and press **OK**.
  5. The screen shows that authorization number, the transaction total and the receipts print. The customer **must** sign the signature field on the merchant copy for a force post sale transaction.

## Void


This transaction is used to correct a previously entered transaction from the terminal in the current, open business day. You can also use Transaction Recall to recall and cancel/void a transaction based on information other than the trace number.

If you have closed the business day that the transaction was performed in, you can only perform a return. The option to void the transaction is no longer available.

1. Press **OK** → Void.  
Enter the **trace number** for the transaction to be voided and press **OK**. If you are voiding a debit transaction you will need the card that it was performed on.
2. Verify that this is the correct transaction: **Void** or **Back**. If you select back, you can enter a new trace number to void.
3. The voided transaction receipts print.

# Transaction recall

This option recalls a transaction so that you can view or void it for any transactions that were performed in the current open batch. If a day close has been completed you can only recall transactions after the last day close or batch close. Pre-authorization and tab transactions are covered in our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

1. Press  / **Admin** key → Trans Recall Menu.
2. Select one of the following options:


### by Detail

This recalls the details all of transactions in the open batch.

- a) Scroll to the **desired transaction** and press  / **F4**. Go to step 3.

### by Amount

This recalls any transaction for the entered dollar amount in the open batch.

- b) Enter the **dollar amount** and press **OK**.
- c) If more than one transaction appears, select the desired one and press  / **F4**. Go to step 3.

### by Account # (credit cards only)

This recalls any transaction for the entered card account number in the open batch.

- a) Swipe the credit card or enter the **card account number** and press **OK**.
- b) Select the **transaction** and press  / **F4**. Go to step 3.

### by Invoice #

This recalls the transaction for the entered invoice number.

- a) Enter the invoice number that you want to recall and press **OK**. Go to step 3.

### by Trace #

This only recalls the transaction connected to the trace number in the open batch.

- a) Enter the **trace number** that you want to recall and press **OK**. Go to step 3.

3. Verify that it is the correct transaction information on the screen and do one of the following:
  - a) Select **Void** to cancel the transaction and the voided receipts print.
  - b) Select **Back** to select a different transaction.
  - c) Press **Cancel** to exit the screen.

# Return

You can only perform a return on a transaction that has already been submitted for reimbursement.

Debit returns are disabled by default. If you wish to activate debit returns on your terminal please call the TD Merchant Solutions Help Desk at **1-800-363-1163**.

1. Press **OK** → Return.
2. Enter the **dollar amount** and press **OK**.
3. Customer confirms the dollar amount and presses **Yes** or **No**.
4. Perform one of the following: **Insert**, **Swipe** or **Manual entry** the card in question.

#### Insert credit card

- a) Verify the card info with what is on the screen and press **OK**.
- b) The customer may be required to enter their PIN. Go to step 5.

#### Swipe credit card

- a) Verify the card info with what is on the screen and press **OK**. Go to step 5.

#### Manually enter credit card

- a) Enter the **account number** and press **OK**.
- b) Enter the **expiry date** and press **OK**. This is four digits in length.
- c) Indicate if the return is for a phone / mail sale: **Yes** or **No**. Go to step 5.

#### Insert / swipe debit card

- a) The customer selects the account to use: **CHQ** or **SAV**.
- b) The customer enters their **PIN** and presses **OK**. Go to step 5.

5. The screen shows that authorization number, the transaction total and the receipts print.

## Receipts

Each transaction has a different receipt and most of the information is purely for record keeping. There is **important information** that you need to be aware of to ensure that your transactions have completed correctly.

## Reprinting receipts

1. Press **[.#\*]** / **Admin** key → Reprint Menu and select a reprint option.

#### Reprint Last

2. Select which copy you want to reprint (**Merchant**, **Customer** or **Both**) and press **OK**.
3. The receipt reprints and is noted as a duplicate.

#### Reprint Previous

2. Select one of the following options:

##### All

- a) Scroll through the **available receipts**, select the desired one and press **OK**. Go to step 3.

##### Invoice #

- a) Enter the **invoice number** and press **OK**. Go to step 3.

##### Account #

- a) Swipe the card or enter the **account number** and press **OK**. Go to step 3.

##### Approval Code

- a) Enter the **approval code** and **OK**. Go to step 3.

3. Select which receipt to reprint (**Merchant**, **Customer** or **Both**) and press **OK**.
4. The receipt reprints and is noted as a duplicate.

# Receipt examples

## Credit card

## Debit card

The information that you will use the most is explained below.

```

Merchant Name
Address
City, Province
Merchant Number
Terminal ID

SALE

06-16-2016           12:41:02
Acct # 455763*****1632           S
                                     Card Type VI

Name: nnnnnnnn
Trace # 010103
Inv # 109
Auth #089090           RRN 001003099

Sale                               $9.00

TOTAL                               $9.00

+++++
00 APPROVED-THANK YOU
+++++

Retain this copy for your
records
Merchant copy
    
```

```

Merchant Name
Address
City, Province
Merchant Number
Terminal ID

SALE

06-16-2016           12:41:02
Acct # 476173*****0010           C
                                     Card Type DP

Name: nnnnnnnnnn
A00000000980840

Trace # 060072
Inv # 124
Auth #008635           RRN 001003099
TVR 8000048000           TSI 6800
TC 98952D8874F69BD1

Sale                               $25.00

TOTAL                               $25.00

+++++
00 APPROVED-THANK YOU
+++++

Retain this copy for your
records
Merchant copy
    
```

## Transaction type

<b>C</b>	Online chip card transaction	<b>RF</b>	Contactless transaction
<b>CN</b>	Chip card No Signature Required transaction	<b>S</b>	Swiped mag card transaction
<b>CO</b>	Off-line chip card transaction	<b>SC</b>	Swiped chip card fall back transaction
<b>M</b>	Manually entered mag card transaction	<b>SN</b>	Swiped No Signature Required transaction
<b>MC</b>	Manually entered fall back of a chip card transaction		



## Card type

<b>AM</b> American Express	<b>MC</b> MasterCard
<b>DP</b> Debit	<b>VI</b> Visa
<b>DS</b> Discover/Diner	

## Important information

**Trace #** The trace number associated with the transaction

**Inv #** The invoice number associated with the transaction.

**Auth #** The authorization number associated with the transaction

**Signature** The card issuer determines when a signature is required for a transaction so ensure that the client signs these receipts.

**Approved** Always ensure that the transaction was approved as it could be **DECLINED**.

# Business Day Functions

## Performing a day close

You have a deadline to perform a day close. This is called your balancing window and it is set on the system. If your day close is done before your balancing window ends, you'll receive same or next business day deposit for credit and debit card totals. Otherwise, they will be forwarded to the next business day.

A day close is automatically performed on your terminal every three to five business days if one isn't performed sooner by you.

1. Press **[F1]** / **Admin** key → Business Day Menu → End of Day.
2. Confirm that you want to close the business day: **Yes** or **No**.
3. The end of day reports print.
4. The terminal reboots.

- If a lot of transactions have been conducted during the day, or you are using a dial-up connection, this process may take a while.
- Once the process is started, ensure no one interrupts it by processing any transactions, pressing any buttons or disconnecting your Internet service on the terminal in question.

You must close your business day on **each terminal** in order to maintain accurate records and balance your accounts. Closing the business day is important as it:

A batch is a group of transactions that you must submit to the issuer to accept in order for you to be paid. Once you close the batch or perform an end of day, these transactions are sent to the issuer for settlement and then they will deposit the funds into your account.

- Sends any stored transactions (SAFs)
- Closes all open batches
- Prints selected reports
- Checks for mail, and downloads
- Downloads available updates
- Starts a new business day on the terminal by opening a new batch

# Administration

## Changing the terminal communication method

### (iWL252 only)

If you have changed your Internet connection at your place of business, you may have to change your terminal connection settings so that you have a fall back connection in case your primary fails. Please refer to the chart below for the best option for your communications.

I have a dial connection	I have an Ethernet connection	Suggested communication setting
--	✓	Ethernet Only
✓	--	Dial Only
✓	✓	Eth w/dial F'back

1. Press **[F10]** / **Admin** key → Setup Menu → Communications Menu → Comms Type Setting.
2. Select one of the following: **Ethernet Only**, **Dial Only**, **Eth w/dial F'back** or **Dial w/Eth F'back** and press **OK**.

## More features and functionality

There are more ways to configure your terminal such as:

- User management
- Software downloads
- Communication options
- Terminal settings
- Transaction options

For more information, please visit our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

# Reporting

The following reporting options are split into different groups, **business day, batch** and **customized**. You have access to all of the business day and batch reports, and these will be covered in this Guide. Please see our online documentation for customized reports at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

## Business day reports

1. Press  / **Admin** key → Business Day → Business Day Reports and then select a report.

Report	Instructions	Provides...
Terminal Detail	<b>DISPLAY</b> or <b>PRINT</b> your report.	... all transactions for the current business day.
Terminal Balancing	Same as above.	...transactions for the current business day.
Day Subtotals	Select whether the report is for an <b>individual ID</b> or <b>all IDs</b> . <b>DISPLAY</b> or <b>PRINT</b> your report.	...transactions by operator ID and for the current business day.
Operator Detail	Same as above.	...transactions by card type, operator ID for the current business day.
Operator Balancing	Same as above.	...transactions by card type, operator ID for the current business day.
Outstanding SAF	<b>DISPLAY</b> or <b>PRINT</b> your report.	...all stored transaction details that have not been sent for settlement.

## Batch reports

1. Press the  / **Admin** key → Business Day → Batch Reports and then select a report.

Report	Actions	Provides...
Terminal Detail	Select which batch you want to review <b>PREV</b> or <b>CURRENT</b> and how you want to receive it <b>DISPLAY</b> or <b>PRINT</b> .	...transaction details by card type by current or previous batch.
Terminal Balancing	Same as above.	...transaction details by card type by current or previous batch

# Troubleshooting


If you're unable to resolve the problem after performing the following steps, please contact the TD Merchant Solutions Help Desk at **1-800-363-1163**.

## What problems can I easily resolve?

Problem	Action Required
Bad Communication	<ol style="list-style-type: none"><li>1. There was a communication failure after the transaction was initiated.</li><li>2. Verify your connections (Internet, dial up, terminal cables, etc.).</li><li>3. Press <b>Cancel</b> and try again.</li></ol>
Chip cards cannot be processed	<ol style="list-style-type: none"><li>1. Try a different card. If this card can be read, the problem is with the first card.</li><li>2. Use a cleaning card to clean the card reader.</li></ol>
Display screen is blank	<ol style="list-style-type: none"><li>1. Ensure that the power cable is firmly connected to the power port and the electrical outlet.</li></ol>
Magnetic stripe card reader won't read cards	<ol style="list-style-type: none"><li>1. Swipe the card more quickly or more slowly or from the top of the reader towards you.</li><li>2. Request another form of payment. If this card can be read, the problem is with the first card.</li><li>3. Use a cleaning card to clean the problem card reader.</li></ol>
Printer does not print	<ol style="list-style-type: none"><li>1. Ensure there is paper and that it is loaded correctly in the device.</li></ol>
Printer jam	<ol style="list-style-type: none"><li>1. Ensure that the paper feed is clear and that the paper roll is seated correctly.</li><li>2. Ensure the printer lid is completely closed.</li></ol>

## Why don't I see a connection icon on the Idle screen?

### TD iWL252

There are two communication methods for the TD iWL252 solution: dial-up / phone line and DSL. If you don't see the green network icon (  ) for DSL or the green phone icon for dial-up, you can quickly check the following:

Dial-up / phone line connection	DSL Internet connection
<ol style="list-style-type: none"><li>1. Is your phone line working properly?</li><li>2. Ensure the terminal is securely plugged into the communication adapter.</li><li>3. Ensure the communication adapter is securely plugged into a phone outlet.</li></ol>	<ol style="list-style-type: none"><li>1. Is your Internet connection working properly? Verify this with another device.</li><li>2. Is your modem / router working correctly? Unplug and plug back in your modem / router and wait for three to four minutes.</li><li>3. Ensure the terminal is securely plugged into the communication adapter.</li><li>4. Ensure the communication adapter is securely plugged into a phone outlet.</li></ol>

## TD iWL255

If you don't see the  icon, try the following:

- Have you made physical changes to your location? New walls or electronic devices near the terminal may inadvertently reduce the wireless signal strength. Try walking around your place of business to see if you are able to receive a signal.
- Has something changed to the environment outside your place of business? A new building may also reduce or block your signal strength. Try walking around your place of business to see if you are able to receive a signal.
- There may be an issue with the wireless phone network.

## Signal Strength

The signal strength is represented by five to zero bars. Your terminal should always show at least one in order to be able to complete transactions and ideally it should be a minimum of two bars.



If the terminal is experiencing low or no signal strength, check the following:

### Has the Bluetooth base become loose or unplugged? (TD iWL252 only)

Ensure the base is securely plugged into an electrical outlet.

### Have any obstacles or electronic equipment been placed around the base or the terminal? (TD iWL252 and TD iWL255)

If you have made physical changes to your location, such as adding a new wall or piece of equipment, you may need to have the base moved to accommodate this change. Please contact the TD Merchant Solutions Help Desk to assist with this if necessary.

## What can interfere with Bluetooth connectivity?

The biggest issue is that the frequency range (2.4GHz) used by Bluetooth is shared by other equipment and can be blocked by certain materials. There are steps that you can take that will minimize Bluetooth connectivity issues. They are:

### 1. Distance between the terminal and the base

Ensure that you keep your terminal and base in the same room if possible. Obstacles such as walls or furniture may weaken or block the Bluetooth signal.

### 2. Signal interference

Bluetooth uses the 2.4GHz frequency range which is shared by other devices such as:

- Microwaves
- Wi-Fi devices (routers, VoIP phones, wireless cameras)
- Fluorescent office lighting
- Some cordless phones and baby monitors

To avoid connectivity and data issues, avoid going near these devices when using the TD iWL252 solution. Of course, you can't always avoid sources of interference such

as Wi-Fi or fluorescent lighting. To accommodate this, Bluetooth is able to adapt to some interference from multiple sources depending on its strength. But, if you encounter too many sources of interference at once, your devices may not be able to adapt and they could lose connectivity.

## What can interfere with 3G connectivity?

The 3G (cell towers) signal is blocked by certain materials. Buildings (new or existing) have a large amount of concrete or brick and may cause connection issues. As well, new physical barriers added to your workplace (walls with metal frameworks and electrical wires) may also cause interference for your iWL255 terminal. Be aware when modifying your workplace that you may be introducing signal interference.

## Why isn't my terminal charging?

### TD iWL252

1. Ensure the terminal is seated firmly in the base? Then, check to see if the charging icon appears in the top-right of the screen. If it doesn't, go to step 2.
2. Ensure that the bases' electrical outlet has power. If it is, go to step 3.
3. Ensure that the power pack is fully inserted into the power outlet. Is the terminal charging? If not, go to step 4.
4. Ensure that the power cable is fully inserted into the base. Is the terminal charging? If not, go to step 5.
5. Use charging cord included in your welcome kit. Plug this into an electrical outlet and plug the other end into the charging port on the left side of the terminal. It is covered by a grey rubber flap that can easily be lifted with your thumbnail.

### TD iWL255

1. Use charging cord included in your welcome kit. Plug this into an electrical outlet and plug the other end into the charging port on the left side of the terminal. It is covered by a grey rubber flap that can easily be lifted with your thumbnail.

If after trying these steps your terminal still does not charge, please contact the TD Merchant Solutions Help Desk.

## What do I do if there's a power outage?

### TD iWL252

The terminal will not be able to process transactions without power. Once the power has been restored, you do not need to take any steps to restart your Bluetooth base. It will automatically come online and create a connection with your terminal if it is in range. If a transaction was interrupted due to battery/power failure, please perform the transaction again when power is restored.

### TD iWL255

A terminal with battery power will still work and be able to perform transactions unless the local cell tower does not have power as well.

# Menu structure

Access all of the following menus by pressing the **[F12]** / **Admin** key.

Logon / Logoff		
Log ON		--
Log OFF		--

Business Day Menu		
End of Day		--
B. Day Reports	Terminal Detail	--
	Terminal Balancing	
	Day Subtotals	
	Operator Detail	
	Operator Balancing	
	Pre-Auth Status*	
	Open Pre-Auth*	
	Tip Totals	
	Outstanding SAF	
	Cashback Totals*	
Customized Reports	Transaction Details	--
	Totals	
	Pre-Auth Status*	
Batch Reports	Terminal Detail	--
	Terminal Balancing	
Host Transactions	Batch Subtotals	--
	Batch Close	

\* Pre-authorizations and cashbacks are covered in our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

Trans Recall Menu		
by Detail		--
by Amount		--
by Account #		--
by Invoice		--
by Trace #		--
PreAuthOpen-Inv.#*		--
PreAuthOpen-Detail*		--

\* Pre-authorizations, tabs and cashbacks are covered in our online documentation at [www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre).

## Setup Menu

### Customization

Receipt Options	Receipt Banner Preprint Receipt Delay Receipt Order
Language Options	--
Use ID / Password	Disable Enable Oper ID Enable Oper ID/Pwd
Authority Setup	End of Day Manual Account # Batch Reports B.Day Reports Customized Reports Batch Close Recent Error Report
Transaction Options	Cashback Options High Amount Limit Duplicate Trans Check Tip Options
Transaction Prompts	Split Tender Card Present
Hardware Options	Key Beep Backlight Sleep Timer
Idle Timer	--

### User Setup

Add User	--
Change Password	
View & Delete	
Operator Wording	
Unlock User	
ID Report	



## Setup Menu

<b>Communications</b>	Comms Type Setting	--	
	IP Address Type	Dynamic IP Static IP	
	Dial Menu	Prefix Code	
		LD Prefix	
		Predial	
		Dial Retry	
		Dial Tone	
		Baud	
		Dial Mode	
	Bluetooth (iWL252 only)	New Base	
		Remove base	
		Print Bases	
	Wireless (iWL255 only)	Access Point 1	
Access Point 2			
Access Point 3			
Wireless preference			
SIM Code			
Operation Mode			
<b>Config. Reports</b>	Communications	--	
	Customization		
	Host 1 Settings		
	Host 2 Settings		
	BIN Ranges		

## Reprint Menu

<b>Reprint Last</b>	--	--
<b>Reprint Previous</b>	--	--

## Maintenance Menu

<b>Host 1 Param DL</b>	--	--
<b>Host 2 Param DL</b>	--	--
<b>US BIN Download</b>	--	--
<b>Reset Menu</b>	Reset Invoice #	--
<b>System Info</b>	--	--
<b>Software Download</b>	Setup	Dial IP
	Connection Type	Ethernet Dial
	Start Download	--
	Schedule Download	--



## Other Functions Menu

<b>Training Mode</b>	--	--
<b>Service Menu</b>	--	--
<b>EMV Reports</b>	EMV Parameter Rpt EMV Statistics Rpt EMV Last Trans EMV Public Keys	--
<b>Recent Error Rep.</b>	--	--
<b>Activity Log</b>	--	--

# Reference

## Entering letters and special characters

Whenever you have are requested to enter a letter or special character, such as a receipt banner or creating a user ID, follow these steps. Press **correction** to change any entry.

Letters	Spaces	Special characters
<ol style="list-style-type: none"><li>1. Press the key that has the desired letter on it. For example, press  / <b>2</b> key to enter C.</li><li>2. Press the <b>F</b> key until the desired letter is displayed.</li></ol>	<ol style="list-style-type: none"><li>1. Press <b>0</b> key.</li><li>2. Press the <b>F</b> key twice.</li></ol>	<ol style="list-style-type: none"><li>1. Press the  / <b>Admin</b> key.</li><li>2. Press the <b>F</b> key until the desired special character appears on the screen.</li></ol>

## Maintaining the terminal

- Don't place it on a magnetized pad — this will cause it to malfunction.
- Routinely clean it with a damp cloth so that spills don't get into the inner workings.
- Use TD-approved cleaning cards for the chip and magnetic card readers.
- This also includes the Bluetooth base for the TD iWL252.

## Storing the terminal

- They must be stored in temperatures between 0° and 50° Celsius.
- Do not leave it outdoors, or in your vehicle, (summer or winter) for an extended period of time as this will have an adverse effect on battery performance.
- This also includes the Bluetooth base for the TD iWL252.

# Call Centre Information

Please call the TD Merchant Solutions Help Desk at **1-800-363-1163**. We would be happy to answer any questions you may have.

**Authorization:**

24 hours a day, seven days a week

**Terminal Inquiries:**

24 hours a day, seven days a week

**General Merchant Inquiries:**

Monday – Friday, 8 a.m. – 8 p.m. ET

**Printer / Stationery Supplies:**

Monday – Friday, 8 a.m. – 5 p.m. ET

## Documentation Portal

This Guide covers the most commonly used information in order to get you started. Your terminal has more features and functionality to explore on our documentation portal.

*[www.TDMerchantSolutions.com/ResourceCentre](http://www.TDMerchantSolutions.com/ResourceCentre)*

