

## **US PROVISIONAL PATENT APPLICATION**

(Provisional Application for Patent Cover Sheet)  
This is a request for filing a PROVISIONAL APPLICATION FOR PATENT  
under 37 CFR 1.53(c)

# **ADD-ON ELECTRIC HEATING**

### Applicants and Inventors:

Peter V. Schwartz (A citizen of the United States)  
residing at 1441 Iris Street, San Luis Obispo CA 93401

John D'Ambrosio (A citizen of the United States)  
residing at 1236 Monte Vista Place, Apt. 3, San Luis Obispo, CA 93405

Diana Swanson (A citizen of the United States)  
residing at 428 N Chorro St., San Luis Obispo, CA 93405

Nathaniel Heston (A citizen of the United States)  
residing at 1109 Pismo St, Apt. C, San Luis Obispo, CA 93401

Entity: Micro

**PTO CUSTOMER NUMBER: 124278**

**CORRESPONDENCE ADDRESS:  
LAW OFFICES OF STEPHEN J. LEBLANC  
1551 MADISON STREET, SUITE 311  
OAKLAND CA, 94612**

**STEPHEN J. LEBLANC,  
PTO REGISTRATION 36,579**

## PATENT

**ADD-ON ELECTRIC HEATING****COPYRIGHT NOTICE**

5 [0001] Pursuant to 37 C.F.R. 1.71(e), applicant notes that a portion of this disclosure contains material that is subject to and for which is claimed copyright protection (such as, but not limited to, source code listings, screen shots, user interfaces, or user instructions, or any other aspects of this submission for which copyright protection is or may be available in any jurisdiction.). The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or patent disclosure, as it appears in the  
10 Patent and Trademark Office patent file or records. All other rights are reserved, and all other reproduction, distribution, creation of derivative works based on the contents, public display, and public performance of the application or any part thereof are prohibited by applicable copyright law.

**FIELD OF THE INVENTION**

15 [0002] The present invention relates to electrical devices. Specific embodiments involve residential and commercial heaters and/or water heaters and alternative methods of heating.

**BACKGROUND**

20 [0003] The discussion of any work, publications, sales, or activity anywhere in this submission, including in any documents submitted with this application, shall not be taken as an admission that any such work constitutes prior art. The discussion of any activity, work, or publication herein is not an admission that such activity, work, or publication existed or was known in any particular jurisdiction.

25 [0004] Patent Application number US20150104160 A1<sup>1</sup> claims a solar water heater that can go in the side or top ports for water heater and hot tubs. Patent number US6810206 B1<sup>2</sup> claims an electric water heating element able to *be connected through* the drain of a water tank and has a cord and a three prong plug. SunBandit<sup>3</sup> sells a hot water system that includes an electrically heated water tank powered by PV solar cells. A system consisting of the water tank and electrical control costs about \$4,000 without solar panels.

---

<sup>1</sup> Photovoltaic DC Heater Systems <http://www.freepatentsonline.com/20150104160.pdf>

<sup>2</sup> Drain Plug Heater <http://www.freepatentsonline.com/6810206.pdf>

## SUMMARY

**[0005]** According to specific embodiments, systems and methods described herein present an inexpensive way to add electric heating capacity to any water heater through the insertion of an electric heating element into the drain of any hot water tank. Specific embodiments are useful for adding electrical heating capacity to a natural gas water tank, for example to take advantage of inexpensive or free electricity. Specific embodiments may also be useful for an electrical water tank to add additional electric heating from a different source without substantially altering the original function of the electric water tank.

**[0006]** With respect to the example above, free or reduced cost electricity can result from a variety of circumstances including when renewable energy is produced in surplus and is cheaper to use than to turn off. This can happen on a grid-wide basis such as in parts of Texas where electricity at night is free because of abundant wind power and low electrical load at night (Krauss, 2015)<sup>4</sup>; or for locally produced electricity not tied to the grid.

**[0007]** According to specific embodiments, “Add-On Electric Water Heating”<sup>TM</sup> provides consumers a capacity to practice demand side management by using surplus electricity to heat water. This can in some circumstances primarily save the user’s costs of grid utilities and/or natural gas, or petroleum; or whatever the default heating fuel is. According to specific embodiments, the invention can also be used for stabilizing an electric power supply grid by storing electricity as thermal energy. In further embodiments, utilities or electricity or energy suppliers can control or influence consumers’ Add-On Electric Water Heaters, and thereby stabilize the grid by using the bank of controlled water heaters as a dispatchable load in order to compensate for changes in demand or variable electrical sources such as wind.

**[0008]** According to specific embodiments, the present design provides that much of or all of the entire heating element can pass through the drain port into the interior of the hot water tank, and sealed in a threaded “T” adapter that allows the heating element to be

---

<sup>3</sup> SunBandit <http://www.sunbandit.us>

operated while displacing the drain 90 degrees, but maintaining its function. Specific embodiments can use various electrical sources, including AC and DC power sources and may include a swivel adapter to allow the heating element and “T” drain to be screwed into the tank.

- 5 **[0009]** Example implementations according to specific embodiments allow the user to heat water in a pre-existing water tank with electricity for under \$200 in hardware, requiring 1-4 hours for installation.

### BRIEF DESCRIPTION OF THE DRAWINGS

10 Figure 1 is a diagram of a heating element with thick steel leads attached to the “T” by means of a swivel adapter extending through the drain.

Figure 2 is a diagram illustrating the heating element in a natural gas water tank. The element is inserted through the drain pipe of the water heater tank and bends upwards so it does not hit the flue or other parts of the tank. The thermostat in this case is thermally connected to the inner water heater vessel under the insulation.

15

Figure 3 is the outside of an electric water tank showing an electric thermostat hooked up in series with an electric heating element that is inserted through the drain of the water tank. There is a factory-installed heating element between the drain port and the thermostat that is not affected by installation of the Add-On Electric Water Heater .

20 Figure 4 shows a bent electric heating element that can be inserted into a natural gas water tank without hitting the flue or internal obstacles of the tank.

Figure 5 shows an electric heating element screwed into a swivel adapter than can be inserted into a ¾” inner diameter drain of a water heating tank. The metal heating element is visible extending to the right and bending downward. This arrangement would not allow for the continued use of the drain because of the lack of a 90 degree “T” connection for the new drain.

25

---

<sup>4</sup> Krauss, Clifford, and Diane Cardwell. “A Texas Utility Offers a Nighttime Special: Free Electricity.” *The New York Times*. The New York Times, 08 Nov. 2015. Web. 01 Sept. 2016.

Figure 6 shows a computer system that is programmed or otherwise configured as described according to specific embodiments herein.

## DESCRIPTION OF SPECIFIC EMBODIMENTS

5 [0010] According to specific embodiments, an Add-On Electric Water Heater™ allows the user to heat water in a pre-existing water tank by inserting an immersion heater through an existing port such as the drain. Specific embodiments include a “T” adapter that can screw into the drain port and allow the immersion heater to go through and into the water tank, while maintaining a spigot on the side of the “T” for drainage purposes as in Figure 1.

10 [0011] In further embodiments, the heating element feedthrough is attached to the “T” with a swivel to form a watertight connection while allowing rotational independence so the orientation of the immersion heating element in the tank can stay fixed through insertion. In specific embodiments, it is desirable that the element maintain a fixed orientation during insertion so it does not hit the bottom of the tank, the flue in natural gas  
15 tanks or other obstacles.

### 1.1 Modified standard electric immersion heating elements

[0012] Modification to standard electric immersion heating elements may be used in some embodiments to allow the element to fit through the adapter and drain port that has a smaller diameter, typically  $\frac{3}{4}$ ” inner diameter. This can be done by bending the element.  
20 When bending the element, a crack may form, typically at the smallest radius of curvature. The crack may be patched by spot welding or soldering. A custom heater can be manufactured industrially or homemade by coating resistive wires in high temperature insulation inside of metal tubing. For instance, glass beads can be strung onto NiCr wire inside of stainless steel tubing. Mortar can also be added to the interior and/or ends of the  
25 tubing. Special accommodations for the tight radius turn in the heater may be necessary such as using smaller diameter beads or flexible fiberglass in the area of the low radius turn.

[0013] Because part of the heater that is closest to the swivel adapter is inside a pipe enclosure of the “T”, the filament in the heater near the base is preferably low resistance  
30 so as not to generate substantial heat in this region. This low resistance lead in specific embodiments extends from the swivel adapter to the section of heater that is in inside the

main body of the water tank, see Figure 1. The low resistance leads may be any low resistance metal or just much thicker metal that is the same as that of the heater filament, or additional wire added in parallel with the filament wire.

5 **[0014]** According to specific embodiments, an Add-On thermostat in series with the Add-On electric power source is added to control the add-on heating. An add-on electric thermostat can be added underneath the tank insulation allowing thermal contact between the thermostat and the inner tank of the vessel. Alternatively, an add-on electric heater with an add-on thermostat integrated unit can be used<sup>5</sup>.

10 **[0015]** According to specific embodiments, the for the Add-On Electric Water Heater thermostat can be set to a temperature well above the set point for the factory-installed or otherwise usual thermostat of the water heater. This ensures that the building or consumer will always have hot water that is hot enough (determined by the normal operation temperature setting) while making optimal use of the available Add-On Electric Water Heating energy. If the water temperature is kept above the normal operating temperature by the Add-On Electric Water Heater, the factory-installed heater will normally be shut off  
15 in accordance with the normal operating thermostat control.

**[0016]** According to further embodiments, to maximize the thermal energy storage capacity of the water heater, the thermostat can be set higher than what is normally desired for people and/or pipes. For example, where water is usually kept at about 50°C for  
20 domestic use and the thermostat for the Add-On Electric Water Heater may be set to about 95°C.

**[0017]** According to specific embodiments, at high temperatures, a thermostat mixing valve is necessary at the output of the tank to protect the pipes and people. One mixing valve that may be used according to specific embodiments is the AMX 300 DirectConnect™ made by Honeywell<sup>6</sup>, examples of which presently cost around \$125.  
25 This allows cold water to be mixed with the heated water to yield the desired temperature, essentially increasing the water tank capacity.

---

<sup>5</sup> An element similar to this could be used, but higher power ratings would be ideal [www.sespvt.com/24-Volt-600-Watt-Heater-with-Adjustable-Thermostat](http://www.sespvt.com/24-Volt-600-Watt-Heater-with-Adjustable-Thermostat)

<sup>6</sup> [https://forwardthinking.honeywell.com/related\\_links/water/amx\\_300/.../62\\_3113.pdf](https://forwardthinking.honeywell.com/related_links/water/amx_300/.../62_3113.pdf)

## 1.2 Thermostat Control

[0018] The Add-On Electric Water Heater can be controlled (e.g., switched on or off) via any combination of the following: an installed thermostat directly, commands from a cell phone or the utilities, based on water temperature, time of day, or the spot price of electricity. Further Example Embodiments

### *Example I:*

[0019] For example, the Add-On Electric Water Heater can be used in water tanks in areas such as parts of Texas where electricity is free at night because of abundant power from wind turbines and traditionally low night-time demand. A resident in Texas with a natural gas water heater heats water at night for free with an Add-On Electric Water Heater controlled by a timer. The natural gas water heater is set to 50°C, but the Add-On Electric Water Heater thermostat is set to 95°C requiring an output mixing valve to lower the output to the pipes and users to be 50°C thus increasing the water capacity.

### *Example II:*

[0020] For example, the Add-On Electric Water Heater can be used on a house with a traditional electric water heater or natural gas water heater and has photovoltaic panels that are not grid connected but used to power DC loads during the day. The thermostat for the Add-On Electric Water Heater is set to 70°C not requiring the addition of a mixing valve at the output of the tank. When PV power is not otherwise used it could be directed to the Add-On Electric Water Heater to heat water, thus storing the otherwise wasted electricity as thermal energy. We recognize that for this example of an electric factory-installed water heater, it would be possible to direct the PV electricity to the factory-installed elements in the electric water heater. However this modification may be much more costly than simply inserting the Add-On Electric Water Heater through the drain port with an added thermostat. And the user maintains the ability to use grid power when necessary.

## 1.3 Semi-Permanent Conversion

[0021] According to specific embodiments, a natural gas water heater can be permanently or semi-permanently converted to all electricity. Natural gas water heaters lose considerable heat through the flue and keeping the pilot light on. Efficiency can be improved according to specific embodiments if the pilot light is extinguished and the flue is sealed and insulated, either permanently or during periods or seasons when it is expected the add-on electric heating will be sufficient. This can be done permanently; or

on a temporary basis by a responsible user. Alternatively, one could implement a pilot light and flue that can automatically be closed.

## **2 Add-On Thermostat or Controller**

5 **[0022]** As described above, according to specific embodiments, an Add-On controller can be queried, configured, or controlled remotely by either a user or an electric supplier, over a communication channel. This is an optional element not in all embodiments. In simpler embodiments, a controller can be stand-alone and temperature or time based or based on detection of available Add On electricity. Any suitable communications network can be used, such as a cellular or Internet network and wired or wireless.

10 **[0023]** Figure 6 shows a computer system that is programmed or otherwise configured as described according to specific embodiments herein. All or part of such a system can be included in an integrated Add-On thermostat controller system according to specific embodiments. Figure 6 shows a computer system 801 that is programmed or otherwise configured to perform communication and control as described herein. The computer  
15 system 801 can be in whole or in part integrated with or may comprise one or more hardware components separate from the system but in communication with the system.

**[0024]** The control system 801 according to specific embodiments includes a logic processing unit (CPU, also “processor” and “computer processor” herein) 805. An example computer system 801 generally includes memory or memory location 810 (e.g.,  
20 random-access memory, read-only memory, flash memory) and can include electronic storage unit 815, communication interface 820 (e.g., network adapter) for communicating with one or more other systems, and peripheral devices 825, such as a thermostat interface cache, and/or communication adapters. The computer system 801 can be operatively coupled to a computer network (“network”) 830 with the aid of the communication  
25 interface 820. The network 830 can be the Internet, an Internet and/or extranet, or an intranet and/or extranet that is in communication with the Internet. The network 830 in some cases is a telecommunication and/or data network. The network 830 can include one or more computer servers including servers of an electricity provider.

**[0025]** The logic processor 805 executes a sequence of machine-readable instructions,  
30 which can be embodied in a program or software. The instructions may be stored in a memory location, such as the memory 810. The processor 805 can be part of a circuit, such as an integrated circuit. One or more other components of the system 801 can be



included in the circuit. In some cases, the circuit is an application specific integrated circuit (ASIC).

5 **[0026]** The computer system 801 can communicate with one or more remote computer systems through the network 830. For instance, the computer system 801 can communicate with a remote computer system of a user (e.g., operator). Examples of remote computer systems include personal computers (e.g., portable PC), slate or tablet PC's (e.g., Apple® iPad, Samsung® Galaxy Tab), telephones, Smart phones (e.g., Apple® iPhone, Android-enabled device, Blackberry®), or personal digital assistants. The user  
10 can access the computer system 801 via the network 830.

**[0027]** Methods as described herein can be implemented by way of machine (e.g., computer processor) executable code stored on an electronic storage location of the computer system 801, such as, for example, on the memory 810 or electronic storage unit 815. The machine executable or machine readable code can be provided in the form of  
15 software. During use, the code can be executed by the processor 805. In some cases, the code can be retrieved from the storage unit 815 and stored on the memory 810 for ready access by the processor 805. In some situations, the electronic storage unit 815 can be precluded, and machine-executable instructions are stored on memory 810.

**[0028]** The code can be pre-compiled and configured for use with a machine have a  
20 processor adapted to execute the code, or can be compiled during runtime. The code can be supplied in a programming language that can be selected to enable the code to execute in a pre-compiled or as-compiled fashion.

**[0029]** Aspects of the systems and methods provided herein, such as the computer system 801, can be embodied in programming. Various aspects of the technology may be  
25 thought of as “products” or “articles of manufacture” typically in the form of machine (or processor) executable code and/or associated data that is carried on or embodied in a type of machine readable medium. Machine-executable code can be stored on an electronic storage unit, such memory (e.g., read-only memory, random-access memory, flash memory) or a hard disk. “Storage” type media can include any or all of the tangible  
30 memory of the computers, processors or the like, or associated modules thereof, such as various semiconductor memories, tape drives, disk drives and the like, which may provide non-transitory storage at any time for the software programming. All or portions of the software may at times be communicated through the Internet or various other

telecommunication networks. Such communications, for example, may enable loading of the software from one computer or processor into another, for example, from a management server or host computer into the computer platform of an application server. Thus, another type of media that may bear the software elements includes optical, electrical and electromagnetic waves, such as used across physical interfaces between local devices, through wired and optical landline networks and over various air-links. The physical elements that carry such waves, such as wired or wireless links, optical links or the like, also may be considered as media bearing the software. As used herein, unless restricted to non-transitory, tangible “storage” media, terms such as computer or machine “readable medium” refer to any medium that participates in providing instructions to a processor for execution.

**[0030]** Hence, a machine readable medium, such as computer-executable code, may take many forms, including but not limited to, a tangible storage medium, a carrier wave medium or physical transmission medium. Non-volatile storage media include, for example, optical or magnetic disks, such as any of the storage devices in any computer(s) or the like, such as may be used to implement the databases, etc. shown in the drawings. Volatile storage media include dynamic memory, such as main memory of such a computer platform. Tangible transmission media include coaxial cables; copper wire and fiber optics, including the wires that comprise a bus within a computer system. Carrier-wave transmission media may take the form of electric or electromagnetic signals, or acoustic or light waves such as those generated during radio frequency (RF) and infrared (IR) data communications. Common forms of computer-readable media therefore include for example: a floppy disk, a flexible disk, hard disk, magnetic tape, any other magnetic medium, a CD-ROM, DVD or DVD-ROM, any other optical medium, punch cards paper tape, any other physical storage medium with patterns of holes, a RAM, a ROM, a PROM and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave transporting data or instructions, cables or links transporting such a carrier wave, or any other medium from which a computer may read programming code and/or data. Many of these forms of computer readable media may be involved in carrying one or more sequences of one or more instructions to a processor for execution.

### **3 Conclusions**

5 [0031] Thus, according to specific embodiments, the present invention is involved with methods and/or systems and/or devices that can be used together or independently to provide efficient use of electric power for heating as described herein. This description introduces a selection of concepts that are further described or can be further understood from other papers submitted with this application. Key features or essential features of the claimed subject matter are discussed throughout this submission, thus no individual part of this submission is intended to determine the scope of the claimed subject matter.

10 [0032] It is well known in the art that systems and methods such as described herein can include a variety of different components and different functions in a modular fashion. Different example specific embodiments and implementations can include different mixtures of elements and functions and may group various functions as parts of various elements. For purposes of clarity, embodiments of the invention are described in terms of systems that include different innovative components and innovative combinations of innovative components and known components. No inference should be taken to limit the claimed invention to combinations containing all of the innovative components listed in any illustrative embodiment in this specification. The general structure and techniques, and more specific embodiments that can be used to effect different ways of carrying out the more general goals are described herein. Although only a few embodiments have been disclosed in detail herein, other embodiments are possible and the inventor(s) intend these to be encompassed within this specification. The specification describes specific examples to accomplish a more general goal that may be accomplished in another way. This disclosure is intended to be exemplary, and the claims are intended to cover any modification or alternative that might be predictable to a person having ordinary skill in the art.

25 [0033] It is intended that only those claims which use the words “means for” are intended to be interpreted under 35 U.S.C. § 112, sixth paragraph. Moreover, no limitations from the specification are intended to be read into any claims, unless those limitations are expressly included in the claims.

30 [0034] Where a specific numerical value is mentioned herein, it should be considered that the value may be increased or decreased by 20%, while still staying within the teachings of the present application, unless some different range is specifically mentioned. Where a specified logical sense is used, the opposite logical sense is also intended to be

encompassed.

**WHAT IS CLAIMED:**

1. An electrical add-on heating element comprising:  
an immersion heater inserted into a port in a vessel;  
an electrical power source;  
5 wires connecting the immersion heater to the power source that can be inserted into a hot water tank, allowing the water tank to function as before, but with the additional capability of heating the water with this “Add-On Electric Water Heater.”
2. The apparatus of claim 1 further comprising:  
an electrical power source that is either AC or DC from any source including grid,  
10 photovoltaic solar cells, wind power, or any other electrical generation; or from an electrical storage medium such as batteries.
3. The apparatus of claim 1 further comprising:  
electrical switch between the heater and power source that will allow the electricity to  
power the heater, turn the electrical power off, or route the electrical power  
15 elsewhere.
4. The apparatus of claim 3 further comprising:  
an electrical switch controlled by a thermostat that measures the temperature of the  
water by any conventional means including thermocouples, bimetallic discs,  
bimetallic strips, electronic means or taking the temperature from the standard  
20 thermostat on the pre-existing vessel.
- 4A. The apparatus of claim 4 further comprising:  
further wherein the thermostat can be integrated into the heating element feed through,  
integrated as part of the heating element or a separate device inserted against the  
tank under the insulation.
- 25 5. The apparatus of claim 4 further wherein the thermostat is set to a temperature substantially higher than the factory installed thermostat is set, allowing the immersion heater to heat the water when the other heater is not engaged.
6. The apparatus of claim 5 further wherein the temperature of the water can be made  
substantially higher without harm to people or infrastructure through the use of a mixing  
30 valve, thereby increasing the capacity to store thermal energy. This temperature can be above 60°C and optimally between 80°C and 95°C. At a pressure of 90 psi the boiling

point of water is 160°C, allowing a more optimal storage temperature between 140°C and 155°C.

7. The apparatus of claim 6 further wherein comprising the use of the drain port for insertion.

5 8. The apparatus of claim 7 further comprising:

the insertion of a “T” or other branching pipe, allowing the continued use of a drain with the addition of the Add-On Electric Water Heater.

9. The apparatus of claim 8 further comprising:

10 modification of the immersion heater by bending of immersion heater, or otherwise, to allow it to fit through the drain and prevent obstruction from the central flue (of natural gas water heaters) or bottom of tank; and/or including a section of the internal wire that is not sufficiently resistive to result in a section of the heater that does not substantially heat the water where heating is not desired; and/or making the immersion heater narrower than usual in order to allow passage through the pre-  
15 existing vessel port; and/or patching any cracks in the modified heater (due to bending) through soldering, welding, adhesive or otherwise.

10. The apparatus of claim 9 further comprising:

a swivel adapter to allow insertion of immersion heater without rotation.

11. An electrical immersion heater that can fit through a small pipe of inner diameter  
20 of 1.5” or less, optimally 1” or less, most optimally of ¾” or less, or possibly more optimally of ½” or less, as required by the factory installed ports.

12. The apparatus of claim 11 further comprising an electrical immersion heater that has low resistance leads extending into the immersion tubing in order to limit the hot portion of the heater to a given distance from the swivel adapter.

25 13. The apparatus of claim 12 further comprising of an electrical immersion heater made by means of wires of resistive metal (such as Nickel-Chromium wire) running through pieces of nonconducting material (such as glass beads or fiberglass) inside of metal tubing (such as stainless steel tubing).

14. The apparatus of claim 13 further comprising nonconducting material that is  
30 substantially transparent to light, including all wavelengths of light, especially infrared

radiation, allowing for more effective heat transport from the wire to the metal housing (tubing).

15. The apparatus of claim 14 further comprising special construction to make a tight radius turn including but not limited to inclusion of beads of a small radius.

5 16. The apparatus of claim 15 used as a heater in connection with any of claims from claim 1 through claim 10.

10 17. A technology limiting the flow of air through the flue of a natural gas water heater either permanently or temporarily thereby decreasing heat loss through the flue when the natural gas heating is not used such as inserting Styrofoam into the port, or a lid on the port.

18. The apparatus of claim 17 further comprising the ability to turn off the pilot light and completely occlude the flue opening, eliminating air-flow through the flue.

19. The apparatus of claims 18 further comprising the ability to open and close the flue in order to turn natural gas heating on and off.

15 20. The use of claim 19 in connection with claim 10 and/or claim 16.

20 21. The apparatus of any of claims 10, 16, and 20 or any combination thereof, further comprising a means to control the temperature settings or power to the heater including remote cell phone apps, computerized communicating thermostat, connection with the internet and communication with the utilities by any means including that of a “smart grid”.

22. The apparatus of claim 21 further comprising a means to stabilize the electrical grid by means of demand response, or demand side management, whereby consumers store surplus electrical energy as thermal energy.

25 23. The apparatus of claim 22 further comprising a means for utilities to take control of heating consumers’ water, and thereby stabilize the grid by using the bank of controlled water heaters as a dispatchable load in order to compensate for changes in demand or variable electrical sources such as wind.

24. The apparatus of claim 1 further comprising:

a controller that activates the add-on electric heater in response to any one or any combination of: time, temperature, commands received of a communications medium, etc.

25. The apparatus of claim 1 further comprising:

5 a user input allowing a user to configure the controller.

26. The apparatus of claim 1 further comprising:

an internet or other communications interface allowing a user to monitor and/or configure and/or activate the controller.

27. The apparatus of claim 1 further comprising:


10 an internet or other communications interface allowing a third-party to monitor and/or configure and/or activate the controller.



**ADD-ON ELECTRIC HEATING**


**ABSTRACT OF THE DISCLOSURE**

Method and apparatus allowing use of an add-on electrical heating element.

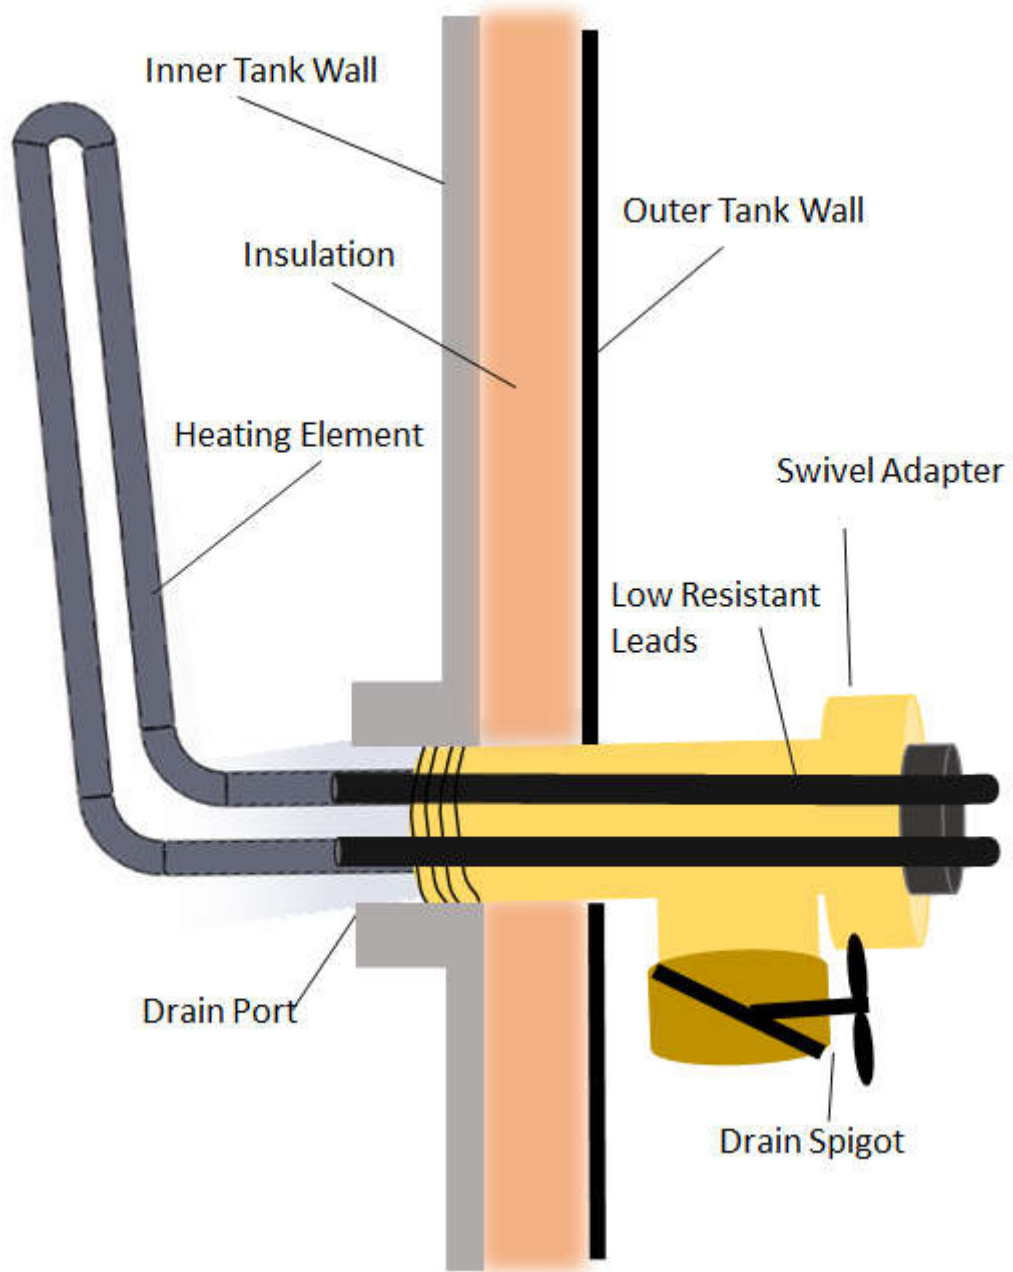

*Figure 1 Heating Element with swivel adapter and steel leads.*

2/4

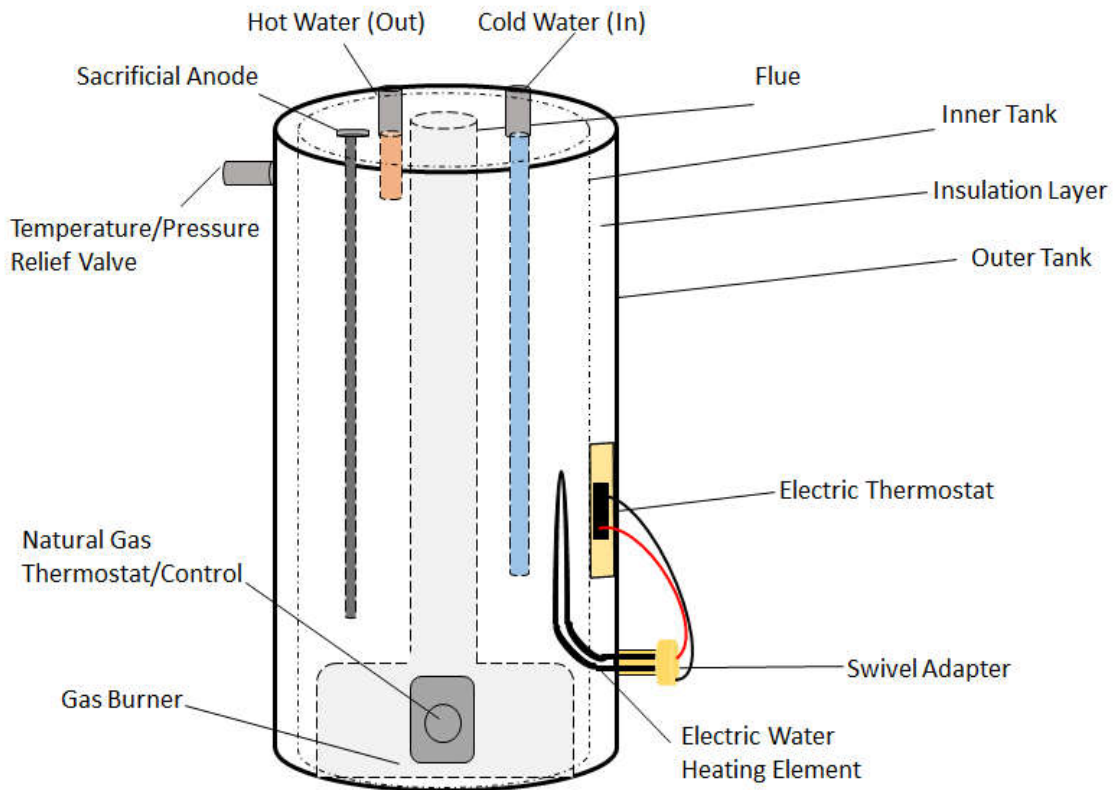

*Figure 2: Natural gas tank with the Add-On Electric Water Heater and thermostat in place on side of tank.*



*Figure 3*


3/4



*Figure 4*



*Figure 5*

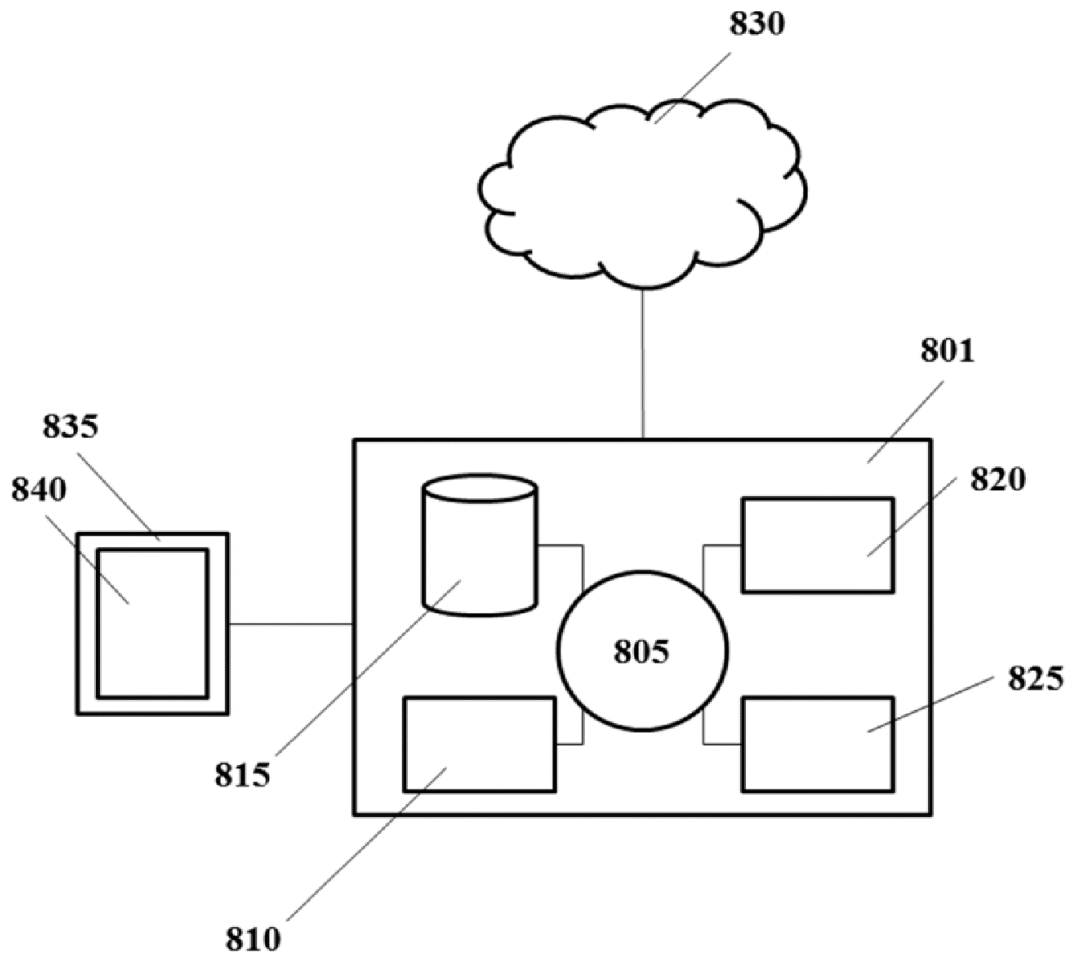

*Figure 6*