

IDEX
IDEX CORPORATION

■
Reduce
down-time with
our immediate
availability of
spares for Blagdon
and competitors.

■
Confidence
of delivery
99.1%
on-time
delivery

■
Flexible design
and production
meets our
customer's
exacting
standards.

■
High quality
products with
certification to
EHEDG, ATEX, ISO.

■
Worldwide
technical
representation for
customer's
support.

BLAGDON PUMP

Air Operated Double Diaphragm Pumps

GLOBAL PUMPING SOLUTIONS



www.blagdonpump.com

Blagdon – The Company

Our Background

Blagdon Pump was originally founded in the early 1950's in the North East of England as a specialist pump manufacturer. We commenced the production of **AIR OPERATED DOUBLE DIAPHRAGM PUMPS** in 1979. We soon became market leaders in their production resulting in the US based multi-national IDEX CORPORATION acquiring Blagdon Pump to strengthen their position in the double diaphragm market in 1997.

Our Credentials

We are world-wide market leaders in providing high quality **AIR OPERATED DOUBLE DIAPHRAGM PUMPS**. We comply with all British Standards **BS EN ISO 9001:2000** Quality Management System and **BS EN ISO 14001:2004** Environmental Management System.

We comply with the letter and spirit of current OH & S legislation and other requirements as well as take all necessary measures to protect the Environment.

We are **INVESTOR IN PEOPLE** accredited as we continuously strive to improve our products and standards for our customers.

Our Mission

Is to provide all our customers with an exceptional product and service. To be respected by customers and competitors alike, setting standards by which others will be measured.

Our Website

We are committed to offering you a dedicated sales and after sales service which is second to none. Now you can keep up to date with developments as they happen with our **NEW WEBSITE** and **QUARTERLY NEWSLETTER**. (See inside back pages for more details)

There is a lot happening at Blagdon Pump. We aim to make dealing with us a more efficient experience. A service you can rely on for all your pump requirements

We look forward to dealing with you.

General Manager



INVESTOR IN PEOPLE

Continuous improvement methodologies are at the heart of the Blagdon culture and used every day in every process within the business.

Durham University has for the past 10 years used our Washington factory as one of its preferred sites for the purpose of training in manufacturing techniques in a full production setting.

John Garside, Teaching Fellow and Industrial Tutor at Durham University said:

"I have had many a student and project activities with Blagdon Pump since about 1996. I now feel privileged to visit myself and recommend others to visit Blagdon Pump, and hear and see what I call the 'Blagdon Story'. I believe it is truly special; it covers so many aspects of excellent manufacturing and business practices".

Neil Radbourne, Best Practice Manager, MAS (Manufacturing Advisory Service) said:

"Blagdon's unique use of continuous improvement activity together with lean and six sigma tools provides a stimulating combination with excellent examples for visiting managers, whether from large or small organisations".

Current practices include:

- Six Sigma
- Kaizen
- Value Stream Mapping
- Supply Chain Management
- 5S Housekeeping
- Lean Thinking
- Kanban

Anyone wishing to experience how Blagdon Pump manages continuous improvement can arrange a visit by calling +44 (0) 191 417 7475.

Choice of models to suit all applications

Air operated double diaphragm pumps have long been recognised as the "work horse" of industry for handling "difficult" liquids at relatively low pressures and flows. The range of applications is virtually limitless. Blagdon AODD pumps come in many sizes and choices of materials of construction. Almost every type of liquid from highly corrosive acids through high viscosity paints and adhesives, to food and drink products can be pumped.

Blagdon 1/2", 1" and 2" EHEDG Approved Hygienic Pumps in Polished 316L Stainless Steel



Blagdon Non-metallic B10 3/8" available in Polypropylene and Kynar (PVDF)



Blagdon 1" and 2" High Pressure 2:1 Pumps available in Aluminium, Stainless Steel



BLAGDON 1/2", 1", 1 1/2", 2" FDA Compliant Pumps in Polished Steel plus assorted standard fluid fittings



Blagdon Metallic Pumps available in Aluminium, Cast Iron, Stainless Steel from 1/4" to 3"



Blagdon Non-metallic Pumps available in Polypropylene and Kynar (PVDF) from 1/4" to 2"



Download individual specification sheets from our website.

The benefits you get from a Blagdon Pump

Blagdon offer an extensive pump range for handling **fluid media safely and cost effectively**. We offer **low cost ownership**, by combining **high quality wear parts** with **low price spares** and a **vast array of accessories**. A **flexible modular design** of pumps means we can offer **short lead times** and a high degree of **customising** opportunities. Our experienced staff can provide **instant support** for installation, servicing, maintenance or a technical enquiry. We offer a **fast spares delivery service**, many items being in stock for immediate delivery.

11 key features and benefits of a Blagdon Pump

1. Blagdon pumps can run dry without damage or danger.
2. They are fully submersible.
3. They are designed to operate at low noise levels.
4. They have leak-free air valves that are easily removed for servicing.
5. They can be easily maintained. They can be stripped down quickly without any specialist tools.
6. They are self-priming to over 6 metres.
7. They are pressure balanced. They stall if discharge is closed and restart when discharge is opened so avoiding heat build up and wearing of components.
8. They have minimum product agitation.
9. They have long stroke, slow speed cycling capability for low initial break out.
10. They are portable and compact-can be remotely controlled and fully packaged.
11. Safe in hazardous areas, no sparking, air-driven.



How the double diaphragm system works


The Blagdon pump is basically two pumps in one. Chambers A&B are alternatively filled and emptied by drawing fluid in through a common inlet (C) and out through a common outlet (D). The diaphragms in each chamber are linked by a common shaft so that they move backwards and forwards in unison. Compressed air is directed by the air valve (E) alternatively behind each diaphragm to power discharge strokes. Pump speed and therefore fluid flowrate can be infinitely controlled by increasing or decreasing air pressure and / or volume.

Operation sequence

The red arrows show the pump cycle. Fluid is being drawn into inlet (C) by the suction stroke of the diaphragm in chamber B, which opens the ball valve (2) to allow liquid to enter the chamber. Ball valve (4) is closed by the diaphragm suction.

In chamber (A) air has been applied to the rear of the diaphragm to force out the liquid in the chamber through the ball valve (3) to the liquid outlet (D). This discharge stroke closes ball valve (1) to prevent further liquid entering the chamber. This cycle is repeated to provide a continuous flow to outlet D.

Standard Blagdon pumps are 1:1 ratio. Maximum outlet pressure cannot exceed air supply pressure. Blagdon also offer 2:1 ratio high pressure pumps.

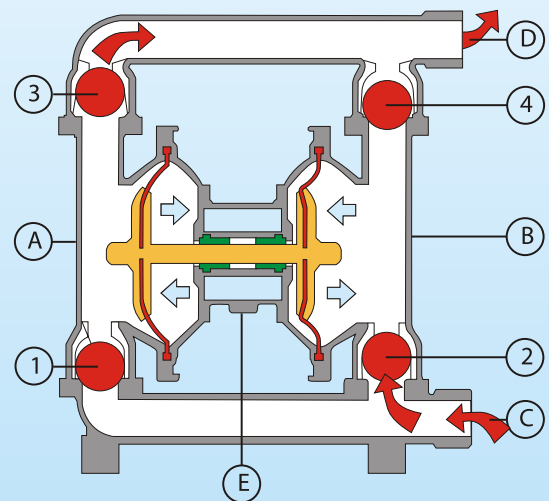


The media Blagdon Pump can handle

A full list of chemicals and recommended elastomers is available on request, or our sales office can advise on the best pump and materials for specific media.

Typical range of products you can pump.

- **ABRASIVES:** Clay slip, titanium dioxide, mill scale.
- **ACIDS:** All mineral and organic acids.
- **ADHESIVE:** Solvent and water based.
- **ALCOHOLS:** Chemicals.
- **CAUSTICS:** Acids.
- **CEMENT:** Cement, mortar.
- **CERAMICS:** Slip, glazes, clay.
- **COSMETICS:** Creams, emulsions, detergents.
- **DRILLING:** Mud, grout, lubricants.
- **DRINKS:** Soft drinks, spirits, beer, wine, milk.
- **EXPLOSIVES:** Suspensions of gun powder, explosives, etc.
- **FOODS:** Liquid and semi-solid foods, flavourings.
- **INKS & DYES:** Printing inks, dryers, dyes, sizes and solvents.
- **OILS:** Petrol, diesel, hydraulic and cutting oils, lube oils, animal and vegetable oils and greases.
- **PAINT:** Emulsions, latexes, pigments, solvents, resins, thinners.
- **PHARMACEUTICALS:** Liquids, creams and compounds.
- **PLATING:** Aggressive acids, salts, sludge and effluents.
- **PULPS:** Paper, wood, sizes, bleaches.
- **RESINS:** Natural and synthetics, water and solvent based, monomeric and polymeric plastics.
- **RUBBER:** Gum, latex.
- **SLUDGE & WASTE:** Sewage, effluents, coal and lime slurry.
- **SOLVENTS:** Aromatic and aliphatics, ketones, aldehydes, esters and chlorinated hydrocarbons, de-icing fluids.
- **TIMBER PRESERVATIVES:** Creosote, turpentine, copper naphthenate.
- **WATER:** All types.

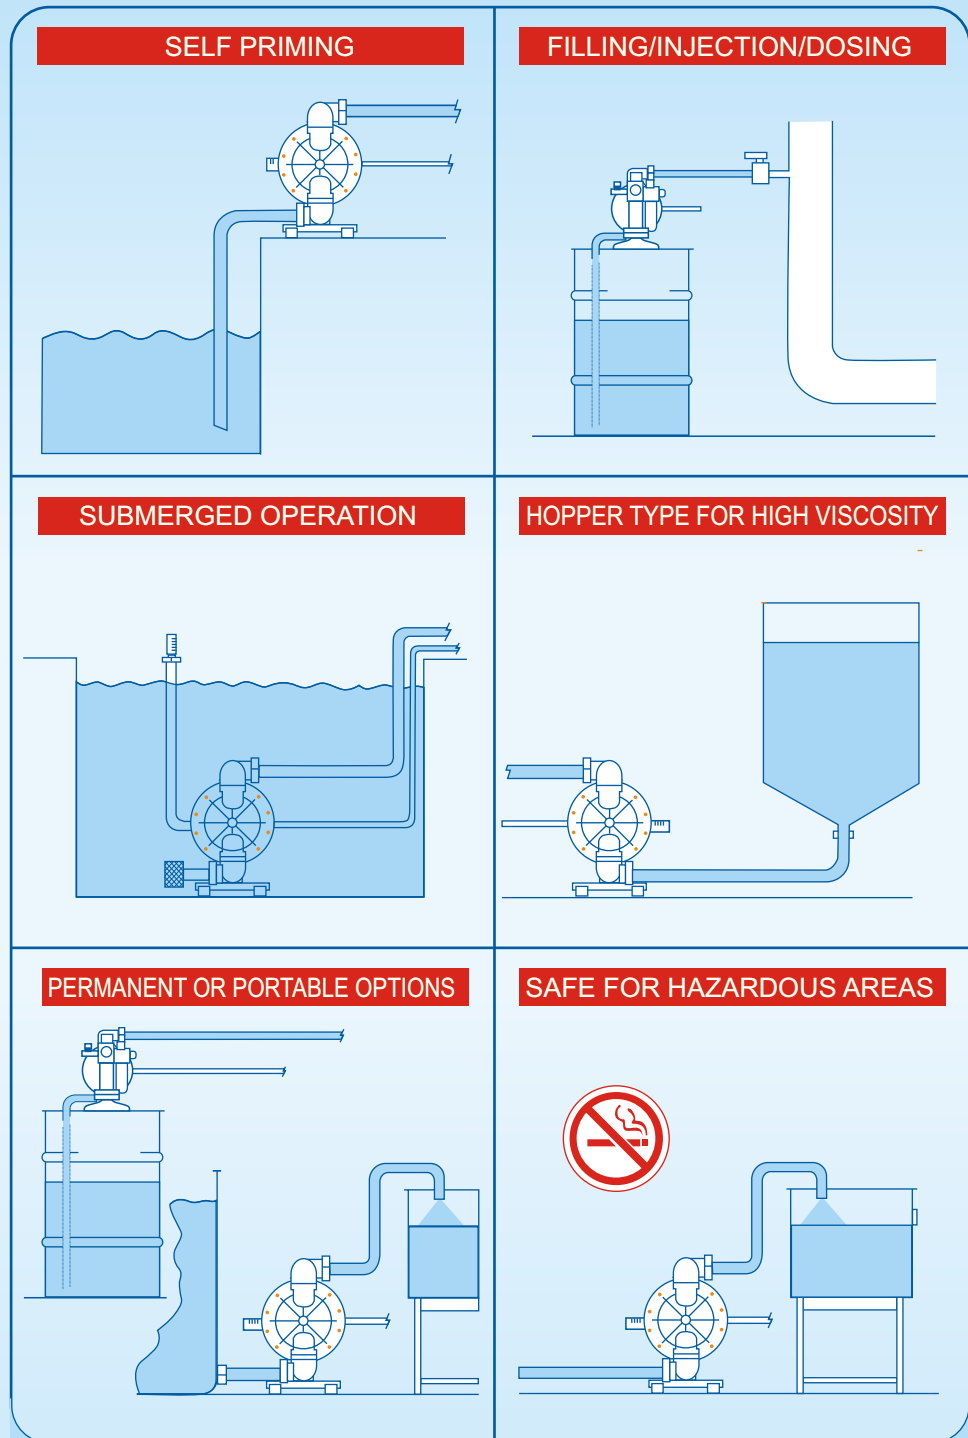

Pump Duties

Blagdon pumps can be installed in any of the models illustrated to perform the following duties: Liquid Transfer, Slurry Handling, Filter Feeding, Circulation, De-watering, Low Pressure Spray Supply, Tank/Sump/Barrel/Drum Filling and emptying, Batching/Mixing/Metering/Dosing, and Chemical Injection etc.



Blagdon - Portfolio Information

	Pump Model/Size/Material	Fluid Contact Materials							Air Chamber Materials						Diaphragm							
		Conductive PTFE	Virgin PTFE	Aluminium	Cast Iron	PVDF	Polypropylene	Stainless Steel	Polished Stainless	Aluminium	Cast Iron	Nickel Plated Aluminium	Polypropylene	Stainless Steel	Epoxy Coated Aluminium	Epoxy Coated Stainless Steel	Conductive PTFE	Buna-N	EPDM (Inc. Food Grade)	Geolast	Polyester (Hytel)	Neoprene
Metallic Pumps	B06 - 1/4" Stainless Steel						●						●					●	●	●	●	
	B15 - 1/2" Aluminium			●						●								●	●	●	●	●
	B15 - 1/2" Stainless Steel						●						●					●	●	●	●	●
	B25 - 1" Aluminium			●						●								●	●	●	●	●
	B25 - 1" Cast Iron				●					●	●							●	●	●	●	●
	B25 - 1" Stainless Steel						●			●	●			●				●	●	●	●	●
	B40 - 1 1/2" Aluminium			●						●								●	●	●	●	●
	B40 - 1 1/2" Cast Iron				●					●	●							●	●	●	●	●
	B40 - 1 1/2" Stainless Steel						●			●	●			●				●	●	●	●	●
	B50 - 2" Aluminium			●						●								●	●	●	●	●
	B50 - 2" Cast Iron				●					●	●							●	●	●	●	●
	B50 - 2" Stainless Steel						●			●	●			●				●	●	●	●	●
	X75 - 3" Aluminium			●						●								●	●	●	●	●
	X75 - 3" Cast Iron				●					●	●							●	●	●	●	●
X75 - 3" Stainless Steel						●			●	●							●	●	●	●	●	
Non-Metallic Pumps	B06 - 1/4" Polypropylene					●						●						●	●	●	●	
	B06 - 1/4" PVDF					●						●						●	●	●	●	
	B10 - 3/8" Polypropylene					●	●					●						●	●	●	●	
	B15 - 1/2" Polypropylene					●	●					●						●	●	●	●	
	B15 - 1/2" PVDF					●	●					●						●	●	●	●	
	B25 - 1" Polypropylene					●	●					●						●	●	●	●	
	B25 - 1" PVDF					●	●					●						●	●	●	●	
	B50 - 2" Polypropylene					●	●					●						●	●	●	●	
B50 - 2" PVDF					●	●					●						●	●	●	●		
Hygienic Pumps	B15 - 1/2" Hygienic								●		●		●					●	●	●	●	
	B25 - 1" Hygienic								●		●		●					●	●	●	●	
	B50 - 2" Hygienic								●		●		●					●	●	●	●	
High Pressure Pumps	B25 - 1" Standard 2:1			●	●			●	●	●		●					●	●	●	●	●	
	B25 - 1" Full Flow 2:1			●				●	●	●		●					●	●	●	●	●	
	B50 - 2" Full Flow 2:1			●				●	●	●		●					●	●	●	●	●	
FDA Pumps	B15 - 1/2" Stainless Steel							●		●								●	●	●	●	
	B25 - 1" Stainless Steel							●		●								●	●	●	●	
	B40 - 1 1/2" Stainless Steel							●		●								●	●	●	●	
	B50 - 2" Stainless Steel							●		●								●	●	●	●	
PTFE Pumps	B15 - 1/2" Conductive PTFE	●											●									
	B15 - 1/2" Virgin PTFE		●										●									
	B25 - 1" Conductive PTFE	●													●							
	B25 - 1" Virgin PTFE		●																			

Diaphragm & Ball Valve Options - Uses, Temperature Limits & Specific Gravity

Elastomer	Main Properties and Uses	Operating Temperatures	
		Min	Optimum
Buna-N	General purpose for use on water, most hydrocarbons and mild chemicals	-18F -28C	50 to 140F 10 to 60C
EPDM	Caustic solutions and dilute acids. Poor on oils and solvents	-11F -24C	50 to 140F 10 to 60C
Geolast	General purpose for use on water, most hydrocarbons and mild chemicals	-10F -23C	50 to 140F 10 to 60C
Neoprene	Excellent abrasion resistance. Widely used in the ceramics industry on dirty water, clays, grout etc	-4F -20C	50 to 130F 10 to 54C
Polyester	High mechanical strength. Suitable with most oils, solvents and hydrocarbons	-40F -40C	50 to 130F 10 to 54C
Polyurethane	Excellent abrasion resistance, dirty water, oils and hydrocarbons	-40F -40C	50 to 130F 10 to 54C
PTFE	Aggressive chemicals and solvents but with low abrasion resistance	32F 0C	50 to 212F 10 to 100C
Santoprene	Caustic solutions and dilute acids. Excellent abrasion resistance	-10F -23C	50 to 140F 10 to 60C
Stainless Steel	N/A	N/A	N/A
Viton	Aggressive chemicals and most solvents. High temperature uses	0F -18C	75 to 212F 24 to 100C

Materials										Ball Valve Materials				Max. Flow		Fluid Connections			Air Inlet	Max. Op Pressure		Max. Solid Size (mm)
PTFE (One Piece)	Polyurethane	Santoprene	PTFE	Viton	Buna-N	EPDM (Inc. Food Grade)	Neoprene	Santoprene	Stainless Steel	PTFE	Viton	UKGPM	L/Min	BSP(F)	ANSI Flange	RJT(M)	BSP(F)	Bar	PSI			
●	●	●	●	●	●	●	●	●	●	●	●	4	18	1/4"			1/4"	8.6	125	2		
●	●	●	●	●	●	●	●	●	●	●	●	14	60	1/2"			1/4"	8.6	125	2		
●	●	●	●	●	●	●	●	●	●	●	●	14	60	1/2"			1/4"	8.6	125	2		
●	●	●	●	●	●	●	●	●	●	●	●	40	180	1"			3/8"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	40	180	1"			3/8"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	40	180	1"			3/8"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	76	320	1 1/2"			3/8"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	76	320	1 1/2"			3/8"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	76	320	1 1/2"			3/8"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	120	530	2"			3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	120	530	2"			3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	120	530	2"			3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	202	889	3"			3/4"	8.6	125	10		
●	●	●	●	●	●	●	●	●	●	●	●	202	889	3"			3/4"	8.6	125	10		
●	●	●	●	●	●	●	●	●	●	●	●	202	889	3"			3/4"	8.6	125	10		
●	●	●	●	●	●	●	●	●	●	●	●	4	16	1/4"			1/4"	5	72	2		
●	●	●	●	●	●	●	●	●	●	●	●	4	16	1/4"			1/4"	5	72	2		
●	●	●	●	●	●	●	●	●	●	●	●	6	26	3/8"			1/4"	7	100	2		
●	●	●	●	●	●	●	●	●	●	●	●	11	48		1/2" 150 RF		1/4"	8	116	2		
●	●	●	●	●	●	●	●	●	●	●	●	11	48		1/2" 150 RF		1/4"	8	116	2		
●	●	●	●	●	●	●	●	●	●	●	●	34	154		1" 150 RF		3/8"	8	116	3		
●	●	●	●	●	●	●	●	●	●	●	●	34	154		1" 150 RF		3/8"	8	116	3		
●	●	●	●	●	●	●	●	●	●	●	●	120	530		2" 150 RF		3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	120	530		2" 150 RF		3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	17	75			1"	1/4"	8.6	125	2		
●	●	●	●	●	●	●	●	●	●	●	●	31	136			1"	3/8"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	114	500			2"	3/4"	8.6	125	10		
●	●	●	●	●	●	●	●	●	●	●	●	20	86	1"			1/4"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	28	125	1"			3/8"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	80	350	2"			3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	14	60	1/2"			1/4"	8.6	125	2		
●	●	●	●	●	●	●	●	●	●	●	●	40	180	1"			3/8"	8.6	125	3		
●	●	●	●	●	●	●	●	●	●	●	●	76	320	1 1/2"			3/8"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	120	530	2"			3/4"	8.6	125	6		
●	●	●	●	●	●	●	●	●	●	●	●	11	48		1/2" 150 RF		1/4"	7	100	2		
●	●	●	●	●	●	●	●	●	●	●	●	11	48		1/2" 150 RF		1/4"	7	100	2		
●	●	●	●	●	●	●	●	●	●	●	●	34	154		1" 150 RF		3/8"	7	100	3		
●	●	●	●	●	●	●	●	●	●	●	●	34	154		1" 150 RF		3/8"	7	100	3		

Max	Ball Valve S.G.	
	Standard	Weighted
176F 80C	1.23	2.64
212F 100C	1.23	2.64
212F 100C	1.0	N/A
212F 100C	1.23	2.64
158F 70C	N/A	N/A
158F 70C	N/A	N/A
356F 180C	N/A	N/A
212F 100C	0.98	N/A
N/A	7.80	N/A
356F 180C	1.80	3.2

Viscosity Guide

This table is a guide only – cps = centipoise

X75 - 3" Pumps										Maximum 25000				
B50 - 2" Pumps										Maximum 12000				
B40 - 1 1/2" Pumps										Maximum 12000				
B25 - 1" Pumps										Maximum 5000				
B15 - 1/2" Pumps										Maximum 5000				
B10 - 3/8" Pumps										Maximum 2000				
B06 - 1/4" Pumps										Maximum 2000				
1	200	500	1000	2000	4000	10000	15000							
Water 1 cps	Tomato Juice 176 cps	SAE 30 Oil 352 cps	Glycerine 880 cps	SAE 50 Oil 1561 cps	Glue 3000 cps	Mayonnaise 5000 cps	Molasses B 8640 cps	Sour Cream 15200 cps	SAE 70 Oil 17640 cps					

The Products – Blagdon Pumps in action



An ink pumping and mixing plant at Amcor Packaging in Australia using Blagdon 15 moulded pumps.




Fully automated Rexson ink manufacturing plant. Blagdon 25 metallic pumps are used for mixing and recirculation.



Blagdon 75 pump transferring paint from dispenser to blending vessel.



Blagdon 50 pumps feeding a ring main for final blending at a coatings producer.

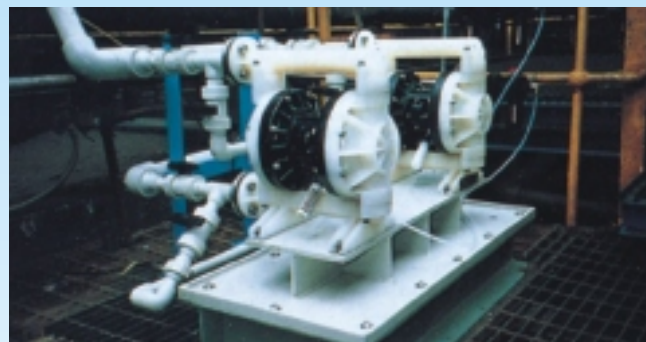

Blagdon 25 moulded Kynar pumps transferring hydrofluoric acid.



Blagdon 06 moulded pumps being used by Duraco Industries, Singapore, for chemical injection at a waste treatment plant.



Blagdon 25 metallic pump at a major chemical plant in Northern England.



Part of the filtration process at a major multi-national paint manufacturer where Blagdon 50 pumps are used to supply the fully automated filling line.



This Blagdon 25 metallic pump at Caradon Bathroom is feeding a robotic spray glazing operation.




2 Blagdon pumps at Royal Doulton pottery works. The unit at the rear pumped clay slip for 8 years without change of diaphragm, ball valves or valve seats.

Moulded Non Metallic Series



- Simple construction, easy to maintain.
- Self priming, ideal for emptying containers.
- Pressures to 5 bar.
- Flow rates up to 16 litres/minute.
- Bolted construction for safety.
- Low break out pressure requirement.
- Reliable pneumatic air valve system.

TYPICAL CODE = B06. PP. BB. TTP

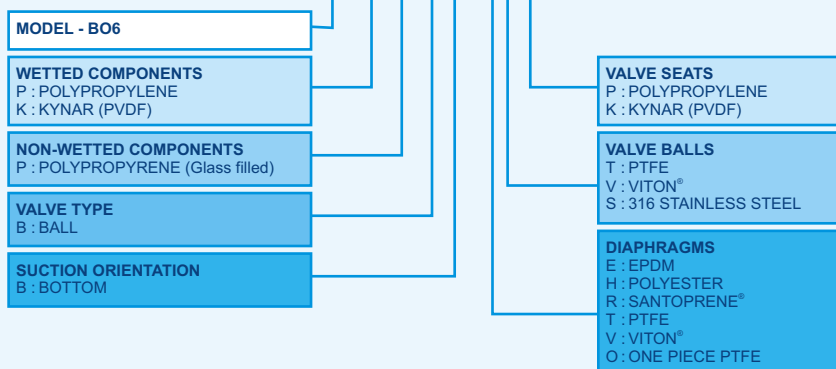

Example above: B06.PP.BB.TTP refers to B06 model with Polypropylene wetted components, Glass filled Polypropylene non-wetted components, with PTFE Diaphragms and Valve Balls and Polypropylene Seats.

TECHNICAL DATA;


NON METALLIC SERIES B06 POLYPROPYLENE & PVDF

Maximum Delivery:	16 ltrs/min
Max. working Pressure:	5 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	1.5 m.
Suction Lift (Wet):	4.1 m.
Fluid Inlet/Outlet:	1/4" BSP(F)
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Polypropylene	1.7 kg.
PVDF	1.9 kg.

Performance curve

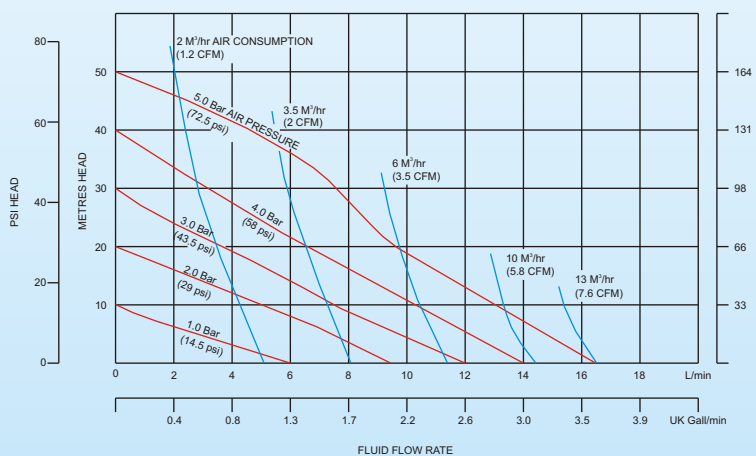


Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 240 x 180 x 200 mm.

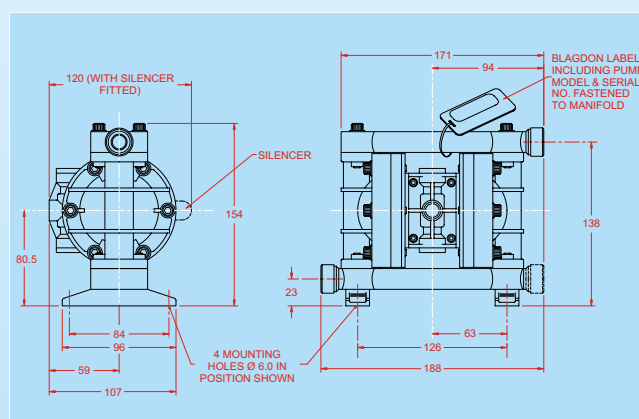


Metallic Series

- Simple construction, easy to maintain.
- Self priming, ideal for emptying containers.
- High quality investment cast design.
- Pressures to 8.6 bar.
- Flow rates up to 18 litres/minute.
- Bolted construction for safety.
- Reliable pneumatic air valve system.
- Constructed from 316L Stainless steel.

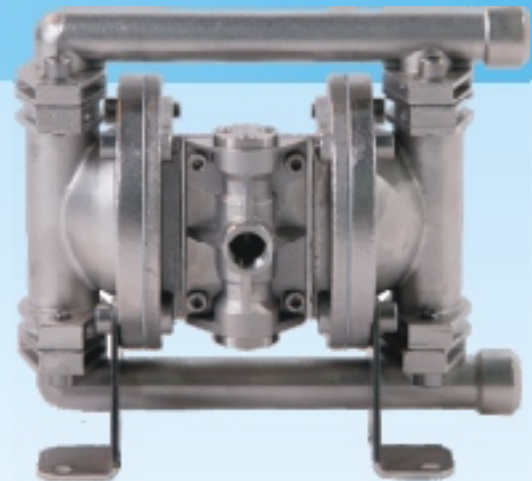

TYPICAL CODE = B06. 01. SS. BB. TTS

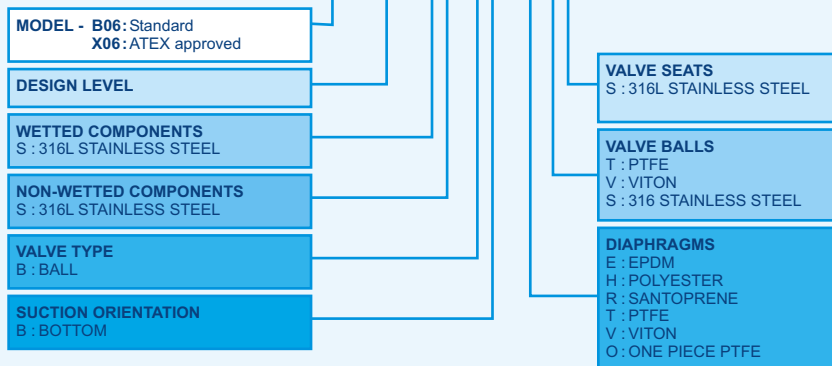

TECHNICAL DATA;


METALLIC SERIES B06 STAINLESS STEEL

Maximum Delivery:	18 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	1.5 m.
Suction Lift (Wet):	4.1 m.
Fluid Inlet/Outlet:	1/4" BSP(F)
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Stainless Steel 3.7 kg.

Performance curve

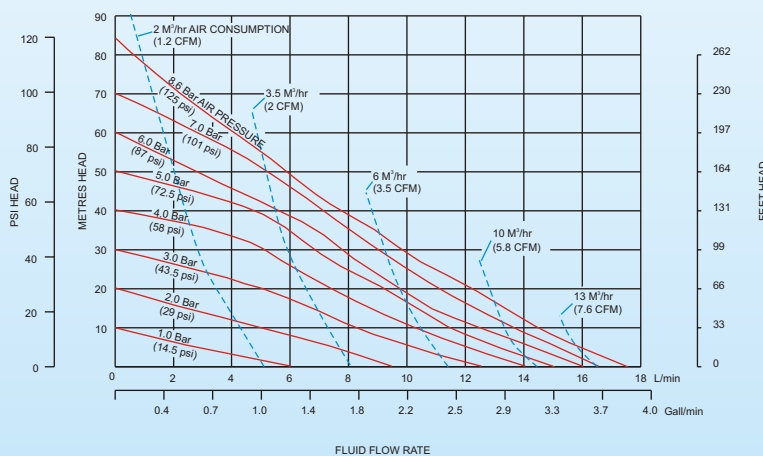

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 240 x 180 x 200 mm.

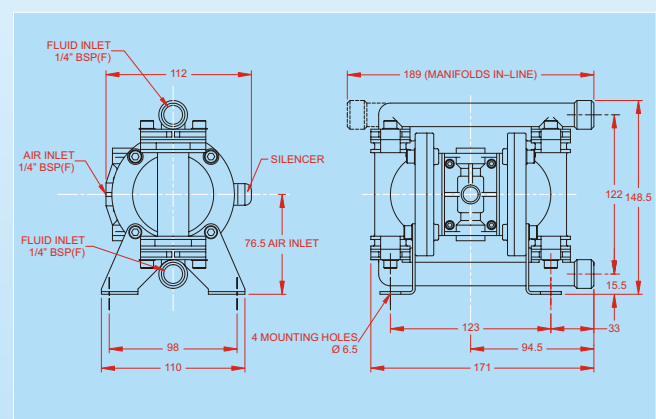

B 15

Air Operated Diaphragm Pump Range

Moulded Non Metallic Series

- Simple construction, easy to maintain.
- Self priming, ideal for emptying containers.
- Strong, robust design.
- Pressures to 8 bar.
- Flow rates up to 48 litres/minute.
- Flanged or screwed end connections.
- Pneumatic air valve, reliable and easy.



TYPICAL CODE = B15. 01. PT. BB. TTP

MODEL - B15	VALVE SEATS B : BUNA-N K : KYNAR (PVDF) E : EPDM V : VITON N : NEOPRENE P : POLYPROPYLENE
DESIGN LEVEL	VALVE BALLS B : BUNA-N T : PTFE E : EPDM V : VITON N : NEOPRENE S : 316 STAINLESS STEEL
WETTED COMPONENTS P : POLYPROPYLENE K : KYNAR (PVDF)	DIAPHRAGMS B : BUNA-N P : POLYPROPYLENE E : EPDM R : SANTOPRENE H : POLYESTER T : PTFE N : NEOPRENE V : VITON O : ONE PIECE PTFE
NON-WETTED COMPONENTS T : EPOXY COATED ALUMINIUM W : EPOXY COATED STAINLESS STEEL	
VALVE TYPE B : BALL	
SUCTION ORIENTATION B : BOTTOM	

TECHNICAL DATA;


MOULDED NON METALLIC SERIES B15 POLYPROPYLENE & PVDF

Maximum Delivery:	48 ltrs/min
Max. Working Pressure:	8 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.6 m.
Suction Lift (Wet):	6.1 m.
Fluid Inlet/Outlet:	1/2" ANSI #150 RF Flanged
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Polypropylene/Aluminium	5.3kg.
PVDF/Aluminium	7kg.
Polypropylene/Stainless	12kg.
Steel	
PVDF/Stainless Steel	13.5kg.

Performance curve

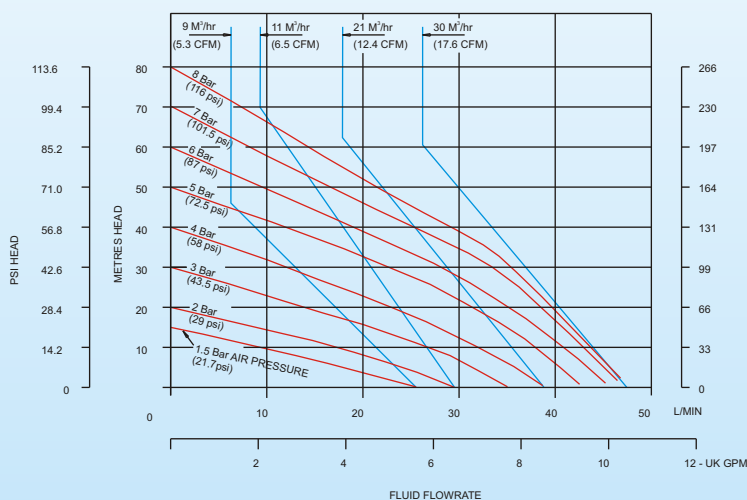

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 320 x 200 x 340 mm.

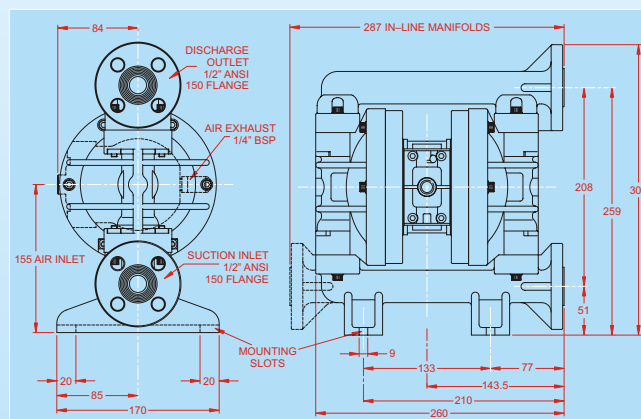

Metallic Series

- Simple construction, easy to maintain.
- Self priming, ideal for emptying containers.
- Pressures to 8.6 bar.
- Flow rates up to 54 litres/minute.
- Bolted construction for greater integrity.
- Reliable pneumatic air valve design.
- Portable.



TYPICAL CODE = B15. 01. AA. BB. TTS

MODEL - B15 : Standard X15 : ATEX approved	VALVE SEATS A : ALUMINIUM B : BUNA-N E : EPDM N : NEOPRENE V : VITON S : 316 STAINLESS STEEL VALVE BALLS B : BUNA-N V : VITON E : EPDM T : PTFE N : NEOPRENE S : 316 STAINLESS STEEL DIAPHRAGMS B : BUNA-N P : POLYURETHANE E : EPDM R : SANTOPRENE H : POLYESTER T : PTFE N : NEOPRENE V : VITON O : ONE PIECE PTFE
DESIGN LEVEL	
WETTED COMPONENTS A : ALUMINIUM	
NON-WETTED COMPONENTS A : ALUMINIUM	
VALVE TYPE B : BALL	
SUCTION ORIENTATION B : BOTTOM	

TECHNICAL DATA;


METALLIC SERIES B15 ALUMINIUM

Maximum Delivery:	60 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.6 m.
Suction Lift (Wet):	6.1 m.
Fluid Inlet/Outlet:	1/2" BSP(F)
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Aluminium 5.9 kg.

Performance curve

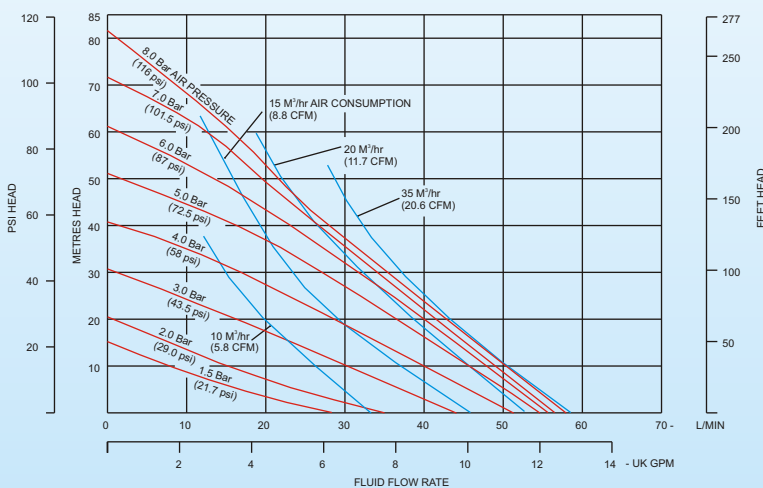

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 320 x 200 x 340 mm.

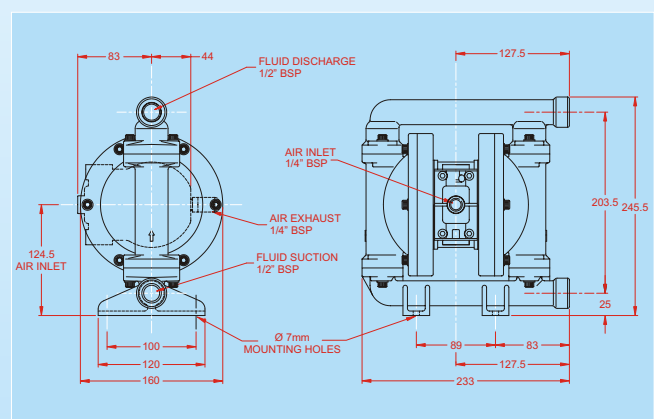

B 15

Air Operated Diaphragm Pump Range

Metallic Series

- Simple construction, easy to maintain
- Self priming, ideal for emptying
- Pressures to 8.6 bar
- Flow rates up to 60 litres/minute
- Bolted construction for greater integrity
- 316L Stainless steel



TYPICAL CODE = B15. 01. SA. BB. TTS

MODEL - B15 : Standard X15 : ATEX approved	VALVE SEATS S : 316 STAINLESS STEEL
DESIGN LEVEL	VALVE BALLS B : BUNA-N T : PTFE E : EPDM V : VITON N : NEOPRENE S : 316 STAINLESS STEEL
WETTED COMPONENTS S : 316 STAINLESS STEEL	DIAPHRAGMS B : BUNA-N P : POLYURETHANE E : EPDM R : SANTOPRENE H : POLYESTER T : PTFE N : NEOPRENE V : VITON O : ONE PIECE PTFE
NON-WETTED COMPONENTS A : ALUMINIUM S : 316 STAINLESS STEEL	
VALVE TYPE B : BALL	
SUCTION ORIENTATION B : BOTTOM	

TECHNICAL DATA;


METALLIC SERIES B15 STAINLESS STEEL

Maximum Delivery:	60 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.6 m.
Suction Lift (Wet):	6.1 m.
Fluid Inlet/Outlet:	1/2" BSP(F)
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Stainless Steel/Aluminium	9.7 kg.
Stainless Steel	15 kg.

Performance curve

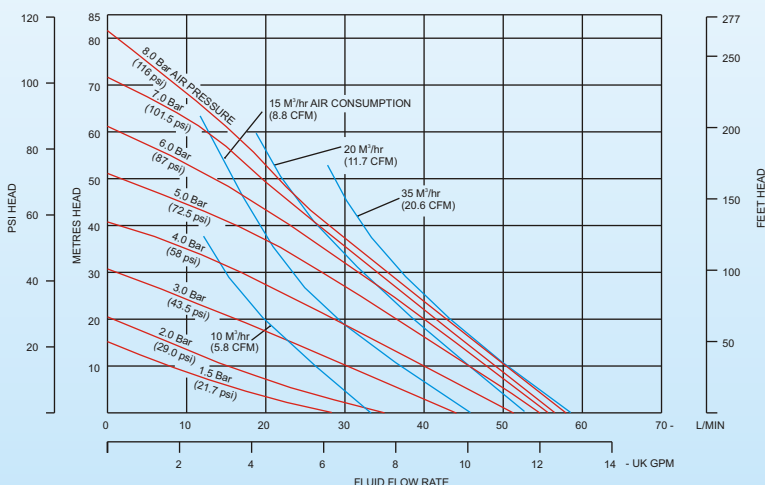

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 320 x 200 x 340 mm.

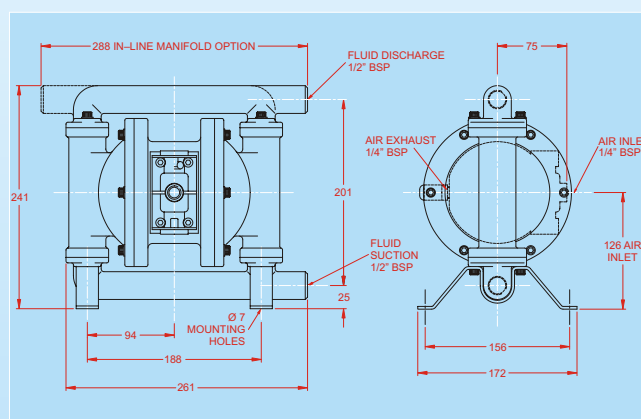

PTFE Non Metallic Series

- Simple construction, easy to maintain
- Available in virgin and conductive PTFE
- Chemically inert
- Flanged end connections
- Atex approved - intrinsically safe
- Reliable, proven pneumatic air valve
- Strong, robust design



TYPICAL CODE = B15.00.TS.BB.TTT

MODEL - B15 : Standard X15 : ATEX approved	VALVE SEATS T : PTFE
DESIGN LEVEL	VALVE BALLS T : PTFE
WETTED COMPONENTS T : PTFE 4 : CONDUCTIVE PTFE	DIAPHRAGMS T : PTFE X : PTFE/VITON (HIGHT TEMP.)
NON-WETTED COMPONENTS 4 : CONDUCTIVE PTFE 5 : POLYETHYLENE (HDPE) S : 316 STAINLESS STEEL	
VALVE TYPE B : BALL W : WEIGHTED	
SUCTION ORIENTATION B : BOTTOM	

TECHNICAL DATA;


NON METALLIC SERIES B15 CONDUCTIVE / VIRGIN PTFE

Maximum Delivery:	48 ltrs/min
Max. Working Pressure:	7 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.6 m.
Suction Lift (Wet):	6.1 m.
Fluid Inlet/Outlet:	1/2" ANSI #150 RF Flanged
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Conductive PTFE	16 kg.
Virgin PTFE	16 kg.

Performance curve

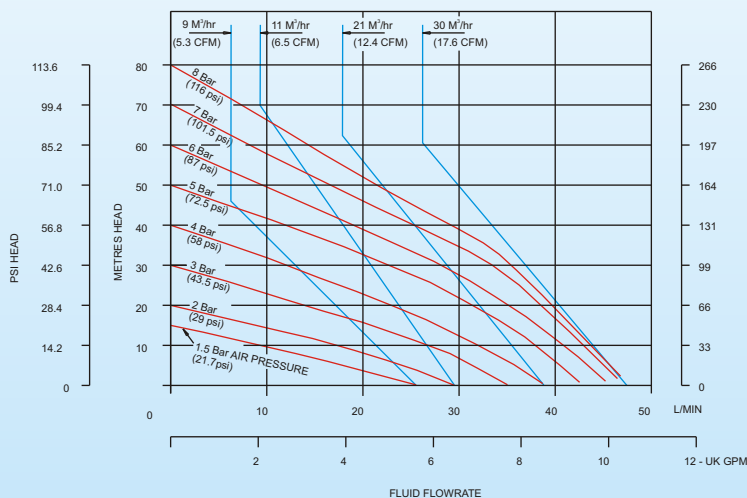

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitter.

Shipping Dimensions: 335 x 215 x 335 mm.

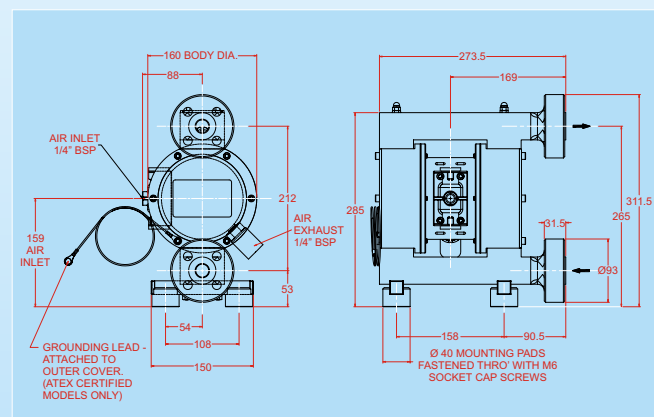


Hygienic Series

- Range of DIN/RJT and Ferrule connections
- Self priming, for emptying containers
- Food grade elastomers-EPDM/PTFE
- Pressures to 8.6 bar
- Certified CIP cleanable
- EU Design approval



TYPICAL CODE = B15.01. ZF. BB. EEE

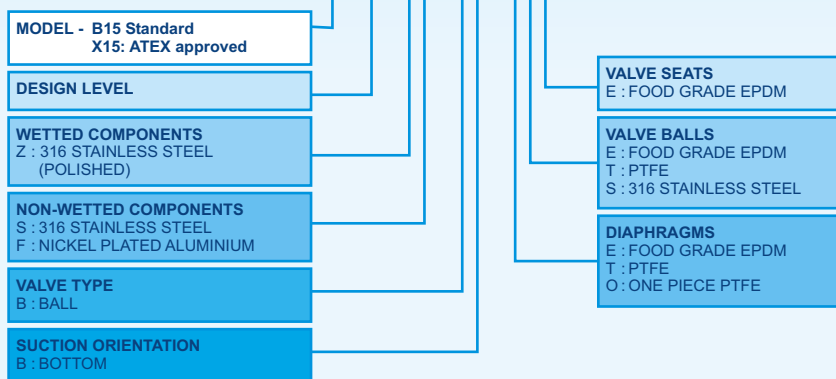

TECHNICAL DATA;


HYGIENIC SERIES B15 STAINLESS STEEL

Maximum Delivery:	60 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	2 mm.
Air Inlet:	1/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.6 m.
Suction Lift (Wet):	6.1 m.
Fluid Inlet/Outlet:	1" RJT (Standard)
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air silencer

Shipping Weights:


Stainless Steel/Aluminium	10.5 kg.
Stainless Steel	15.8 kg.

Performance curve

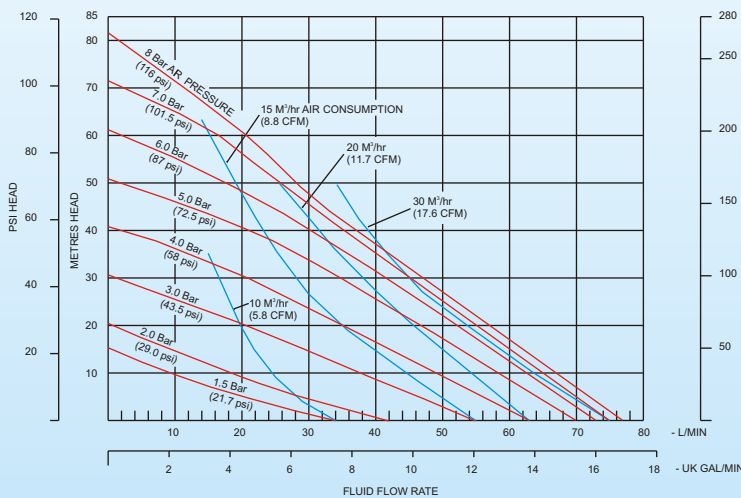

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 320 x 210 x 390 mm.

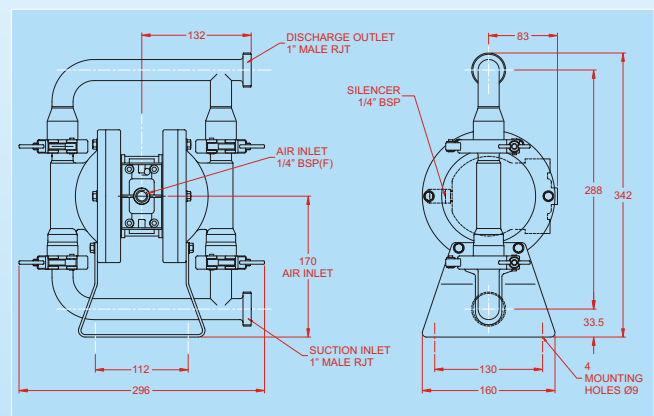


Moulded Non Metallic Series

- Materials options suitable for a wide range of chemicals
- Simple construction, easy to maintain
- Self priming, ideal for emptying containers
- Pressures to 8 bar
- Flow rates up to 154 litres/minute
- Flanged or screwed end connections
- Reliable, pneumatic air valve
- Strong, robust design, bolted construction



TYPICAL CODE = B25. PT. BB. EEP

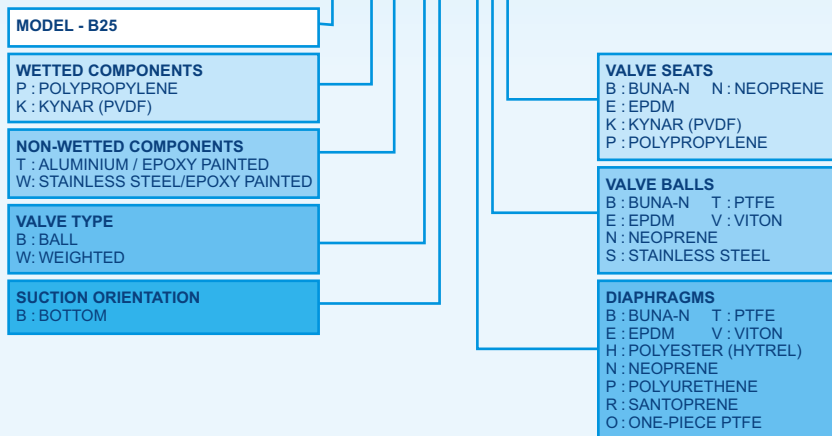

TECHNICAL DATA;

MOULDED NON METALLIC SERIES B25 POLYPROPYLENE AND PVDF


Maximum Delivery:	152 ltrs/min
Max. Working Pressure:	8 bar
Max. Solid Particle Size:	3 mm.
Air Inlet:	3/8" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	1" ANSI # 150 Flanged RF
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Polypropylene/Aluminium	13.5 kg.
PVDF/Aluminium	18 kg.
Polypropylene/Stainless Steel	18 kg.
PVDF/Stainless Steel	20 kg.

Shipping Dimensions: 440 x 260 x 470 mm.

Performance curve

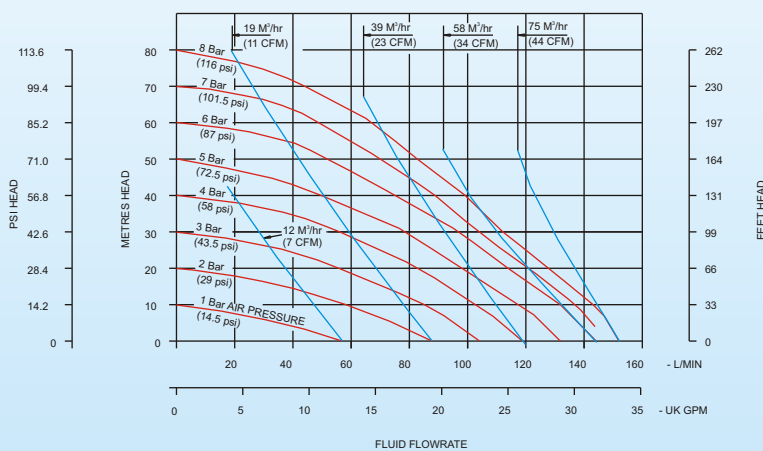

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

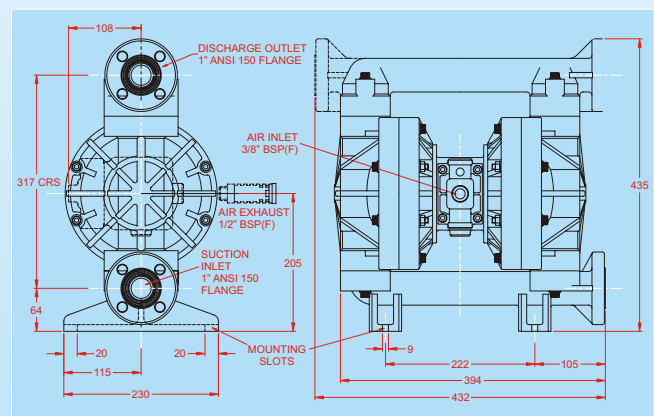

B 25

Air Operated Diaphragm Pump Range

Metallic Series

- Material options suitable for a wide range of applications
- Simple construction, easy to maintain
- Self priming, ideal for emptying containers
- Pressures to 8.6 bar
- Flow rates up to 180 litres/minute
- Bolted construction for greater integrity
- Weighted Valve Balls for high S.G. and viscous fluids
- Reliable, pneumatic air valve



TYPICAL CODE = B25.03 AA. BB. BBS

MODEL - B2503 : Standard X2503 : ATEX approved	VALVE SEATS S : 316L STAINLESS STEEL
WETTED COMPONENTS A : ALUMINIUM S : 316L STAINLESS STEEL C : CAST IRON	VALVE BALLS T : PTFE E : EPDM N : NEOPRENE V : VITON B : BUNA-N S : STAINLESS STEEL D : DELRIN
NON-WETTED COMPONENTS A : ALUMINIUM	DIAPHRAGMS N : NEOPRENE V : VITON P : POLYESTER B : BUNA-N R : SANTROPRENE T : PTFE P : POLYURETHANE E : EPDM O : ONE-PIECE PTFE
VALVE TYPE B : BALL W : WEIGHTED	
SUCTION ORIENTATION B : BOTTOM	

TECHNICAL DATA;


METALLIC SERIES B2503 ALUMINIUM, STAINLESS STEEL, CAST IRON

Maximum Delivery:	180 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	3 mm.
Air Inlet:	3/8" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	1" BSP(F)
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Aluminium	16 kg.
Cast Iron/Aluminium	25 kg.
Stainless Steel/Aluminium	25 kg.

Performance curve

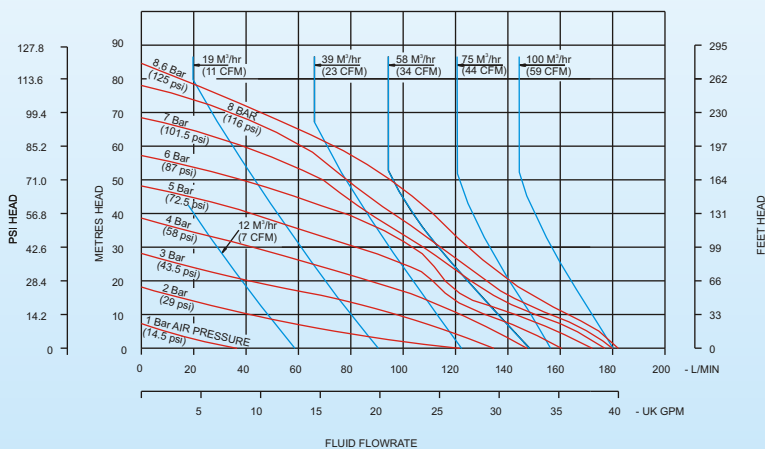

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 400 x 300 x 470 mm.

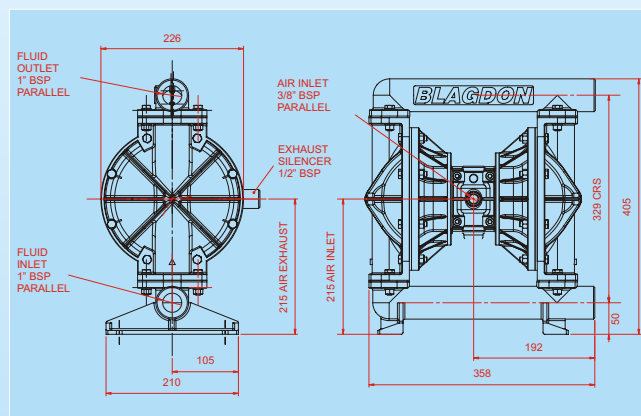


PTFE – Non Metallic Series

- Simple construction, easy to maintain
- Available in Virgin and conductive PTFE
- Chemically inert
- Flanged end connections
- Atex approved – intrinsically safe
- Reliable, proven pneumatic air valve
- Strong, robust design



TYPICAL CODE = B25.00.T5.BB.TTT-LF

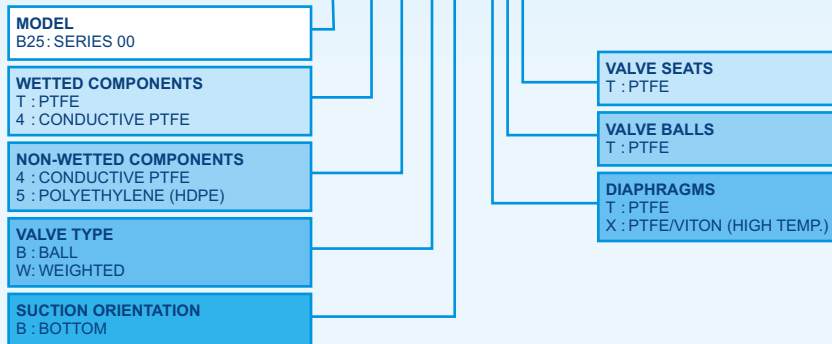


TECHNICAL DATA;

NON METALLIC SERIES B25 VIRGIN PTFE, CONDUCTIVE PTFE

Maximum Delivery:	136 ltrs/min
Max. Working Pressure:	7 Bar (8 Bar Max. Air Inlet)
Max. Solid Particle Size:	3 mm.
Air Inlet:	3/8" BSP (F) 3/8" NPT (F)
Temperature Limits:	100°C
Suction Lift (Dry):	6.1 m
Suction Lift (Wet):	7.6 m
Inlet/Outlet:	1" BSP/ANSI 150 Flange
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Performance curve

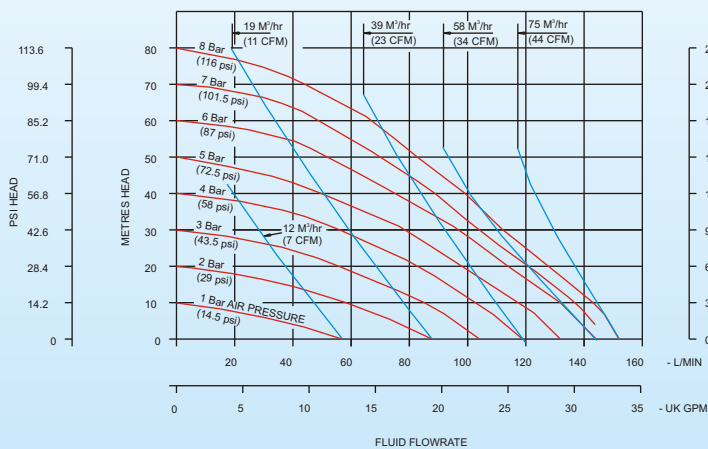


Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Weights:

Virgin PTFE:	37 kg.
Conductive PTFE:	40 kg.

Shipping Dimensions: 500 x 300 x 450 mm.

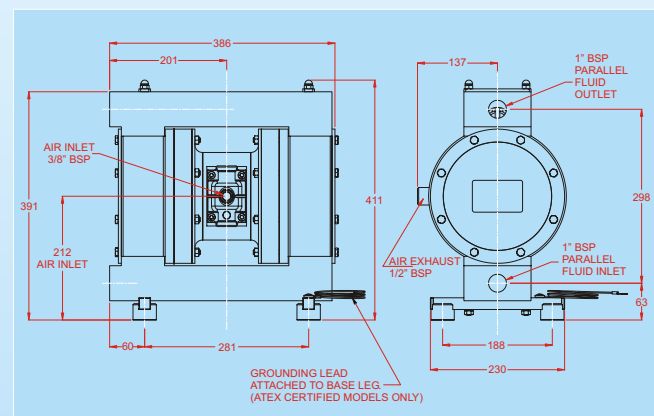

B 25

Air Operated Diaphragm Pump Range

Full Flow High Pressure

- Robust construction, easy to maintain
- Can easily handle viscous, high S.G and high head applications
- Smooth action, less vibration and wear
- Pressures to 16 bar
- Flow rates up to 125 litres/minute
- Bolted construction for greater integrity
- Reliable pneumatic air valve
- Stalls against closed head without damage.
- Re-start on demand



TYPICAL CODE = B25. 01. AA. W3. NNS

MODEL - B25 : Standard X25 : ATEX approved	VALVE SEATS S : 316 STAINLESS STEEL
DESIGN LEVEL	VALVE BALLS T : PTFE N : NEOPRENE B : BUNA-N E : EPDM S : STAINLESS STEEL V : VITON
WETTED COMPONENTS A : ALUMINIUM S : 316 STAINLESS STEEL.	DIAPHRAGMS T : PTFE N : NEOPRENE B : BUNA-N R : SANTOPRENE E : EPDM H : POLYESTER (HYTREL) O : ONE PIECE PTFE P : POLYURETHANE V : VITON
NON-WETTED COMPONENTS A : ALUMINIUM	
VALVE TYPE B : BALL W : WEIGHTED	
MODEL DESIGNATION	

TECHNICAL DATA;

METALLIC SERIES - FULL FLOW 2:1 B25


Maximum Delivery:	125 ltrs/min
Max. Working Pressure:	16 Bar (232 psi) (8 Bar Max. Air Inlet)
Max. Solid Particle Size:	3 mm.
Air Inlet:	3/8" BSP (F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6 m. (20')
Suction Lift (Wet):	7.6 m. (25')
Fluid Inlet/Outlet:	1" BSP (F)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Stainless Steel/Aluminium	33 kg.
Aluminium	24.5 kg.

Shipping Dimensions: 480 x 320 x 480 mm.

Performance curve

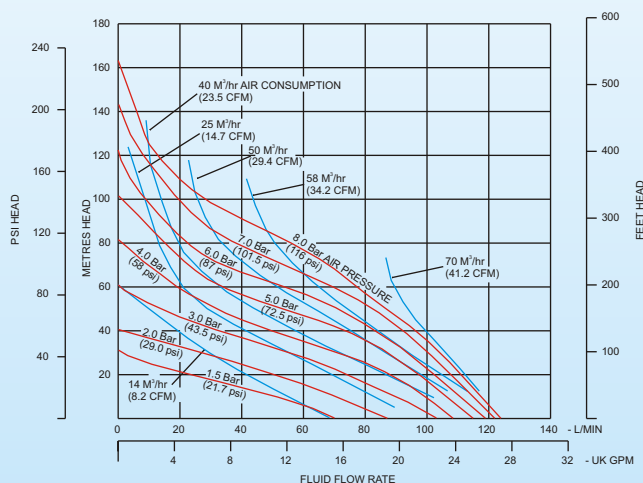

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

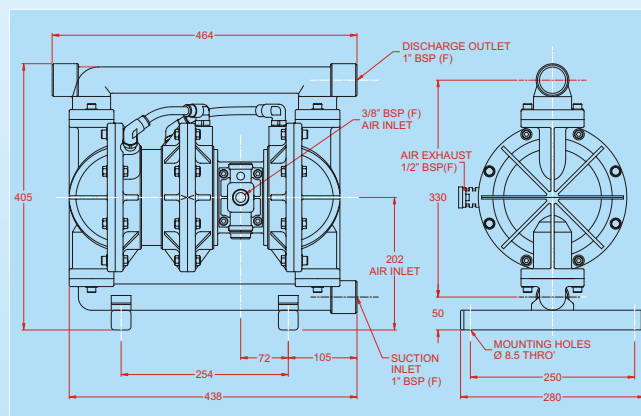

Hygienic Series

- Range of DIN/RJT and Ferrule connections
- Self priming for emptying containers
- Food grade elastomers-EPDM/PTFE
- Pressures to 8.6 bar
- Capable of handling high viscosity & S.G
- Certified CIP cleanable
- EU Design approval
- 316L Stainless steel



TYPICAL CODE = B25. ZF. BB. EEE

MODEL - B25 X25: ATEX approved	
WETTED COMPONENTS Z : 316 STAINLESS STEEL (POLISHED)	
NON-WETTED COMPONENTS S : 316 STAINLESS STEEL F : NICKEL PLATED ALUMINIUM	
VALVE TYPE B : BALL	
SUCTION ORIENTATION B : BOTTOM	
	VALVE SEATS E : FOOD GRADE EPDM S : 316 STAINLESS STEEL
	VALVE BALLS E : FOOD GRADE EPDM T : PTFE S : 316 STAINLESS STEEL
	DIAPHRAGMS E : FOOD GRADE EPDM T : PTFE

TECHNICAL DATA;


HYGIENIC SERIES B25 STAINLESS STEEL

Maximum Delivery:	136 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	5 mm.
Air Inlet:	3/8" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.6 m.
Suction Lift (Wet):	6.1 m.
Fluid Inlet/Outlet:	1" RJT
Installation:	Wall or surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Stainless Steel 21.5 kg.

Performance curve

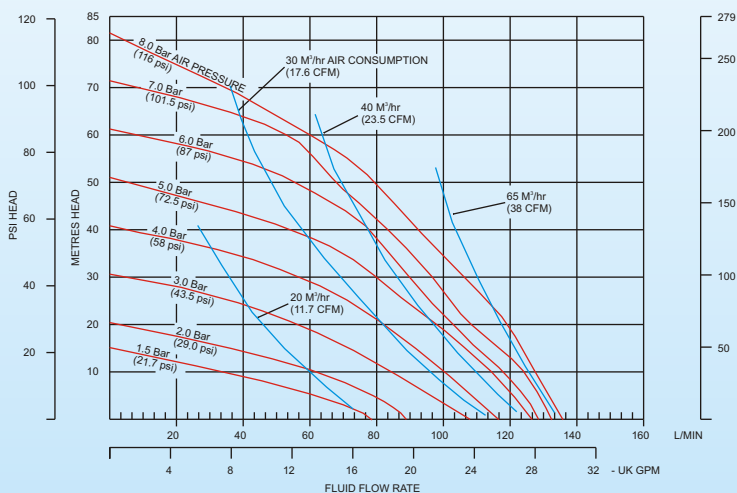

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 450 x 280 x 500 mm.

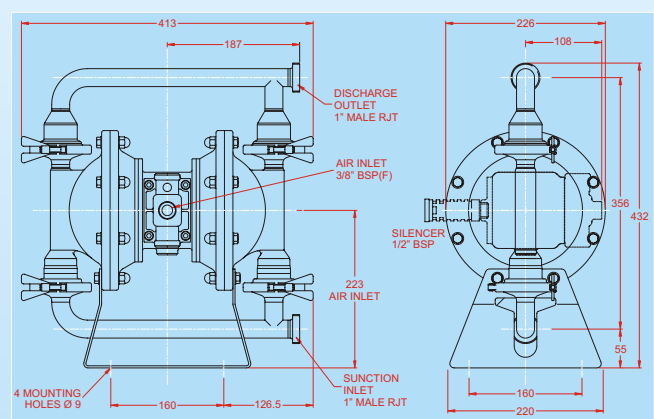

B 40

Air Operated Diaphragm Pump Range

Metallic Series

- Simple construction, easy to maintain
- Self priming, ideal for emptying containers
- Pressures to 8.6 bar
- Flow rates up to 320 litres/minute
- Bolted construction for greater integrity
- Reliable, proven pneumatic air valve system



TYPICAL CODE = B40. 02. AA. BB. BBS

MODEL - B40 : Standard X40 : ATEX approved	
DESIGN LEVEL	
WETTED COMPONENTS A : ALUMINIUM C : CAST IRON S : 316 STAINLESS STEEL	VALVE SEATS B : BUNA-N A : ALUMINIUM E : EPDM N : NEOPRENE V : VITON S : 316 STAINLESS STEEL
NON-WETTED COMPONENTS A : ALUMINIUM C : CAST IRON S : 316 STAINLESS STEEL	VALVE BALLS B : BUNA-N T : PTFE E : EPDM V : VITON N : NEOPRENE S : 316 STAINLESS STEEL
VALVE TYPE B : BALL W : WEIGHTED	DIAPHRAGMS B : BUNA-N P : POLYURETHANE E : EPDM R : SANTOPRENE H : POLYESTER T : PTFE N : NEOPRENE V : VITON O : ONE PIECE PTFE
SUCTION ORIENTATION B : BOTTOM	

TECHNICAL DATA;

METALLIC SERIES B40 ALUMINIUM, CAST IRON & STAINLESS STEEL


Maximum Delivery:	320 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	6 mm.
Air Inlet:	3/8" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	1 1/2" BSP(F)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Aluminium	22 kg.
Stainless Steel/Aluminium	36 kg.
Stainless Steel	46 kg.
Stainless Steel/Cast Iron	46 kg.
Cast Iron/Aluminium	51.4 kg.
Cast Iron	61 kg.

Shipping Dimensions: 500 x 350 x 600 mm.

Performance curve

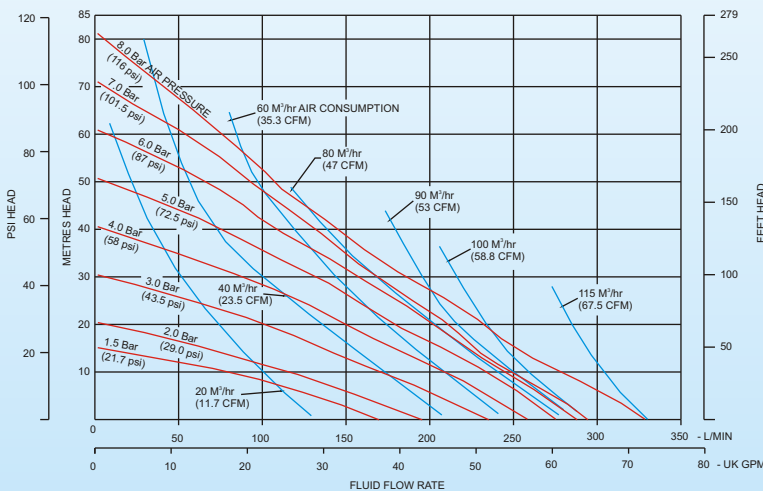

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

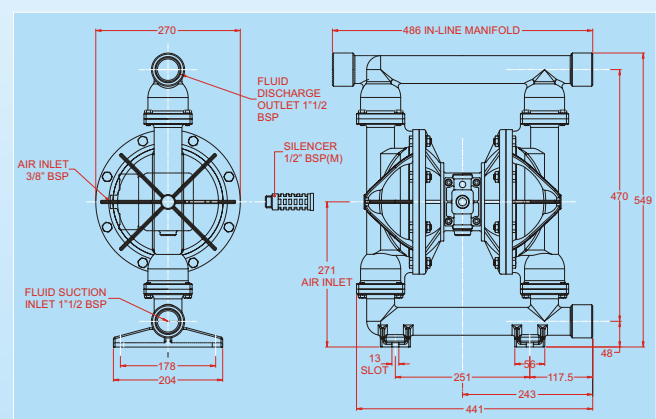

The above drawing shows Aluminium and Cast Iron only.



Moulded Non Metallic Series

- Simple construction, easy to maintain
- Capable of handling high S.G and viscous fluids
- Pressures to 8.6 bar
- Flow rates up to 530 litres/minute
- Flanged end connections
- Reliable, proven pneumatic air valve



TYPICAL CODE = B50. 02. PT. BB. EEP

MODEL - B50	
DESIGN LEVEL	
WETTED COMPONENTS P : POLYPROPYLENE K : KYNAR (PVDF)	
NON-WETTED COMPONENTS T : ALUMINIUM / EPOXY PAINTED W : 316 STAINLESS STEEL / EPOXY PAINTED	
VALVE TYPE B : BALL W : WEIGHTED	
SUCTION ORIENTATION B : BOTTOM	
	VALVE SEATS B : BUNA-N T : PTFE E : EPDM V : VITON N : NEOPRENE P : POLYPROPYLENE
	VALVE BALLS B : BUNA-N T : PTFE E : EPDM V : VITON N : NEOPRENE S : 316 STAINLESS STEEL
	DIAPHRAGMS B : BUNA-N T : PTFE E : EPDM V : VITON H : POLYESTER (HYTEL) N : NEOPRENE P : POLYURETHANE R : SANTOPRENE O : ONE-PIECE PTFE

TECHNICAL DATA;

MOULDED NON METALLIC SERIES B50 POLYPROPYLENE & PVDF


Maximum Delivery:	530 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	6 mm.
Air Inlet:	3/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	2" ANSI #150 RF Flanged
Installation:	Surface mounted
Accessories Included:	Exhaust Air Silencer

Shipping Weights:


Polypropylene/Aluminium	39.5 kg.
Polypropylene/Stainless	50.5 kg.
PVDF/Aluminium	50.5 kg.
PVDF/Stainless	70 kg.

Shipping Dimensions: 630 x 380 x 670 mm.

Performance curve

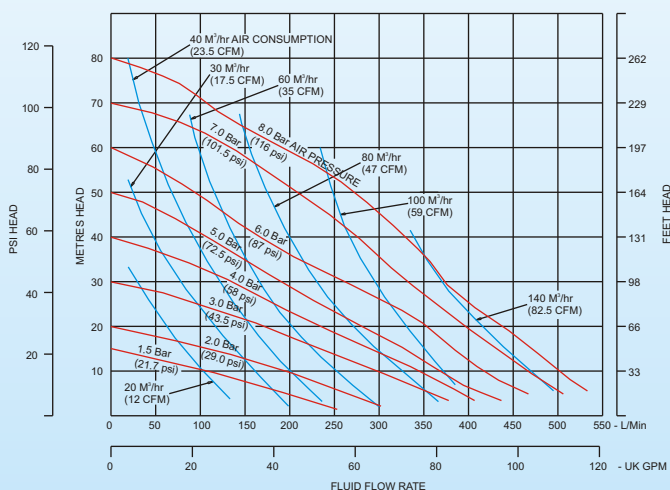

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

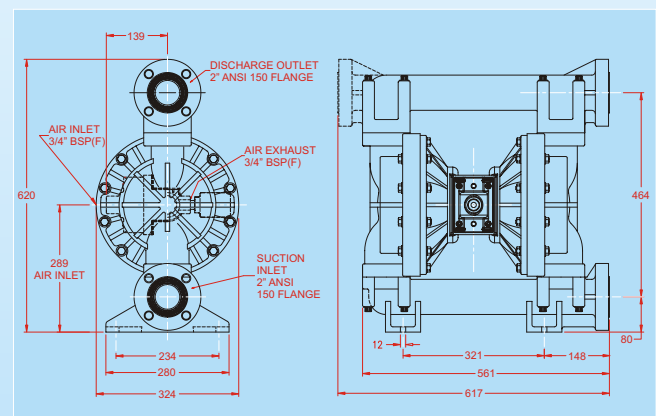

B 50 Air Operated Diaphragm Pump Range

Metallic Series

- Air valve designed for in-line maintenance
- End ported for improved flow
- Pressures to 8.6 bar
- Flow rates up to 530 litres/minute
- Bolted construction for greater integrity
- Robust construction



TYPICAL CODE = B50.02.AA.BB.BBB

MODEL - B50 : Standard X50 : ATEX approved	
DESIGN LEVEL	
WETTED COMPONENTS A : ALUMINIUM C : CAST IRON	
NON-WETTED COMPONENTS A : ALUMINIUM C : CAST IRON	
VALVE TYPE B : BALL W : WEIGHTED	
SUCTION ORIENTATION B : BOTTOM	
	VALVE SEATS A : ALUMINIUM S : 316 STAINLESS STEEL N : NEOPRENE B : BUNA-N E : EPDM T : PTFE
	VALVE BALLS B : BUNA-N N : NEOPRENE E : EPDM V : VITON S : 316 STAINLESS STEEL T : PTFE
	DIAPHRAGMS B : BUNA-N V : VITON T : PTFE E : EPDM H : POLYESTER P : POLYURETHANE O : ONE PIECE N : NEOPRENE R : SANTOPRENE

TECHNICAL DATA;


METALLIC SERIES B50 ALUMINIUM & CAST IRON

Maximum Delivery:	530 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	6 mm.
Air Inlet:	3/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	2" BSP(F)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Aluminium	38 kg.
Cast Iron/Aluminium	63 kg.
Cast Iron	90 kg.

Performance curve

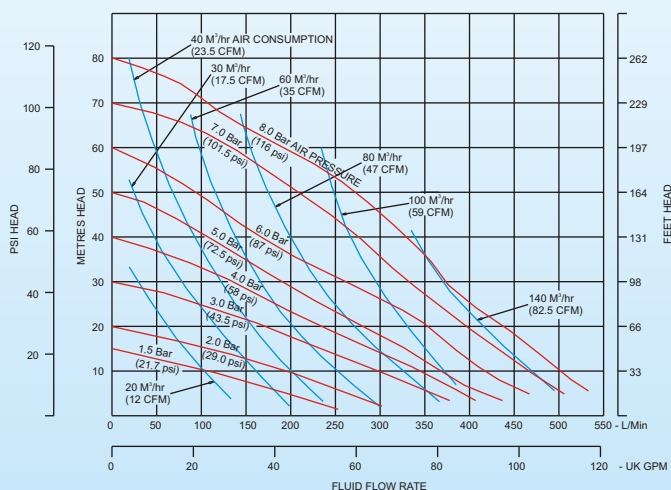

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 540 x 350 x 750 mm.

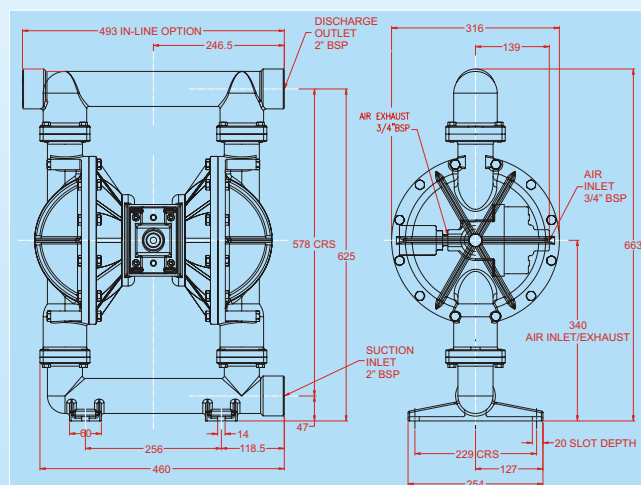

Metallic Series

- Simple construction, easy to maintain
- Self priming, ideal for emptying containers
- Pressures to 8.6 bar
- Flow rates up to 530 litres/minute
- Bolted construction for greater integrity
- 316 Stainless Steel



TYPICAL CODE = B50. 02. SA. BB. BBS

MODEL - B50 : Standard X50 : ATEX approved	VALVE SEATS A : ALUMINIUM S : 316 STAINLESS STEEL N : NEOPRENE B : BUNA-N E : EPDM V : VITON
DESIGN LEVEL	
WETTED COMPONENTS S : 316 STAINLESS STEEL	
NON-WETTED COMPONENTS A : ALUMINIUM C : CAST IRON S : 316 STAINLESS STEEL	
VALVE TYPE B : BALL W : WEIGHTED	
SUCTION ORIENTATION B : BOTTOM	
	VALVE BALLS B : BUNA-N N : NEOPRENE E : EPDM T : PTFE S : 316 STAINLESS STEEL V : VITON
	DIAPHRAGMS B : BUNA-N E : EPDM H : POLYESTER P : POLYURETHANE T : PTFE R : SANTOPRENE N : NEOPRENE

TECHNICAL DATA;


METALLIC SERIES B50 STAINLESS STEEL

Maximum Delivery:	530 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	6 mm.
Air Inlet:	3/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	2" BSP(F)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer


Shipping Weights:

Stainless Steel/Aluminium	70 kg.
Stainless Steel	95.5 kg.
Stainless Steel/Cast Iron	95.5 kg.

Shipping Dimensions: 630 x 380 x 670 mm.

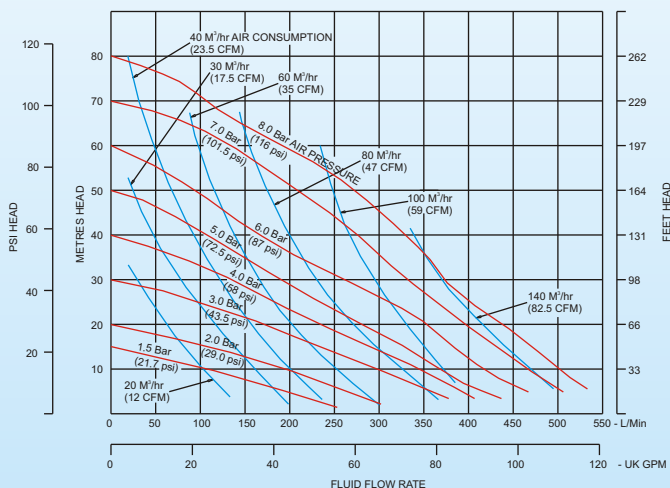

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

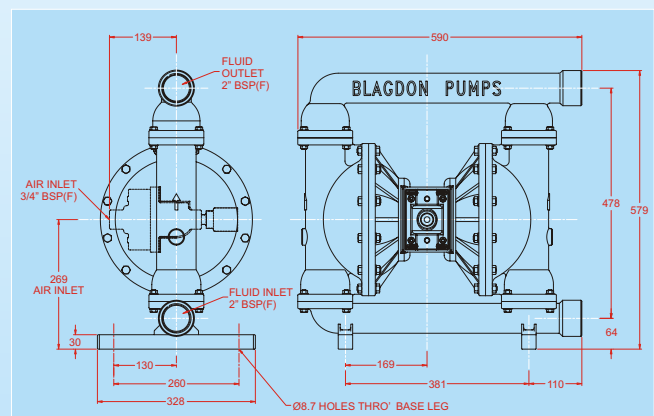

B 50 Air Operated Diaphragm Pump Range

Full Flow High Pressure

- Robust construction, easy to maintain
- Can easily handle viscous, high S.G and high head applications
- Smooth action, less vibration and wear
- Pressures to 16 bar
- Flow rates up to 350 litres/minute
- Bolted construction for greater integrity
- Reliable pneumatic air valve
- Stalls against closed head without damage.
- Re-start on demand



TYPICAL CODE = B50. 02. SA. W3. BBS

MODEL - B50 : Standard X50 : ATEX approved	VALVE SEATS S : 316 STAINLESS STEEL A : ALUMINIUM
DESIGN LEVEL	VALVE BALLS B : BUNA-N N : NEOPRENE E : EPDM V : VITON T : PTFE S : 316 STAINLESS STEEL
WETTED COMPONENTS S : 316 STAINLESS STEEL A : ALUMINIUM	DIAPHRAGMS B : BUNA-N N : NEOPRENE E : EPDM H : POLYESTER P : POYURETHANE V : VITON T : PTFE R : SANTOPRENE O : ONE PIECE
NON-WETTED COMPONENTS A : ALUMINIUM	
VALVE TYPE B : BALL W : WEIGHTED	
MODEL DESIGNATION	

TECHNICAL DATA;

METALLIC SERIES-FULL FLOW 2:1 B50 STAINLESS STEEL, ALUMINIUM


Maximum Delivery:	350 ltrs/min
Max. Working Pressure:	16 bar
Max. Solid Particle Size:	6 mm.
Air Inlet:	3/4" BSP(F)
Max Air Inlet:	8 bar
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	2" BSP(F)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Aluminium	52 kg.
Stainless Steel/Aluminium	78 kg.

Shipping Dimensions: 850 x 450 x 800 mm.

Performance curve

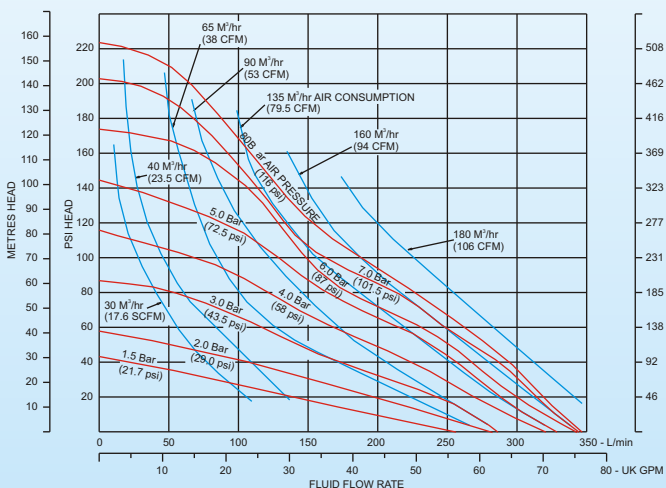

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

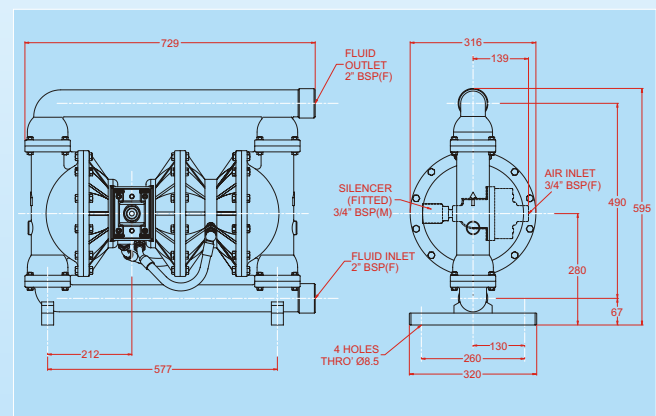

The above drawing shows Stainless Steel only.




Hygienic Series

- Range of DIN/RJT and Ferrule connections
- Self priming for emptying containers
- Food grade elastomers-EPDM/PTFE
- Pressures to 8.6 bar
- Capable of handling high viscosity & S.G
- Certified CIP cleanable
- EU Design approval
- 316 Stainless steel
- Pump stand option for 180° rotation in place



TYPICAL CODE = B50. 01. ZF. BB. EEE

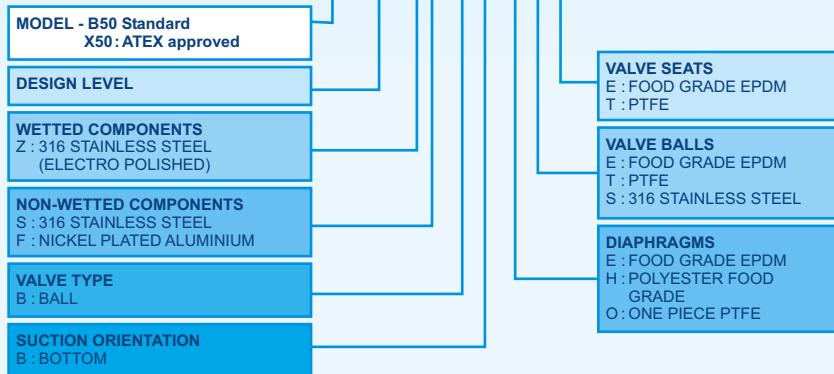

TECHNICAL DATA;

HYGIENIC SERIES B50 STAINLESS STEEL


Maximum Delivery:	500 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	6 mm.
Air Inlet:	3/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	6.1 m.
Suction Lift (Wet):	7.6 m.
Fluid Inlet/Outlet:	2" RJT (Standard)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Stainless Steel 64 kg.

Shipping Dimensions: 660 x 430 x 880 mm.

Performance curve

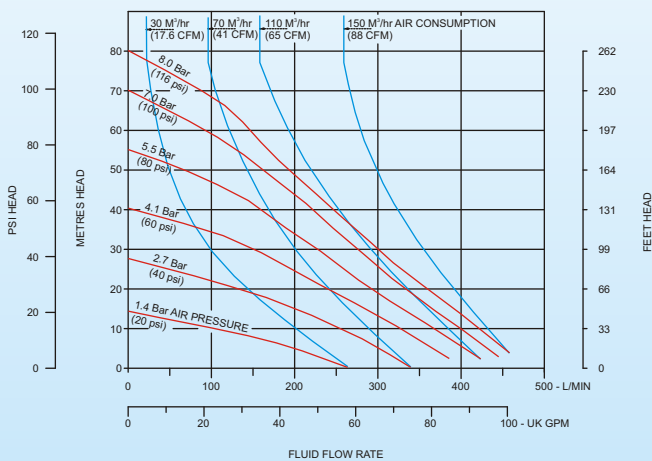

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

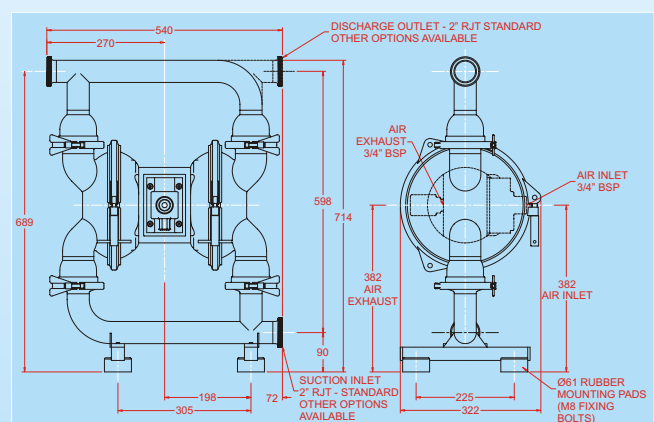

X75


Air Operated Diaphragm Pump Range

Metallic Series

- Air valve will not stall in mid position
- Air valve designed for in-line maintenance
- End ported for improved flow
- Pressures to 8.6 bar
- Flow rates up to 889 litres/minute
- Bolted construction for greater integrity
- Robust construction



TYPICAL CODE = X75. 01. AA. BB. BBB

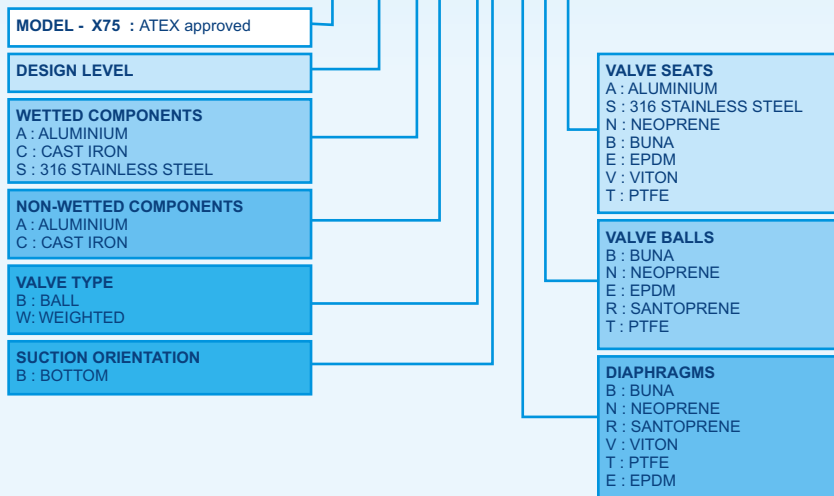

TECHNICAL DATA;


METALLIC SERIES X75

Maximum Delivery:	889 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	10 mm.
Air inlet:	3/4" BSP(F)
Temperature Limits:	Determined by Elastomers
Suction Lift (Dry):	4.0 m.
Suction Lift (Wet):	5.0 m.
Fluid Inlet/Outlet:	3" BSP(F)
Installation:	Surface mounted
Accessories Included:	Exhaust air Silencer

Shipping Weights:


Aluminium	53.5 kg.
Cast Iron/Aluminium	90 kg.
Stainless Steel/Aluminium	90 kg.

Performance curve

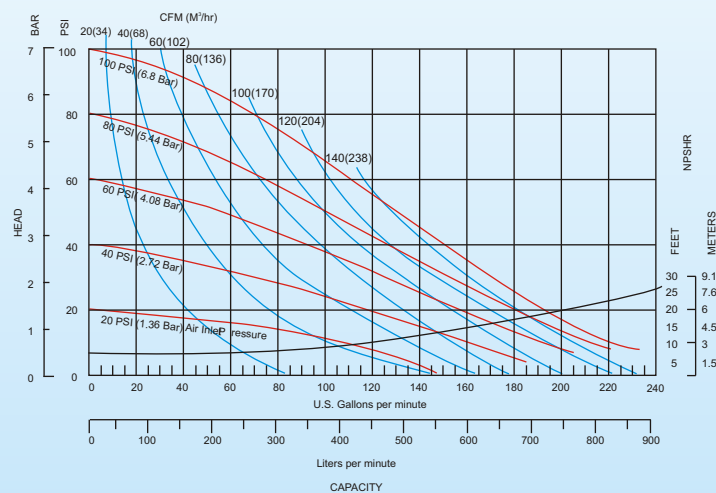

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

Shipping Dimensions: 720 x 350 x 900 mm.

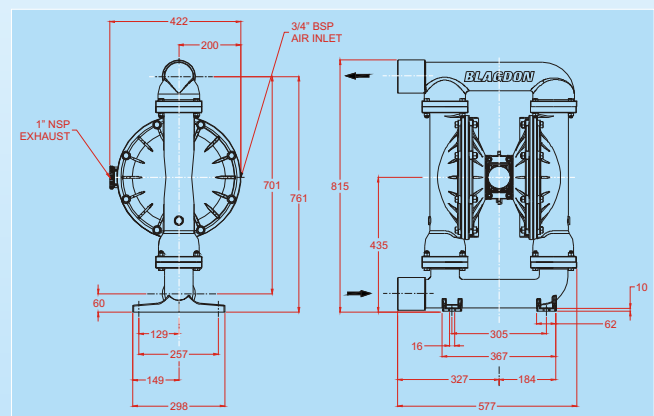

Submersible Centrifugal Pump

Industries

Mining
Construction
De-watering
Sewage
Well-pointing



- Submersible
- Designed for underground use
- High intensity spark free
- Robust construction
- Modular construction, easy to maintain
- Spring loaded vanes for immediate start up
- Pumps solid particles up to 8mm
- Viton seal options for higher temperatures
- Integral baseplate/strainer
- Automatic overspeed control
- Integral oil reservoir - automatic lubrication

TECHNICAL DATA;

SUBMERSIBLE CENTRIFUGAL PUMP


Maximum Delivery:	560 ltrs/min
Max. Working Pressure:	8.6 bar
Max. Solid Particle Size:	6 mm.
Air inlet:	3/4" BSP(F)
Temperature Limits:	Determined by Seals
Suction Lift (Dry):	N/A
Suction Lift (Wet):	N/A
Fluid Inlet/Outlet:	2" BSPT(F)
Installation:	N/A
Accessories Included:	None

Shipping Weights:


Cast Iron 33 kg.

Shipping Dimensions: 500 x 380 x 260 mm

Performance curve

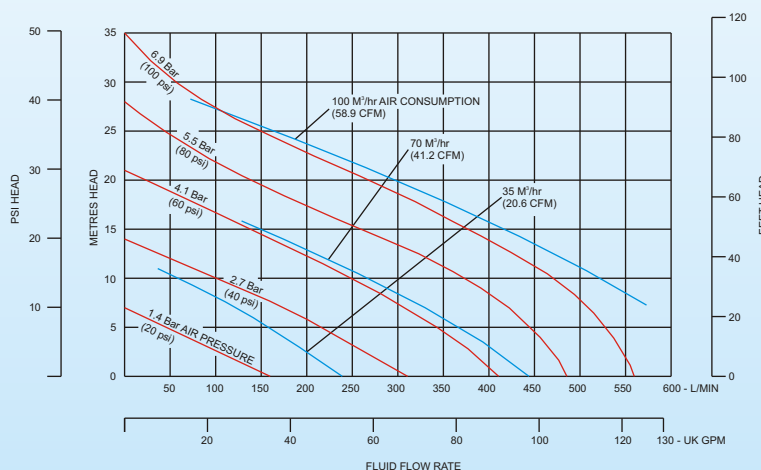

Note: The above performance curve has been determined under the following conditions: flooded suction, pumping clean water through a calibrated electronic flow meter with pulsation dampener and silencer fitted.

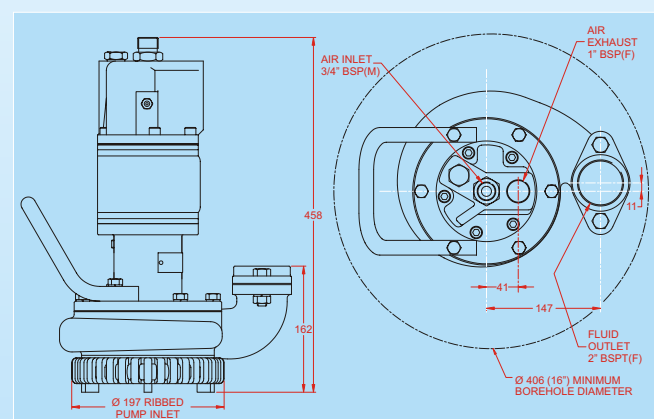

Bespoke Products

1" Stainless Steel 2:1 Pump

- 1" Stainless Steel 2:1 Pump
- c/w Custom Flange Design



1" Stainless with Steam Jacket

- 1" Industrial Stainless Steel Pump
- c/w Steam Jacket



4 Port Pump

- 1" Aluminium 4 Port Pump also available in Stainless Steel, Polypropylene and Kynar



1/2" Aluminium with Stroke Counter

- 1/2" Aluminium with Stroke Counter



2" Hygienic on Trolley

- 2" Hygienic on Trolley
- c/w Stainless Steel Trolley



1" Hygienic

- 1" Hygienic Pump
- c/w Steam Jackets



Pulsation Dampener

- Virtually pulsation free flows
- Steadier pressures
- Less vibration and noise
- Simple installation
- Variety of sizes and materials
- Automatically self-charging



Flanges

- ANSI 150 as standard - also available:-
 - ANSI 300
 - PN16
 - Food Industry - RJT, DIN, TRI-CLAMP
- Ease of connections to pipework systems




Valve Block with Sensors

- Batch Control
- Linkage to control equipment
- Greater process control
- 10 - 30v DC, PNP normally open



Oil Bottle Assembly

- Exclusive to Blagdon Pump
- Robust heavy duty design
- Suitable for arduous installations
- Safe for underground use - no aluminium



Filter Regulators

- Maintains constant oil density with varying flow
- Remote installation for ease of maintenance
- Ensures clean, filtered air
- Can be controlled independently of other equipment



Pumper Parts – replacement parts that fit

ARO[®], Wilden[®] and Yamada[®] AODD Pumps



Save upto 20% on OEM prices

Quality & Service

Global supplier of quality pump replacement parts.

Individual parts and repair kits that fit ARO[®], Wilden[®] and Yamada AODD[®] pumps.

Materials include synthetic rubbers, injected-molded thermoplastics and Teflon[®].

Our products are manufactured to meet or exceed the highest quality standards in the industry. All of our parts are engineered to perform equal to or better than the original equipment manufacturer (OEM). Parts guaranteed.

- Worldwide distribution network
- Most parts ship in 24 hours
- Free product trials available

Replacement parts that fit ARO[®] Pumps



Replacement parts that fit Wilden[®] Pumps



Replacement parts that fit Yamada[®] Pumps



PUMPER PARTS

A UNIT OF IDEX CORPORATION



BLAGDON PUMP HOLDINGS LTD.,
Lambert Road, Armstrong,
Washington,
Tyne & Wear, NE37 1QP,
United Kingdom.

Tel: 0044 (0) 191 417 7475
Fax: 0044 (0) 191 417 5435
Email: sales@blagdonpump.com
Web: www.blagdonpump.com

Pumper Parts Europe and its products are not affiliated with any of the original equipment manufacturers referenced herein. All original equipment manufacturers' names, colours, pictures, descriptions and part numbers are used for identification purposes only.

- Wilden is a registered trade name of Wilden Pump and Engineering Company, a Dover Resources Company.
- Yamada is a registered trade name of Yamada Corporation.
- ARO as a registered trade name of Ingersoll-Rand Company.
- Teflon is a registered trade name of E.I. Dupont Company.
- Pumper Parts is a registered trade name of IDEX Corporation.



Notes

VISIT THE BLAGDON WEBSITE - INFORMATION

BLAGDON PUMP

A unit of

IDEX
IDEX CORPORATION

Products

Applications

Materials

About Our Pumps

About Blagdon Pump

Blagdon News

Distributors

Literature

Contacts

Technical Details

Installation

Troubleshooting

The Blagdon website operates on a 2 click policy. This means that wherever you are within the site it will never take more than two clicks to navigate to the information you require, whether that be technical data like a manual or datasheet, or a copy of the Company brochure.

The sites purpose is to have as much information as possible available to our Customers. Detailed opposite is a chart showing some of the most frequently asked questions and where the answers can be found.

Also shown within the web pages are:

- Chemical Resistance Charts
- Kit Revisions
- Index with Components and Drawings
- Viscosity Correction Curve
- Flow Rate Conversion Calculator
- Shipping Weights and Dimensions
- Blagdon Numbering System



Quarterly Newsletter



Features include:

- Engineering updates
- New Legislation issues
- Current standards – Atex, EHEDG, ISO, IIP
- Project updates
- Product updates
- Future products
- Technical advice
- To view this online – go to **BLAGDON NEWS**

Brochure



Brochure available online:

- Brochure available to download
- To view the brochure online go to – **LITERATURE**
- To order additional copies go to – **OTHER ENQUIRIES**

IS JUST 2 CLICKS AWAY

[Home](#) [Sitemap](#) [Website FAQ's](#) [Website Feedback](#)

[Other Enquiries](#) [Links](#)

Finding the pump you want couldn't be easier...

- Why use an air operated pump?

Go to [About Our Pumps](#)
- How does an air operated pump work?

Go to [Blagdon Pump Tutorial](#)
- What options do I have?

Go to [Products](#)
- Can the pump handle my process?

Go to [Technical Details](#)
- I'd like to download some technical information

Go to [Technical Details](#)
- I'd like to download some sales material

Go to [Literature](#)
- How do I get a quotation?

Go to [Contacts](#)
- I'd like to speak to a member of staff

Go to [Contacts](#)

GLOBAL NETWORK

At Blagdon we are committed to providing our Customers with an exceptional product. Along with our global network of Distributors, will endeavour at all times to provide unrivalled customer satisfaction.

To find your local Distributor click on **DISTRIBUTOR** from the home page.

Worldwide Distribution

 Australia	 Austria	 Belgium
 Canada	 Chile	 China
 Columbia	 Czech Republic	 Denmark
 Eire	 Finland	 France
 Germany	 Hong Kong	 Hungary
 India	 Indonesia	 Italy
 Japan	 Korea	 Latvia
 Malaysia	 Netherlands	 Norway
 Pakistan	 Philippines	 Poland
 Saudi Arabia	 Singapore	 South Africa
 Spain	 Sweden	 Thailand
 Turkey	 UAE	 UK
 USA	 Venezuela	



Product Literature

Product specific literature is available which includes:

- Technical data
- Performance curves
- Applicable industries/applications
- Available options
- To view this online go to – **LITERATURE**
- To order additional copies go to – **OTHER ENQUIRIES**

BLAGDON PUMP

(EUROPEAN PUMP GROUP)

Lambert Road, Armstrong, Washington, Tyne & Wear, NE37 1QP, UK.

Tel : +44 (0)191 4177475 Fax : +44 (0)191 4175435

E-mail : sales@blagdonpump.com Web : www.blagdonpump.com



LOCAL DISTRIBUTOR



BLAGDON LAPG (LATIN AMERICA)

Hegel 153-602 Colonia Polanco
11560 Mexico D.F. Mexico
Tel : +52 (55) 5255 1357
Fax : +52 (55) 5255 1356
E-mail : sales@blagdonpump.com
Web : www.blagdonpump.com

BLAGDON APG (ASIA PACIFIC)

IDEX Asia Pacific Pte. Ltd
63, Hillview Ave. #7-08
Lam Soon Industrial Building
Singapore 669-569
Tel : +65 6314 6131
Fax : +65 6764 4020
E-mail : sales@blagdonpump.com
Web : www.blagdonpump.com

www.blagdonpump.com