



A330

AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

AC

The content of this document is the property of Airbus.
It is supplied in confidence and commercial security on its contents must be maintained.
It must not be used for any purpose other than that for which it is supplied, nor may
information contained in it be disclosed to unauthorized persons.
It must not be reproduced in whole or in part without permission in writing from the owners of
the copyright. Requests for reproduction of any data in this document and the media authorized
for it must be addressed to Airbus.

© AIRBUS S.A.S. 2005. All rights reserved.

*AIRBUS S.A.S.
Customer Services
Technical Data Support and Services
31707 Blagnac Cedex
FRANCE*

HIGHLIGHTS

Revision No. 20 - Jan 01/12

| LOCATIONS | CHG CODE | DESCRIPTIONS OF CHANGE |
|---------------------------------------|----------|---|
| <u>CHAPTER 2</u> | | |
| Section 2-1 | | |
| Subject 2-1-0 | | |
| General Airplane Characteristics | R | |
| Subject 2-1-1 | | |
| General Airplane Characteristics Data | R | OEW AND PAYLOAD DELETED. WV054, WV055 AND WV056 ADDED |
| | | USABLE VOLUME BASED ON LD3 |
| | | UPDATED |
| | | OEW AND PAYLOAD DELETED. WV062 |
| | | ADDED |
| | | USABLE VOLUME BASED ON LD3 |
| | | UPDATED |
| | | NOTE AMENDED |
| General Airplane Characteristics Data | R | OEW DELETED, VALUES OF PAYLOAD |
| | | UPDATED. WV002 ADDED |
| | | USABLE VOLUME BASED ON LD3 |
| | | UPDATED |
| | | NOTE AMENDED |
| Section 2-3 | | |
| Subject 2-3-0 | | |
| Ground Clearances | R | NOTE AMENDED |
| FIGURE Ground Clearances | R | ILLUSTRATION REVISED |
| FIGURE Ground Clearances | R | ILLUSTRATION REVISED |
| Ground Clearances | R | NOTE AMENDED |
| FIGURE Ground Clearances - Ground | R | ILLUSTRATION REVISED |
| Clearances MRW 227 900 kg | | |
| FIGURE Ground Clearances - Ground | R | ILLUSTRATION REVISED |
| Clearances MRW 233 900 kg | | |
| Section 2-6 | | |
| Subject 2-6-1 | | |

| LOCATIONS | CHG CODE | DESCRIPTIONS OF CHANGE |
|--|----------|--|
| Lower Deck Cargo Compartments Subject 2-6-2 | R | CONTAINERIZED VOLUME UPDATED CONTAINERIZED VOLUME UPDATED |
| Main Deck Cargo Compartments (Loading combinations) | R | |
| FIGURE Main Deck Cargo Compartments - Loading combinations | R | DIMENSIONS ADDED, SIDE BY SIDE (SBS) AND SINGLE ROW (SR) DELETED IN THE TEXT |
| FIGURE Main Deck Cargo Compartments - Loading combinations | R | DIMENSION CORRECTED, SINGLE ROW (SR) DELETED IN THE TEXT |
| FIGURE Main Deck Cargo Compartments - Loading combinations | R | DIMENSIONS ADDED |
| FIGURE Main Deck Cargo Compartments - Loading combinations | N | NEW CONFIGURATION ADDED ILLUSTRATION ADDED |
| Subject 2-6-3 | | |
| FIGURE Main and Lower Deck Cross-sections | R | AMU CODIFICATION REPLACED BY AMJ |
| <u>CHAPTER 4</u> | | |
| Section 4-3 | | |
| Subject 4-3-0 | | |
| FIGURE Minimum Turning Radii | R | |
| <u>CHAPTER 5</u> | | |
| Section 5-2 | R | |
| Subject 5-2-0 | R | |
| Subject 5-2-1 | R | |
| Section 5-3 | R | |
| Subject 5-3-0 | R | |
| Subject 5-3-1 | R | |
| Section 5-4 | | |
| Subject 5-4-6 | | |
| Fuel System | R | |
| FIGURE Overpressure Protector and NACA Flame Arrestor | N | NEW ILLUSTRATION ADDED ILLUSTRATION ADDED |

| LOCATIONS | CHG CODE | DESCRIPTIONS OF CHANGE |
|--|----------|---|
| Section 5-5 Subject 5-5-0 | | |
| Engine Starting Pneumatic Requirements | R | CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED |
| FIGURE Engine Starting Pneumatic Requirements | N | ILLUSTRATION ADDED |
| Subject 5-5-1 | R | |
| Low Ambient Temperatures | R | DESCRIPTION TITLE UPDATED |
| FIGURE Engine Starting Pneumatic Requirements - Low Ambient Temperature - 40 ° C (- 40 ° F) – PW 4000 series engine | R | |
| FIGURE Engine Starting Pneumatic Requirements - Low Ambient Temperature - 55 ° C (- 67 ° F) – RR Trent 700 series engine | R | |
| FIGURE Engine Starting Pneumatic Requirements - Low Ambient Temperature - 40 ° C (- 40 ° F) – GE CF6-80E1 series engine | R | |
| Subject 5-5-2 | R | |
| Medium Ambient Temperatures | R | DESCRIPTION TITLE UPDATED |
| FIGURE Engine Starting Pneumatic Requirements - Medium Ambient Temperature +15 ° C (+59 ° F) – PW 4000 series engine | R | |
| FIGURE Engine Starting Pneumatic Requirements - Medium Ambient Temperature 0 ° C (+32 ° F) – RR Trent 700 series engine | R | |
| FIGURE Engine Starting Pneumatic Requirements - Medium Ambient Temperature +15 ° C (+59 ° F) – GE CF6-80E1 series engine | R | |
| Subject 5-5-3 | R | |

| LOCATIONS | CHG CODE | DESCRIPTIONS OF CHANGE |
|--|----------|---------------------------|
| High Ambient Temperatures | R | DESCRIPTION TITLE UPDATED |
| FIGURE Engine Starting Pneumatic Requirements - High Ambient Temperature +55 ° C (+131 ° F) – PW 4000 series engine | R | |
| FIGURE Engine Starting Pneumatic Requirements - High Ambient Temperature +40 ° C (+104 ° F) – RR Trent 700 series engine | R | |
| FIGURE Engine Starting Pneumatic Requirements - High Ambient Temperature +50 ° C (122 ° F) – GE CF6-80E1 series engine | R | COOLING CHART UPDATED |
| Section 5-6 | | |
| Subject 5-6-2 | | |
| FIGURE Ground Pneumatic Power Requirements - Cooling | R | PCA CHART UPDATED |
| Section 5-7 | | |
| Subject 5-7-0 | | |
| Preconditioned Airflow Requirements | R | PCA CHART UPDATED |
| FIGURE Preconditioned Airflow Requirements | R | |

LIST OF EFFECTIVE CONTENT

Revision No. 20 - Jan 01/12

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| <u>CHAPTER 1</u> | | |
| Subject 1-1-0 | | |
| Purpose | | Feb 01/09 |
| Subject 1-2-0 | | |
| Introduction | | Jan 01/10 |
| <u>CHAPTER 2</u> | | |
| Subject 2-1-0 | | |
| General Airplane Characteristics | R | Jan 01/12 |
| Subject 2-1-1 | | |
| General Airplane Characteristics Data | R | Jan 01/12 |
| General Airplane Characteristics Data | R | Jan 01/12 |
| Subject 2-2-0 | | |
| General Airplane Dimensions | | May 01/07 |
| FIGURE General Airplane Dimensions | | Feb 01/09 |
| FIGURE General Airplane Dimensions | | Feb 01/09 |
| General Airplane Dimensions | | Feb 01/09 |
| FIGURE General Airplane Dimensions | | Feb 01/09 |
| Subject 2-3-0 | | |
| Ground Clearances | R | Jan 01/12 |
| FIGURE Ground Clearances | R | Jan 01/12 |
| FIGURE Ground Clearances | R | Jan 01/12 |
| Ground Clearances | R | Jan 01/12 |
| FIGURE Ground Clearances - Ground Clearances MRW 227 900 kg | R | Jan 01/12 |
| FIGURE Ground Clearances - Ground Clearances MRW 233 900 kg | R | Jan 01/12 |
| Subject 2-4-0 | | |
| Interior Arrangements | | Jan 01/10 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| Subject 2-4-1 | | |
| Typical Configuration | | May 01/07 |
| FIGURE Typical Configuration | | May 01/07 |
| FIGURE Typical Configuration | | May 01/07 |
| Subject 2-5-0 | | |
| Passenger Compartment Cross-section | | May 01/07 |
| FIGURE Passenger Compartment Cross-section | | May 01/07 |
| Subject 2-6-0 | | |
| Cargo Compartment | | Jan 01/10 |
| Subject 2-6-1 | | |
| Lower Deck Cargo Compartments | R | Jan 01/12 |
| FIGURE Lower Deck Cargo Compartments | | Feb 01/09 |
| FIGURE Loading Combinations | | Feb 01/09 |
| Subject 2-6-2 | | |
| Main Deck Cargo Compartments (Loading combinations) | R | Jan 01/12 |
| FIGURE Main Deck Cargo Compartments - Loading combinations | R | Jan 01/12 |
| FIGURE Main Deck Cargo Compartments - Loading combinations | R | Jan 01/12 |
| FIGURE Main Deck Cargo Compartments - Loading combinations | R | Jan 01/12 |
| FIGURE Main Deck Cargo Compartments - Loading combinations | N | Jan 01/12 |
| Subject 2-6-3 | | |
| Main and Lower Deck Cross-sections | | Feb 01/09 |
| FIGURE Main and Lower Deck Cross-sections | R | Jan 01/12 |
| Subject 2-7-0 | | |
| Doors Clearances | | Feb 01/09 |
| Subject 2-7-1 | | |
| Forward Passenger / Crew Door | | Feb 01/09 |
| FIGURE Forward Passenger / Crew Doors | | May 01/07 |
| FIGURE Forward Passenger / Crew Doors | | Feb 01/09 |
| Subject 2-7-2 | | |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| Mid Passenger / Crew Door | | May 01/07 |
| FIGURE Mid Passenger / Crew Door | | May 01/07 |
| Subject 2-7-3 | | |
| Emergency Exits | | May 01/07 |
| FIGURE Emergency Exits | | May 01/07 |
| Subject 2-7-4 | | |
| Aft Passenger / Crew Doors | | May 01/07 |
| FIGURE Aft Passenger / Crew Doors | | May 01/07 |
| Subject 2-7-5 | | |
| Forward Cargo Compartment Doors | | May 01/07 |
| FIGURE Forward Cargo Compartment Doors | | May 01/07 |
| Forward Cargo Compartment Doors | | Feb 01/09 |
| FIGURE Forward Cargo Compartment Doors | | Feb 01/09 |
| FIGURE Forward Cargo Compartment Doors | | Feb 01/09 |
| Subject 2-7-6 | | |
| Aft Cargo Compartment Doors | | Feb 01/09 |
| FIGURE Aft Cargo Compartment Doors | | Feb 01/09 |
| FIGURE Aft Cargo Compartment Doors | | Feb 01/09 |
| FIGURE Aft Cargo Compartment Doors | | Feb 01/09 |
| Subject 2-7-7 | | |
| Bulk Cargo Compartment Doors | | May 01/07 |
| FIGURE Bulk Cargo Compartment Doors | | May 01/07 |
| Bulk Cargo Compartment Doors | | Feb 01/09 |
| FIGURE Bulk Cargo Compartment Doors | | Feb 01/09 |
| Subject 2-7-8 | | |
| Main Landing Gear Doors | | May 01/07 |
| FIGURE Main Landing Gear Doors | | May 01/07 |
| Main Landing Gear Doors | | Feb 01/09 |
| FIGURE Main Landing Gear Doors | | Feb 01/09 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| Subject 2-7-9 | | |
| Radome | | Feb 01/09 |
| FIGURE Radome | | Feb 01/09 |
| Subject 2-7-10 | | |
| APU and Nose Landing Gear Doors | | May 01/07 |
| FIGURE APU and Nose Landing Gear Doors | | May 01/07 |
| APU and Nose Landing Gear Doors | | Feb 01/09 |
| FIGURE APU and Nose Landing Gear Doors | | Feb 01/09 |
| <u>CHAPTER 3</u> | | |
| Subject 3-1-0 | | |
| General Information | | Jan 01/10 |
| Subject 3-2-0 | | |
| Payload / Range | | Feb 01/09 |
| Subject 3-2-1 | | |
| ISA Conditions | | May 01/07 |
| FIGURE PAYLOAD / RANGE - PW 4000 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - RR TRENT 700 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - GE CF6-80E1 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - PW 4000 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - RR TRENT 700 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - GE CF6-80E1 Series Engine | | Feb 01/09 |
| ISA Conditions | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - RR TRENT 700 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - RR TRENT 700 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - PW 4000 Series Engine | | Feb 01/09 |
| FIGURE PAYLOAD / RANGE - PW 4000 Series Engine | | Feb 01/09 |
| Subject 3-3-0 | | |
| FAR / JAR Takeoff Weight Limitation | | Feb 01/09 |
| Subject 3-3-1 | | |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| FAR / JAR Takeoff Weight Limitation | | Feb 01/09 |
| FIGURE Takeoff Weight Limitation - ISA Conditions - PW 4000 Series Engine | | Feb 01/09 |
| FIGURE Takeoff Weight Limitation - ISA Conditions - RR TRENT 700 Series Engine | | Feb 01/09 |
| FIGURE Takeoff Weight Limitation - ISA Conditions - GE CF6-80E1 Series Engine | | Feb 01/09 |
| Subject 3-3-2 | | |
| ISA +15 °C (ISA +27 °F) Conditions | | Jan 01/10 |
| FIGURE FAR / JAR Takeoff Weight Limitation - ISA +15 °C (ISA +27 °F) Conditions - PW 4000 Series Engine | | Jan 01/10 |
| FIGURE FAR / JAR Takeoff Weight Limitation - ISA +15 °C (ISA +27 °F) Conditions - RR TRENT 700 Series Engine | | Jan 01/10 |
| FIGURE FAR / JAR Takeoff Weight Limitation - ISA +15 °C (ISA +27 °F) Conditions - GE CF6-80E1 Series Engine | | Jan 01/10 |
| Subject 3-4-0 | | |
| Landing Field Length | | Feb 01/09 |
| Subject 3-4-1 | | |
| ISA Conditions All series engine | | Jan 01/10 |
| FIGURE FAR / JAR Landing Field Length - ISA Conditions - PW 4000 Series Engine | | Jan 01/10 |
| FIGURE FAR / JAR Landing Field Length - ISA Conditions - RR TRENT 700 Series Engine | | Jan 01/10 |
| FIGURE FAR / JAR Landing Field Length - ISA Conditions - GE CF6-80E1 Series Engine | | Jan 01/10 |
| Subject 3-5-0 | | |
| Final Approach Speed | | Feb 01/09 |
| Subject 3-5-1 | | |
| Final Approach Speed | | Feb 01/09 |
| FIGURE Final Approach Speed - PW 4000 Series Engine | | Feb 01/09 |
| FIGURE Final Approach Speed - RR TRENT 700 Series Engine | | Feb 01/09 |
| FIGURE Final Approach Speed - GE CF6-80E1 Series Engine | | Feb 01/09 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| <u>CHAPTER 4</u> | | |
| Subject 4-1-0 | | |
| General Information | | Feb 01/09 |
| Subject 4-2-0 | | |
| Turning Radii | | Feb 01/09 |
| FIGURE Turning Radii - All Models | | Jan 01/11 |
| FIGURE Turning Radii - Steady State Turning Radii | | Jan 01/11 |
| FIGURE Turning Radii - Steady State Turning Radii | | Jan 01/11 |
| Subject 4-3-0 | | |
| Minimum Turning Radii | | Jan 01/11 |
| FIGURE Minimum Turning Radii | R | Jan 01/12 |
| FIGURE Minimum Turning Radii | | Jan 01/11 |
| Subject 4-4-0 | | |
| Visibility from Cockpit in Static Position. | | Feb 01/09 |
| FIGURE Visibility from Cockpit in Static Position | | May 01/07 |
| FIGURE Visibility from Cockpit in Static Position | | Feb 01/09 |
| Subject 4-5-0 | | |
| Runway and Taxiway Turn Paths | | Jan 01/10 |
| Subject 4-5-1 | | |
| 135° Turn - Runway to Taxiway | | Jan 01/11 |
| FIGURE 135° Turn - Runway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 135° Turn - Runway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| FIGURE 135° Turn - Runway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 135° Turn - Runway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| Subject 4-5-2 | | |
| 90° Turn - Runway to Taxiway | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| FIGURE 90° Turn - Runway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 90° Turn - Runway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| FIGURE 90° Turn - Runway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 90° Turn - Runway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| Subject 4-5-3 | | |
| 180° Turn on a Runway | | Jan 01/11 |
| FIGURE 180° Turn on a Runway - 180° Turn on a Runway | | Jan 01/11 |
| FIGURE 180° Turn on a Runway - 180° Turn on a Runway | | Jan 01/11 |
| Subject 4-5-4 | | |
| 135° Turn - Taxiway to Taxiway | | Jan 01/11 |
| FIGURE 135° Turn - Taxiway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 135° Turn - Taxiway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| FIGURE 135° Turn - Taxiway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 135° Turn - Taxiway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| Subject 4-5-5 | | |
| 90° Turn - Taxiway to Taxiway | | Jan 01/11 |
| FIGURE 90° Turn - Taxiway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 90° Turn - Taxiway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| FIGURE 90° Turn - Taxiway to Taxiway - Judgemental Oversteer Method | | Jan 01/11 |
| FIGURE 90° Turn - Taxiway to Taxiway - Cockpit Over Centerline Method | | Jan 01/11 |
| Subject 4-6-0 | | |
| Runway Holding Bay (Apron) | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Runway Holding Bay (Apron) | | Jan 01/11 |
| Subject 4-7-0 | | |
| Airplane Parking | | Feb 01/09 |
| FIGURE Airplane Parking - Steering Geometry | | May 01/07 |
| FIGURE Airplane Parking - Steering Geometry | | May 01/07 |
| FIGURE Airplane Parking - Minimum Parking Space Requirements | | May 01/07 |
| FIGURE Airplane Parking - Steering Geometry | | Feb 01/09 |
| FIGURE Airplane Parking - Steering Geometry | | Feb 01/09 |
| FIGURE Airplane Parking - Minimum Parking Space Requirements | | Feb 01/09 |
| <u>CHAPTER 5</u> | | |
| Subject 5-0-0 | | |
| TERMINAL SERVICING | | Jan 01/10 |
| Subject 5-1-0 | | |
| Airplane Servicing Arrangements | | Jan 01/10 |
| Airplane Servicing Arrangements | | Jan 01/10 |
| Subject 5-1-1 | | |
| Symbols Used on Servicing Diagrams | | Jan 01/10 |
| Subject 5-1-2 | | |
| Loading (Open Apron) | | Jan 01/10 |
| FIGURE Airplane Servicing Arrangements - Typical Ramp Layout (Open Apron) | | Jan 01/10 |
| FIGURE Airplane Servicing Arrangements - Typical Ramp Layout (Open Apron) | | Jan 01/10 |
| Loading (Open Apron) | | Jan 01/10 |
| FIGURE Airplane Servicing Arrangements - Typical Ramp Layout (Open Apron) | | Jan 01/10 |
| Subject 5-1-3 | | |
| Loading (Passenger Bridge) | | Jan 01/10 |
| FIGURE Airplane Servicing Arrangements - Typical Ramp Layout (gate area) | | Jan 01/10 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| FIGURE Airplane Servicing Arrangements - Typical Ramp Layout (gate area) | | Jan 01/10 |
| Subject 5-2-0 | | |
| Terminal Operations - Full Servicing Turn Round Charts | | Jan 01/10 |
| Subject 5-2-1 | | |
| Full Servicing Turn Round Charts | | Jan 01/10 |
| FIGURE Full Servicing Turn Round Charts - Turn Round Time 60 min. | | Jan 01/10 |
| FIGURE Full Servicing Turn Round Charts - Turn Round Time 64 min. | | Jan 01/10 |
| Full Servicing Turn Round Charts | | Jan 01/10 |
| FIGURE Full Servicing Turn Round Charts - Turn Round Time 62 min. | | Jan 01/10 |
| Subject 5-3-0 | | |
| Terminal Operations - Transit Turn Round Charts | | Jan 01/10 |
| Subject 5-3-1 | | |
| Transit Turn Round Charts | | Jan 01/10 |
| FIGURE Transit Turn Round Charts - Turn Round Time 44 min. | | Jan 01/10 |
| FIGURE Transit Turn Round Charts - Turn Round Time 48 min. | | Jan 01/10 |
| Subject 5-4-0 | | |
| Ground Service Connections | | Jan 01/10 |
| Subject 5-4-1 | | |
| Ground Service Connections Layout | | May 01/07 |
| FIGURE Ground Service Connections | | May 01/07 |
| Ground Service Connections Layout | | Feb 01/09 |
| FIGURE Ground Service Connections | | Feb 01/09 |
| Subject 5-4-2 | | |
| Grounding Points | | Feb 01/09 |
| FIGURE Ground Service Connections - Grounding Points | | Feb 01/09 |
| FIGURE Ground Service Connections - Grounding Points | | Feb 01/09 |
| Subject 5-4-3 | | |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| Hydraulic System | | Jan 01/10 |
| Subject 5-4-4 | | |
| Electrical System | | Jan 01/10 |
| Subject 5-4-5 | | |
| Oxygen System | | Feb 01/09 |
| Subject 5-4-6 | | |
| Fuel System | R | Jan 01/12 |
| FIGURE Overpressure Protector and NACA Flame Arrestor | N | Jan 01/12 |
| Subject 5-4-7 | | |
| Pneumatic System | | Feb 01/09 |
| Subject 5-4-8 | | |
| Potable Water System | | Jan 01/10 |
| Subject 5-4-9 | | |
| Oil System | | Feb 01/09 |
| FIGURE Ground Service Connections - Engine Oil Tank - PW 4000 series engine | | Feb 01/09 |
| FIGURE Ground Service Connections - Engine Oil Tank - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Ground Service Connections - Engine Oil Tank - GE CF6-80E1 series engine | | May 01/07 |
| FIGURE Ground Service Connections - IDG Oil Tank - PW 4000 series engine | | Feb 01/09 |
| FIGURE Ground Service Connections - IDG Oil Tank - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Ground Service Connections - IDG Oil Tank - GE CF6-80E1 series engine | | May 01/07 |
| APU Oil System | | Jan 01/10 |
| FIGURE Ground Service Connections - APU Oil Tank | | Jan 01/10 |
| Subject 5-4-10 | | |
| Vacuum Toilet System | | Jan 01/10 |
| Subject 5-5-0 | | |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| Engine Starting Pneumatic Requirements | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements | N | Jan 01/12 |
| Subject 5-5-1 | | |
| Low Ambient Temperatures | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - Low Ambient Temperature - 40 °C (- 40 °F) – PW 4000 series engine | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - Low Ambient Temperature - 55 °C (- 67 °F) – RR Trent 700 series engine | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - Low Ambient Temperature - 40 °C (- 40 °F) – GE CF6-80E1 series engine | R | Jan 01/12 |
| Subject 5-5-2 | | |
| Medium Ambient Temperatures | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - Medium Ambient Temperature +15 °C (+59 °F) – PW 4000 series engine | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - Medium Ambient Temperature 0 °C (+32 °F) – RR Trent 700 series engine | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - Medium Ambient Temperature +15 °C (+59 °F) – GE CF6-80E1 series engine | R | Jan 01/12 |
| Subject 5-5-3 | | |
| High Ambient Temperatures | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - High Ambient Temperature +55 °C (+131 °F) – PW 4000 series engine | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - High Ambient Temperature +40 °C (+104 °F) – RR Trent 700 series engine | R | Jan 01/12 |
| FIGURE Engine Starting Pneumatic Requirements - High Ambient Temperature +50 °C (122 °F) – GE CF6-80E1 series engine | R | Jan 01/12 |
| Subject 5-6-0 | | |
| Ground Pneumatic Power Requirements | | Jan 01/10 |
| Subject 5-6-1 | | |
| Heating | | Feb 01/09 |
| FIGURE Ground Pneumatic Power Requirements - Heating | | Feb 01/09 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| Subject 5-6-2 | | |
| Cooling | | Feb 01/09 |
| FIGURE Ground Pneumatic Power Requirements - Cooling | R | Jan 01/12 |
| Subject 5-7-0 | | |
| Preconditioned Airflow Requirements | R | Jan 01/12 |
| FIGURE Preconditioned Airflow Requirements | R | Jan 01/12 |
| Subject 5-8-0 | | |
| Ground Towing Requirements | | Jan 01/11 |
| FIGURE Ground Towing Requirements | | Jan 01/11 |
| FIGURE Ground Towing Requirements - Typical tow bar configuration 1 | | Jan 01/10 |
| FIGURE Ground Towing Requirements - Typical tow bar configuration 2 | | Jan 01/10 |
| FIGURE Ground Towing Requirements - Maximum Extension of the NLG Shock Absorber | | Jan 01/10 |
| <u>CHAPTER 6</u> | | |
| Subject 6-1-0 | | |
| Engine Exhaust Velocities and Temperatures | | Jan 01/10 |
| Subject 6-1-1 | | |
| Engine Exhaust Velocities Contours - Ground Idle Power | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Ground Idle Power - PW 4000 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Ground Idle Power - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Ground Idle Power - GE CF6-80E1 series engine | | Jan 01/10 |
| Subject 6-1-2 | | |
| Engine Exhaust Temperatures Contours - Ground Idle Power | | Jan 01/10 |
| FIGURE Engine Exhaust Temperatures - Ground Idle Power - PW 4000 series engine | | Feb 01/09 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Engine Exhaust Temperatures - Ground Idle Power - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Temperatures - Ground Idle Power - GE CF6-80E1 series engine | | Jan 01/10 |
| Subject 6-1-3 | | |
| Engine Exhaust Velocities Contours - Breakaway Power | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Breakaway Power - PW 4000 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Breakaway Power - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Breakaway Power - GE CF6-80E1 series engine | | Jan 01/10 |
| Subject 6-1-4 | | |
| Engine Exhaust Temperatures Contours - Breakaway Power | | Jan 01/10 |
| FIGURE Engine Exhaust Temperatures - Breakaway Power - PW 4000 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Temperatures - Breakaway Power - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Temperatures - Breakaway Power - GE CF6-80E1 series engine | | Jan 01/10 |
| Subject 6-1-5 | | |
| Engine Exhaust Velocities Contours - Takeoff Power | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Takeoff Power - PW 4000 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Takeoff Power - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Velocities - Takeoff Power - GE CF6-80E1 series engine | | May 01/07 |
| Subject 6-1-6 | | |
| Engine Exhaust Temperatures Contours - Takeoff Power | | Feb 01/09 |
| FIGURE Engine Exhaust Temperatures - Takeoff Power - PW 4000 series engine | | Feb 01/09 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Engine Exhaust Temperatures - Takeoff Power - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Engine Exhaust Temperatures - Takeoff Power - GE CF6-80E1 series engine | | May 01/07 |
| Subject 6-2-0 Airport and Community Noise Data | | Feb 01/09 |
| Subject 6-2-1 Noise Data | | Feb 01/09 |
| FIGURE Airport and Community Noise - PW 4000 series engine | | Feb 01/09 |
| FIGURE Airport and Community Noise - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Airport and Community Noise - GE CF6-80E1 series engine | | May 01/07 |
| Subject 6-3-0 Danger Areas of Engines | | Jan 01/10 |
| Subject 6-3-1 Ground Idle Power | | Feb 01/09 |
| FIGURE Danger Areas of Engines - PW 4000 series engine | | Feb 01/09 |
| FIGURE Danger Areas of Engines - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Danger Areas of Engines - GE CF6-80E1 series engine | | May 01/07 |
| Subject 6-3-2 Breakaway Power | | Feb 01/09 |
| FIGURE Danger Areas of Engines - PW 4000 series engine | | Feb 01/09 |
| FIGURE Danger Areas of Engines - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Danger Areas of Engines - GE CF6-80E1 series engine | | May 01/07 |
| Subject 6-3-3 Takeoff Power | | Feb 01/09 |
| FIGURE Danger Areas of Engines - PW 4000 series engine | | Feb 01/09 |
| FIGURE Danger Areas of Engines - RR Trent 700 series engine | | Feb 01/09 |
| FIGURE Danger Areas of Engines - GE CF6-80E1 series engine | | May 01/07 |
| Subject 6-4-0 APU Exhaust Velocities and Temperatures | | Jan 01/10 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| Subject 6-4-1 | | |
| APU - GARRETT | | Feb 01/09 |
| FIGURE Exhaust Velocities and Temperatures - APU – GARRETT GTCP 331-350 | | Feb 01/09 |
| <u>CHAPTER 7</u> | | |
| Subject 7-1-0 | | |
| General Information | | Jan 01/11 |
| Subject 7-2-0 | | |
| Landing Gear Footprint | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 192 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 202 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 210 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 220 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 227 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 184 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 205 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 205 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 205 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 215 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 217 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 217 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 230 000 kg | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Landing Gear Footprint - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Footprint - MTOW 233 000 kg | | Jan 01/11 |
| Subject 7-3-0 | | |
| Maximum Pavement Loads | | Feb 01/09 |
| FIGURE Maximum Pavement Loads | | May 01/07 |
| FIGURE Maximum Pavement Loads | | May 01/07 |
| FIGURE Maximum Pavement Loads | | Feb 01/09 |
| FIGURE Maximum Pavement Loads | | May 01/07 |
| FIGURE Maximum Pavement Loads | | May 01/07 |
| FIGURE Maximum Pavement Loads | | May 01/07 |
| Subject 7-4-0 | | |
| Landing Gear Loading on Pavement | | Jan 01/11 |
| Subject 7-4-1 | | |
| Landing Gear Loading on Pavement | | Feb 01/09 |
| FIGURE Landing Gear Loading on Pavement - MTOW 192 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 210 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 227 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 184 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 215 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 215 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 217 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 217 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Landing Gear Loading on Pavement - MTOW 233 000 kg | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|--|----------|--------------------|
| Subject 7-5-0 Flexible Pavement Requirements - US Army Corps of Engineers Design Method | | Jan 01/11 |
| Subject 7-5-1 Flexible Pavement Requirements - US Army Corps of Engineers Design Method | | Jan 01/10 |
| FIGURE Flexible Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| Subject 7-6-0 | | |
| Flexible Pavement Requirements - LCN Conversion | | Jan 01/11 |
| Subject 7-6-1 | | |
| Flexible Pavement Requirements - LCN Conversion | | Feb 01/09 |
| FIGURE Flexible Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Flexible Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| Subject 7-7-0 | | |
| Rigid Pavement Requirements - Portland Cement Association Design Method | | Jan 01/11 |
| Subject 7-7-1 | | |
| Rigid Pavement Requirements - Portland Cement Association Design Method | | Feb 01/09 |
| FIGURE Rigid Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Rigid Pavement Requirements - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements - MTOW 233 000 kg | | Jan 01/11 |
| Subject 7-8-0 | | |
| Rigid Pavement Requirements - LCN Conversion | | Jan 01/11 |
| Subject 7-8-1 | | |
| Radius of Relative Stiffness | | Feb 01/09 |
| FIGURE Radius of relative stiffness - (Reference : Portland Cement Association) | | Feb 01/09 |
| Subject 7-8-2 | | |
| Rigid Pavement Requirements - LCN Conversion | | Feb 01/09 |
| FIGURE Rigid Pavement Requirements LCN - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements LCN - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements LCN - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements LCN - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements LCN - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Rigid Pavement Requirements LCN - MTOW 233 000 kg | | Jan 01/11 |
| Subject 7-8-3 | | |
| Radius of Relative Stiffness (Other values of "E" and " μ ") | | Jan 01/11 |
| Subject 7-8-4 | | |
| Radius of Relative Stiffness | | Feb 01/09 |
| FIGURE Radius of Relative Stiffness - (Effect E and μ ON "L" values) | | Feb 01/09 |
| Subject 7-9-0 | | |
| ACN/PCN Reporting System - Flexible and Rigid Pavements | | Jan 01/11 |
| Subject 7-9-1 | | |
| Aircraft Classification Number - Flexible Pavement | | Feb 01/09 |
| FIGURE Aircraft Classification Number - Flexible Pavement - MTOW 192 000 kg | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 202 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 210 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 220 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 227 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 184 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 205 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 215 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 217 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Flexible Pavement - MTOW 233 000 kg | | Jan 01/11 |
| Subject 7-9-2 | | |
| Aircraft Classification Number - Rigid Pavement | | Feb 01/09 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 192 000 kg | | Jan 01/11 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 202 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 210 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 220 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 227 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 233 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 184 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 205 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 212 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 215 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 217 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 218 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 230 000 kg | | Jan 01/11 |
| FIGURE Aircraft Classification Number – Rigid Pavement - MTOW 233 000 kg | | Jan 01/11 |
| <p>CHAPTER 8 Subject 8-1-0 Possible Future Derivative Airplane</p> | | Feb 01/09 |

| CONTENT | CHG CODE | LAST REVISION DATE |
|---|----------|--------------------|
| <u>CHAPTER 9</u> | | |
| Subject 9-1-0 | | |
| Scaled Drawing 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| FIGURE Scaled Drawing - 1 in. = 50 ft. | | Jan 01/10 |
| Subject 9-2-0 | | |
| Scaled Drawing 1 cm. = 500 cm. | | Feb 01/09 |
| FIGURE Scaled Drawing - 1 cm. = 500 cm. | | Feb 01/09 |
| FIGURE Scaled Drawing - 1 cm. = 500 cm. | | Feb 01/09 |
| FIGURE Scaled Drawing - 1 cm. = 500 cm. | | Feb 01/09 |
| FIGURE Scaled Drawing - 1 cm. = 500 cm. | | Feb 01/09 |
| FIGURE Scaled Drawing - 1 cm. = 500 cm. | | Feb 01/09 |
| FIGURE Scaled Drawing - 1 cm. = 500 cm. | | Feb 01/09 |

TABLE OF CONTENTS

| | |
|--------|--|
| 1 | SCOPE |
| 1-1-0 | Purpose |
| 1-2-0 | Introduction |
| 2 | AIRPLANE DESCRIPTION |
| 2-1-0 | General Airplane Characteristics |
| 2-1-1 | General Airplane Characteristics Data |
| 2-2-0 | General Airplane Dimensions |
| 2-3-0 | Ground Clearances |
| 2-4-0 | Interior Arrangements |
| 2-4-1 | Typical Configuration |
| 2-5-0 | Passenger Compartment Cross Section |
| 2-6-0 | Cargo Compartments |
| 2-6-1 | Lower Deck Cargo Compartments (Loading combinations) |
| 2-6-2 | Main Deck Cargo Compartments (Loading combinations) |
| 2-6-3 | Main and Lower Deck Cross-sections |
| 2-7-0 | Door Clearances |
| 2-7-1 | Forward Passenger / Crew Doors |
| 2-7-2 | Mid Passenger / Crew Doors |
| 2-7-3 | Emergency Exits |
| 2-7-4 | Aft Passenger / Crew Doors |
| 2-7-5 | Forward Cargo Compartment Doors |
| 2-7-6 | Aft Cargo Compartment Doors |
| 2-7-7 | Bulk Cargo Compartment Doors |
| 2-7-8 | Main and Center Landing Gear Doors |
| 2-7-9 | Radome |
| 2-7-10 | APU and Nose Landing Gear Doors |
| 3 | AIRPLANE PERFORMANCE |
| 3-1-0 | General Information |
| 3-2-0 | Payload / Range |
| 3-2-1 | ISA Conditions |
| 3-3-0 | FAR / JAR Takeoff Weight Limitation |
| 3-3-1 | ISA Conditions |
| 3-3-2 | ISA +15° C (ISA +27° F) Conditions |

| | |
|-------|--|
| 3-4-0 | FAR / JAR Landing Field Length |
| 3-4-1 | ISA Conditions All series engines |
| 3-5-0 | Final Approach Speed |
| 3-5-1 | Final Approach Speed |
| 4 | GROUND MANEUVERING |
| 4-1-0 | General Information |
| 4-2-0 | Turning Radii |
| 4-3-0 | Minimum Turning Radii |
| 4-4-0 | Visibility from Cockpit in Static Position |
| 4-5-0 | Runway and Taxiway Turn Paths |
| 4-5-1 | 135° Turn - Runway to Taxiway |
| 4-5-2 | 90° Turn - Runway to Taxiway |
| 4-5-3 | 180° Turn on a Runway |
| 4-5-4 | 135° Turn - Taxiway to Taxiway |
| 4-5-5 | 90° Turn - Taxiway to Taxiway |
| 4-6-0 | Runway Holding Bay (Apron) |
| 4-7-0 | Airplane Parking |
| 5 | TERMINAL SERVICING |
| 5-0-0 | TERMINAL SERVICING |
| 5-1-0 | Airplane Servicing Arrangements |
| 5-1-1 | Symbols Used on Servicing Diagrams |
| 5-1-2 | Loading (Open Apron) |
| 5-1-3 | Loading (Passenger Bridge) |
| 5-2-0 | Terminal Operations |
| 5-2-1 | Type A and Type B Turn around Charts |
| 5-3-0 | Terminal Operation - en route station |
| 5-3-1 | Type C Turn around Chart |
| 5-4-0 | Ground Service Connections |
| 5-4-1 | Ground Service Connections Layout |
| 5-4-2 | Grounding Points |
| 5-4-3 | Hydraulic System |
| 5-4-4 | Electrical System |
| 5-4-5 | Oxygen System |
| 5-4-6 | Fuel System |
| 5-4-7 | Pneumatic System |
| 5-4-8 | Potable Water System |

| | |
|--------|--|
| 5-4-9 | Oil System |
| 5-4-10 | Vacuum Toilet System |
| 5-5-0 | Engine Starting Pneumatic Requirements |
| 5-5-1 | Low Ambient Temperatures |
| 5-5-2 | Medium Ambient Temperatures |
| 5-5-3 | High Ambient Temperatures |
| 5-6-0 | Ground Pneumatic Power Requirements |
| 5-6-1 | Heating |
| 5-6-2 | Cooling |
| 5-7-0 | Preconditioned Airflow Requirements |
| 5-8-0 | Ground Towing Requirements |
| 6 | OPERATING CONDITIONS |
| 6-1-0 | Engine Exhaust Velocities and Temperatures |
| 6-1-1 | Engine Exhaust Velocities Contours - Ground Idle Power |
| 6-1-2 | Engine Exhaust Temperatures Contours - Ground Idle Power |
| 6-1-3 | Engine Exhaust Velocities Contours - Breakaway Power |
| 6-1-4 | Engine Exhaust Temperatures Contours - Breakaway Power |
| 6-1-5 | Engine Exhaust Velocities Contours - Takeoff Power |
| 6-1-6 | Engine Exhaust Temperatures Contours - Takeoff Power |
| 6-2-0 | Airport and Community Noise |
| 6-2-1 | Noise Data |
| 6-3-0 | Danger Areas of Engines |
| 6-3-1 | Ground Idle Power |
| 6-3-2 | Breakaway Power |
| 6-3-3 | Takeoff Power |
| 6-4-0 | APU Exhaust Velocities and Temperatures |
| 6-4-1 | APU |
| 7 | PAVEMENT DATA |
| 7-1-0 | General Information |
| 7-2-0 | Landing Gear Footprint |
| 7-3-0 | Maximum Pavement Loads |
| 7-4-0 | Landing Gear Loading on Pavement |
| 7-4-1 | Landing Gear Loading on Pavement |
| 7-5-0 | Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method |
| 7-5-1 | Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method S-77-1 |
| 7-6-0 | Flexible Pavement Requirements - LCN Conversion |

| | |
|-------|---|
| 7-6-1 | Flexible Pavement Requirements - LCN Conversion |
| 7-7-0 | Rigid Pavement Requirements - Portland Cement Association Design Method |
| 7-7-1 | Rigid Pavement Requirements - Portland Cement Association Design Method |
| 7-8-0 | Rigid Pavement Requirements - LCN Conversion |
| 7-8-1 | Radius of Relative Stiffness |
| 7-8-2 | Rigid Pavement Requirements - LCN Conversion |
| 7-8-3 | Radius of Relative Stiffness (Other values of E and L) |
| 7-8-4 | Radius of Relative Stiffness |
| 7-9-0 | ACN/PCN Reporting System - Flexible and Rigid Pavements |
| 7-9-1 | Aircraft Classification Number - Flexible Pavement |
| 7-9-2 | Aircraft Classification Number - Rigid Pavement |

8 DERIVATIVE AIRPLANES

| | |
|-------|-------------------------------------|
| 8-1-0 | Possible Future Derivative Airplane |
|-------|-------------------------------------|

9 SCALED DRAWINGS

| | |
|-------|--------------------------------|
| 9-1-0 | Scaled Drawing 1 in. = 500 ft. |
| 9-2-0 | Scaled Drawing 1 cm. = 500 cm. |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

SCOPE

1-1-0 Purpose

****ON A/C A330-200 A330-200F A330-300**

Purpose

1. General

The A330 AIRPLANE CHARACTERISTICS (AC) manual is issued for the A330-200, A330-200F, A330-300 basic versions to provide the necessary data needed by airport operators and airlines for the planning of airport facilities.

This document conforms to NAS 3601.

CORRESPONDENCE

Correspondence concerning this publication should be directed to :

AIRBUS S.A.S.
Customer Services
Technical Data Support and Services
1 Rond Point Maurice BELLONTE
31707 BLAGNAC CEDEX
FRANCE

1-2-0 Introduction****ON A/C A330-200 A330-200F A330-300**Introduction

1. General

This manual comprises 9 chapters with a List of Effective Pages (LEP) and a Table Of Content (TOC) at the beginning of the manual.

Chapter 1 : SCOPE

Chapter 2 : AIRPLANE DESCRIPTION

This chapter contains general dimensional and other basic aircraft data.

It covers :

- aircraft dimensions and ground clearances,
- passenger and cargo compartments arrangement.

Chapter 3 : AIRPLANE PERFORMANCE

This chapter indicates the aircraft performance.

It covers :

- payload range,
- takeoff and landing runway requirements,
- landing approach speed.

Chapter 4 : GROUND MANEUVERING

This chapter provides the aircraft turning capability and maneuvering characteristics on the ground.

It includes :

- turning radii and visibility from the cockpit,
- runway and taxiway turn path.

Chapter 5 : TERMINAL SERVICING

This chapter provides information for the arrangement of ground handling and servicing equipment.

It covers :

- location and connections of ground servicing equipment,

- engines starting pneumatic and preconditioned airflow requirements.

Chapter 6 : OPERATING CONDITIONS

This chapter contains data and safety/environmental precautions related to engine and APU operation on the ground.

It covers :

- contour size and shape of the jet engine exhaust velocities and temperatures,
- noise data.

Chapter 7 : PAVEMENT DATA

This chapter contains the pavement data helpful for airport planning.

It gives :

- landing gear foot print and static load,
- charts for flexible pavements with Load Classification Number (LCN),
- charts for rigid pavements with LCN,
- Aircraft Classification Number (ACN), Pavement Classification Number (PCN), reporting system for flexible and rigid pavements.

Chapter 8 : DERIVATIVE AIRPLANES

This chapter gives relevant data of possible new version with the associated size change.

Chapter 9 : SCALED DRAWINGS

This chapter contains different airplane scaled drawings.

AIRPLANE DESCRIPTION

2-1-0 General Airplane Characteristics

****ON A/C A330-200 A330-200F A330-300**General Airplane Characteristics

1. General Airplane Characteristics

The weight terms used throughout this manual are given below together with their respective definitions.

Maximum Taxi Weight (MTW) :

Maximum weight for ground maneuver as limited by aircraft strength and airworthiness requirements. (It includes weight of run-up and taxi fuel). It is also called Maximum Ramp Weight (MRW).

Maximum Landing Weight (MLW) :

Maximum weight for landing as limited by aircraft strength and airworthiness requirements.

Maximum Takeoff Weight (MTOW) :

Maximum weight for takeoff as limited by aircraft strength and airworthiness requirements. (This is the maximum weight at start of the takeoff run).

Maximum Zero Fuel Weight (MZFW) :

Maximum operational weight of the aircraft without usable fuel.

Standard Seating Capacity :

Number of passengers specifically certified or anticipated for certification.

Usable Volume :

Usable volume available for cargo, pressurized fuselage, passenger compartment and cockpit.

Usable Fuel Capacity:

Fuel available for aircraft propulsion.

Water Volume :

Volume of cargo compartment.

2-1-1 General Airplane Characteristics Data

****ON A/C A330-200 A330-300**

General Airplane Characteristics Data

****ON A/C A330-300**

- The following table provides characteristics of A330-300 Models, these data are specific to each Weight Variant:

| Aircraft Characteristics | | | | |
|---------------------------------|--------------|--------------|--------------|--------------|
| | WV000 | WV001 | WV002 | WV003 |
| Maximum Taxi Weight (MTW) | 212 900 kg | 184 900 kg | 212 900 kg | 215 900 kg |
| Maximum Ramp Weight (MRW) | (469 363 lb) | (407 634 lb) | (469 363 lb) | (475 977 lb) |
| Maximum Takeoff Weight (MTOW) | 212 000 kg | 184 000 kg | 212 000 kg | 215 000 kg |
| | (467 379 lb) | (405 650 lb) | (467 379 lb) | (473 993 lb) |
| Maximum Landing Weight (MLW) | 174 000 kg | 174 000 kg | 177 000 kg | 177 000 kg |
| | (383 603 lb) | (383 603 lb) | (390 217 lb) | (390 217 lb) |
| Maximum Zero Fuel Weight (MZFW) | 164 000 kg | 164 000 kg | 167 000 kg | 167 000 kg |
| | (361 557 lb) | (361 557 lb) | (368 171 lb) | (368 171 lb) |

| Aircraft Characteristics | | | | |
|---------------------------------|----------------------------|--------------|--------------|--------------|
| | WV004 * | WV010 | WV011 | WV012 |
| Maximum Taxi Weight (MTW) | 215 900 kg | 217 900 kg | 212 900 kg | 218 900 kg |
| Maximum Ramp Weight (MRW) | (475 977 lb) | (480 386 lb) | (469 363 lb) | (482 591 lb) |
| Maximum Takeoff Weight (MTOW) | 215 000 kg | 217 000 kg | 212 000 kg | 218 000 kg |
| | (473 993 lb) | (478 402 lb) | (467 379 lb) | (480 607 lb) |
| Maximum Landing Weight (MLW) | 182 000 kg | 179 000 kg | 177 000 kg | 182 000 kg |
| | (401 240 lb) | (394 627 lb) | (390 217 lb) | (401 240 lb) |
| Maximum Zero Fuel Weight (MZFW) | 167 000 kg to 172 000 kg | 169 000 kg | 167 000 kg | 172 000 kg |
| | (368 171 lb to 379 194 lb) | (372 580 lb) | (368 171 lb) | (379 194 lb) |

NOTE : * Linear MTOW/MZFW trade-off relationship.

| Aircraft Characteristics | | | | | |
|---------------------------------|--------------|--------------|--------------|--------------|--------------|
| | WV013 | WV014 | WV020 | WV022 | WV024 |
| Maximum Taxi Weight (MTW) | 215 900 kg | 205 900 kg | 230 900 kg | 233 900 kg | 205 900 kg |
| Maximum Ramp Weight (MRW) | (475 977 lb) | (453 931 lb) | (509 046 lb) | (515 660 lb) | (453 931 lb) |
| Maximum Takeoff Weight (MTOW) | 215 000 kg | 205 000 kg | 230 000 kg | 233 000 kg | 205 000 kg |
| | (473 993 lb) | (451 947 lb) | (507 062 lb) | (513 676 lb) | (451 947 lb) |
| Maximum Landing Weight (MLW) | 177 000 kg | 182 000 kg | 185 000 kg | 187 000 kg | 185 000 kg |
| | (390 217 lb) | (401 204 lb) | (407 854 lb) | (412 263 lb) | (407 854 lb) |
| Maximum Zero Fuel Weight (MZFW) | 167 000 kg | 172 000 kg | 173 000 kg | 175 000 kg | 173 000 kg |
| | (368 171 lb) | (379 194 lb) | (381 399 lb) | (385 808 lb) | (381 399 lb) |

| Aircraft Characteristics | | | | | |
|---------------------------------|--------------|--------------|--------------|--------------|--------------|
| | WV025 | WV050 | WV051 | WV052 | WV053 |
| Maximum Taxi Weight (MTW) | 217 900 kg | 230 900 kg | 212 900 kg | 233 900 kg | 205 900 kg |
| Maximum Ramp Weight (MRW) | (480 386 lb) | (509 046 lb) | (469 363 lb) | (515 660 lb) | (453 931 lb) |
| Maximum Takeoff Weight (MTOW) | 217 000 kg | 230 000 kg | 212 000 kg | 233 000 kg | 205 000 kg |
| | (478 000 lb) | (507 062 lb) | (467 379 lb) | (513 676 lb) | (451 947 lb) |
| Maximum Landing Weight (MLW) | 179 000 kg | 185 000 kg | 187 000 kg | 187 000 kg | 185 000 kg |
| | (394 627 lb) | (407 854 lb) | (412 263 lb) | (412 263 lb) | (407 854 lb) |
| Maximum Zero Fuel Weight (MZFW) | 169 000 kg | 173 000 kg | 175 000 kg | 175 000 kg | 173 000 kg |
| | (372 580 lb) | (381 399 lb) | (385 808 lb) | (385 808 lb) | (381 399 lb) |

| Aircraft Characteristics | | | |
|---------------------------------|--------------|----------------------------|--------------|
| | WV054 | WV055 ** | WV056 |
| Maximum Taxi Weight (MTW) | 235 900 kg | 235 900 kg | 205 900 kg |
| Maximum Ramp Weight (MRW) | (520 070 lb) | (520 070 lb) | (453 931 lb) |
| Maximum Takeoff Weight (MTOW) | 235 000 kg | 235 000 kg | 205 000 kg |
| | (418 086 lb) | (518 086 lb) | (451 947 lb) |
| Maximum Landing Weight (MLW) | 187 000 kg | 187 000 kg | 187 000 kg |
| | (412 263 lb) | (412 263 lb) | (412 263 lb) |
| Maximum Zero Fuel Weight (MZFW) | 173 000 kg | 173 000 kg to 175 000 kg | 175 000 kg |
| | (381 399 lb) | (381 399 lb to 385 808 lb) | (385 808 lb) |

NOTE : ** Dynamic Payload between WV052 and WV054.

- The following table provides characteristics of A330-300 Models, these data are common to each Weight Variant:

| Aircraft Characteristics | |
|--|-----|
| Standard Seating Capacity (Single-class) | 335 |

| Aircraft Characteristics | |
|--|---|
| Usable Fuel Capacity (density = 0.785 kg/l) | 97 530 l (25 765 US gal) |
| | 76 561 kg (168 787 lb) |
| Pressurized Fuselage Volume (A/C non equipped) | 1 056 m ³ (37 292 ft ³) |
| Passenger Compartment Volume | 372 m ³ (13 137 ft ³) |
| Cockpit Volume | 12 m ³ (424 ft ³) |
| Usable Volume, FWD CC (Based on LD3) | 78 m ³ (2754 ft ³) |
| Usable Volume, AFT CC (Based on LD3) | 60.7 m ³ (2 142 ft ³) |
| Usable Volume, Bulk CC | 19.7 m ³ (695 ft ³) |
| Water Volume, FWD CC | 107 m ³ (3 789ft ³) |
| Water Volume, AFT CC | 85.7 m ³ (3 026ft ³) |
| Water Volume, Bulk CC | 22.7 m ³ (802 ft ³) |

****ON A/C A330-200**

3. The following table provides characteristics of A330-200 Models, these data are specific to each Weight Variant:

| Aircraft Characteristics | | | | | |
|--|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| | WV020 | WV021 | WV022 | WV023 | WV024 |
| Maximum Taxi Weight (MTW) Maximum Ramp Weight (MRW) | 230 900 kg (509 046 lb) | 230 900 kg (509 046 lb) | 233 900 kg (515 660 lb) | 233 900 kg (515 660 lb) | 202 900 kg (447 317 lb) |
| Maximum Takeoff Weight (MTOW) | 230 000 kg (507 062 lb) | 230 000 kg (507 062 lb) | 233 000 kg (513 676 lb) | 233 000 kg (513 676 lb) | 202 000 kg (445 333 lb) |
| Maximum Landing Weight (MLW) | 180 000 kg (396 831 lb) | 182 000 kg (401 240 lb) | 182 000 kg (401 240 lb) | 180 000 kg (396 831 lb) | 180 000 kg (396 831 lb) |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

| Aircraft Characteristics | | | | | |
|---------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| | WV020 | WV021 | WV022 | WV023 | WV024 |
| Maximum Zero Fuel Weight (MZFW) | 168 000 kg (370 376 lb) | 170 000 kg (374 785 lb) | 170 000 kg (374 785 lb) | 168 000 kg (370 376 lb) | 168 000 kg (370 376 lb) |

| Aircraft Characteristics | | | | | |
|--|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| | WV025 | WV026 | WV027 | WV050 | WV051 |
| Maximum Taxi Weight (MTW) Maximum Ramp Weight (MRW) | 220 900 kg (487 000 lb) | 192 900 kg (425 271 lb) | 220 900 kg (487 000 lb) | 230 900 kg (509 046 lb) | 192 900 kg (425 271 lb) |
| Maximum Takeoff Weight (MTOW) | 220 000 kg (485 016 lb) | 192 000 kg (423 287 lb) | 220 000 kg (485 016 lb) | 230 000 kg (507 062 lb) | 192 000 kg (423 287 lb) |
| Maximum Landing Weight (MLW) | 182 000 kg (401 240 lb) | 180 000 kg (396 831 lb) | 180 000 kg (396 831 lb) | 180 000 kg (396 831 lb) | 180 000 kg (396 831 lb) |
| Maximum Zero Fuel Weight (MZFW) | 170 000 kg (374 785 lb) | 168 000 kg (370 376 lb) | 168 000 kg (370 376 lb) | 168 000 kg (370 376 lb) | 168 000 kg (370 376 lb) |

| Aircraft Characteristics | | | | | |
|--|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| | WV052 | WV053 | WV054 | WV055 | WV056 |
| Maximum Taxi Weight (MTW) Maximum Ramp Weight (MRW) | 233 900 kg (515 660 lb) | 210 900 kg (464 954 lb) | 230 900 kg (509 046 lb) | 192 900 kg (425 271 lb) | 233 900 kg (515 660 lb) |
| Maximum Takeoff Weight (MTOW) | 233 000 kg (513 676 lb) | 210 000 kg (462 970 lb) | 230 000 kg (507 062 lb) | 192 000 kg (423 287 lb) | 233 000 kg (513 676 lb) |
| Maximum Landing Weight (MLW) | 182 000 kg (401 240 lb) | 180 000 kg (396 831 lb) | 182 000 kg (401 240 lb) | 182 000 kg (401 240 lb) | 180 000 kg (396 831 lb) |
| Maximum Zero Fuel Weight (MZFW) | 170 000 kg (374 785 lb) | 168 000 kg (370 376 lb) | 170 000 kg (374 785 lb) | 170 000 kg (374 785 lb) | 168 000 kg (370 376 lb) |

| Aircraft Characteristics | | | | |
|---------------------------------|--------------|--------------|--------------|--------------|
| | WV057 | WV058 | WV059 | WV060 |
| Maximum Taxi Weight (MTW) | 236 900 kg | 238 900 kg | 202 900 kg | 220 900 kg |
| Maximum Ramp Weight (MRW) | (522 276 lb) | (526 684 lb) | (447 317 lb) | (487 001 lb) |
| Maximum Takeoff Weight (MTOW) | 236 000 kg | 238 000 kg | 202 000 kg | 220 000 kg |
| | (520 291 lb) | (524 700 lb) | (445 333 lb) | (485 017 lb) |
| Maximum Landing Weight (MLW) | 182 000 kg | 182 000 kg | 182 000 kg | 182 000 kg |
| | (401 240 lb) | (401 240 lb) | (401 240 lb) | (401 240 lb) |
| Maximum Zero Fuel Weight (MZFW) | 170 000 kg | 168 000 kg | 170 000 kg | 170 000 kg |
| | (374 785 lb) | (370 376 lb) | (374 785 lb) | (374 785 lb) |

| Aircraft Characteristics | | |
|---------------------------------|--------------|----------------------------|
| | WV061 | WV062 *** |
| Maximum Taxi Weight (MTW) | 230 900 kg | 238 900 kg |
| Maximum Ramp Weight (MRW) | (509 047 lb) | (526 684 lb) |
| Maximum Takeoff Weight (MTOW) | 230 000 kg | 238 000 kg |
| | (507 063 lb) | (524 700 lb) |
| Maximum Landing Weight (MLW) | 182 000 kg | 182 000 kg |
| | (401 240 lb) | (401 241 lb) |
| Maximum Zero Fuel Weight (MZFW) | 168 000 kg | 168 000 kg to 170 000 kg |
| | (370 376 lb) | (370 376 lb to 374 785 lb) |

NOTE : *** Dynamic Payload between WV057 and WV058.

4. The following table provides characteristics of A330-200 Models, these data are common to each Weight Variant:

| Aircraft Characteristics | |
|--|---|
| Standard Seating Capacity | 303 |
| Usable Fuel Capacity (density = 0.785 kg/l) | 139 090 l (36 744 US gal) |
| | 109 185 kg (240 711 lb) |
| Pressurized Fuselage Volume (A/C non equipped) | 950 m ³ (33 548 ft ³) |
| Passenger Compartment Volume | 335 m ³ (11 830 ft ³) |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

| Aircraft Characteristics | |
|---|---|
| Cockpit Volume | 12 m ³ (424 ft ³) |
| Usable Volume, FWD CC (Based on LD3) | 60.7 m ³ (2 142 ft ³) |
| Usable Volume, AFT CC (Based on LD3) | 52 m ³ (1 836 ft ³) |
| Usable Volume, Bulk CC | 19.7 m ³ (695 ft ³) |
| Water Volume, FWD CC | 84.6 m ³ (2 988 ft ³) |
| Water Volume, AFT CC | 71.1 m ³ (2 511 ft ³) |
| Water Volume, Bulk CC | 22.7 m ³ (802 ft ³) |

****ON A/C A330-200F**

General Airplane Characteristics Data

1. The following table provides characteristics of A330-200F Models, these data are specific to each Weight Variant:

| Aircraft Characteristics | | | |
|-------------------------------------|----------------------------|----------------------------|--|
| | WV000 | WV001 | WV002* |
| Maximum Taxi Weight (MTW) | 233 900 kg (515 660 lb) | 227 900 kg (502 432 lb) | 233 900 kg (515 660 lb) |
| Maximum Rampi Weight (MRW) | | | |
| Maximum Takeoff Weight (MTOW) | 233 000 kg (513 676 lb) | 227 000 kg (500 448 lb) | 233 000 kg (513 676 lb) |
| Maximum Landing Weight (MLW) | 182 000 kg (401 240 lb) | 187 000 kg (412 263 lb) | 187 000 kg (412 263 lb) |
| Maximum Zero Fuel Weight (MZFV) | 173 000 kg (381 399 lb) | 178 000 kg (392 422 lb) | 173 000 to 178 000 kg (381 399 lb to 392 422 lb) |
| Estimated Maximum Payload PW 4000 | 64 742 kg (142 732 lb) | 69 742 kg (153 755 lb) | 64 742 kg to 69 742 kg (142 732 lb to 153 755 lb) |
| Estimated Maximum Payload TRENT 700 | 65 000 kg (143 300 lb) | 70 000 kg (154 324 lb) | 65 000 kg to 70 000 kg (143 300 lb to 154 324 lb) |

NOTE : * Dynamic Payload between WV000 and WV001

2. The following table provides characteristics of A330-200F Models, these data are common to each Weight Variant:

| Aircraft Characteristics | |
|--|--|
| Supernumerary area | 6 |
| Usable Fuel Capacity (density = 0.785 kg/l) | 139 090 l (36 755 US gal) |
| Pressurized Fuselage Volume (A/C non equipped) | 900 m ³ (31 783 ft ³) |
| Cockpit Volume | 12 m ³ (424 ft ³) |
| Main Deck Cargo Compartment Usable Volume (Based on 96"x125" pallet) | 336.8 m ³ (11 894ft ³) |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

| Aircraft Characteristics | |
|--|---|
| Main Deck Cargo Compartment Water Volume | 466.5 m ³ (16 474 ft ³) |
| Usable Volume, FWD CC (Based on LD3) | 60.7 m ³ (2 142 ft ³) |
| Usable Volume, AFT CC (Based on LD3) | 52 m ³ (1 836 ft ³) |
| Usable Volume, Bulk CC | 19.7 m ³ (695 ft ³) |
| Water Volume, FWD CC | 84.6 m ³ (2 988 ft ³) |
| Water Volume, AFT CC | 71.1 m ³ (2 511 ft ³) |
| Water Volume, Bulk CC | 22.7 m ³ (802 ft ³) |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-2-0 General Airplane Dimensions

****ON A/C A330-200 A330-300**

General Airplane Dimensions

1. This section provides General Airplane Dimensions for pax version.


****ON A/C A330-300**

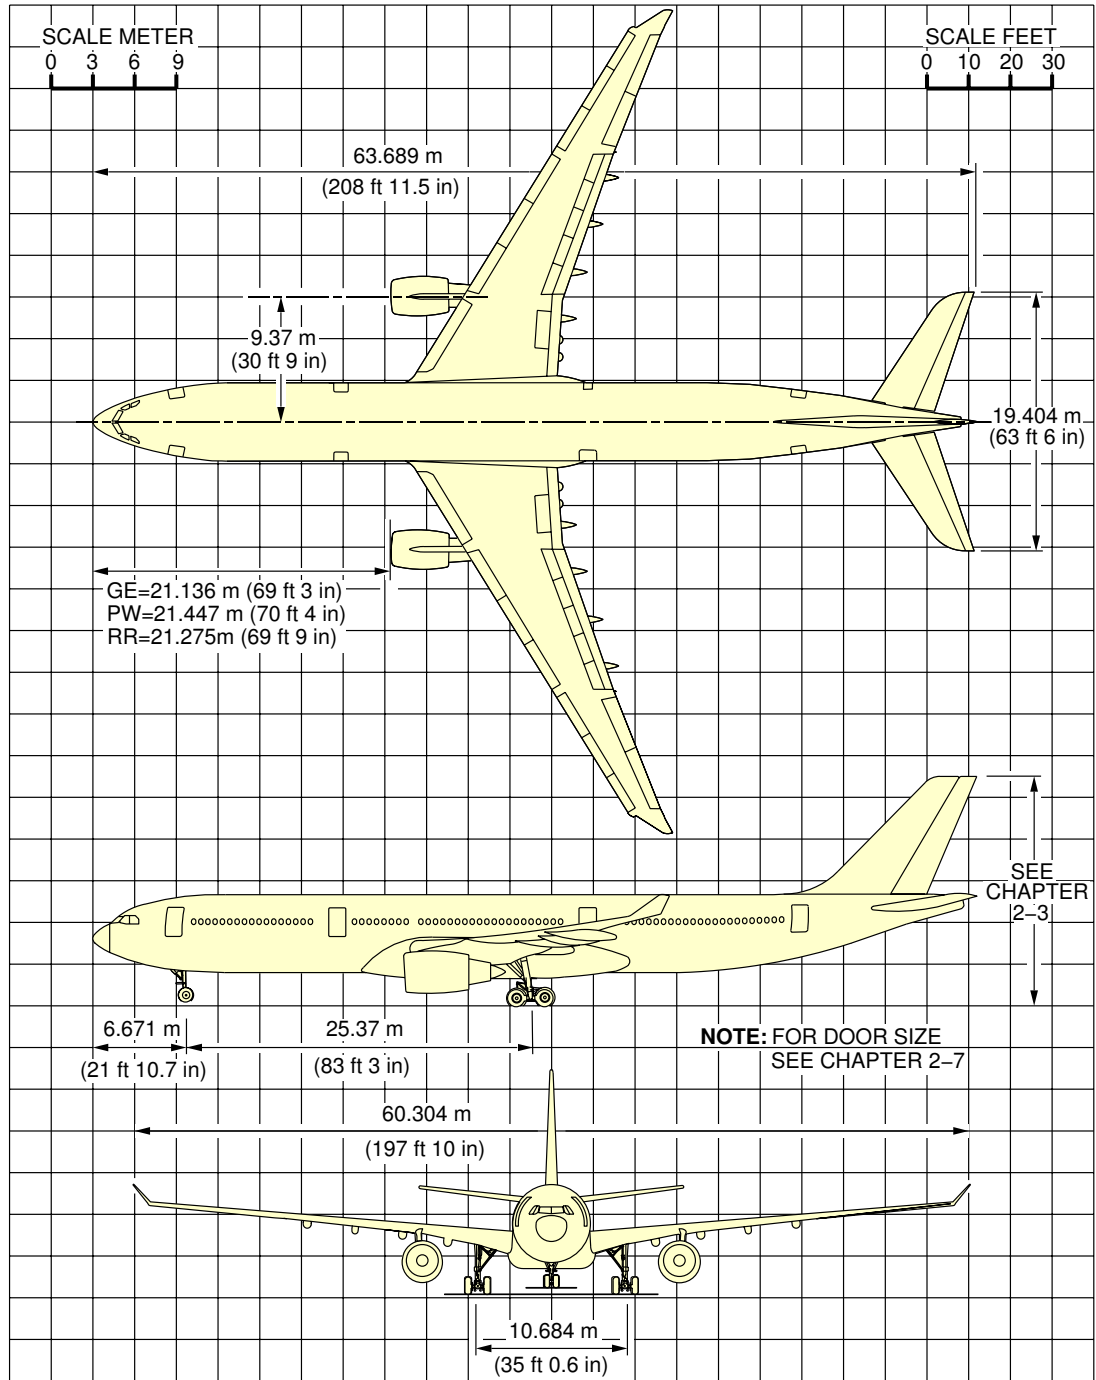

F_AC_020200_1_0010101_01_01

General Airplane Dimensions
FIGURE-2-2-0-991-001-A01

****ON A/C A330-200**

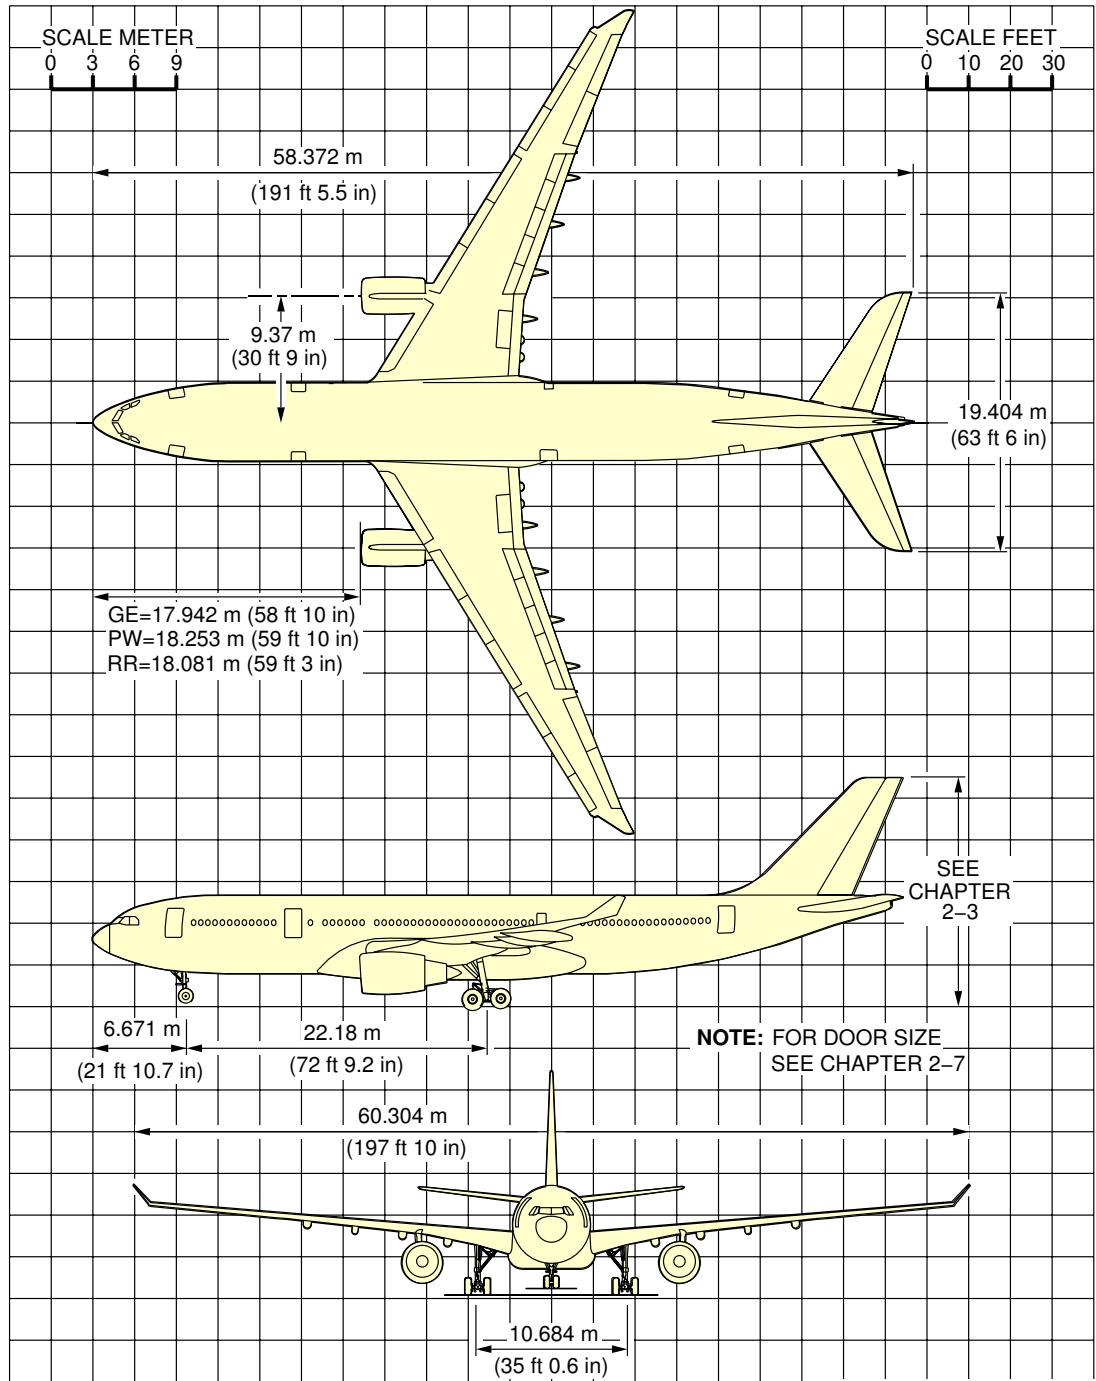

General Airplane Dimensions
FIGURE-2-2-0-991-002-A01




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

General Airplane Dimensions

1. This section provides General Airplane Dimensions for cargo version.

****ON A/C A330-200F**

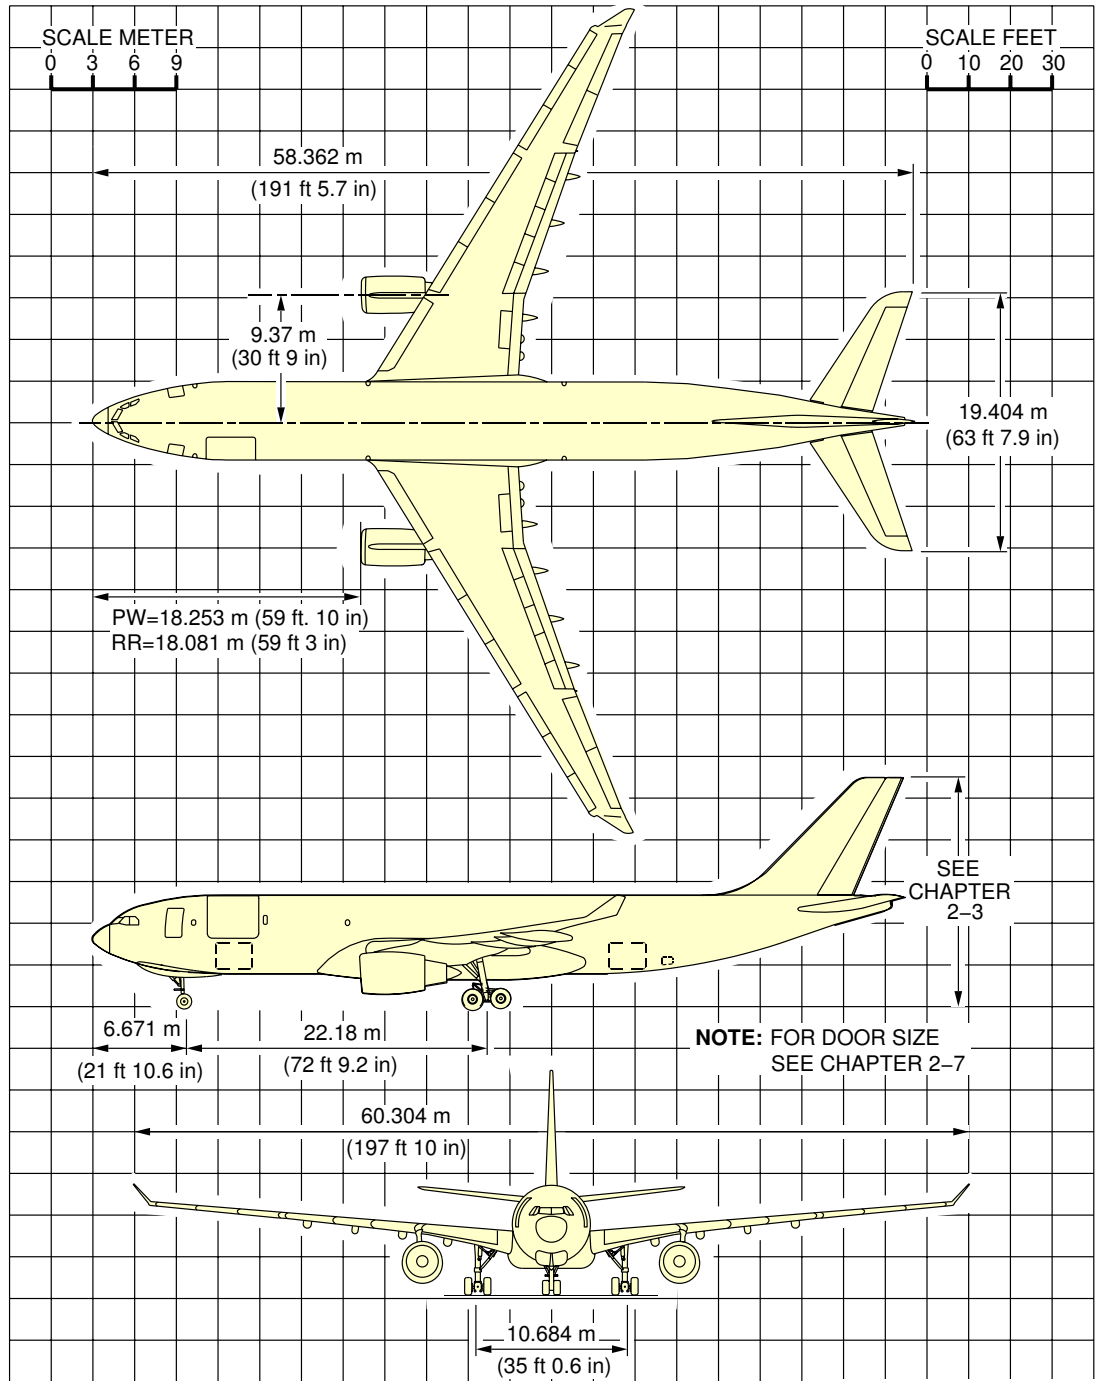

General Airplane Dimensions
FIGURE-2-2-0-991-003-A01

2-3-0 Ground Clearances****ON A/C A330-200 A330-300**Ground Clearances

1. This section gives the height of various points of the aircraft, above the ground, for different aircraft pax configurations.


Dimensions in the tables are approximate and will vary with tire type, W&B and others special conditions.

The dimensions are given for:

- the basic aircraft OWE with a mid CG,
- the MRW for the lightest weight variant with a FWD CG and a AFT CG,
- the MRW for the heaviest weight variant with a FWD CG and a AFT CG,
- aircraft on jacks, FDL at 6.5 m (21.33 ft).

NOTE : Passenger and cargo door clearances are measured from the center of the door sill and from floor level..

****ON A/C A330-300**

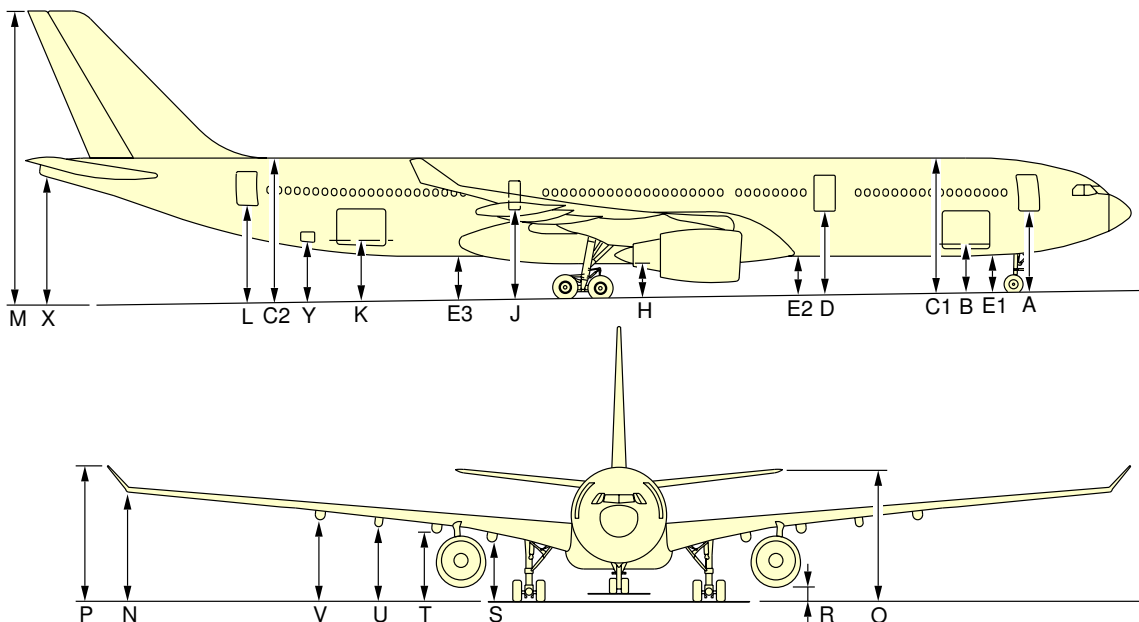


| | MRW 212 900 kg 469 360 lb | OPERATING WEIGHT EMPTY CG 26.8% | | MAXIMUM RAMP WEIGHT CG 15% | | MAXIMUM RAMP WEIGHT CG 36.5% | | AIRCRAFT ON JACKS | |
|--------|---------------------------------|------------------------------------|-------|-------------------------------|-------|---------------------------------|-------|----------------------|------|
| | | m | ft | m | ft | m | ft | m | ft |
| | A | 4.55 | 14.92 | 4.41 | 14.46 | 4.55 | 14.92 | 6.32 | 20.7 |
| | B | 2.70 | 8.85 | 2.55 | 8.36 | 2.66 | 8.72 | 4.14 | 13.5 |
| FR 26 | C1 | 7.74 | 25.4 | 7.58 | 24.86 | 7.67 | 25.16 | 9.32 | 30.5 |
| FR 72 | C2 | 8.53 | 28 | 8.31 | 27.26 | 8.19 | 26.87 | 9.32 | 30.5 |
| | D | 4.83 | 15.84 | 4.67 | 15.32 | 4.73 | 15.51 | 6.32 | 20.7 |
| FR 20 | E1 | 2.10 | 6.89 | 1.95 | 6.39 | 2.03 | 6.66 | 3.68 | 12 |
| FR 37 | E2 | 2.28 | 7.48 | 2.10 | 6.88 | 2.14 | 7.02 | 3.68 | 12 |
| FR 56 | E3 | 2.74 | 8.99 | 2.54 | 8.33 | 2.45 | 8.03 | 3.68 | 12 |
| FR 45 | H | 2.04 | 6.7 | 1.86 | 6.10 | 1.85 | 6.07 | 3.26 | 10.7 |
| | J | 5.34 | 17.5 | 5.31 | 17.4 | 5.20 | 17.06 | 6.43 | 21.1 |
| | K | 3.43 | 11.25 | 3.22 | 10.56 | 3.13 | 10.27 | 4.24 | 13.9 |
| | L | 5.77 | 18.93 | 5.55 | 18.20 | 5.41 | 17.75 | 6.53 | 21.4 |
| | M | 17.18 | 56.36 | 16.94 | 55.58 | 16.72 | 54.85 | 17.62 | 57.8 |
| | N | 6.46 | 21.20 | 6.13 | 20.11 | 6.06 | 19.88 | 7.55 | 24.7 |
| | O | 8.33 | 27.32 | 8.09 | 26.54 | 7.88 | 25.85 | 9.23 | 30.2 |
| | P | 8.05 | 26.41 | 7.70 | 25.26 | 7.61 | 24.96 | 8.96 | 29.4 |
| GE = R | | 0.94 | 3.08 | 0.76 | 2.49 | 0.79 | 2.59 | 2.34 | 7.67 |
| PW = R | | 0.90 | 2.95 | 0.72 | 2.36 | 0.75 | 2.46 | 2.29 | 7.51 |
| RR = R | | 0.87 | 2.85 | 0.69 | 2.26 | 0.72 | 2.36 | 2.21 | 7.25 |
| | S | 3.87 | 12.70 | 3.68 | 12.07 | 3.64 | 11.94 | 5.25 | 17.2 |
| | T | 4.33 | 14.20 | 4.13 | 13.55 | 4.11 | 13.48 | 5.70 | 18.7 |
| | U | 4.64 | 15.22 | 4.41 | 14.46 | 4.37 | 14.33 | 6 | 19.6 |
| | V | 4.97 | 16.30 | 4.72 | 15.48 | 4.67 | 15.32 | 6.30 | 20.6 |
| | X | 7.48 | 24.54 | 7.24 | 23.76 | 7.03 | 23.06 | 8.10 | 26.5 |
| | Y | 3.68 | 12.07 | 3.46 | 11.35 | 3.35 | 11 | 4.39 | 14.4 |

NOTE: PASSENGER AND CARGO DOOR CLEARANCES ARE MEASURED FROM THE CENTER OF THE DOOR SILL AND FROM FLOOR LEVEL.

F_AC_020300_1_0010101_01_01

Ground Clearances
FIGURE-2-3-0-991-001-A01

****ON A/C A330-200**

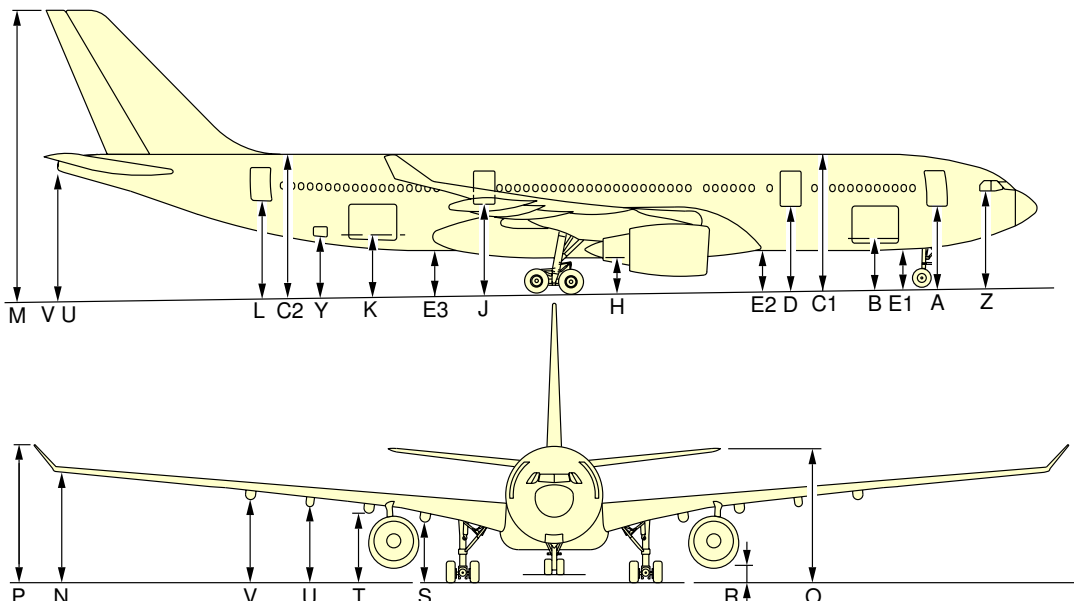

| | MRW 230 900 kg 509 042 lb | OPERATING WEIGHT EMPTY CG 27.9% | | MAXIMUM RAMP WEIGHT CG 21% | | MAXIMUM RAMP WEIGHT CG 37.5% | | AIRCRAFT ON JACKS | |
|-------|---------------------------------|------------------------------------|-------|-------------------------------|-------|---------------------------------|-------|----------------------|-------|
| | | m | ft | m | ft | m | ft | m | ft |
| | A | 4.63 | 15.19 | 4.44 | 14.56 | 4.63 | 15.19 | 6.32 | 20.7 |
| | B | 2.78 | 9.12 | 2.58 | 8.46 | 2.74 | 8.99 | 4.14 | 13.5 |
| FR 26 | C1 | 7.75 | 25.42 | 7.56 | 24.80 | 7.69 | 25.23 | 9.32 | 30.5 |
| FR 72 | C2 | 8.54 | 28.02 | 8.31 | 27.26 | 8.16 | 26.77 | 9.32 | 30.5 |
| | D | 4.86 | 15.9 | 4.66 | 15.3 | 4.78 | 15.7 | 6.36 | 20.7 |
| FR 20 | E1 | 2.04 | 6.7 | 1.84 | 6.03 | 2.01 | 6.59 | 3.68 | 12 |
| FR 37 | E2 | 2.23 | 7.31 | 2.03 | 6.66 | 2.12 | 6.95 | 3.68 | 12 |
| FR 56 | E3 | 2.70 | 8.86 | 2.48 | 8.13 | 2.40 | 7.87 | 3.68 | 12 |
| FR 45 | H | 2.02 | 6.63 | 1.81 | 5.93 | 1.83 | 6 | 3.26 | 10.7 |
| | J | 5.36 | 17.6 | 5.15 | 16.9 | 5.10 | 16.7 | 6.46 | 21.2 |
| | K | 3.50 | 11.48 | 3.27 | 10.73 | 3.16 | 10.36 | 4.24 | 13.9 |
| | L | 5.74 | 18.83 | 5.51 | 18.07 | 5.35 | 17.55 | 6.53 | 21.4 |
| | M | 18.23 | 59.8 | 17.98 | 58.99 | 17.71 | 58.1 | 18.62 | 61.09 |
| | M1 | 17.73 | 58.17 | 17.48 | 57.35 | 17.21 | 56.46 | 18.12 | 59.45 |
| | N | 6.48 | 21.26 | 6.14 | 20.14 | 6.05 | 19.85 | 7.55 | 24.7 |
| | O | 8.30 | 27.23 | 8.05 | 26.41 | 7.77 | 25.49 | 9.23 | 30.2 |
| | P | 8.08 | 26.51 | 7.71 | 25.29 | 7.61 | 24.96 | 8.96 | 29.4 |
| GE = | R | 0.94 | 3.08 | 0.74 | 2.42 | 0.79 | 2.59 | 2.34 | 7.67 |
| PW = | R | 0.90 | 2.95 | 0.70 | 2.29 | 0.75 | 2.46 | 2.29 | 7.51 |
| RR = | R | 0.87 | 2.85 | 0.67 | 2.19 | 0.72 | 2.36 | 2.21 | 7.25 |
| | S | 3.89 | 12.76 | 3.67 | 12.04 | 3.64 | 11.94 | 5.25 | 17.2 |
| | T | 4.35 | 14.27 | 4.13 | 13.55 | 4.11 | 13.48 | 5.70 | 18.7 |
| | U | 4.63 | 15.19 | 4.42 | 14.50 | 4.37 | 14.33 | 6 | 19.6 |
| | V | 4.95 | 16.24 | 4.73 | 15.52 | 4.67 | 15.32 | 6.30 | 20.6 |
| | V U | 7.47 | 24.51 | 7.23 | 23.72 | 6.97 | 22.86 | 8.10 | 25.5 |
| | Y | 3.66 | 12.01 | 3.43 | 11.25 | 3.30 | 10.82 | 4.39 | 14.4 |
| | Z | 5.41 | 17.75 | 5.22 | 17.12 | 5.43 | 17.81 | 7.10 | 23.30 |

M1 = POST MOD 48979 (SHORTER FIN INSTALLATION)

NOTE: PASSENGER AND CARGO DOOR CLEARANCES ARE MEASURED FROM THE CENTER OF THE DOOR SILL AND FROM FLOOR LEVEL.

F_AC_020300_1_0030101_01_01

Ground Clearances
FIGURE-2-3-0-991-003-A01

****ON A/C A330-200F**Ground Clearances

1. This section gives the height of various points of the aircraft, above the ground, for different aircraft cargo configurations.


Dimensions in the tables are approximate and will vary with tire type, W&B and others special conditions.

The dimensions are given for:

- the basic aircraft OWE with a mid CG,
- the MRW for the lightest weight variant with a FWD CG and a AFT CG,
- the MRW for the heaviest weight variant with a FWD CG and a AFT CG,
- aircraft on jacks, FDL at 6.5 m (21.33 ft).

NOTE : Passenger and cargo door clearances are measured from the center of the door sill and from floor level.

****ON A/C A330-200F**

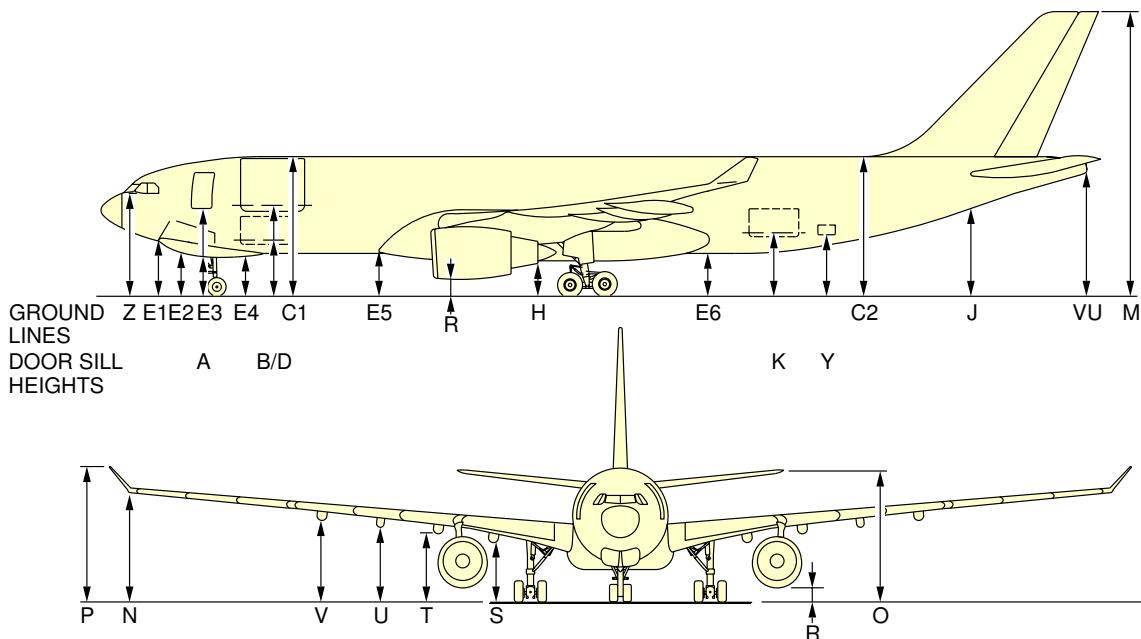


| | MRW 227 900 kg 502 433 lb | OWE (109 000) EMPTY CG 18% | | MAXIMUM RAMP WEIGHT CG 20.6% | | MAXIMUM RAMP WEIGHT CG 37.6% | |
|-------|---------------------------------|-------------------------------|-------|---------------------------------|-------|---------------------------------|-------|
| | | m | ft | m | ft | m | ft |
| | A | 4.98 | 16.34 | 4.82 | 15.81 | 5 | 16.40 |
| | B | 3.11 | 10.20 | 2.93 | 9.61 | 3.08 | 10.10 |
| FR 26 | C1 | 8.06 | 26.44 | 7.88 | 25.85 | 8.01 | 26.27 |
| FR 72 | C2 | 8.44 | 27.69 | 8.08 | 26.51 | 7.92 | 25.98 |
| | D | 5.06 | 16.60 | 4.88 | 16.01 | 5.03 | 16.50 |
| FR 10 | E1 | 3.07 | 10.07 | 2.93 | 9.61 | 3.13 | 10.27 |
| FR 13 | E2 | 2.39 | 7.84 | 2.24 | 7.35 | 2.43 | 7.97 |
| FR 15 | E3 | 2.22 | 7.28 | 2.06 | 6.76 | 2.25 | 7.38 |
| FR 20 | E4 | 2.42 | 7.94 | 2.26 | 7.41 | 2.42 | 7.94 |
| FR 37 | E5 | 2.47 | 8.10 | 2.26 | 7.41 | 2.35 | 7.71 |
| FR 56 | E6 | 2.70 | 8.86 | 2.38 | 7.81 | 2.30 | 7.54 |
| FR 45 | H | 2.16 | 7.09 | 1.90 | 6.23 | 1.91 | 6.26 |
| FR 87 | J | 5.55 | 18.21 | 5.15 | 16.90 | 4.93 | 16.17 |
| | K | 3.52 | 11.55 | 3.16 | 10.37 | 3.05 | 10 |
| | M | 17.41 | 57.12 | 16.97 | 55.68 | 16.68 | 54.71 |
| | N | 7.80 | 25.59 | 7.47 | 24.51 | 7.37 | 24.17 |
| | O | 8.31 | 27.26 | 7.87 | 25.82 | 7.59 | 24.89 |
| | P | 9.23 | 30.28 | 8.90 | 29.20 | 8.79 | 28.83 |
| PW | R | 1.13 | 3.71 | 0.90 | 2.95 | 0.96 | 3.15 |
| RR | R | 1.06 | 3.48 | 0.83 | 2.71 | 0.88 | 2.89 |
| | S | 2.74 | 8.99 | 2.45 | 8.03 | 2.41 | 7.91 |
| | T | 2.98 | 9.79 | 2.70 | 8.85 | 2.67 | 8.77 |
| | U | 2.92 | 9.59 | 2.64 | 8.65 | 2.61 | 8.55 |
| | V | 3.02 | 9.91 | 2.71 | 8.90 | 2.65 | 8.68 |
| | VU | 7.92 | 25.98 | 7.46 | 24.48 | 7.21 | 23.65 |
| | Y | 3.61 | 11.84 | 3.25 | 10.66 | 3.13 | 10.27 |
| | Z | 6.22 | 20.41 | 6.08 | 19.95 | 6.29 | 20.63 |

NOTE: PASSENGER AND CARGO DOOR CLEARANCES ARE MEASURED FROM THE CENTER OF THE DOOR SILL AND FROM FLOOR LEVEL. F_AC_020300_1_0060101_01_03

Ground Clearances
Ground Clearances MRW 227 900 kg
FIGURE-2-3-0-991-006-A01

****ON A/C A330-200F**

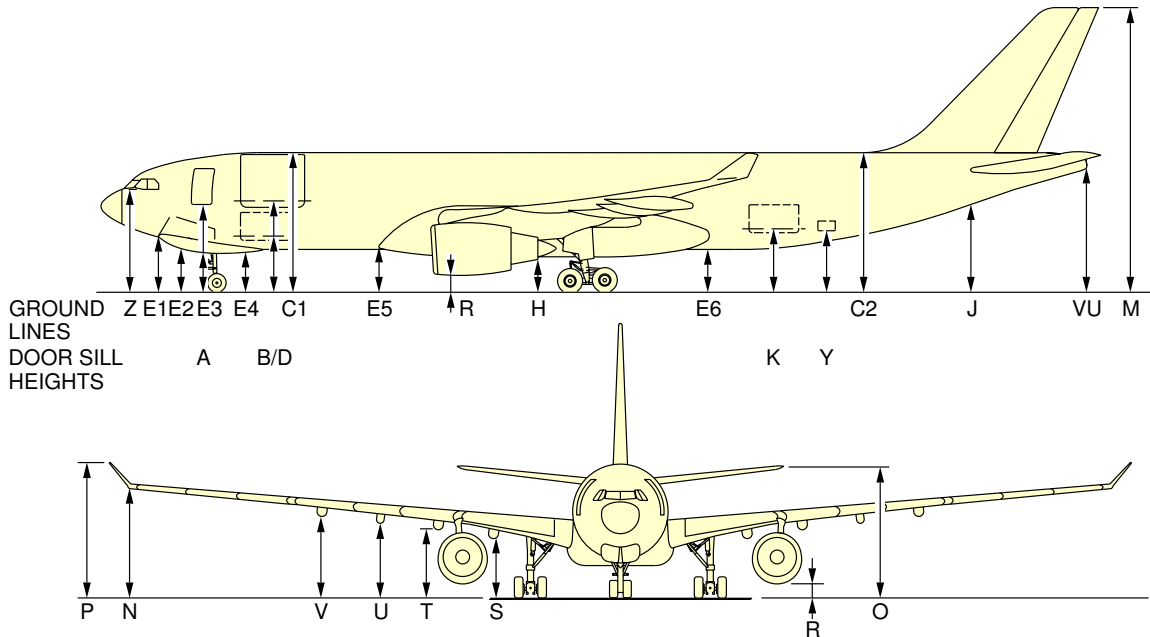

| | MRW 233 900 kg 515 660 lb | OWE (109 000) EMPTY CG 18% | | MAXIMUM RAMP WEIGHT CG 20.6% | | MAXIMUM RAMP WEIGHT CG 37.4% | |
|-------|---------------------------------|-------------------------------|-------|---------------------------------|-------|---------------------------------|-------|
| | | m | ft | m | ft | m | ft |
| | A | 4.98 | 16.34 | 4.82 | 15.81 | 5 | 16.40 |
| | B | 3.11 | 10.20 | 2.93 | 9.61 | 3.08 | 10.10 |
| FR 26 | C1 | 8.06 | 26.44 | 7.87 | 25.82 | 8.01 | 26.28 |
| FR 72 | C2 | 8.44 | 27.69 | 8.06 | 26.44 | 7.91 | 25.95 |
| | D | 5.06 | 16.60 | 4.88 | 16.01 | 5.03 | 16.50 |
| FR 10 | E1 | 3.07 | 10.07 | 2.93 | 9.61 | 3.13 | 10.27 |
| FR 13 | E2 | 2.39 | 7.84 | 2.24 | 7.35 | 2.43 | 7.97 |
| FR 15 | E3 | 2.22 | 7.28 | 2.06 | 6.76 | 2.24 | 7.35 |
| FR 20 | E4 | 2.42 | 7.94 | 2.25 | 7.38 | 2.41 | 7.91 |
| FR 37 | E5 | 2.47 | 8.10 | 2.26 | 7.41 | 2.35 | 7.71 |
| FR 56 | E6 | 2.70 | 8.86 | 2.37 | 7.78 | 2.29 | 7.51 |
| FR 45 | H | 2.16 | 7.09 | 1.89 | 6.20 | 1.91 | 6.27 |
| FR 87 | J | 5.55 | 18.21 | 5.13 | 16.83 | 4.91 | 16.11 |
| | K | 3.52 | 11.55 | 3.15 | 10.33 | 3.04 | 9.97 |
| | M | 17.41 | 57.12 | 16.95 | 55.61 | 16.67 | 54.69 |
| | N | 7.80 | 25.59 | 7.46 | 24.48 | 7.36 | 24.15 |
| | O | 8.31 | 27.26 | 7.85 | 25.75 | 7.57 | 24.84 |
| | P | 9.23 | 30.28 | 8.88 | 29.13 | 8.78 | 28.81 |
| PW | R | 1.13 | 3.71 | 0.89 | 2.92 | 0.95 | 3.12 |
| RR | R | 1.06 | 3.48 | 0.82 | 2.69 | 0.87 | 2.85 |
| | S | 2.74 | 8.99 | 2.44 | 8 | 2.41 | 7.89 |
| | T | 2.98 | 9.79 | 2.69 | 8.83 | 2.67 | 8.75 |
| | U | 2.92 | 9.59 | 2.63 | 8.62 | 2.60 | 8.53 |
| | V | 3.02 | 9.91 | 2.70 | 8.86 | 2.64 | 8.66 |
| | VU | 7.92 | 25.98 | 7.46 | 24.48 | 7.19 | 23.59 |
| | Y | 3.61 | 11.84 | 3.25 | 10.66 | 3.12 | 10.24 |
| | Z | 6.22 | 20.41 | 6.08 | 19.95 | 6.29 | 20.64 |

NOTE: PASSENGER AND CARGO DOOR CLEARANCES ARE MEASURED FROM THE CENTER OF THE DOOR SILL AND FROM FLOOR LEVEL.

F_AC_020300_1_0070101_01_03

Ground Clearances
Ground Clearances MRW 233 900 kg
FIGURE-2-3-0-991-007-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-4-0 Interior Arrangements

****ON A/C A330-200 A330-300**

Interior Arrangements

1. This section gives the standard interior arrangements configuration.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-4-1 Typical Configuration

****ON A/C A330-200 A330-300**

Typical Configuration

1. This section gives the typical configuration for A330 pax version


**ON A/C A330-300

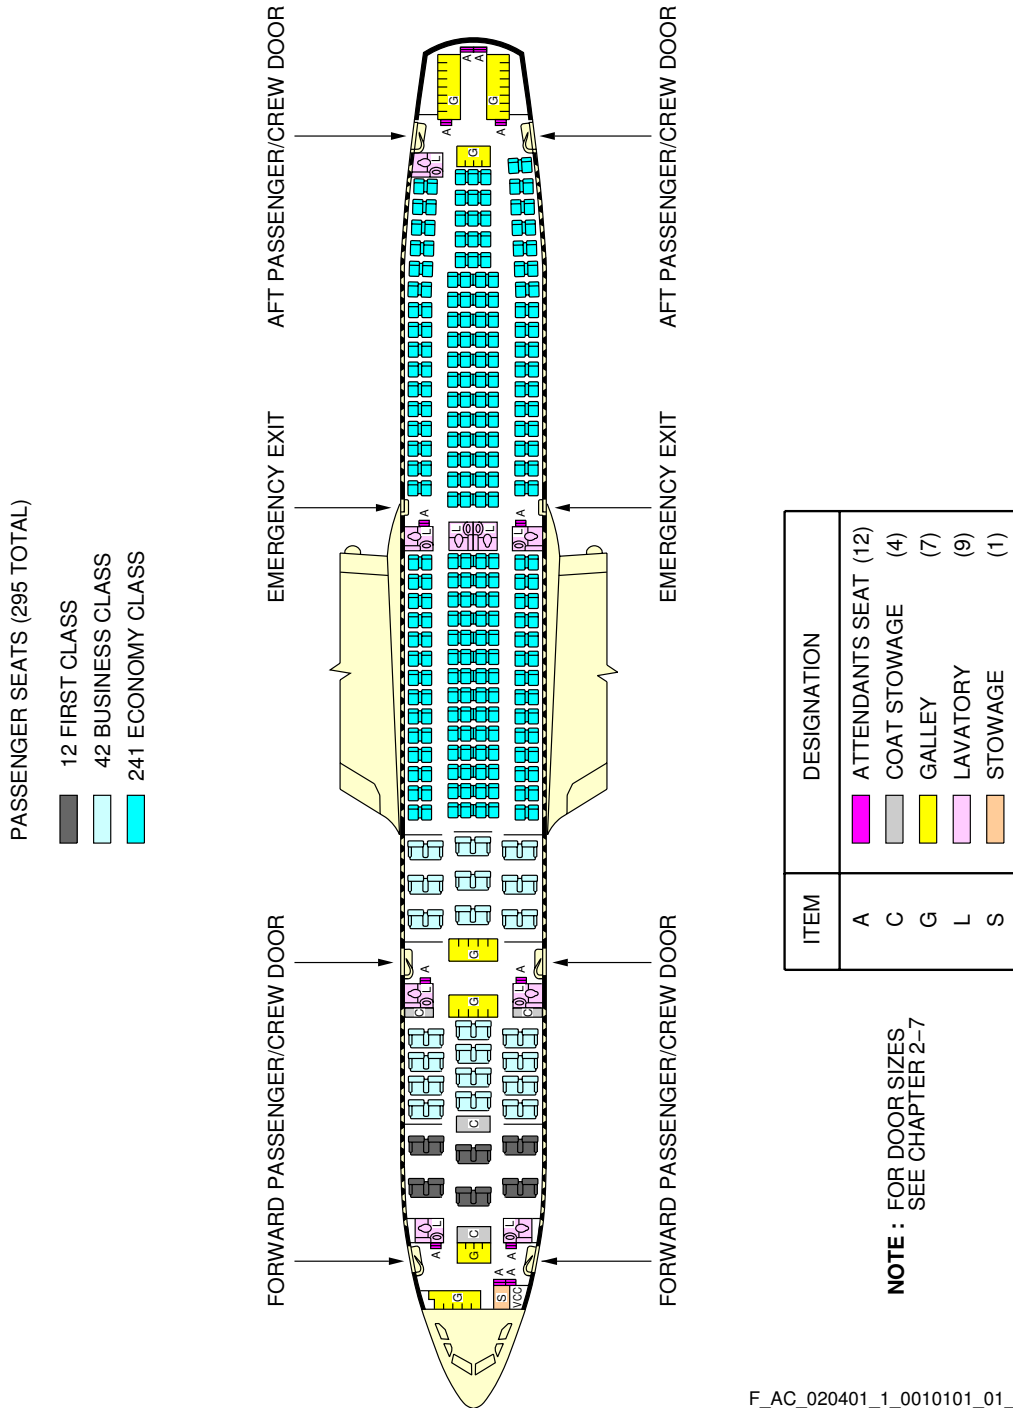

Typical Configuration
FIGURE-2-4-1-991-001-A01

F_AC_020401_1_0010101_01_00

****ON A/C A330-200**

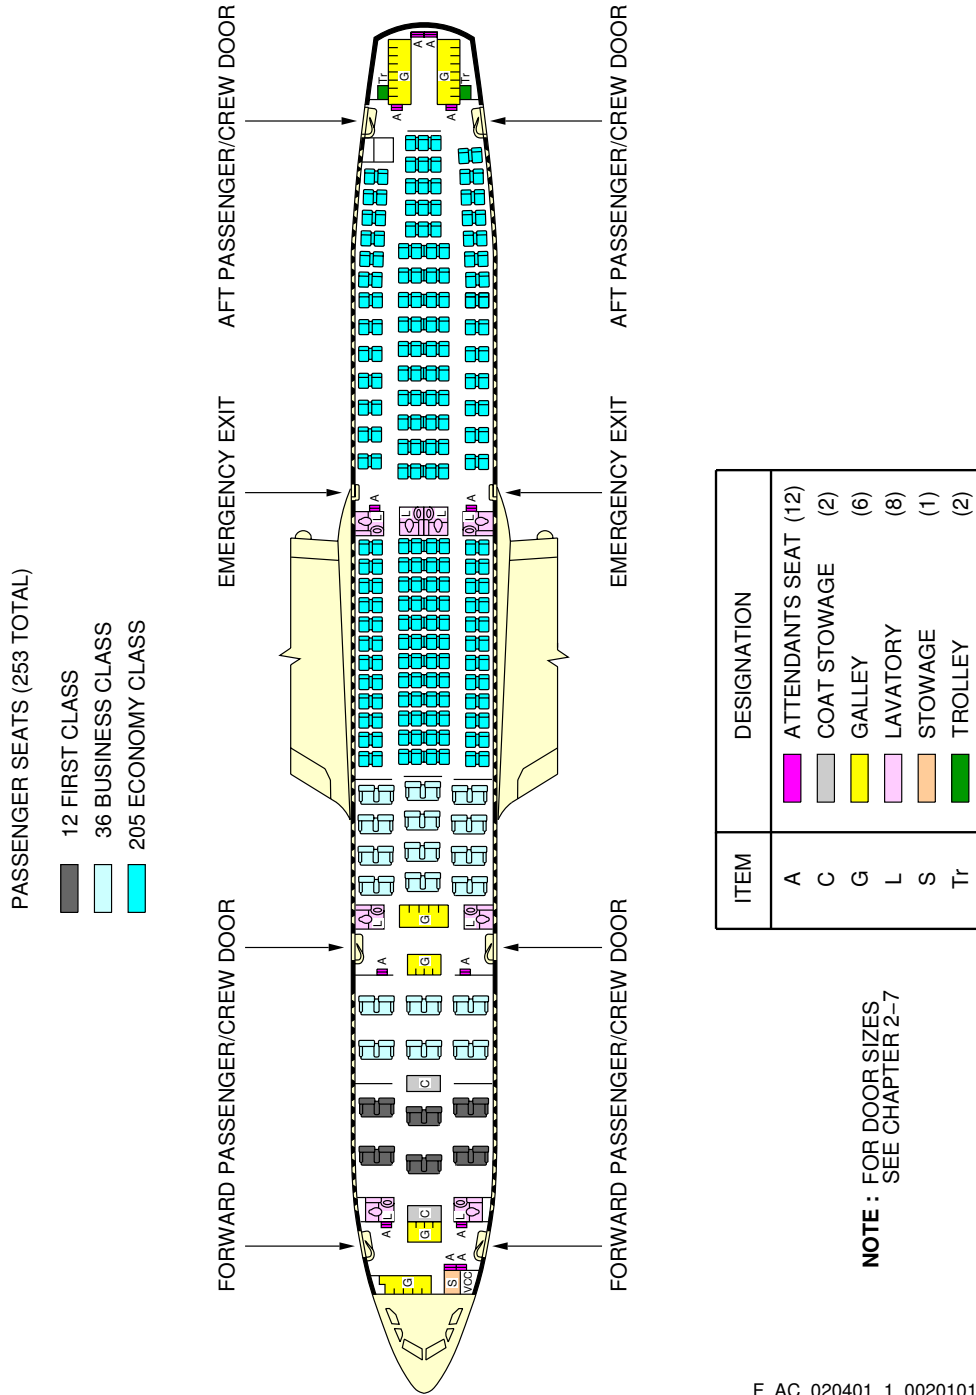

Typical Configuration
FIGURE-2-4-1-991-002-A01

F_AC_020401_1_0020101_01_00



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-5-0 Passenger Compartment Cross Section

****ON A/C A330-200 A330-300**

Passenger Compartment Cross-section

1. This section gives the typical passenger compartment cross-section configuration of A330 models.

**ON A/C A330-200 A330-300

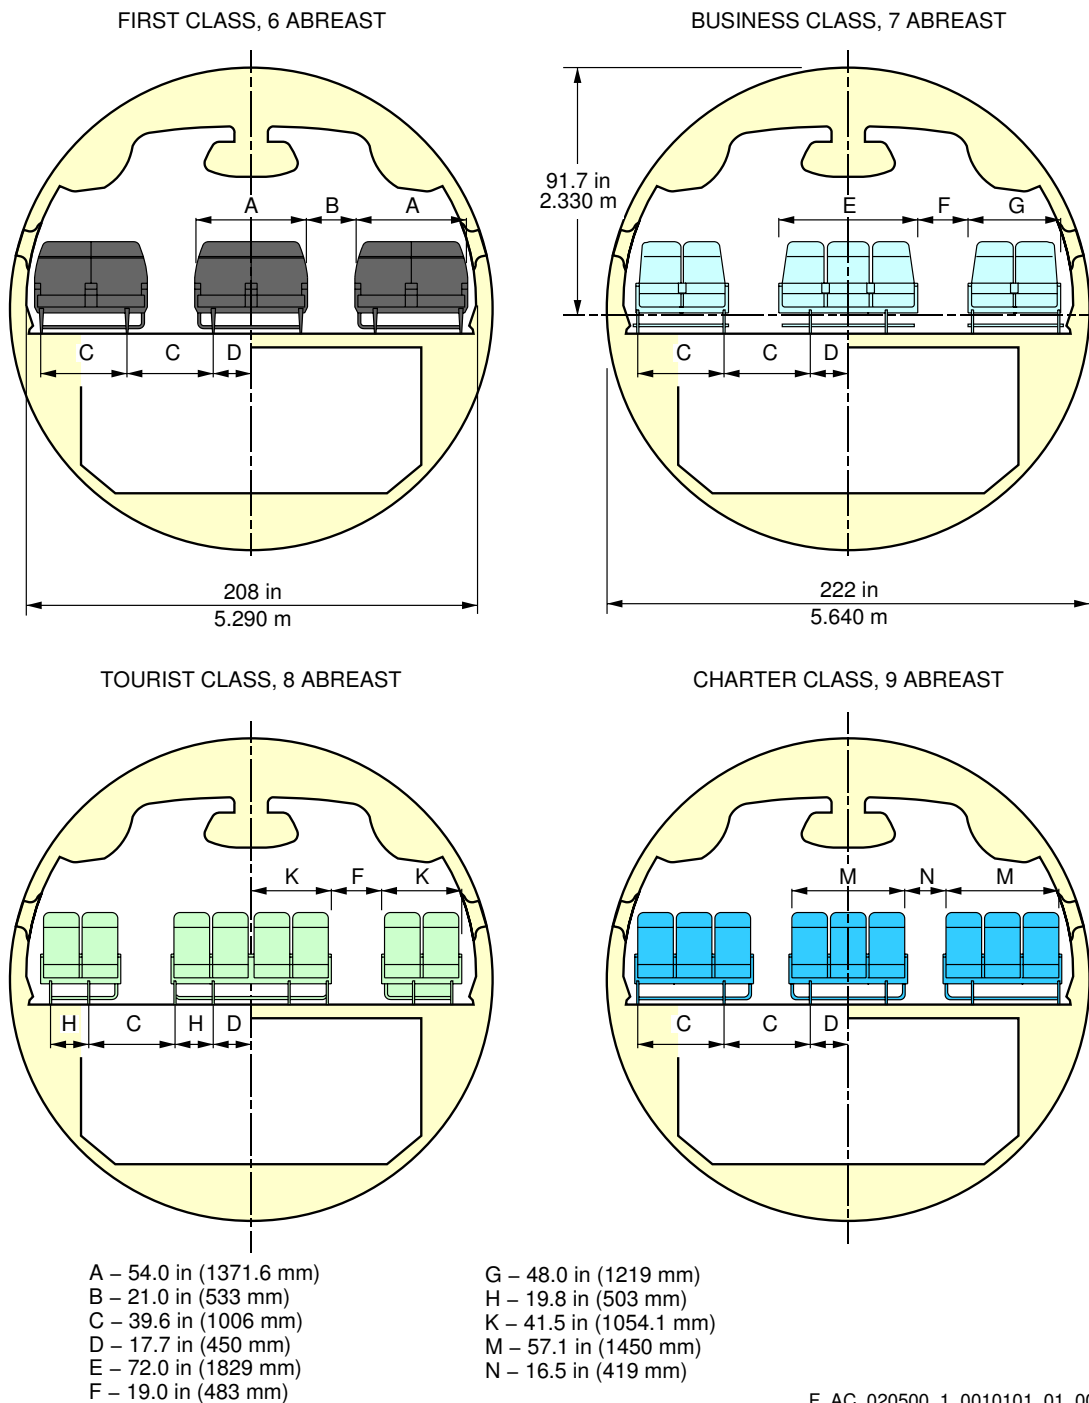

F_AC_020500_1_0010101_01_00

Passenger Compartment Cross-section
FIGURE-2-5-0-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-6-0 Cargo Compartments

****ON A/C A330-200 A330-200F A330-300**

Cargo Compartment

1. This section gives the cargo compartments location and dimensions.

2-6-1 Lower Deck Cargo Compartments (Loading combinations)

****ON A/C A330-200 A330-200F A330-300**

Lower Deck Cargo Compartments

****ON A/C A330-300**

1. This table gives cargo compartments loading combinations.


| Cargo Compartment | Palletized volume | Containerized volume |
|---|--|---|
| Forward Door size (h × w) 66.89 in (1.699 m) × 106.34 in (2.701 m) | 2442 ft ³ (69.150 m ³) 66.89 in (1.699 m) × 106.34 in (2.701 m) | 2754 ft ³ (77.985 m ³) based on LD3 (IATA E NAS 3610-2K2C) container volume |
| Aft Door size (h × w) 66.3 in (1.684 m) × 107.1 in (2.720 m) | 1628 ft ³ (46.100 m ³) based on 96 in × 125 in pallets loaded to height of 64 in (1.626 m) | 2142 ft ³ (60.655 m ³) based on LD3 (IATA E NAS 3610-2K2C) container volume |
| Bulk Door size (h × w) 37.3 in (0.947 m) × 37.3 in (0.947 m) | 695 ft ³ (19.680 m ³) | |

****ON A/C A330-200 A330-200F**

2. This table gives cargo compartments loading combinations.


| Cargo Compartment | Palletized volume | Containerized volume |
|---|--|---|
| Forward Door size (h × w) 66.89 in (1.699 m) × 106.34 in (2.701 m) | 1628 ft ³ (46.100 m ³) based on 96 in × 125 in pallets loaded to height of 64 in (1.626 m) | 2142 ft ³ (60.655 m ³) based on LD3 (IATA E NAS 3610-2K2C) container volume |
| Aft Door size (h × w) 66.3 in (1.684 m) × 107.1 in (2.720 m) | 1628 ft ³ (46.100 m ³) based on 96 in × 125 in pallets loaded to height of 64 in (1.626 m) | 1836 ft ³ (51.990 m ³) based on LD3 (IATA E NAS 3610-2K2C) container volume |
| Bulk Door size (h × w) 37.3 in (0.947 m) × 37.3 in (0.947 m) | 695 ft ³ (19.680 m ³) | |

****ON A/C A330-200 A330-200F A330-300**

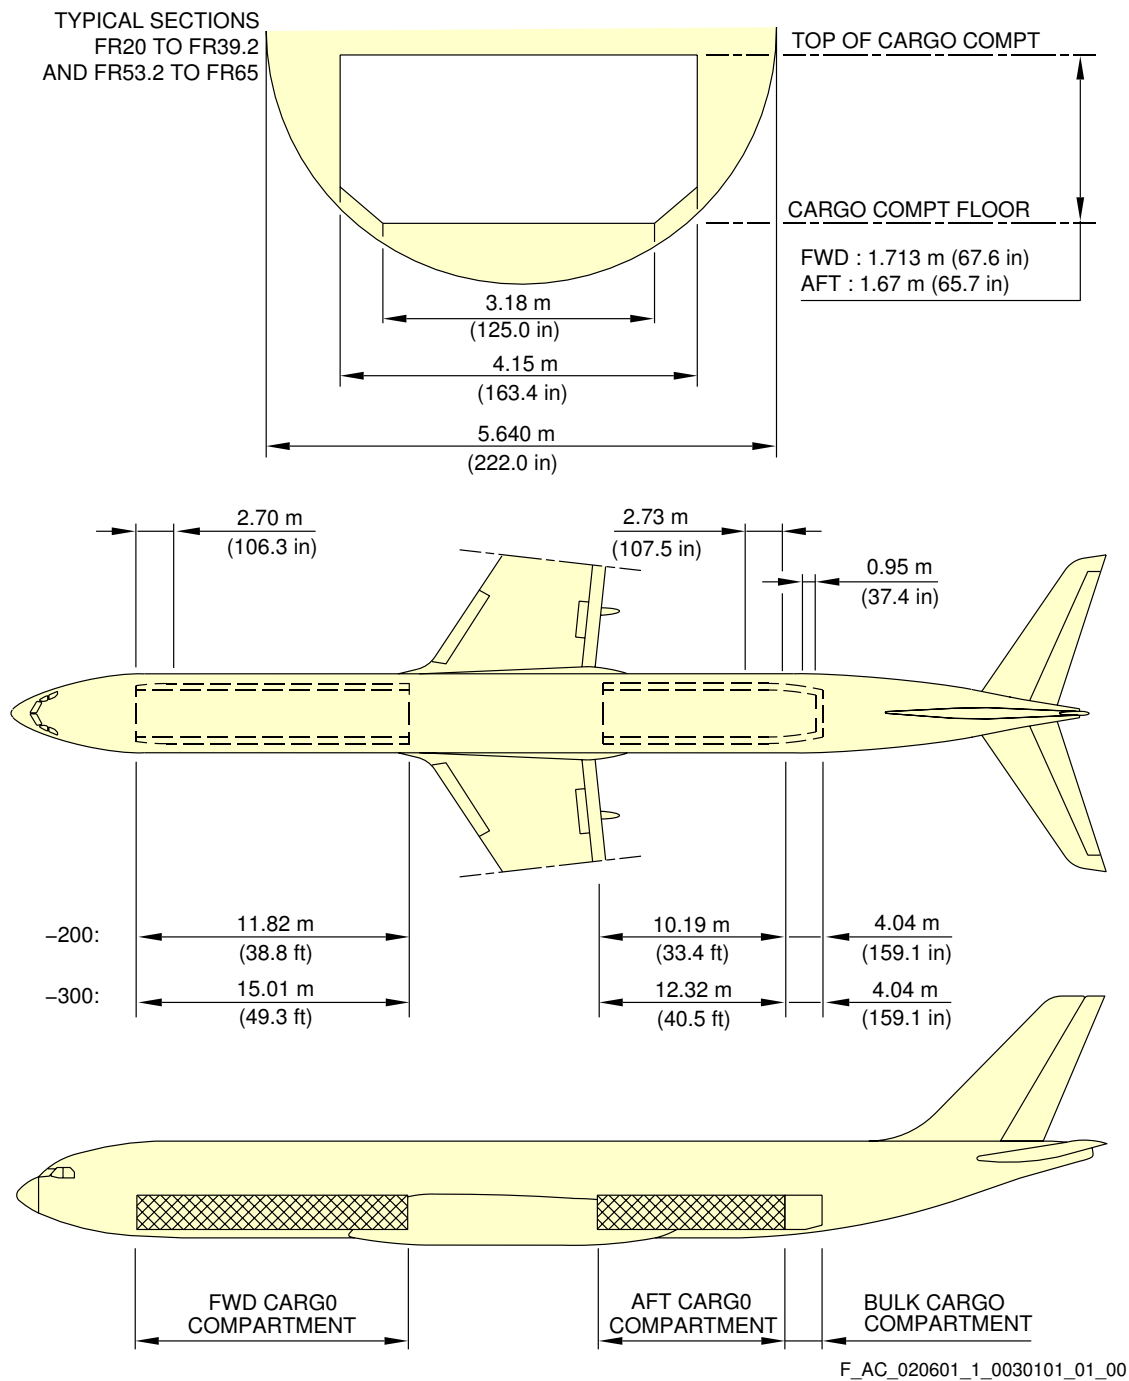

Lower Deck Cargo Compartments
FIGURE-2-6-1-991-003-A01

****ON A/C A330-200 A330-200F A330-300**

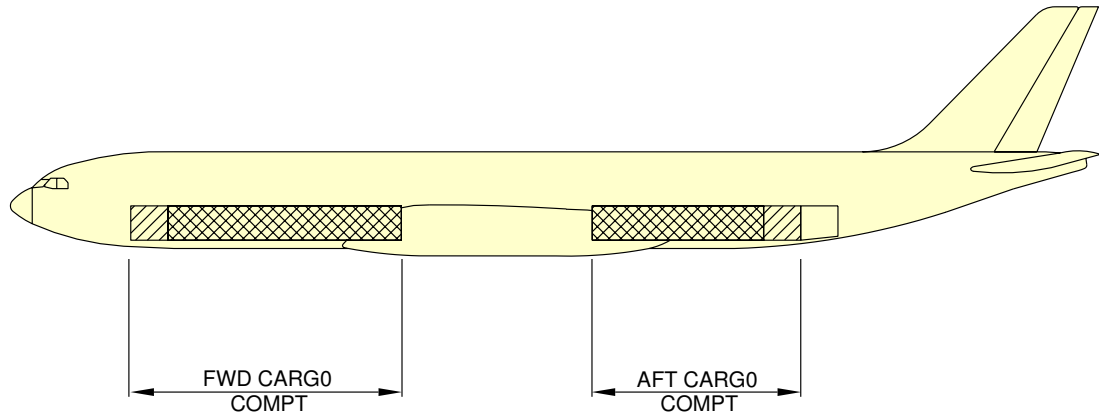

CARGO FLEXIBILITY-LOADING COMBINATIONS

| TYPICAL LOADING COMBINATIONS-STANDARD AIRCRAFT | A330-300 | | A330-200 | |
|--|----------|-----|----------|-----|
| | FWD | AFT | FWD | AFT |
| -HALF-SIZE CONTAINERS NAS 3610-2K2C AS PER IATA CONTOUR E OR 60.4 in X 61.5 in PALLETS NAS 3610-2K3P LIMITED TO MAX GROSS WEIGHT 3500 lb (1587 kg) EACH | 18 | 14 | 14 | 12 |
| -HALF-SIZE CONTAINERS NAS 3610-2K2C AS PER IATA CONTOUR C LIMITED TO MAX GROSS WEIGHT 3500 lb (1587 kg) EACH | 9 | 7 | 7 | 6 |
| -FULL-SIZE CONTAINERS NAS 3610-2L2C AS PER IATA CONTOUR F OR 60.4 in X 61.5 in PALLETS NAS 3610-2K3P,2L4P LIMITED TO MAX GROSS WEIGHT 7000 lb (3174 kg) EACH | 9 | 7 | 7 | 6 |
| -96 in X 125 in PALLETS NAS 3610-2M1P,2P,3P LIMITED TO MAX GROSS WEIGHT 10200 lb (4626 kg) EACH (WITH POTENTIAL FOR EXTENSION TO 11250 lb (5103 kg) | 6 | 4 | 4 | 4 |
| PLUS-HALF-SIZE CONTAINERS NAS 3610-2K2C AS PER IATA CONTOUR E OR N LIMITED TO MAX GROSS WEIGHT 3500 lb (1587 kg) EACH | - | 2 | 2 | |
| -OR 60.4 IN x 61.5 IN PALLETS NAS 3610-2K3P LIMITED TO MAX GROSS WEIGHT 3500 lb (1587 kg) EACH | - | 2 | 2 | |
| -OR 60.4 in x 125 in PALLETS NAS 3610-2L3P, 2L4P LIMITED TO MAX GROSS WEIGHT 7000 lb (3174 kg) EACH | - | 1 | 1 | |
| -OR FULL-SIZE CONTAINERS NAS 3610-2L2C AS PER IATA CONTOUR P LIMITED TO MAX GROSS WEIGHT 7000 lb (3174 kg) EACH | - | 1 | 1 | |

F_AC_020601_1_0040101_01_00

Loading Combinations
FIGURE-2-6-1-991-004-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-6-2 Main Deck Cargo Compartments (Loading combinations)

****ON A/C A330-200F**

Main Deck Cargo Compartments (Loading combinations)

1. This section gives main deck loading combinations.


**ON A/C A330-200F

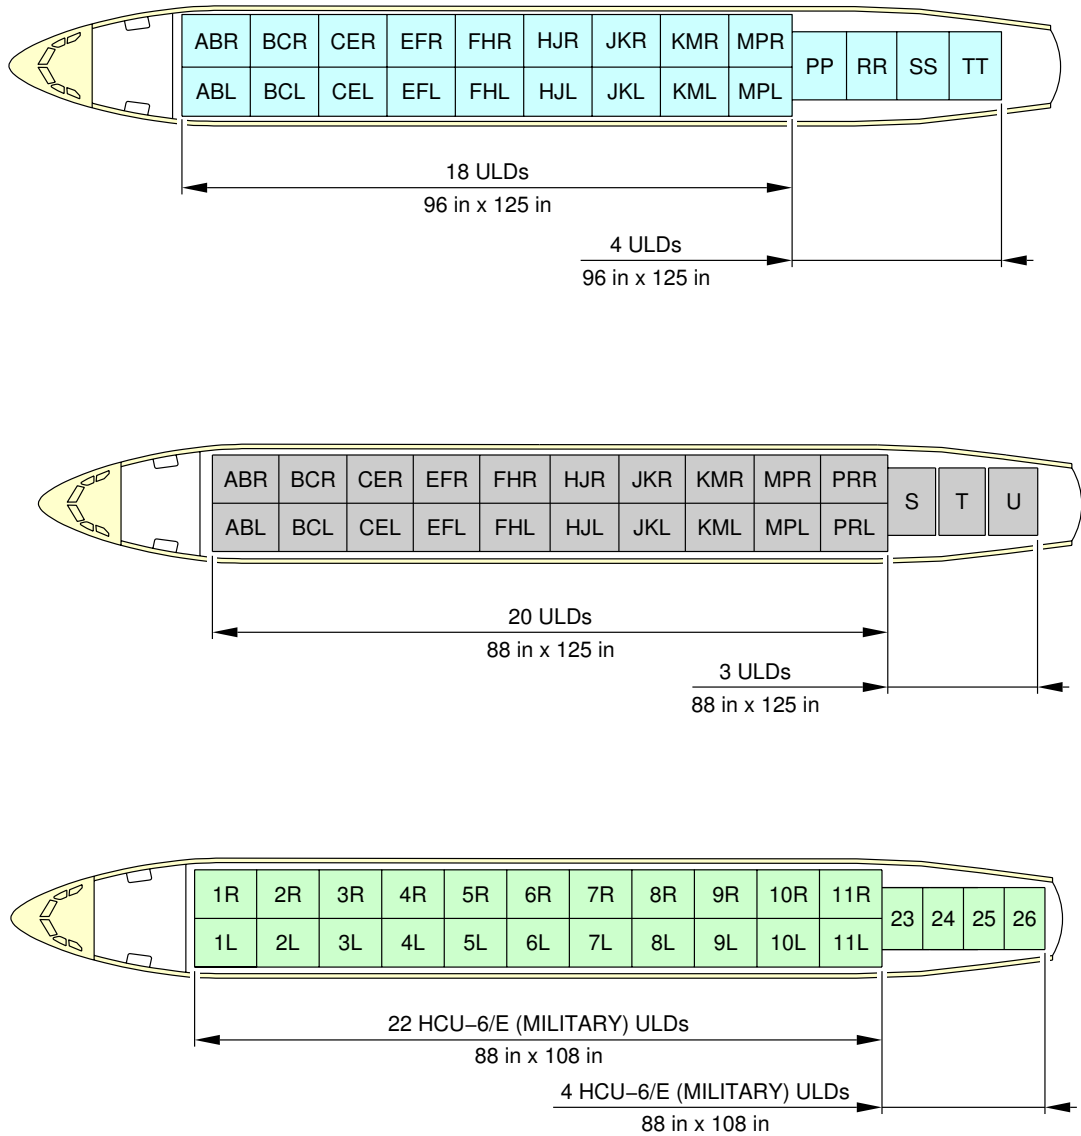

F_AC_020602_1_0010101_01_01

Main Deck Cargo Compartments
Loading combinations
FIGURE-2-6-2-991-001-A01




**ON A/C A330-200F

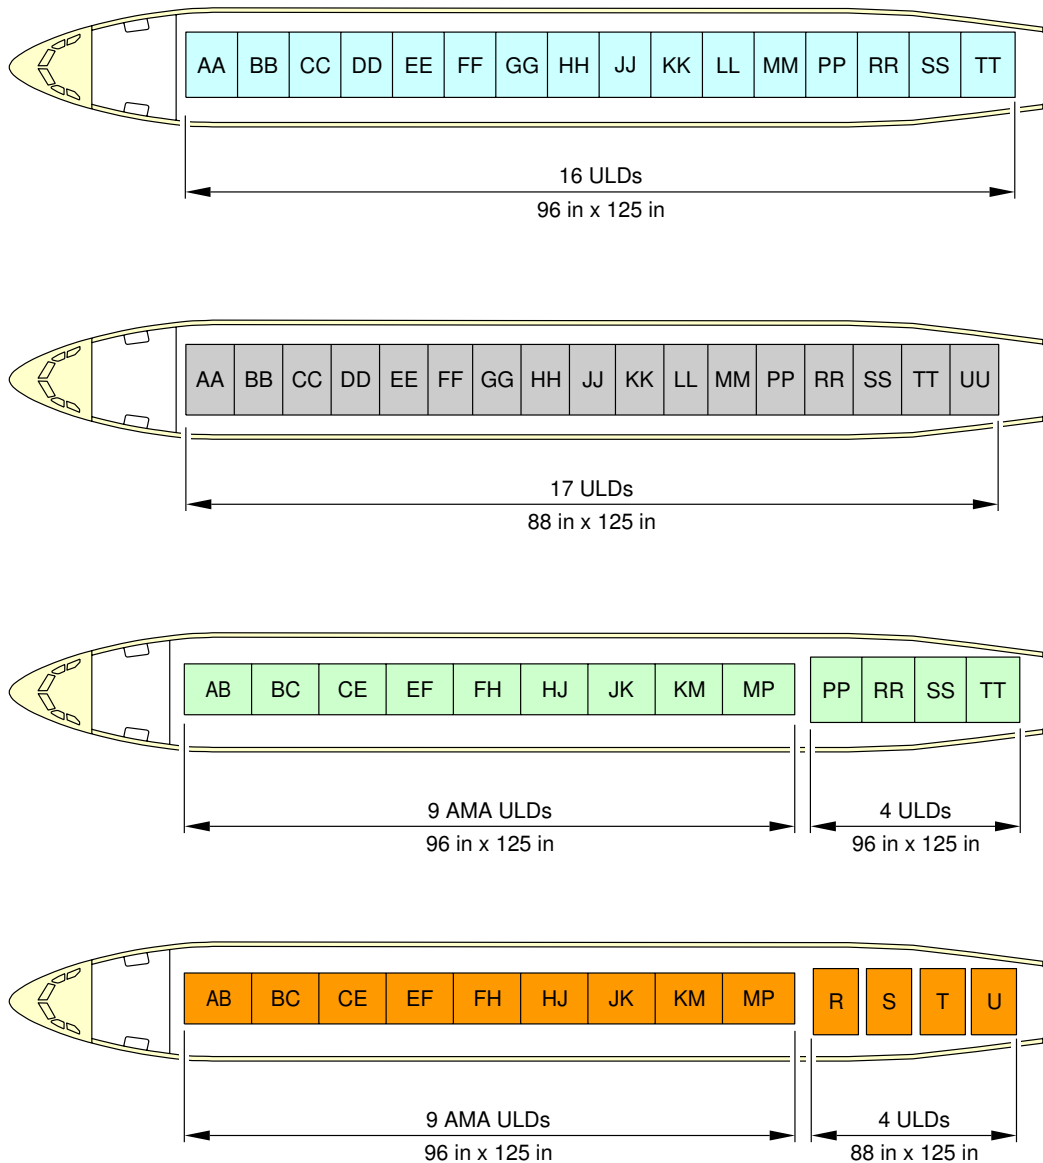

F_AC_020602_1_0020101_01_01

Main Deck Cargo Compartments
Loading combinations
FIGURE-2-6-2-991-002-A01




**ON A/C A330-200F

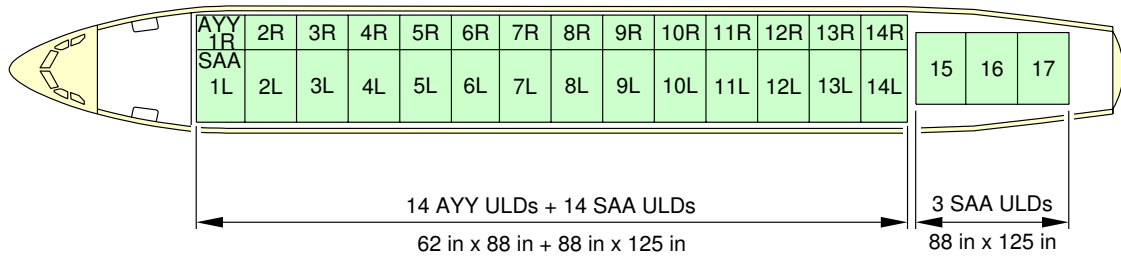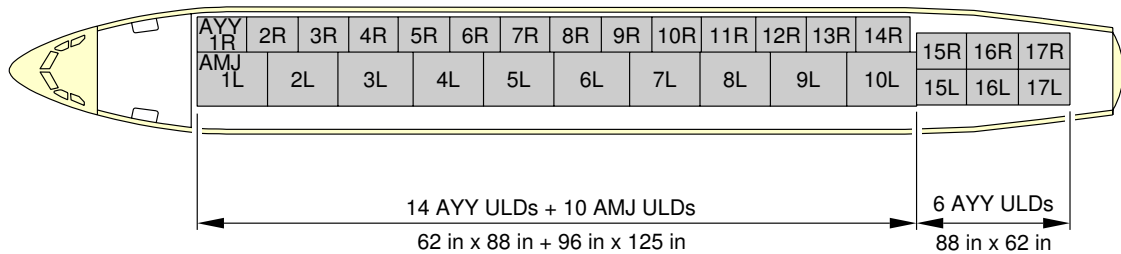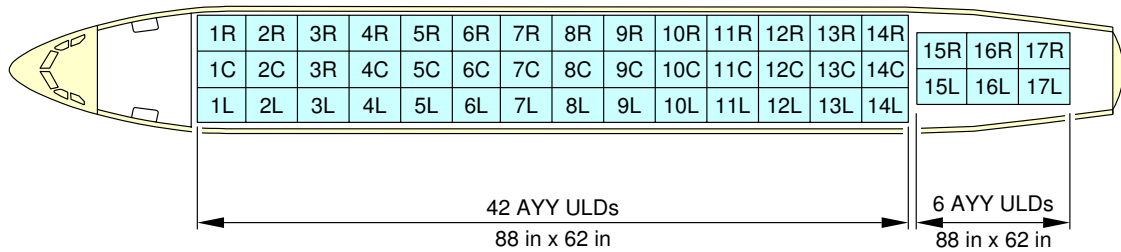

F_AC_020602_1_0030101_01_02

Main Deck Cargo Compartments
Loading combinations
FIGURE-2-6-2-991-003-A01

**ON A/C A330-200F

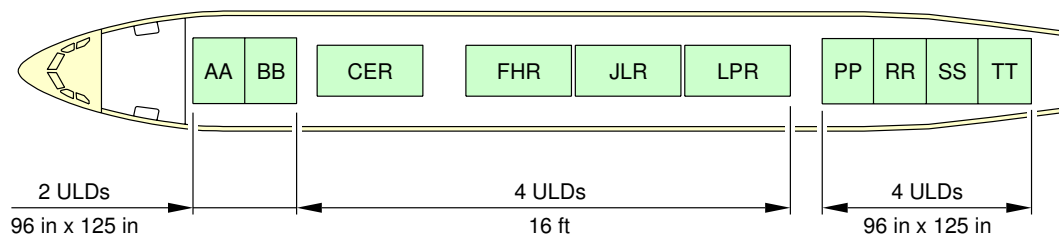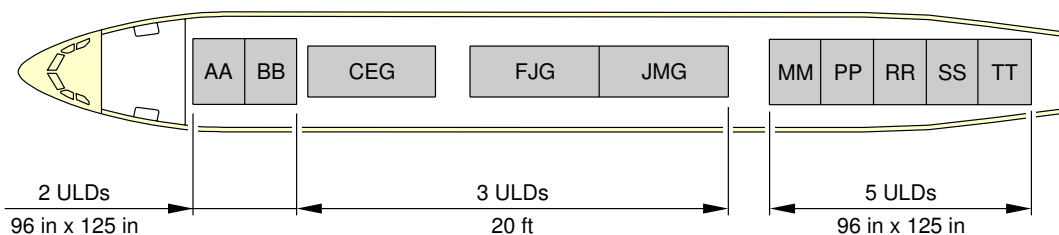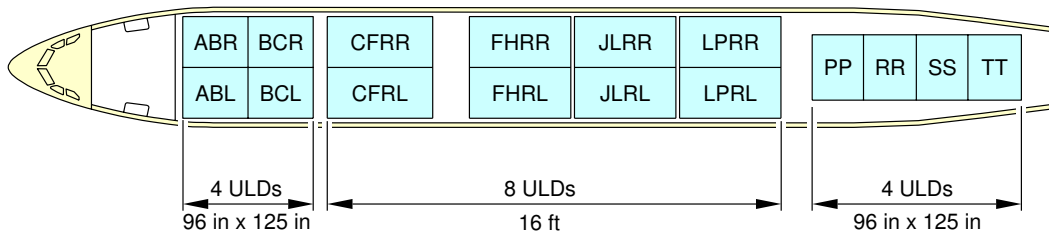

F_AC_020602_1_0050101_01_00

Main Deck Cargo Compartments
Loading combinations
FIGURE-2-6-2-991-005-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-6-3 Main and Lower Deck Cross-sections


****ON A/C A330-200F**

Main and Lower Deck Cross-sections


1. This section gives Main and Lower Deck Cross-sections for cargo version.

**ON A/C A330-200F

REFERENCE CARGO CONFIGURATION LAYOUT

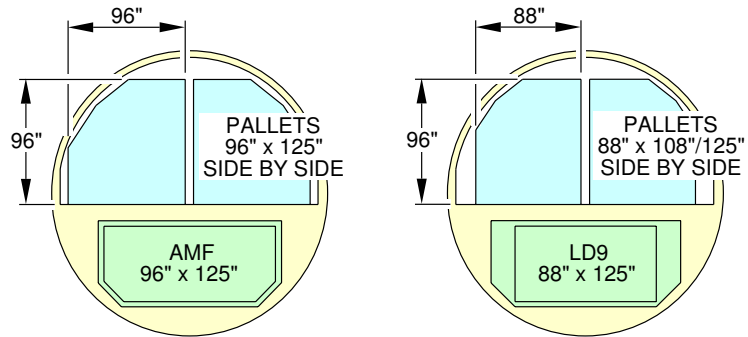

OPTIONAL CARGO CONFIGURATIONS

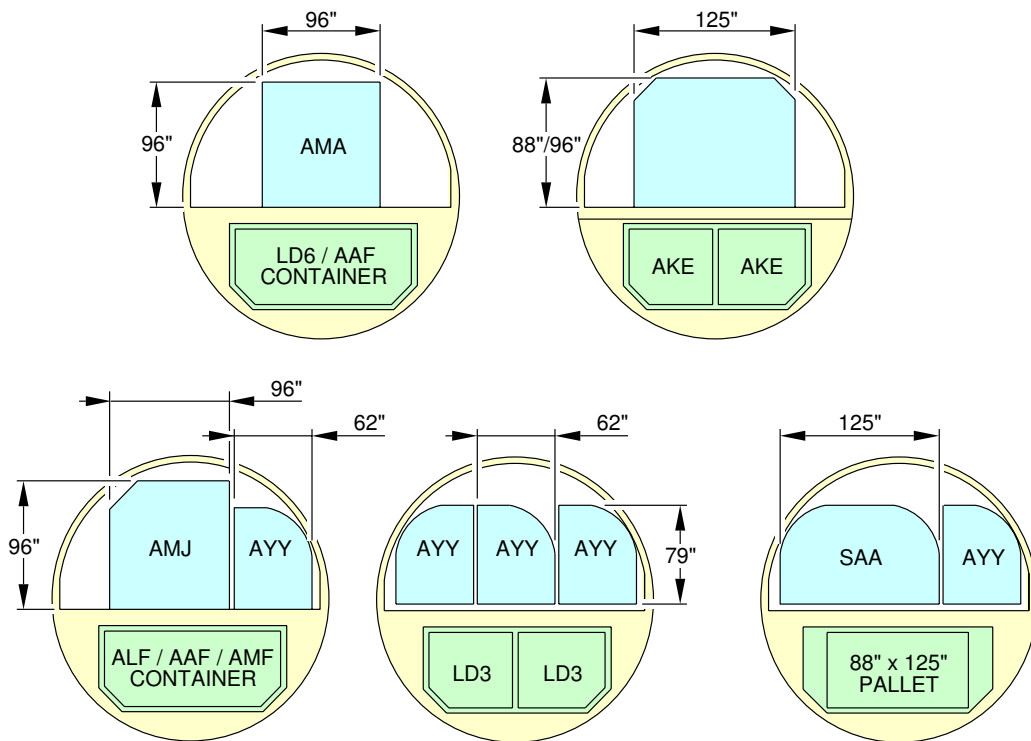

F_AC_020603_1_0010101_01_01

Main and Lower Deck Cross-sections
FIGURE-2-6-3-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-7-0 Door Clearances

****ON A/C A330-200 A330-200F A330-300**

Doors Clearances

1. This section gives doors clearances.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-1 Forward Passenger / Crew Doors

****ON A/C A330-200 A330-200F A330-300**

Forward Passenger / Crew Door


1. This section gives forward passenger / crew doors clearances.

**ON A/C A330-200 A330-300

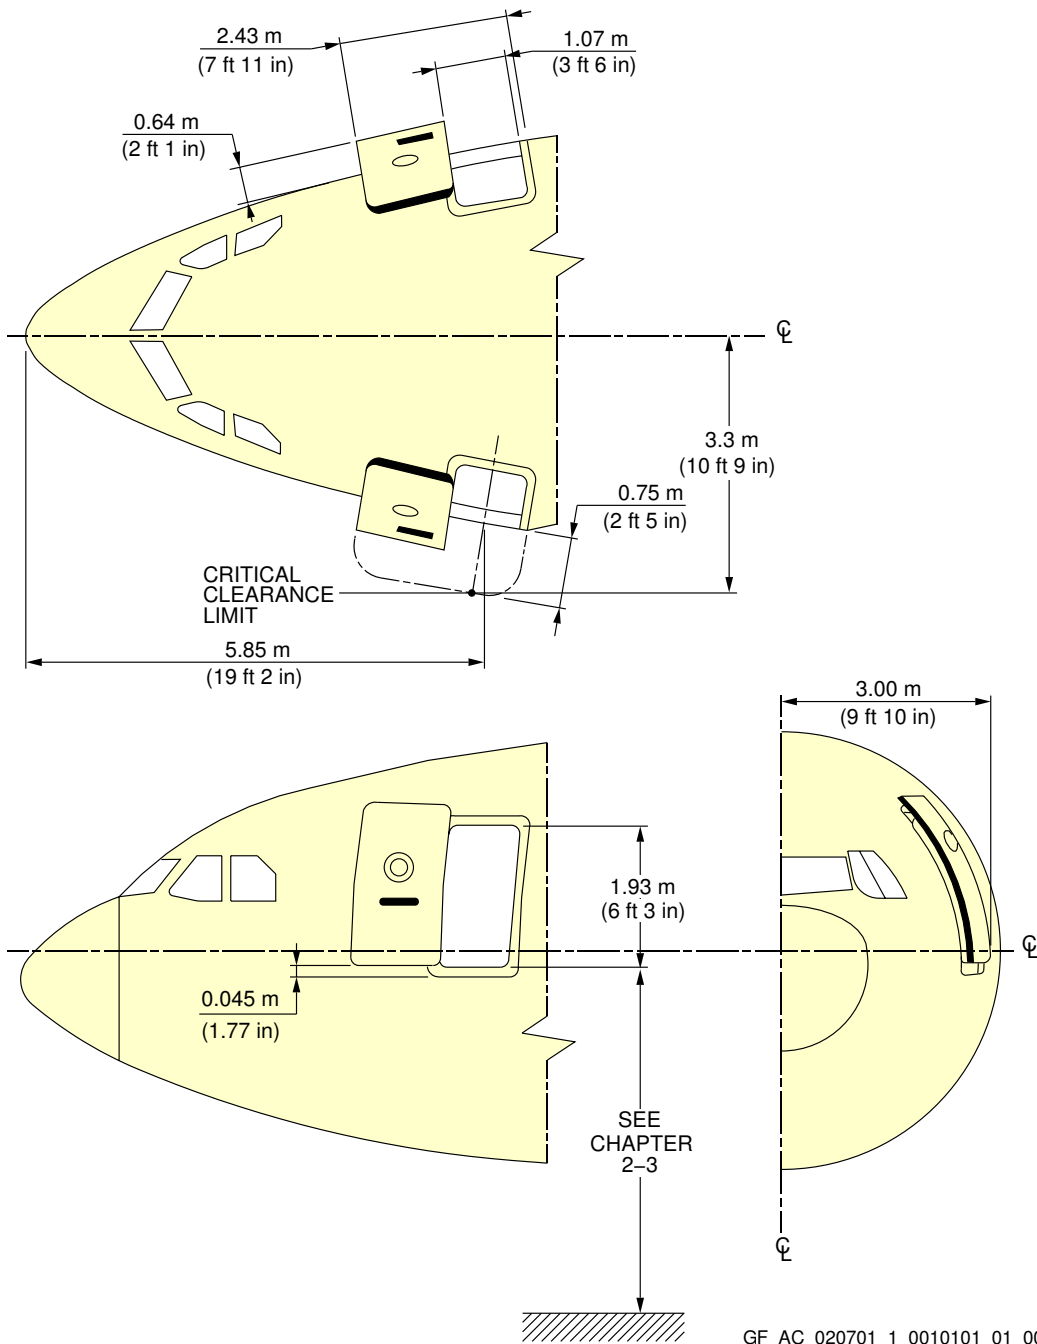

Forward Passenger / Crew Doors
FIGURE-2-7-1-991-001-A01

**ON A/C A330-200F

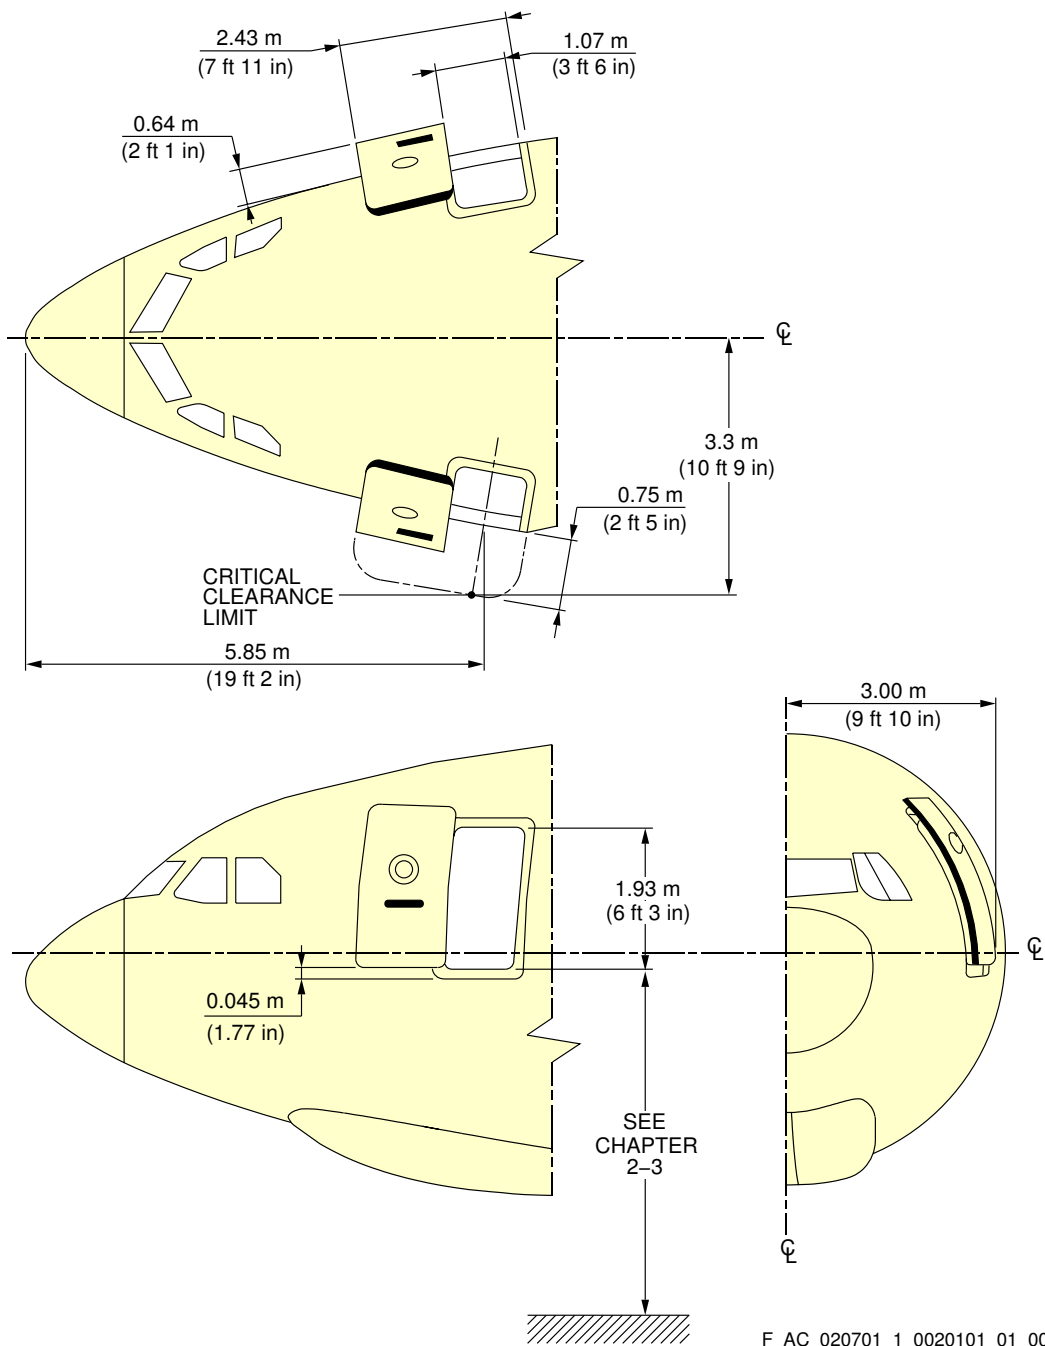

Forward Passenger / Crew Doors
FIGURE-2-7-1-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-2 Mid Passenger / Crew Doors

****ON A/C A330-200 A330-300**

Mid Passenger / Crew Door

1. This section gives mid passenger / crew doors clearances.

**ON A/C A330-200 A330-300

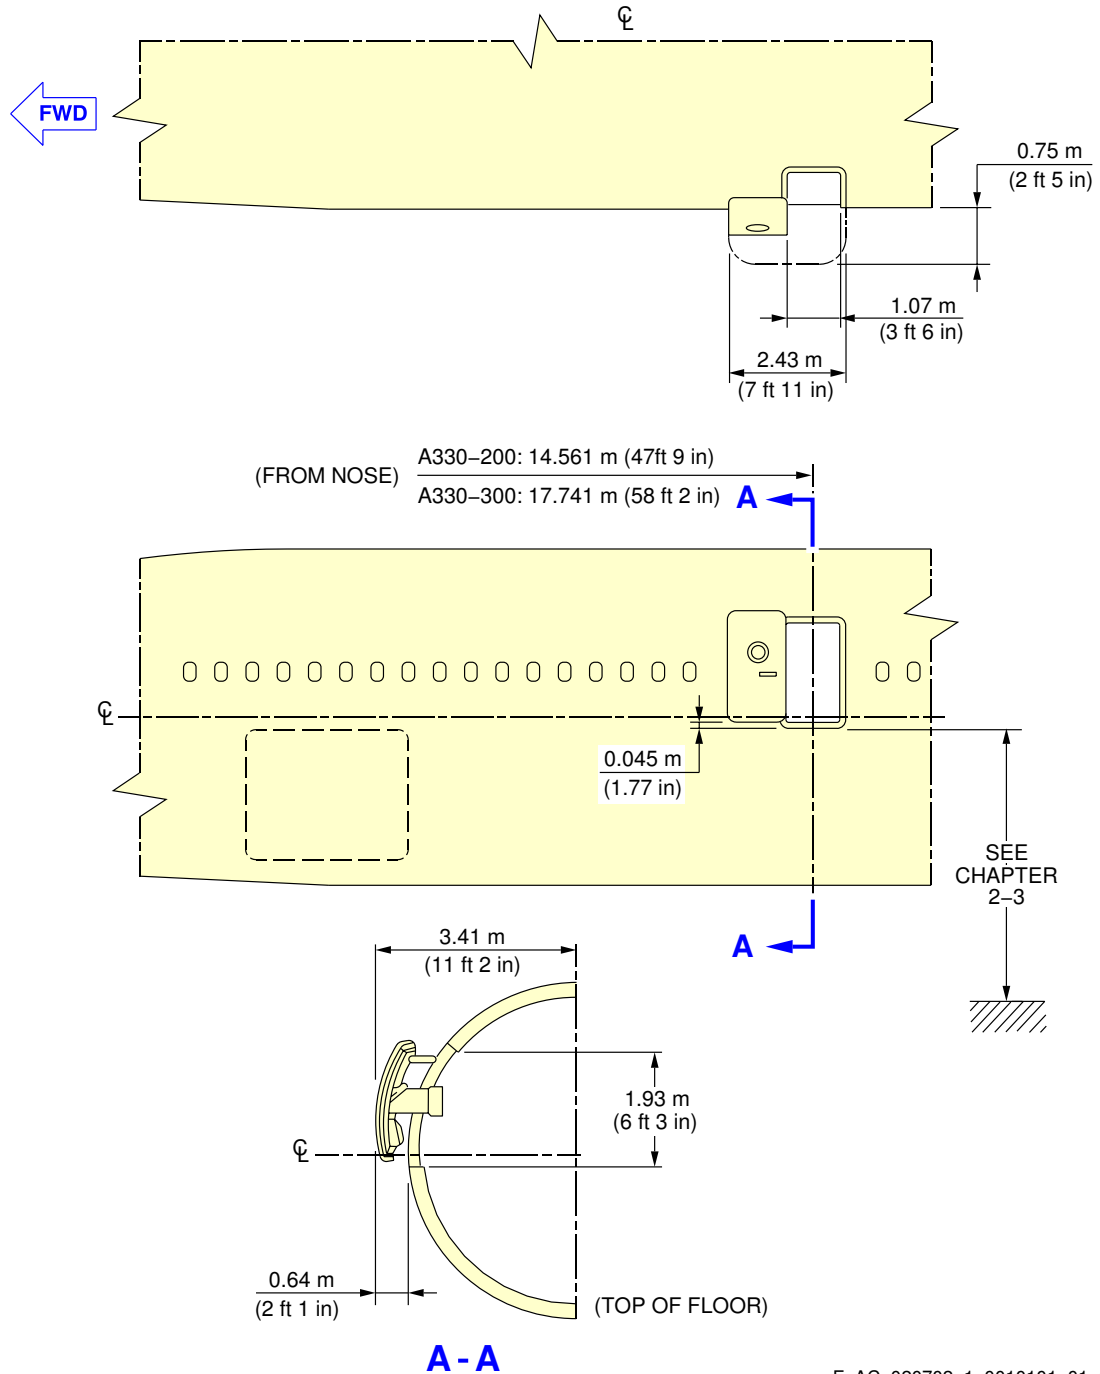

F_AC_020702_1_0010101_01_00

Mid Passenger / Crew Door
FIGURE-2-7-2-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-3 Emergency Exits

****ON A/C A330-200 A330-300**

Emergency Exits

1. This section gives emergency exits doors clearances.

**ON A/C A330-200 A330-300

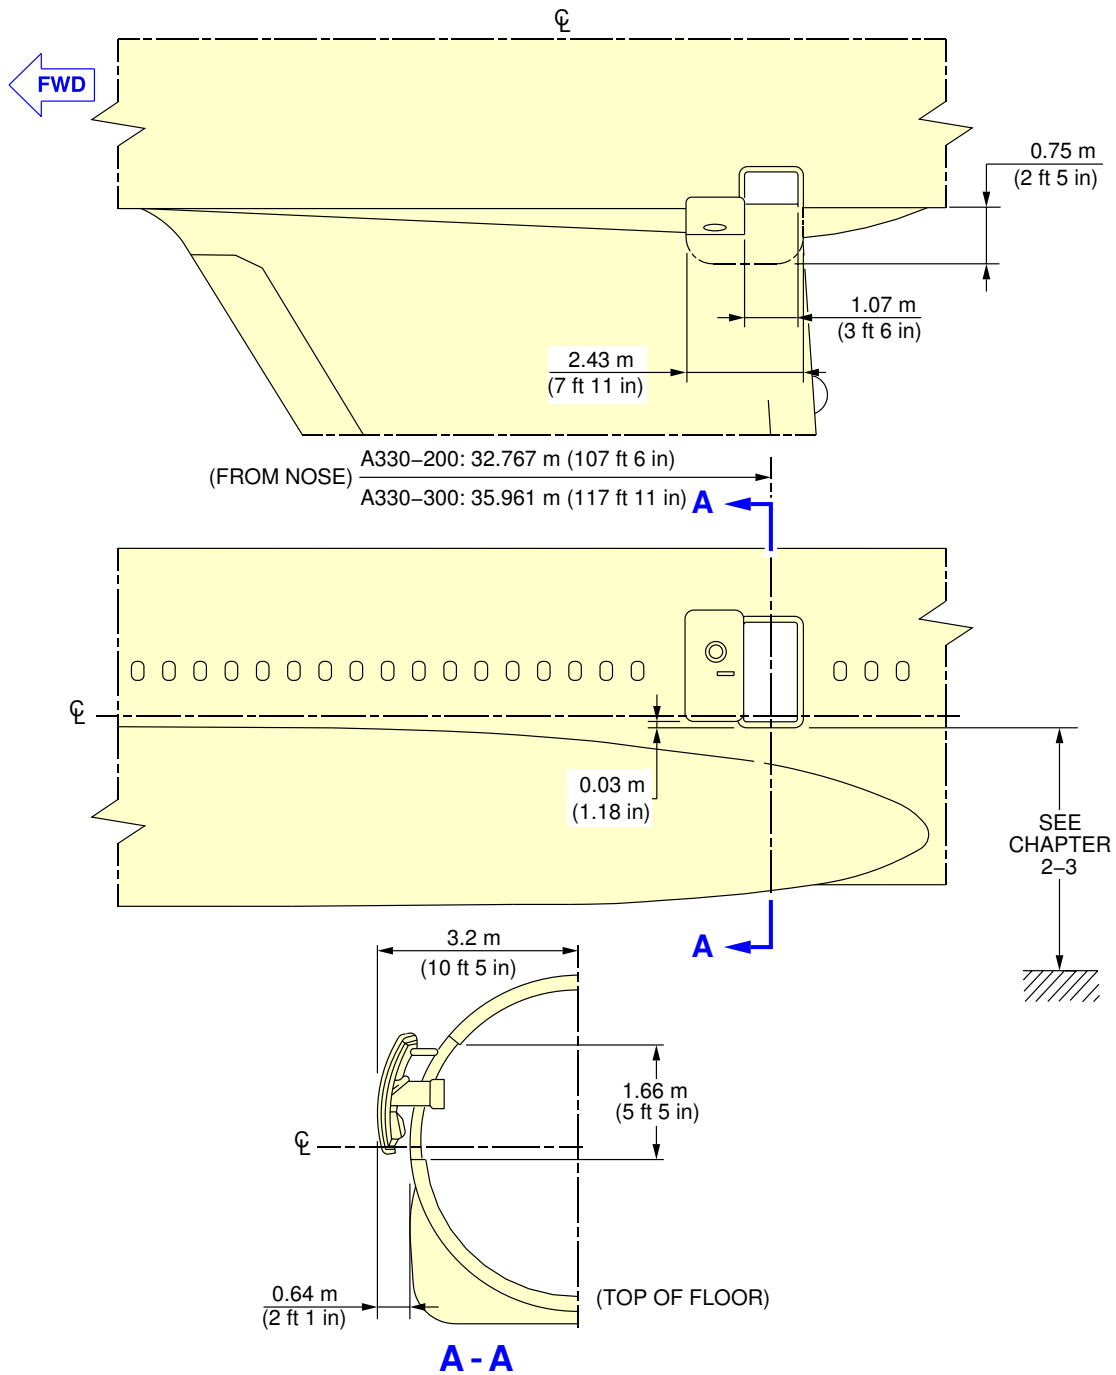

F_AC_020703_1_0010101_01_00

Emergency Exits
FIGURE-2-7-3-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-4 Aft Passenger / Crew Doors

****ON A/C A330-200 A330-300**

Aft Passenger / Crew Doors

1. This section gives Aft passenger / crew doors clearances.

**ON A/C A330-200 A330-300

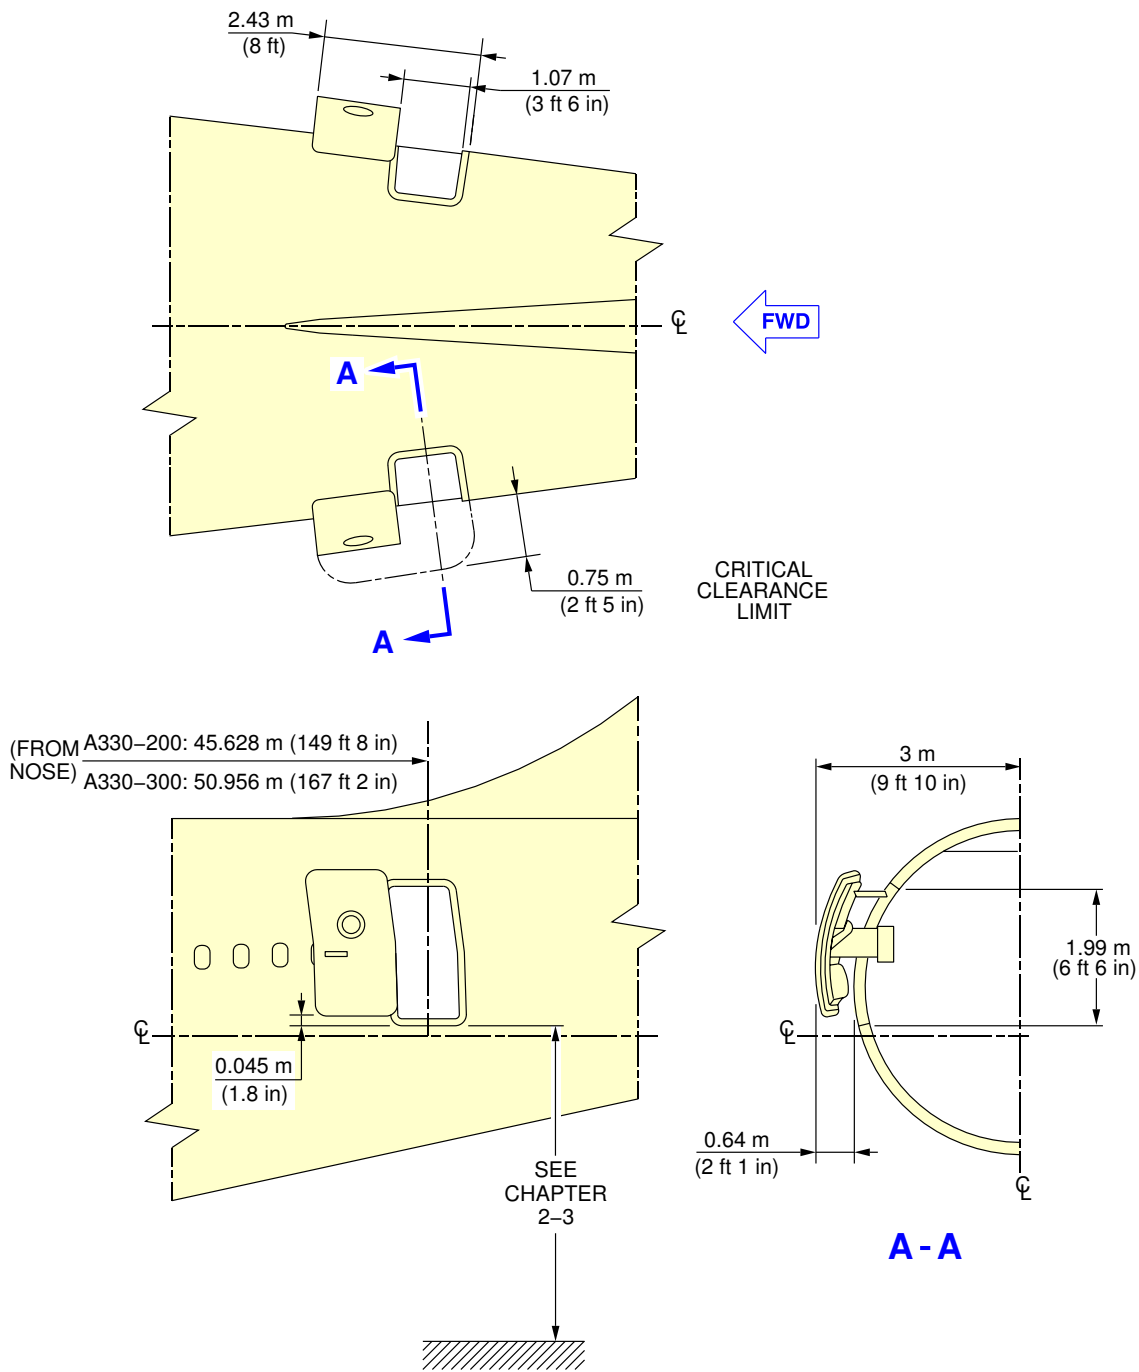

Aft Passenger / Crew Doors
FIGURE-2-7-4-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-5 Forward Cargo Compartment Doors

****ON A/C A330-200 A330-300**

Forward Cargo Compartment Doors

1. This section gives forward cargo compartment doors clearances for pax version.

**ON A/C A330-200 A330-300

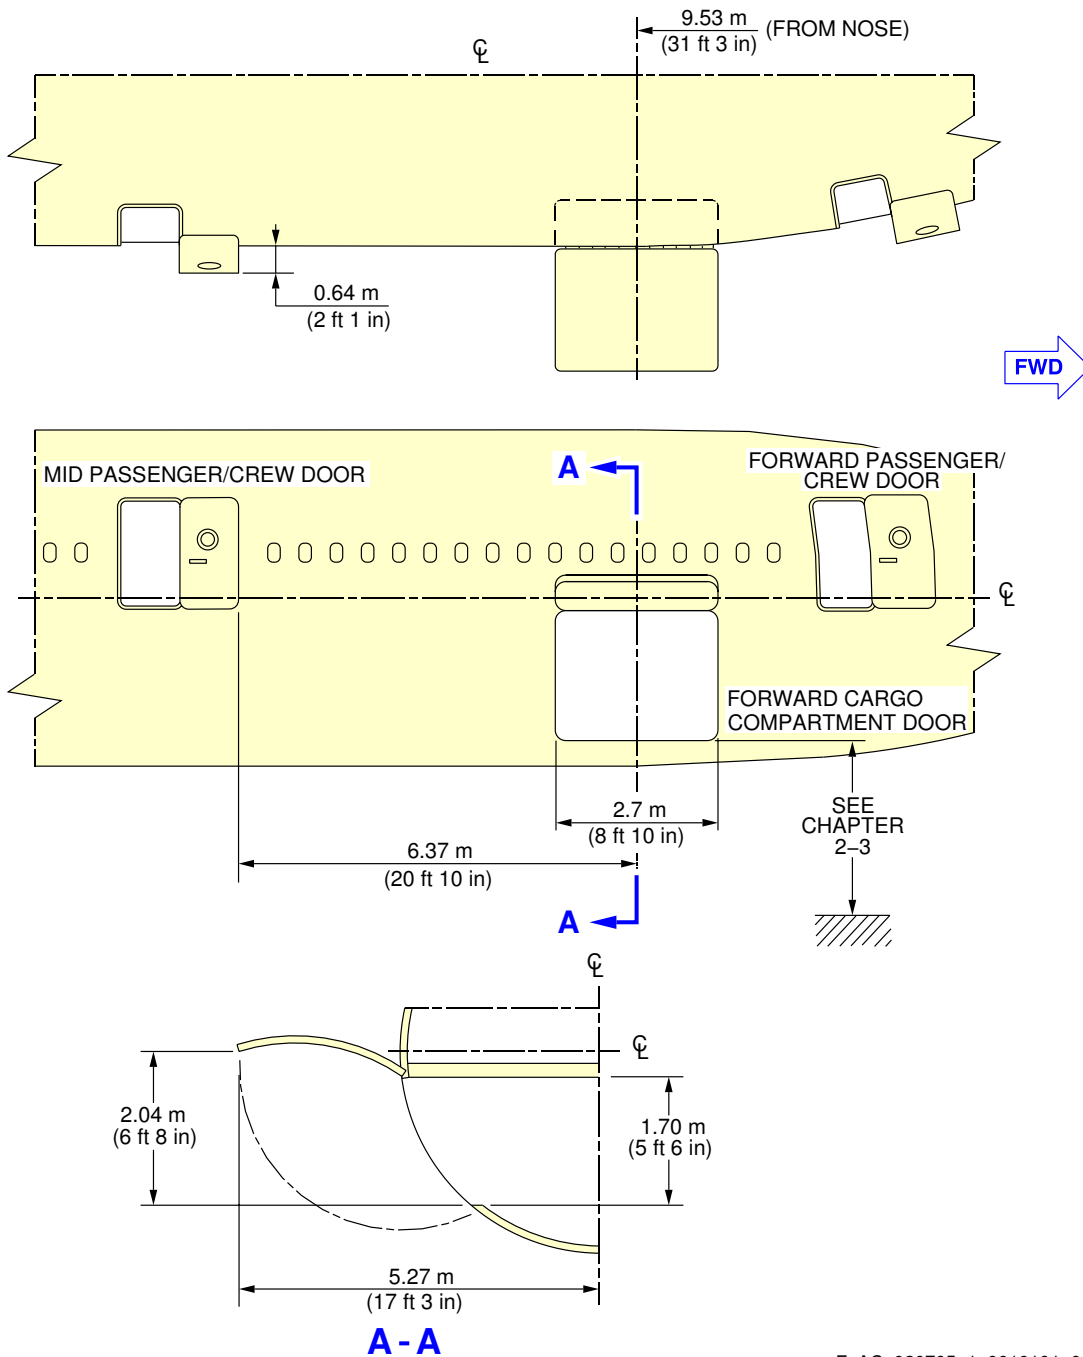

F_AC_020705_1_0010101_01_00

Forward Cargo Compartment Doors
FIGURE-2-7-5-991-001-A01





AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

Forward Cargo Compartment Doors

1. This section gives forward cargo compartment doors clearances for cargo version.


**ON A/C A330-200F

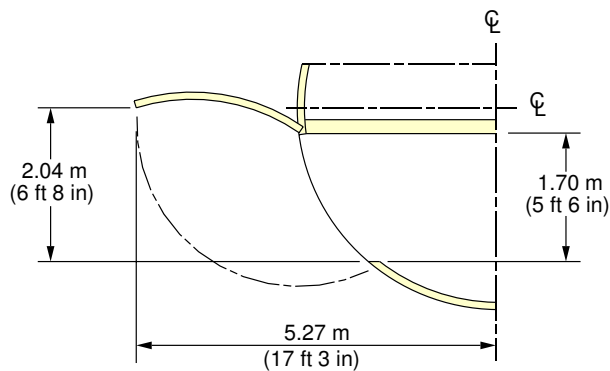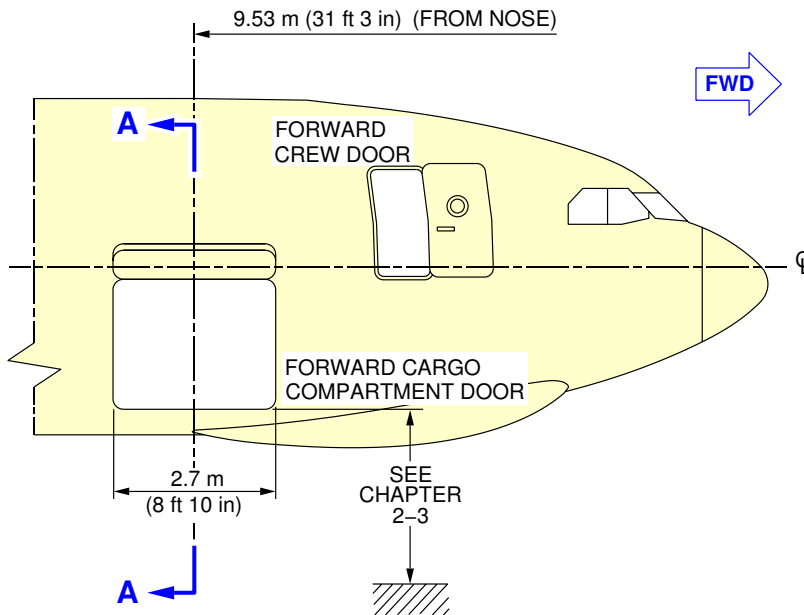

F_AC_020705_1_0020101_01_01

Forward Cargo Compartment Doors
FIGURE-2-7-5-991-002-A01

**ON A/C A330-200F

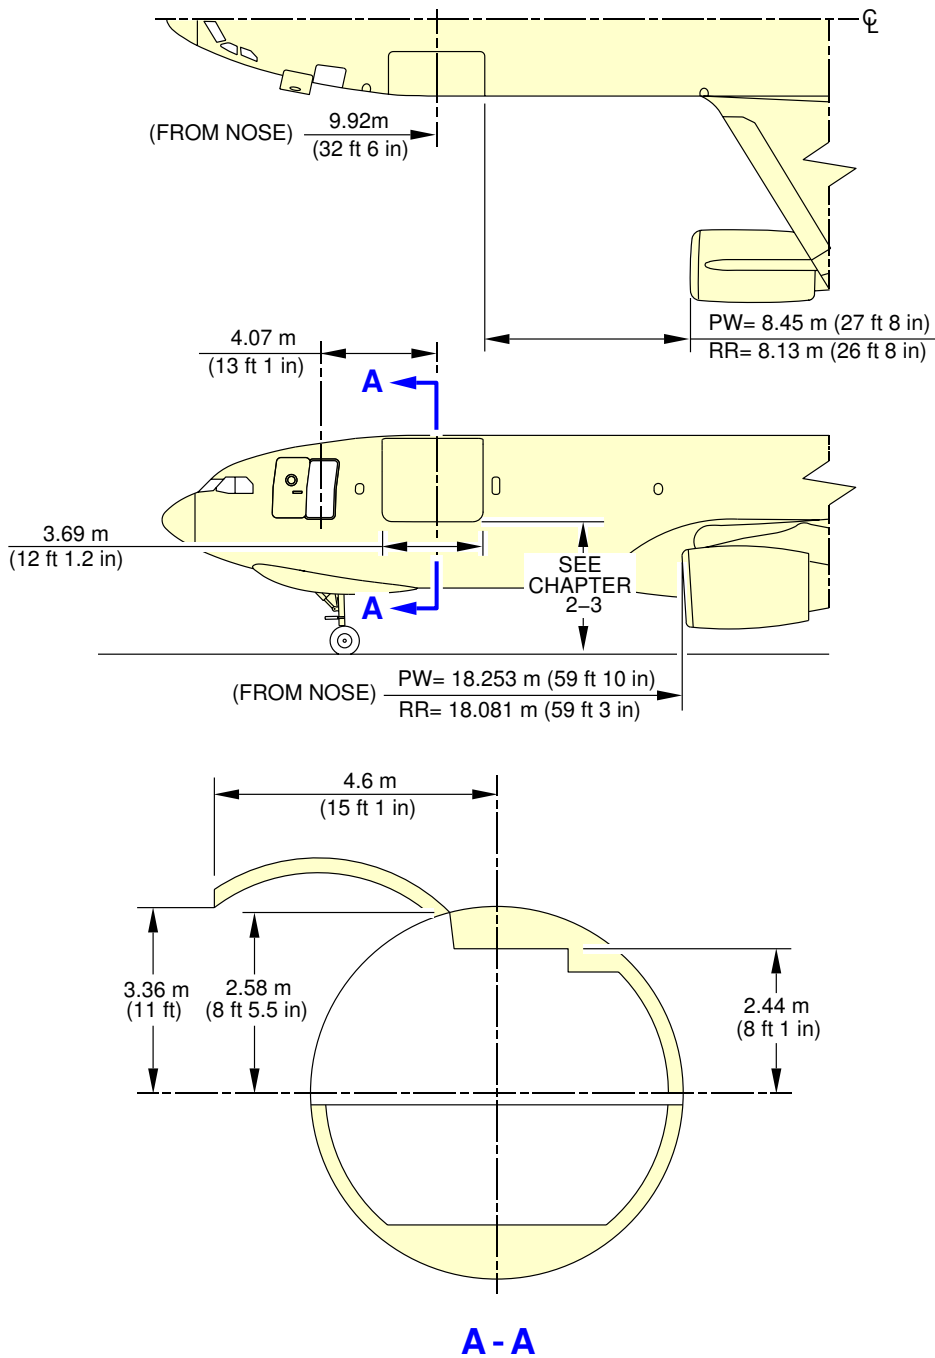

F_AC_020705_1_0030101_01_01

Forward Cargo Compartment Doors
FIGURE-2-7-5-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-6 Aft Cargo Compartment Doors

**ON A/C A330-200 A330-200F A330-300

Aft Cargo Compartment Doors

1. This section gives Aft cargo compartment doors clearances.


**ON A/C A330-200

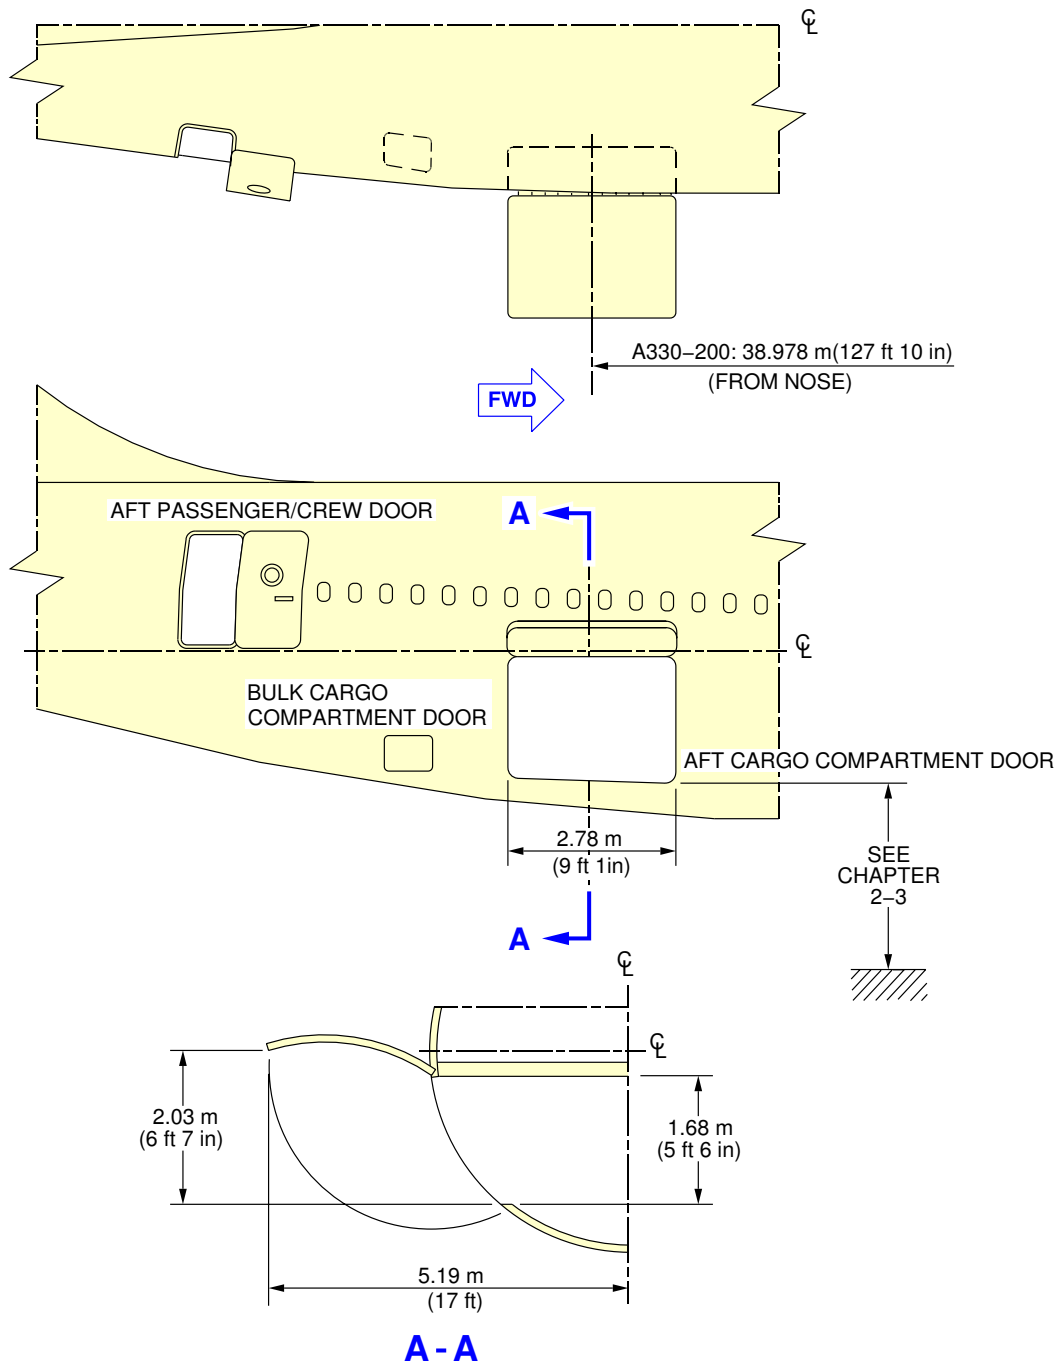

F_AC_020706_1_0010101_01_01

Aft Cargo Compartment Doors
FIGURE-2-7-6-991-001-A01


**ON A/C A330-300

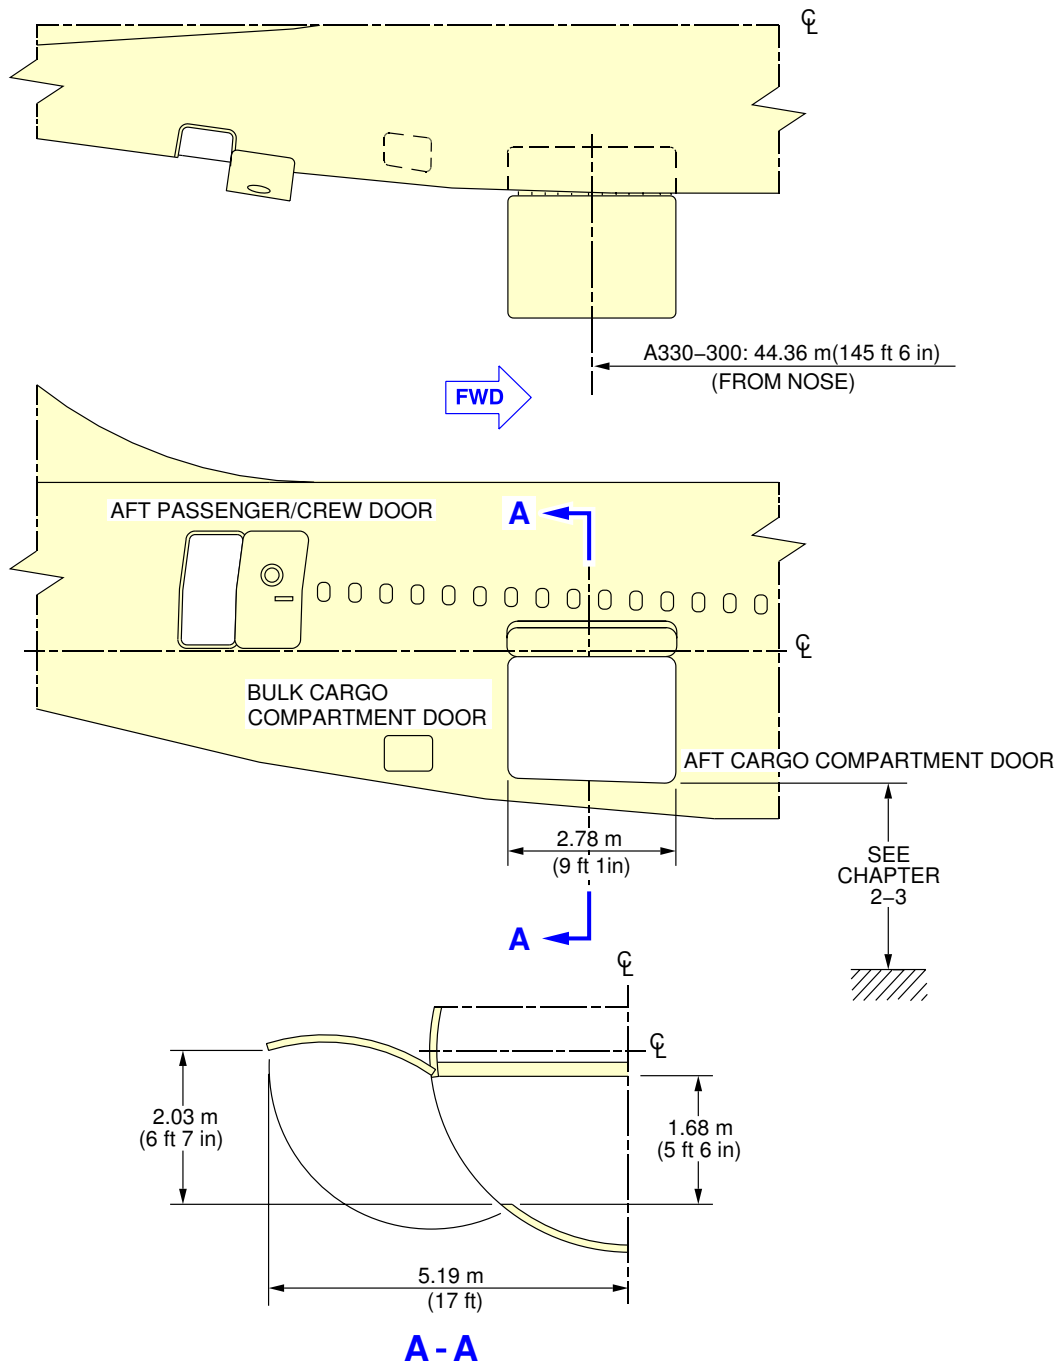

F_AC_020706_1_0030101_01_00

Aft Cargo Compartment Doors
FIGURE-2-7-6-991-003-A01

****ON A/C A330-200F**

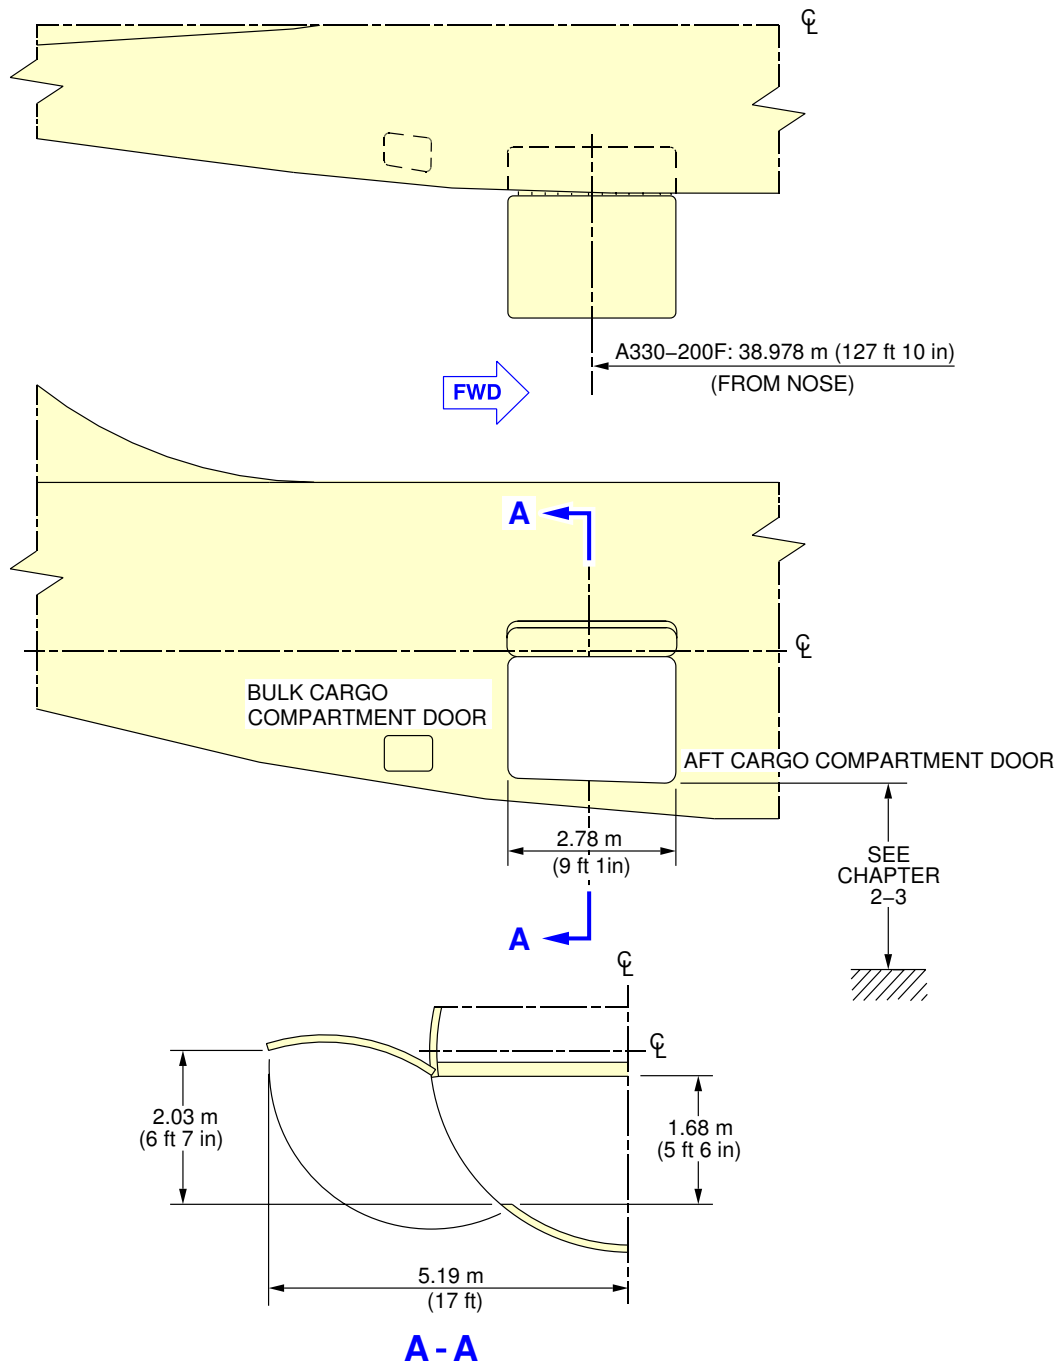

F_AC_020706_1_0020101_01_01

Aft Cargo Compartment Doors
FIGURE-2-7-6-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-7 Bulk Cargo Compartment Doors

****ON A/C A330-200 A330-300**

Bulk Cargo Compartment Doors

1. This section gives the bulk cargo compartment doors clearances for pax version.

**ON A/C A330-200 A330-300

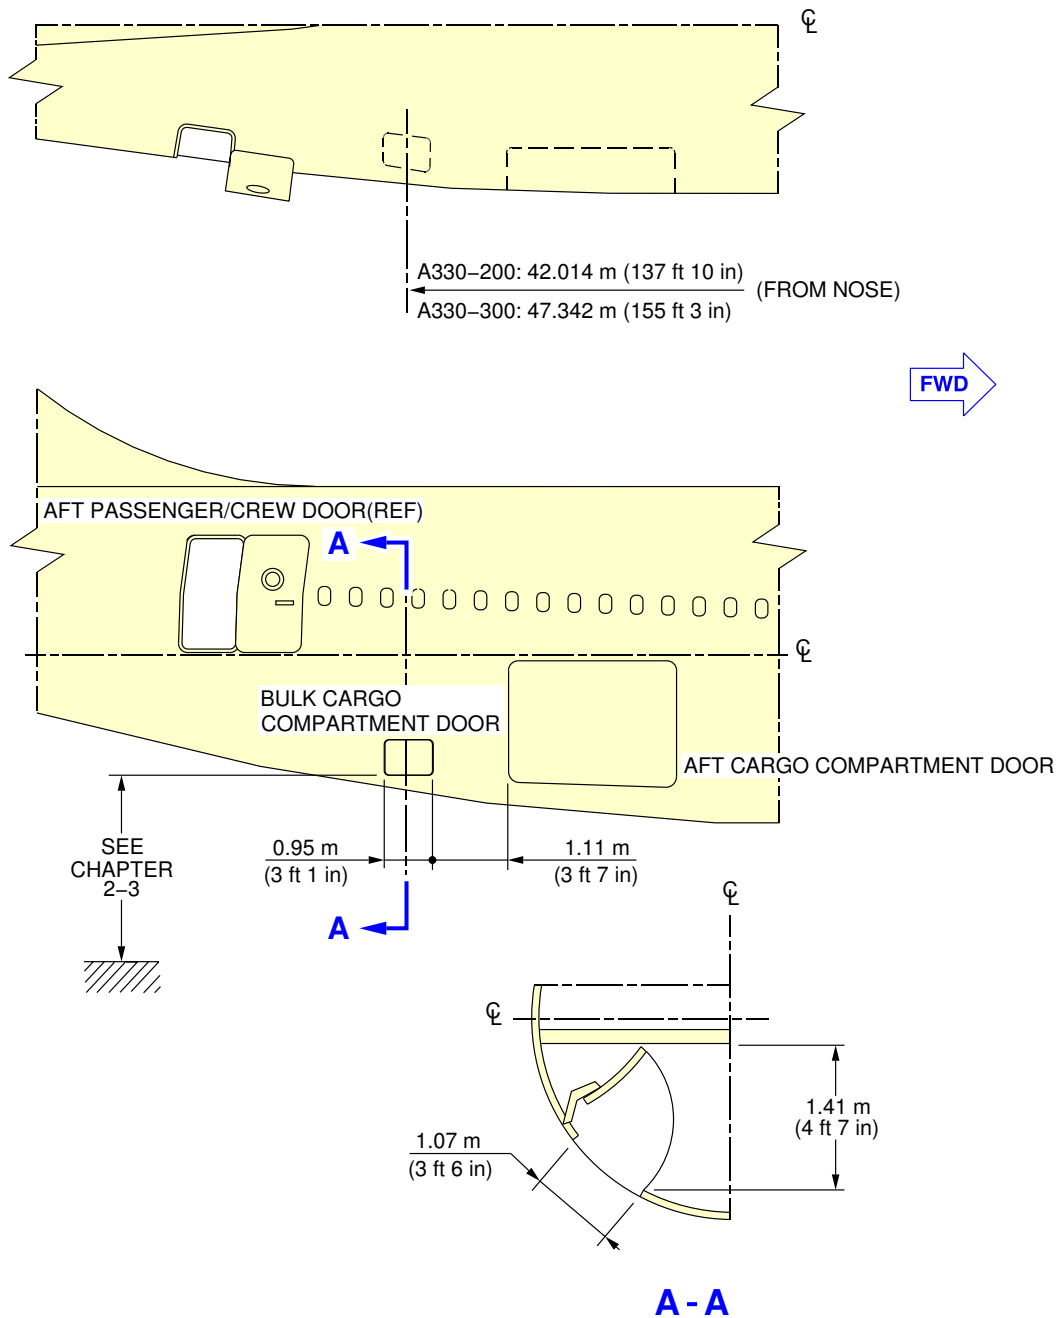

F_AC_020707_1_0010101_01_00

Bulk Cargo Compartment Doors
FIGURE-2-7-7-991-001-A01




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

Bulk Cargo Compartment Doors

1. This section gives the bulk cargo compartment doors clearances for cargo version.

**ON A/C A330-200F

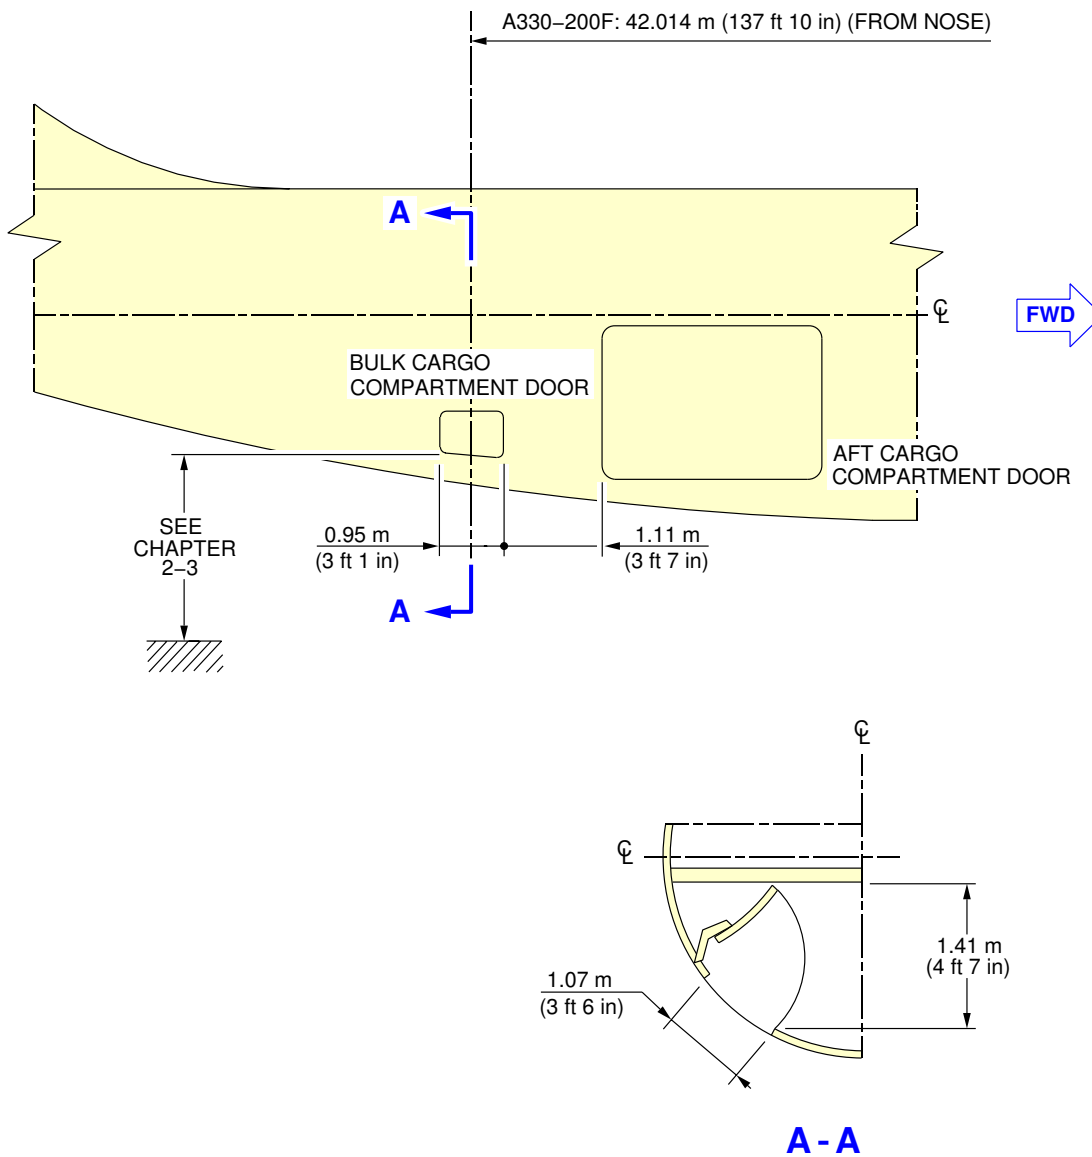

F_AC_020707_1_0020101_01_00

Bulk Cargo Compartment Doors
FIGURE-2-7-7-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING



2-7-8 Main and Center Landing Gear Doors

****ON A/C A330-200 A330-300**

Main Landing Gear Doors

1. This section gives the main landing gear doors clearances for pax version.

**ON A/C A330-200 A330-300

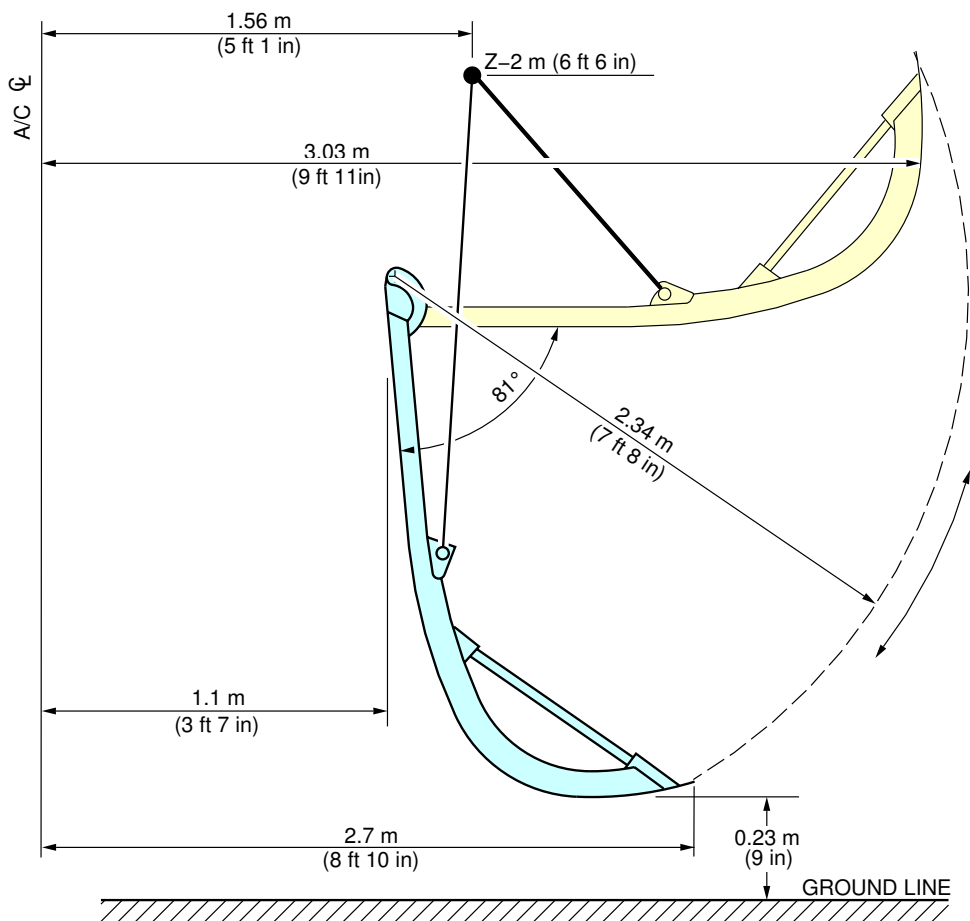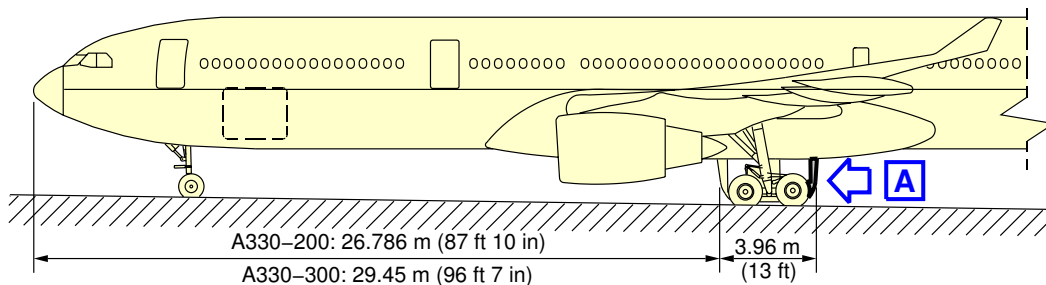

A

F_AC_020708_1_0010101_01_00

Main Landing Gear Doors
FIGURE-2-7-8-991-001-A01




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

Main Landing Gear Doors

1. This section gives the main landing gear doors clearances for cargo version.

**ON A/C A330-200F

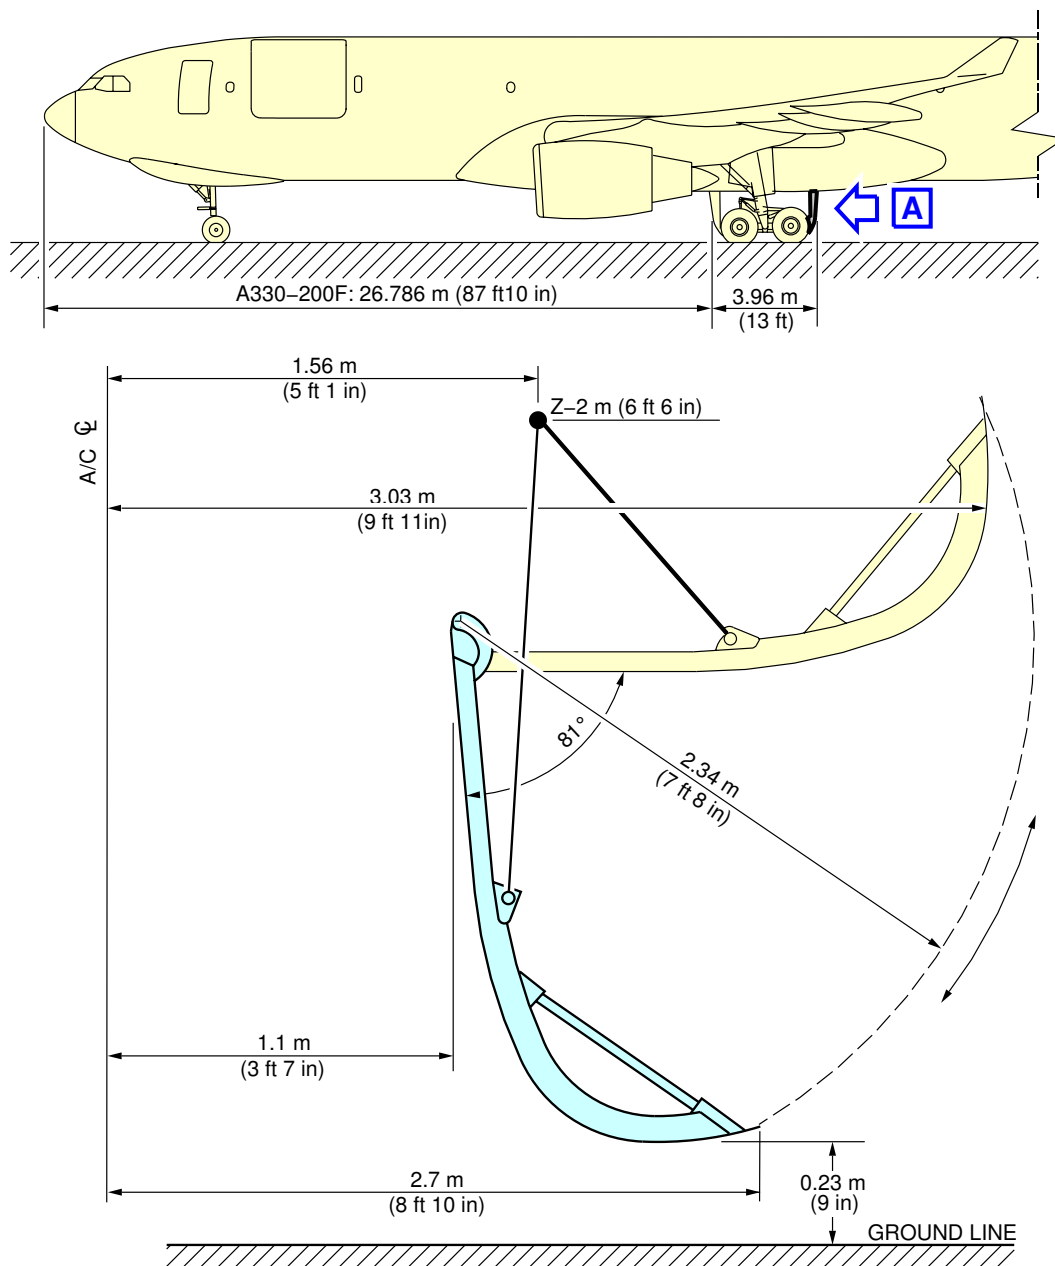

A

F_AC_020708_1_0020101_01_00

Main Landing Gear Doors
FIGURE-2-7-8-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-9 Radome

**ON A/C A330-200 A330-200F A330-300

Radome

1. This section gives the radome clearances.

**ON A/C A330-200 A330-200F A330-300

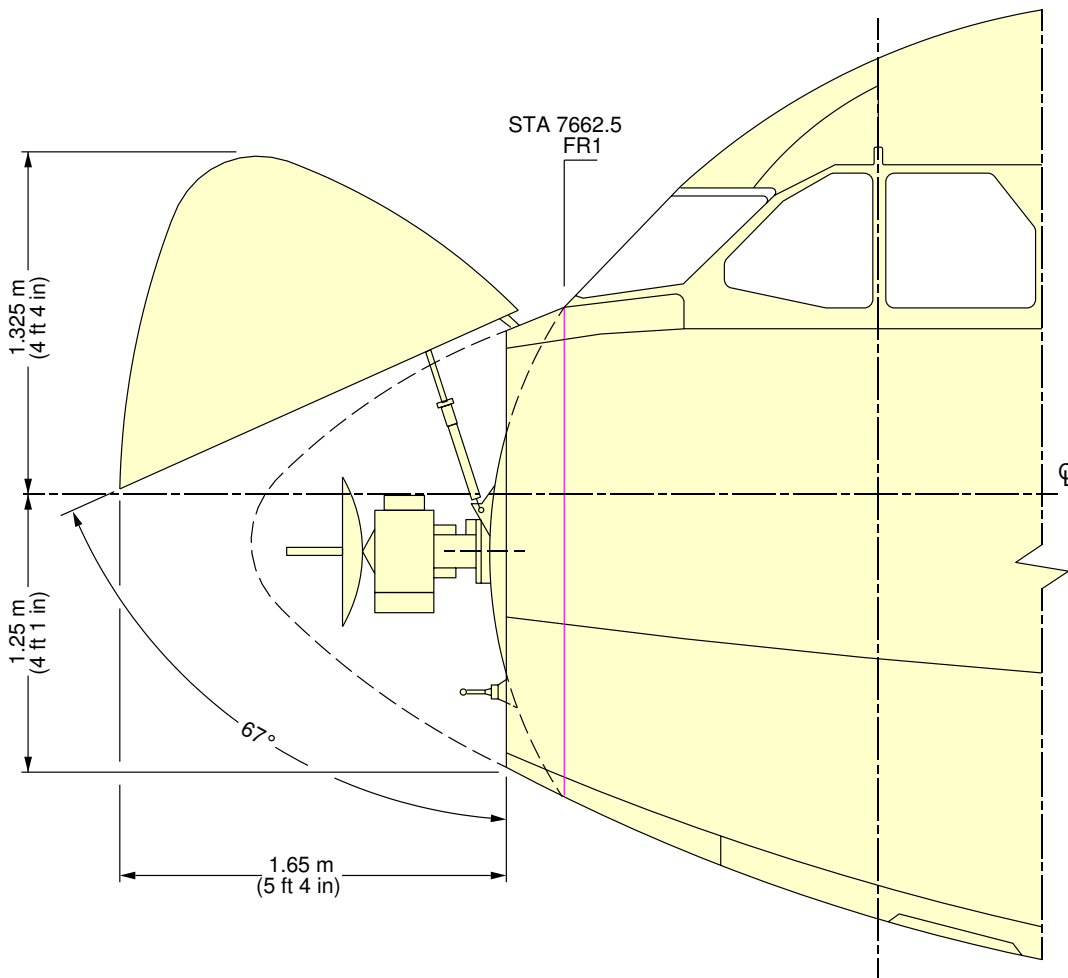

F_AC_020709_1_0010101_01_00

Radome
FIGURE-2-7-9-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-10 APU and Nose Landing Gear Doors

****ON A/C A330-200 A330-300**

APU and Nose Landing Gear Doors

1. This section gives APU and Nose Landing Gear doors clearances for pax version.

**ON A/C A330-200 A330-300

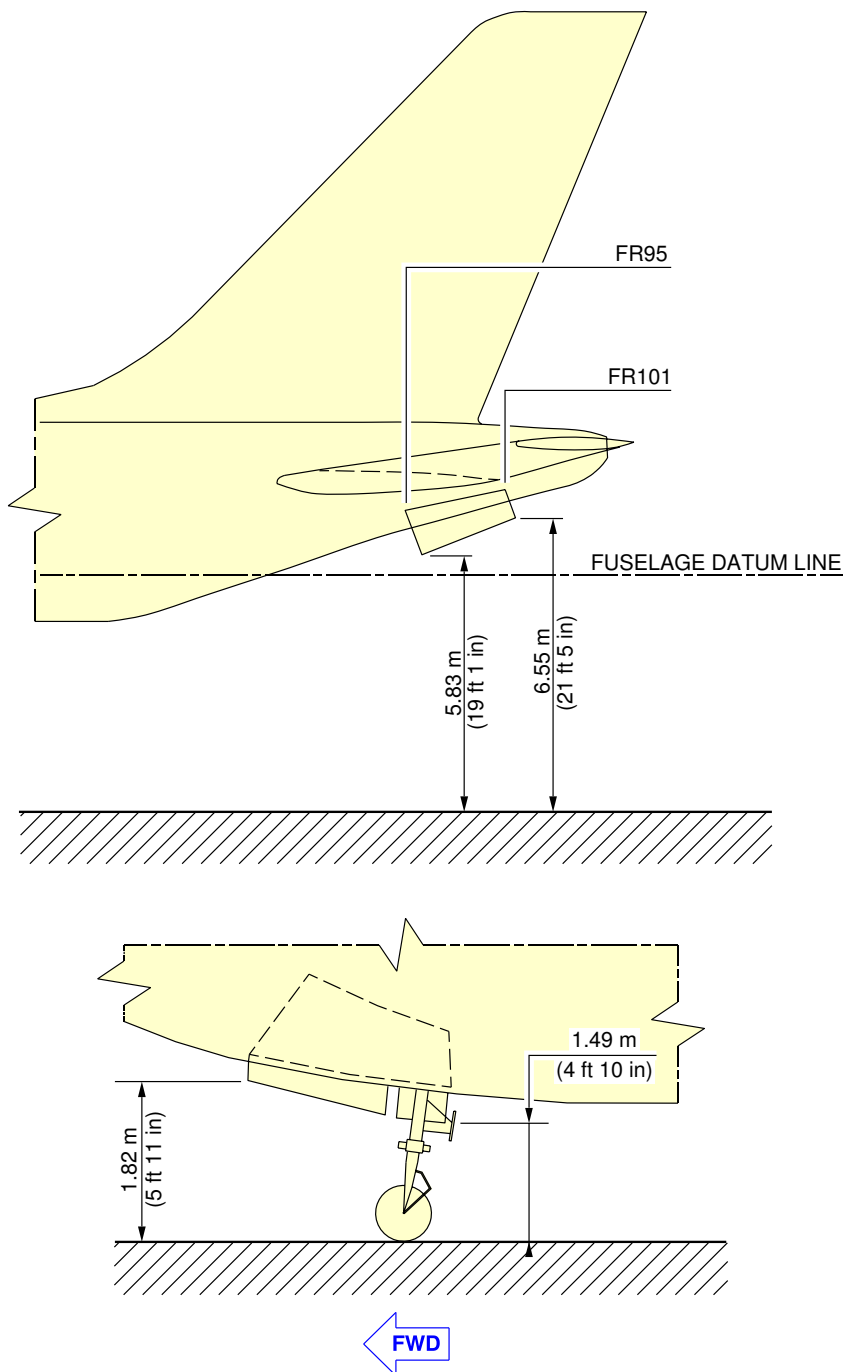

F_AC_020710_1_0010101_01_00

APU and Nose Landing Gear Doors
FIGURE-2-7-10-991-001-A01




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

APU and Nose Landing Gear Doors

1. This section gives APU and Nose Landing Gear doors clearances for cargo version.

**ON A/C A330-200F

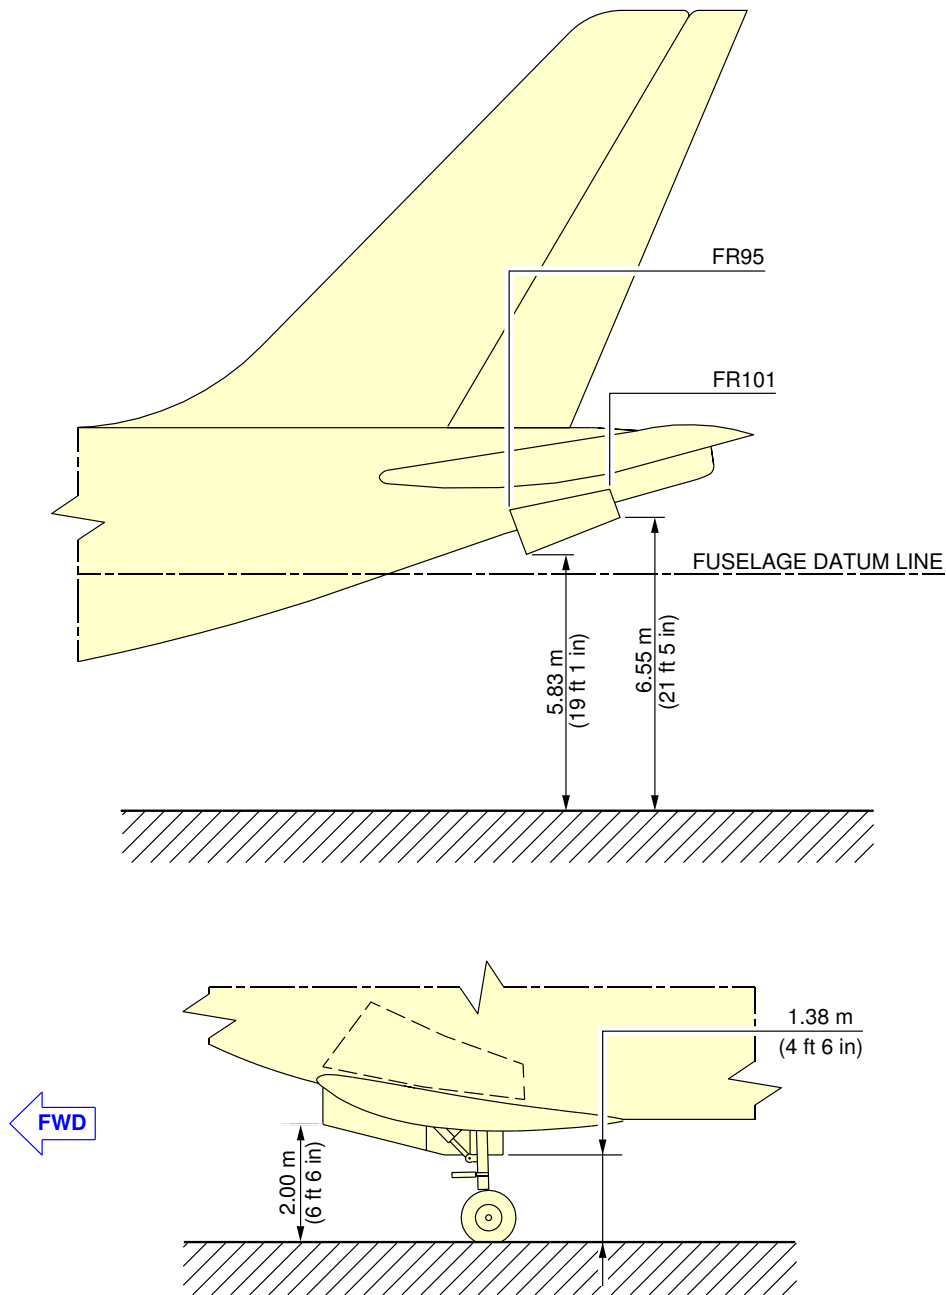

F_AC_020710_1_0020101_01_00

APU and Nose Landing Gear Doors
FIGURE-2-7-10-991-002-A01

AIRPLANE PERFORMANCE

3-1-0 General Information

****ON A/C A330-200 A330-200F A330-300**General Information

1. This section gives standard day temperatures.

Section 3-2 indicates payload range information at specific altitudes recommended for long range cruise with a given fuel reserve condition.

Section 3-3 represents FAR/JAR takeoff runway length requirements at ISA and ISA +15 °C (+27 °F) for engine conditions for FAA/EASA certification :

- PRATT & WHITNEY (PW 4000).
- ROLLS-ROYCE (RR Trent 700).
- GENERAL ELECTRIC (GE CF6-80E1). (A330-200 and A330-300 only)

Section 3-4 represents FAR/JAR landing runway length requirements for FAA/EASA certification.

Section 3-5 indicates final approach speeds.

Standard day temperatures for the altitude shown are tabulated below :

| Standard day temperatures for the altitude | | | |
|--|--------|--------------------------|------|
| Altitude | | Standard Day Temperature | |
| FEET | METERS | °F | °C |
| 0 | 0 | 59.0 | 15.0 |
| 2000 | 610 | 51.9 | 11.1 |
| 4000 | 1219 | 44.7 | 7.1 |
| 6000 | 1829 | 37.6 | 3.1 |
| 8000 | 2438 | 30.5 | -0.8 |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-2-0 Payload / Range

**ON A/C A330-200 A330-200F A330-300

Payload / Range

1. Payload / Range



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-2-1 ISA Conditions

****ON A/C A330-200 A330-300**


ISA Conditions

1. This section gives the payload / range at ISA conditions for pax version.

****ON A/C A330-200**

NOTE : THESE CURVES ARE GIVEN FOR INFORMATION ONLY. THE APPROVED VALUES ARE STATED IN THE "OPERATING MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

NOTE : MAX ZERO FUEL WEIGHT : 170 T
MAX TAKE-OFF WEIGHT : 233 T

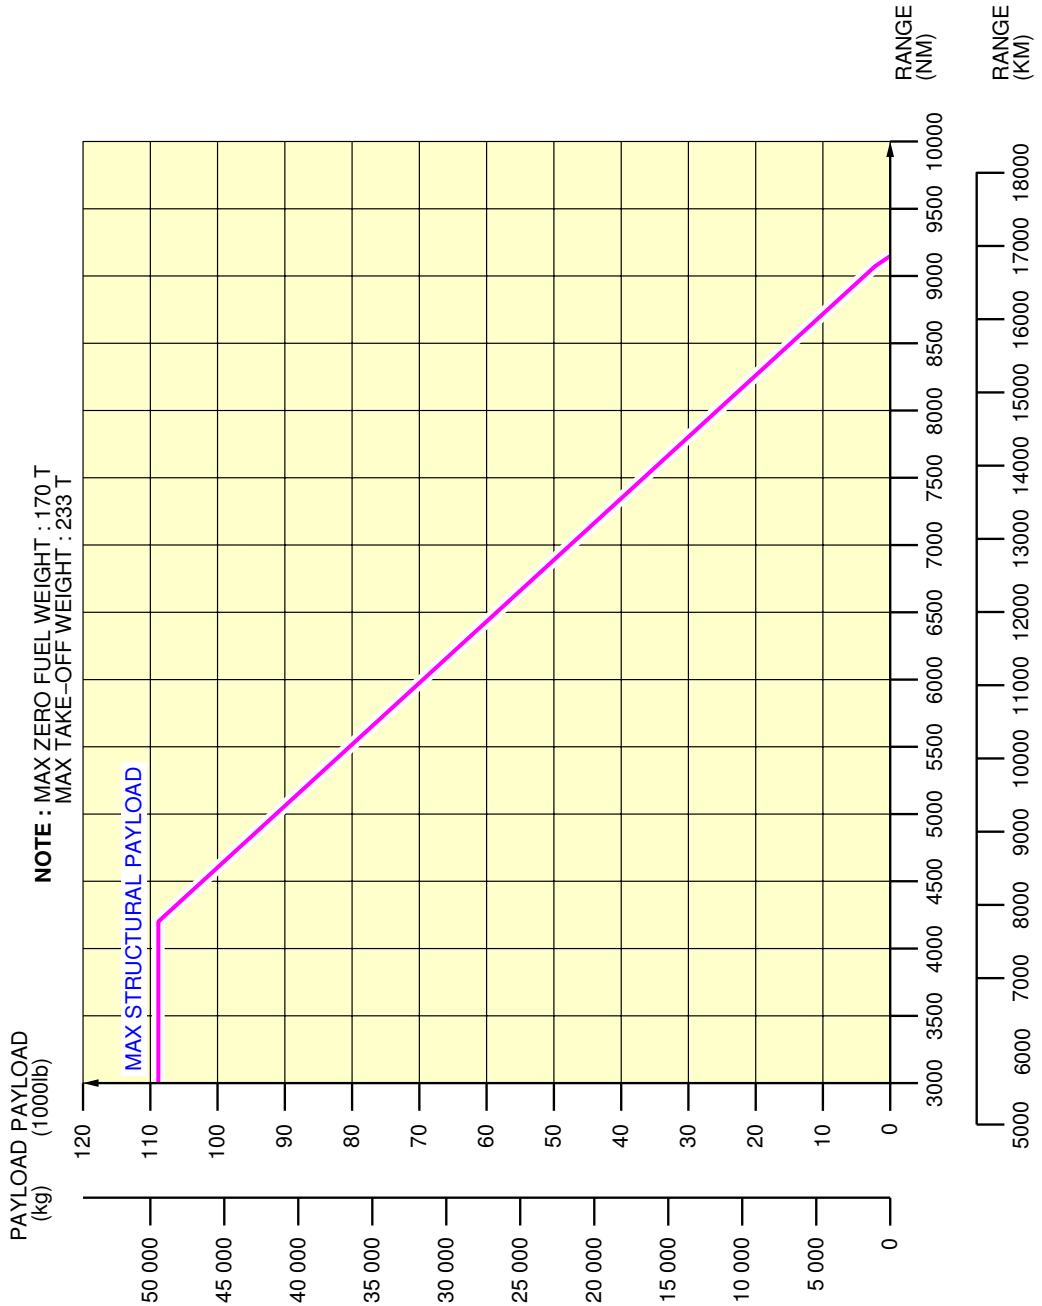


F_AC_030201_1_0010101_01_01

PAYLOAD / RANGE
PW 4000 Series Engine
FIGURE-3-2-1-991-001-A01

**ON A/C A330-200


NOTE : THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

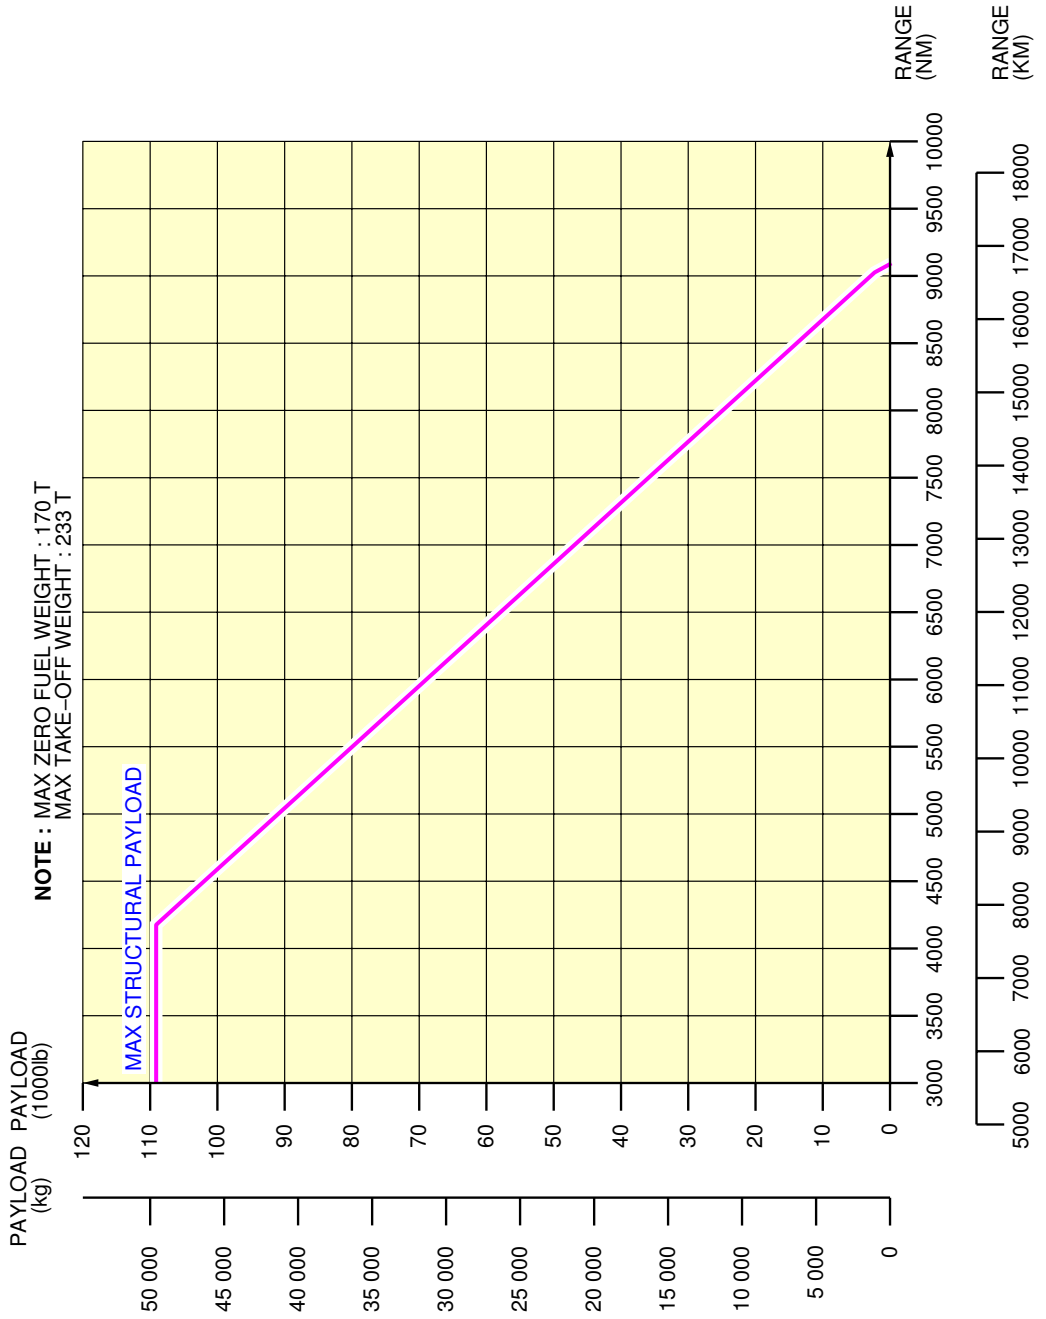

F_AC_030201_1_0020101_01_01

PAYLOAD / RANGE
RR TRENT 700 Series Engine
FIGURE-3-2-1-991-002-A01

**ON A/C A330-200

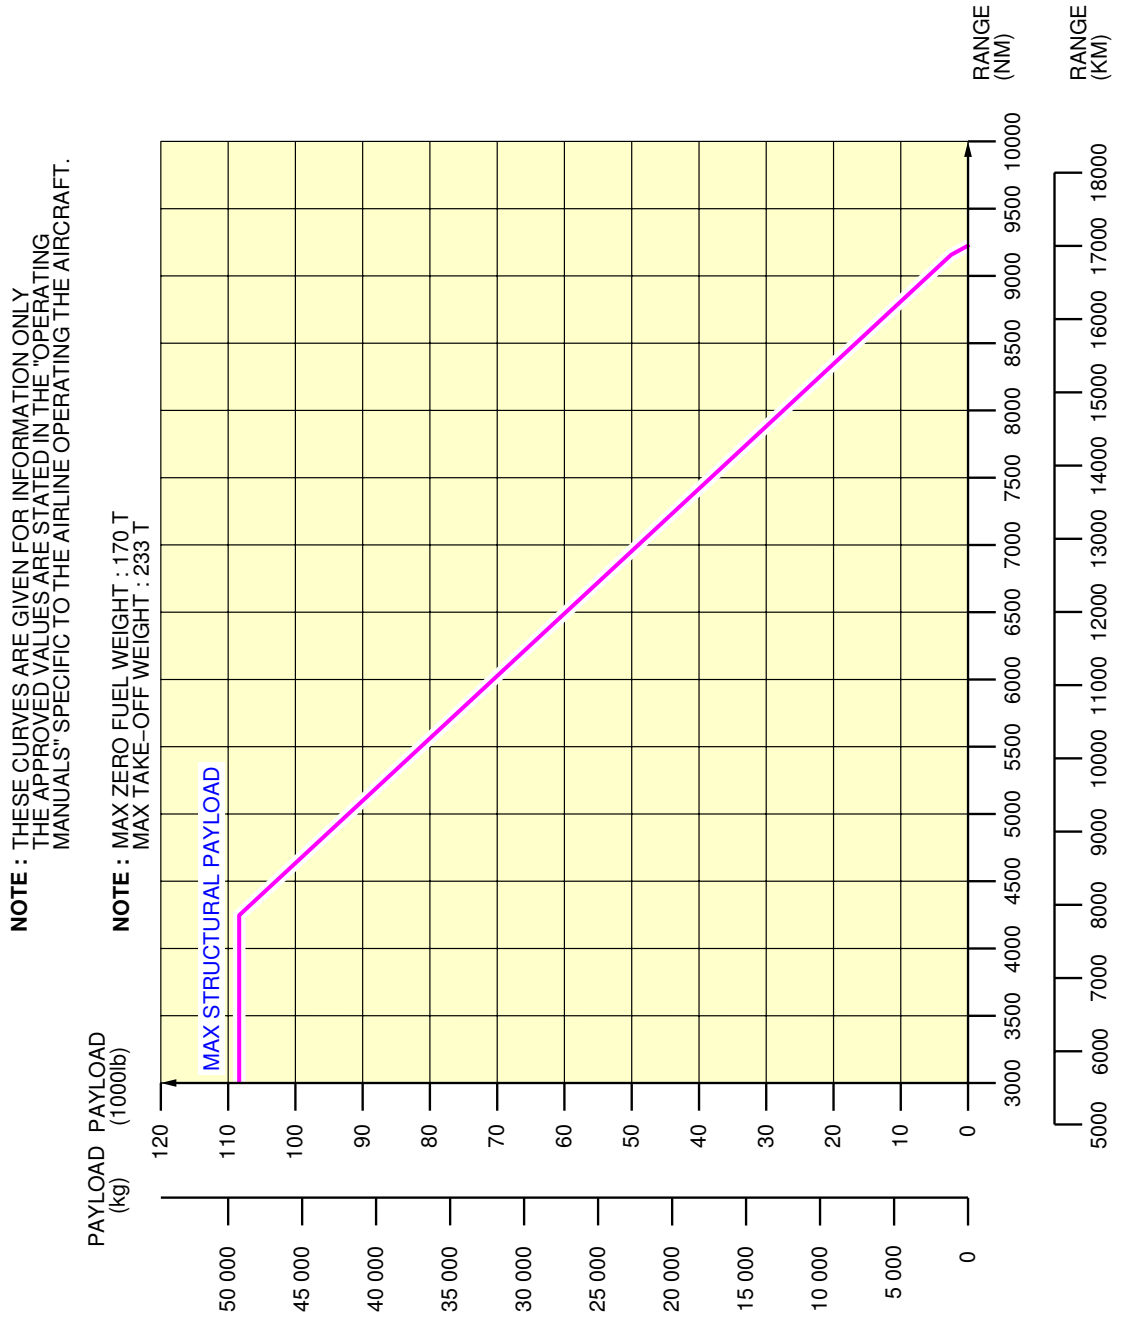


F_AC_030201_1_0030101_01_01

PAYLOAD / RANGE
GE CF6-80E1 Series Engine
FIGURE-3-2-1-991-003-A01

****ON A/C A330-300**

NOTE : THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

NOTE : MAX ZERO FUEL WEIGHT : 175 T
MAX TAKE-OFF WEIGHT : 233 T

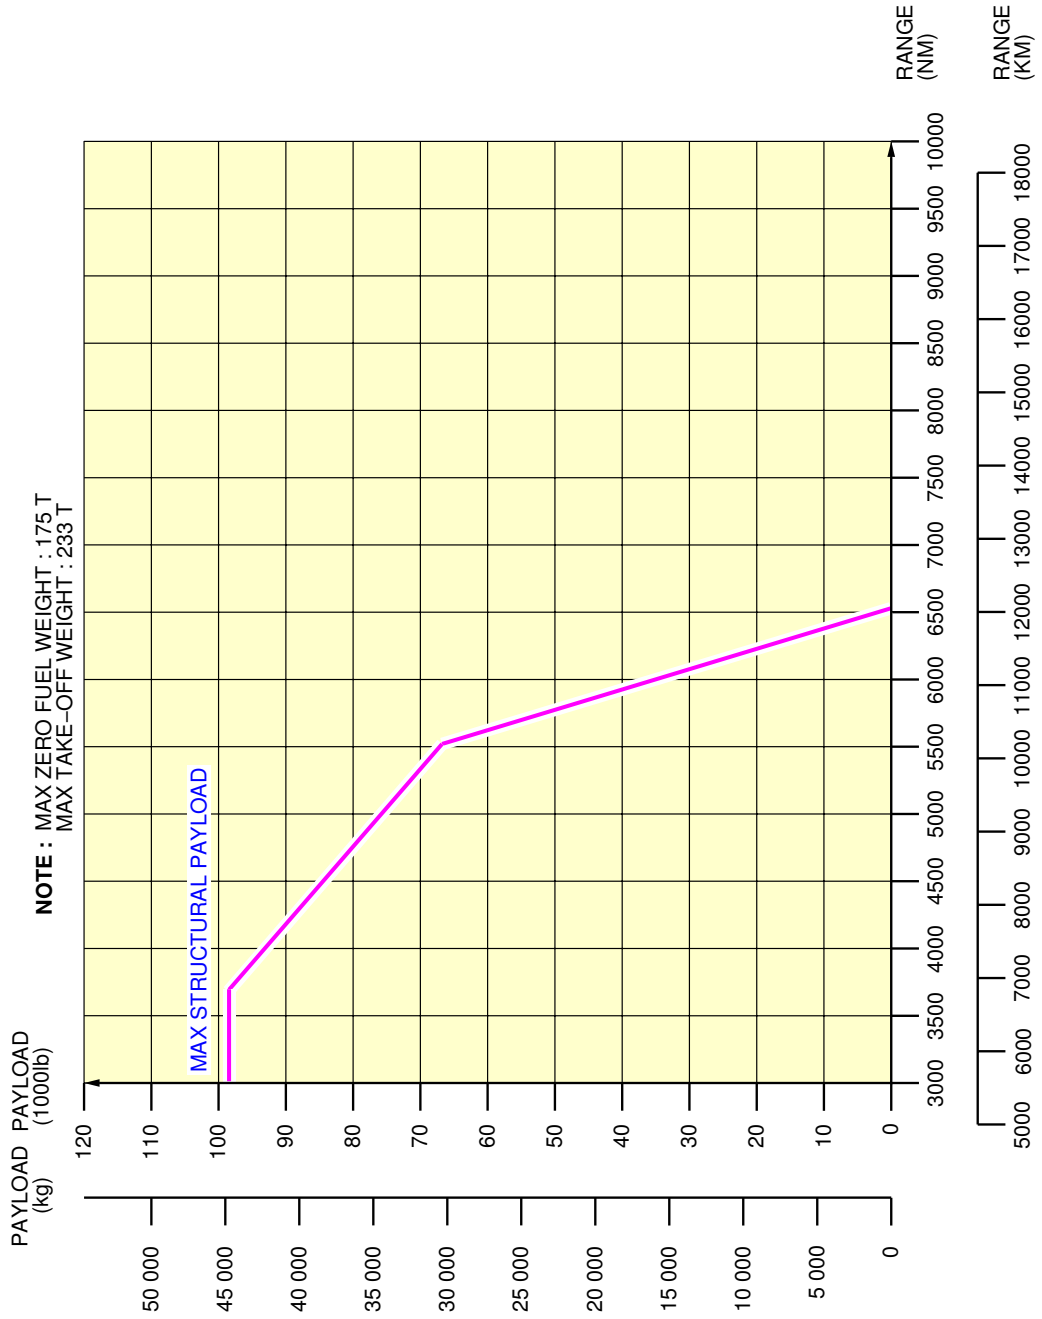


F_AC_030201_1_0040101_01_01

PAYLOAD / RANGE
PW 4000 Series Engine
FIGURE-3-2-1-991-004-A01

**ON A/C A330-300

NOTE : THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

NOTE : MAX ZERO FUEL WEIGHT : 175 T
MAX TAKE-OFF WEIGHT : 233 T

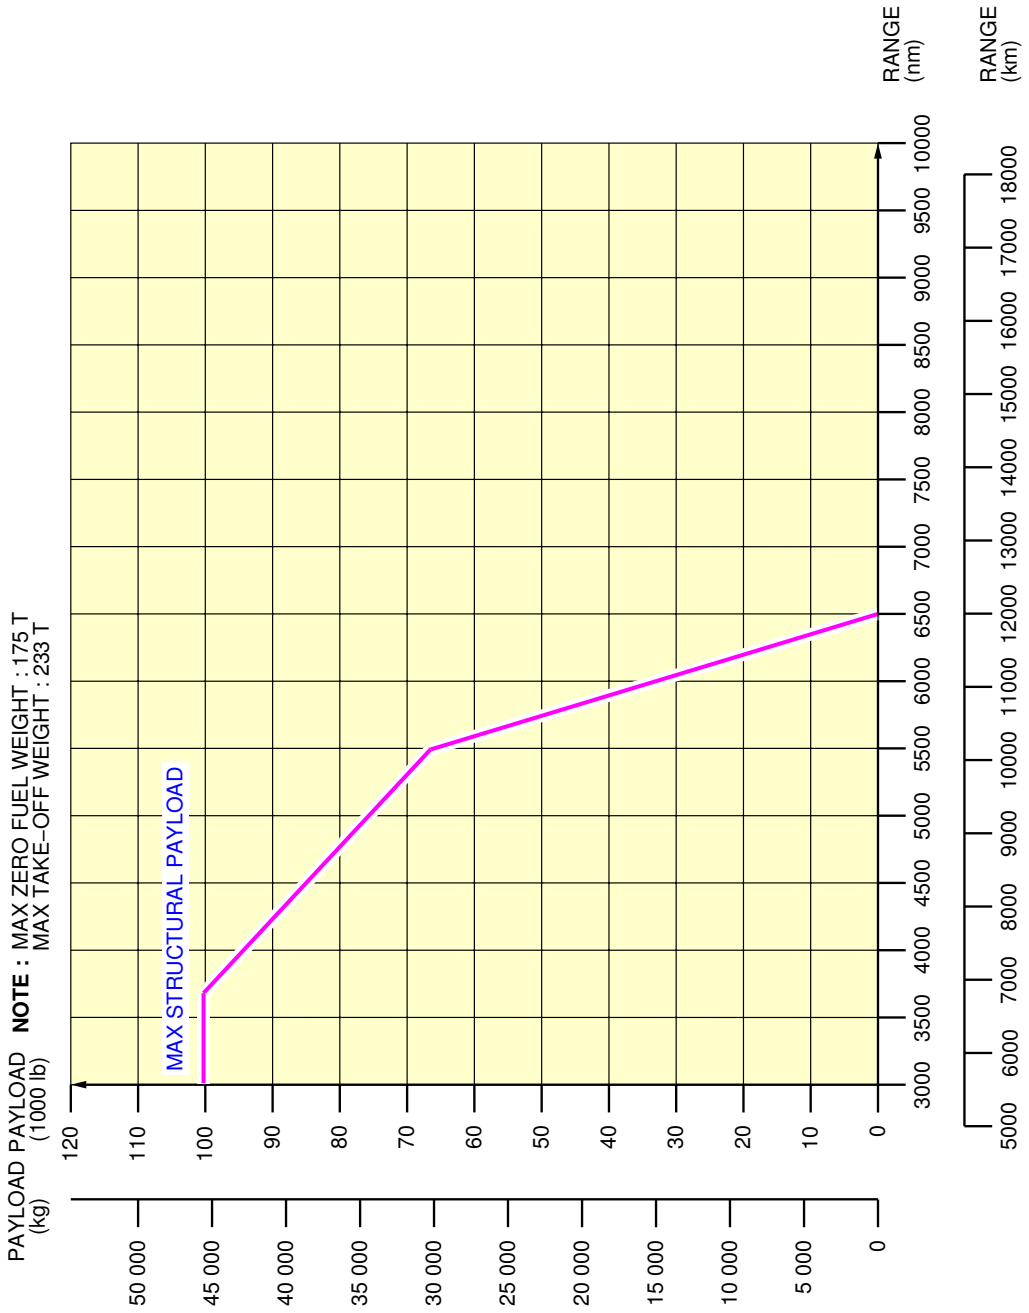


F_AC_030201_1_0050101_01_01

PAYLOAD / RANGE
RR TRENT 700 Series Engine
FIGURE-3-2-1-991-005-A01

**ON A/C A330-300

NOTE : THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

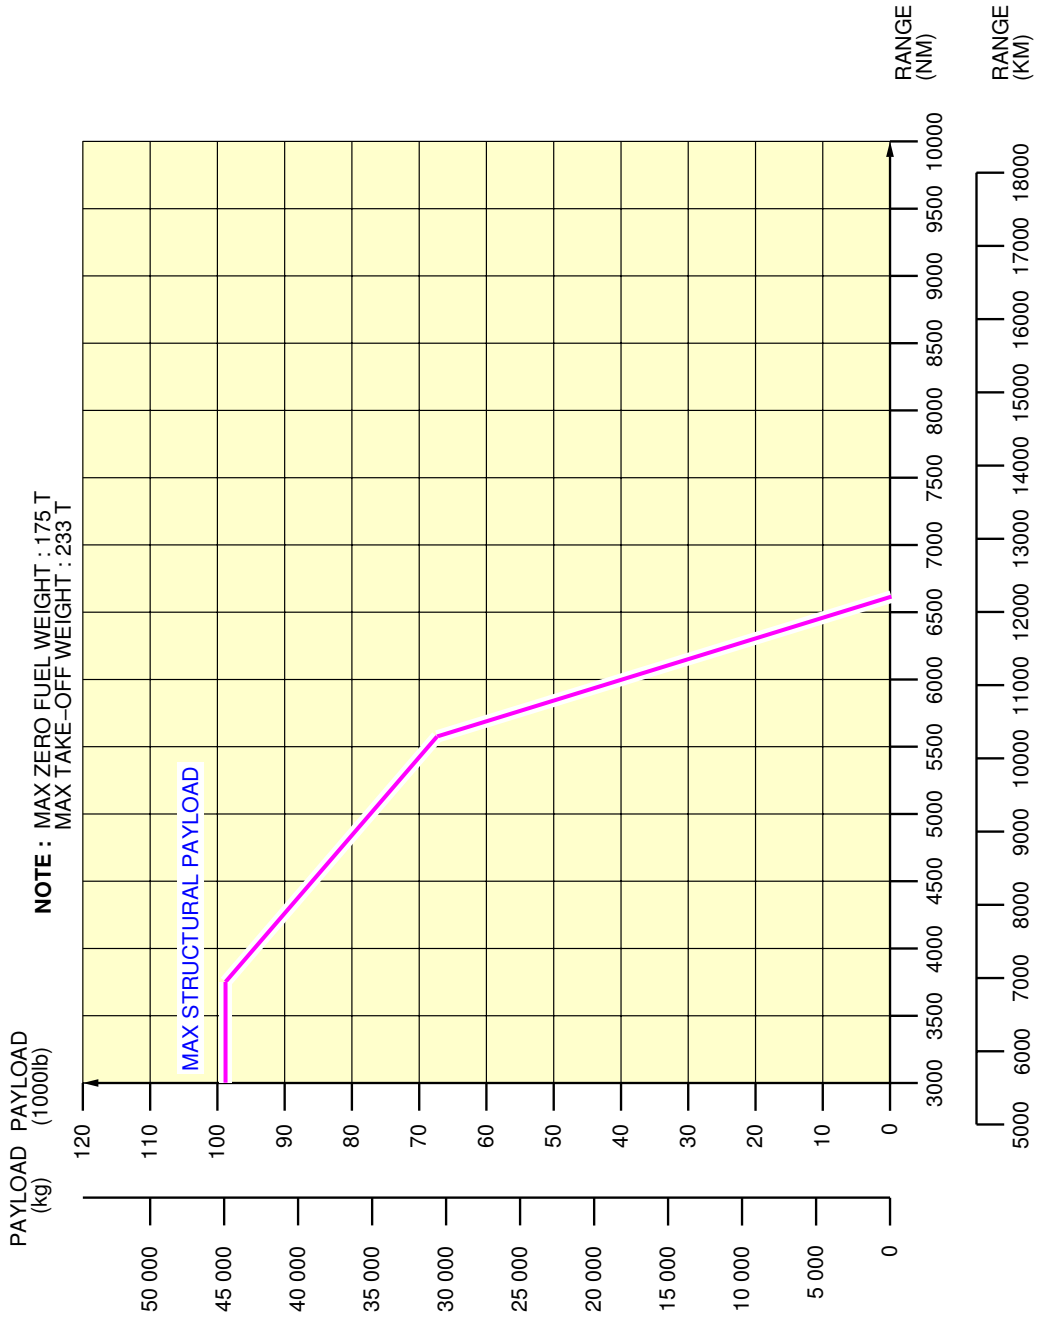

F_AC_030201_1_0060101_01_01

PAYLOAD / RANGE
GE CF6-80E1 Series Engine
FIGURE-3-2-1-991-006-A01




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

ISA Conditions

1. This section gives the payload / range at ISA conditions for cargo version.


**ON A/C A330-200F

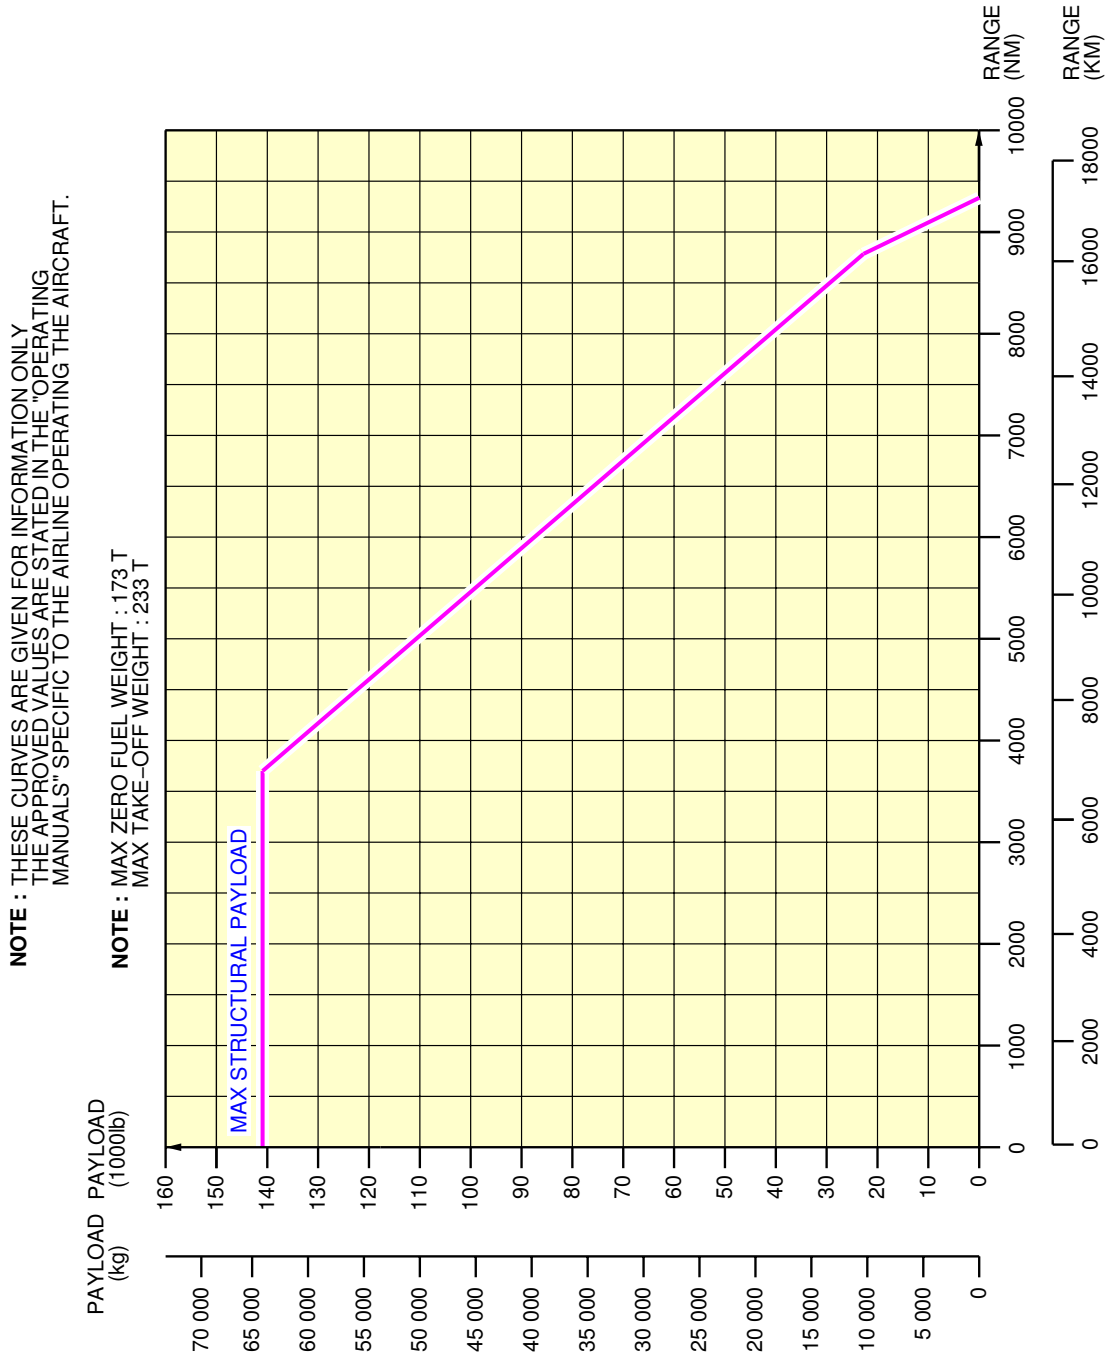

F_AC_030201_1_0070101_01_01

PAYLOAD / RANGE
RR TRENT 700 Series Engine
FIGURE-3-2-1-991-007-A01


**ON A/C A330-200F

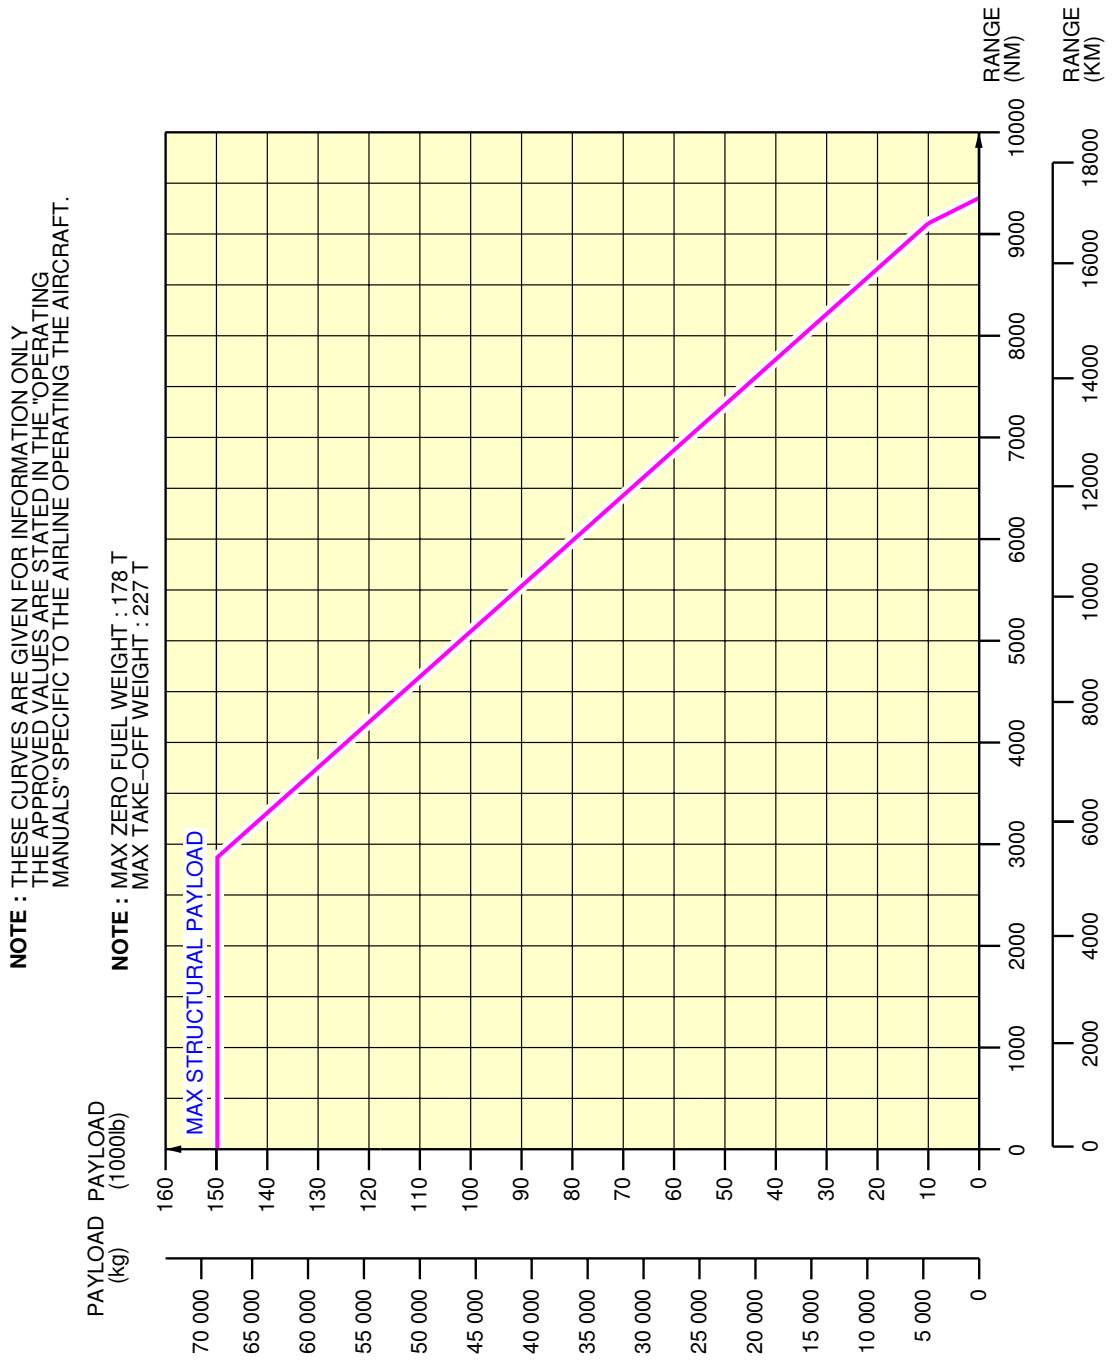

F_AC_030201_1_0080101_01_01

PAYLOAD / RANGE
RR TRENT 700 Series Engine
FIGURE-3-2-1-991-008-A01


**ON A/C A330-200F

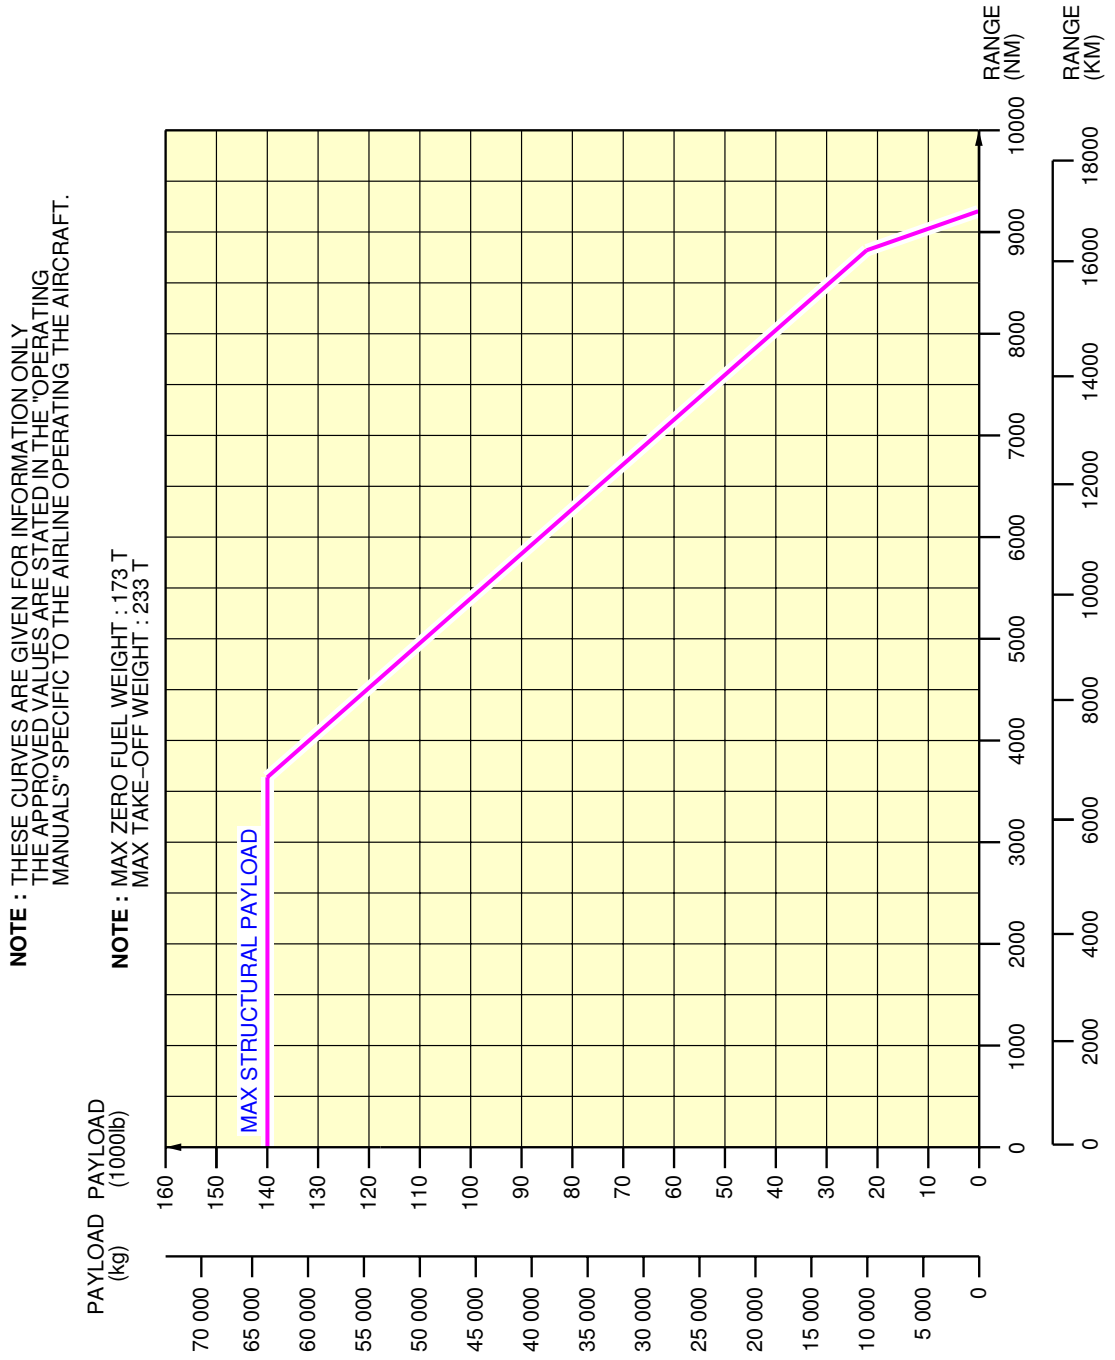

F_AC_030201_1_0090101_01_01

PAYLOAD / RANGE
PW 4000 Series Engine
FIGURE-3-2-1-991-009-A01

**ON A/C A330-200F

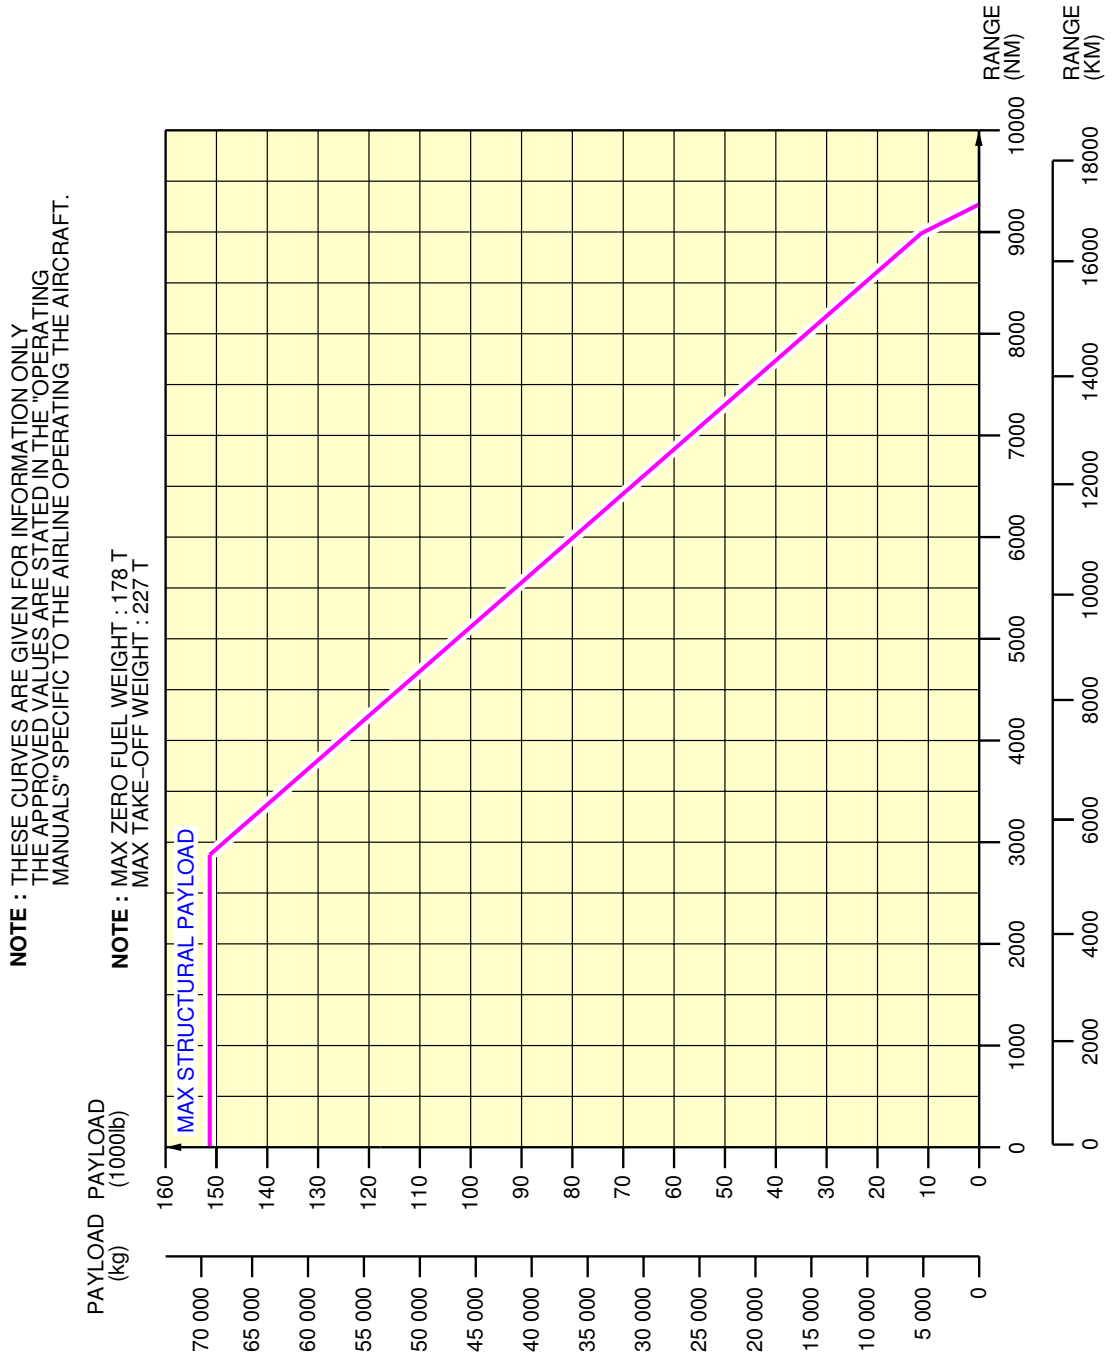

F_AC_030201_1_0100101_01_01

PAYLOAD / RANGE
PW 4000 Series Engine
FIGURE-3-2-1-991-010-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-3-0 FAR / JAR Takeoff Weight Limitation

**ON A/C A330-200 A330-200F A330-300

FAR / JAR Takeoff Weight Limitation

1. FAR / JAR Takeoff Weight Limitation



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


3-3-1 ISA Conditions

****ON A/C A330-200 A330-200F A330-300**

FAR / JAR Takeoff Weight Limitation


1. This section gives the takeoff weight limitation at ISA conditions.

**ON A/C A330-200 A330-200F A330-300

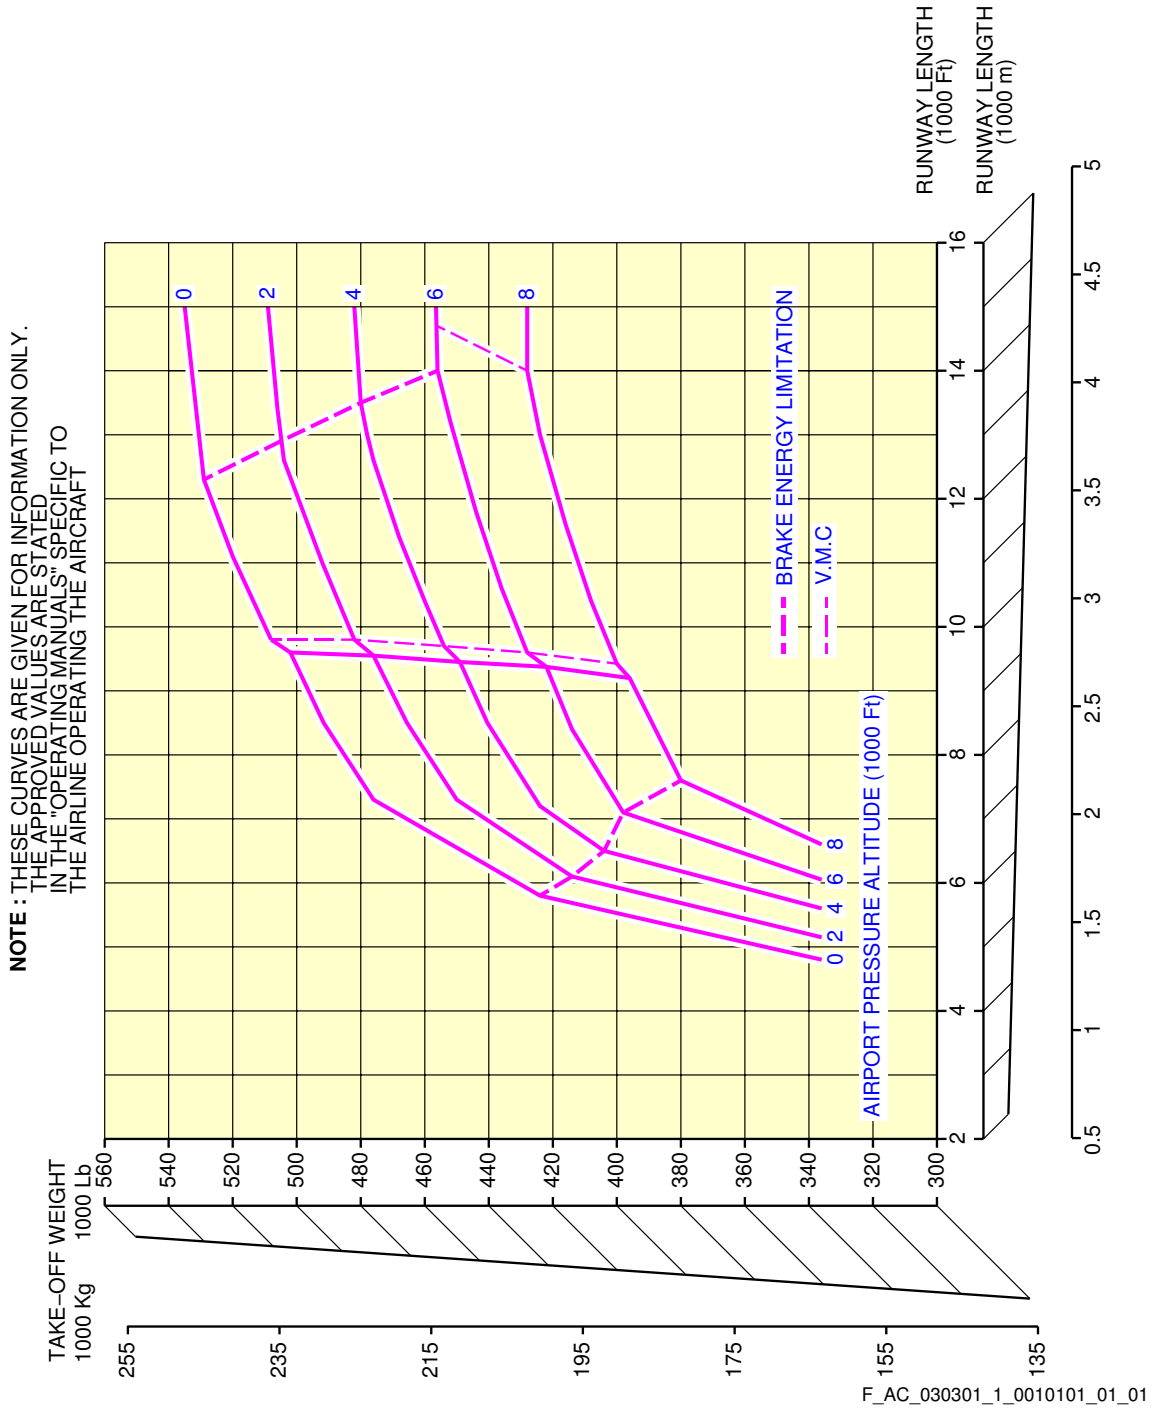


Takeoff Weight Limitation
 ISA Conditions - PW 4000 Series Engine
 FIGURE-3-3-1-991-001-A01

**ON A/C A330-200 A330-200F A330-300

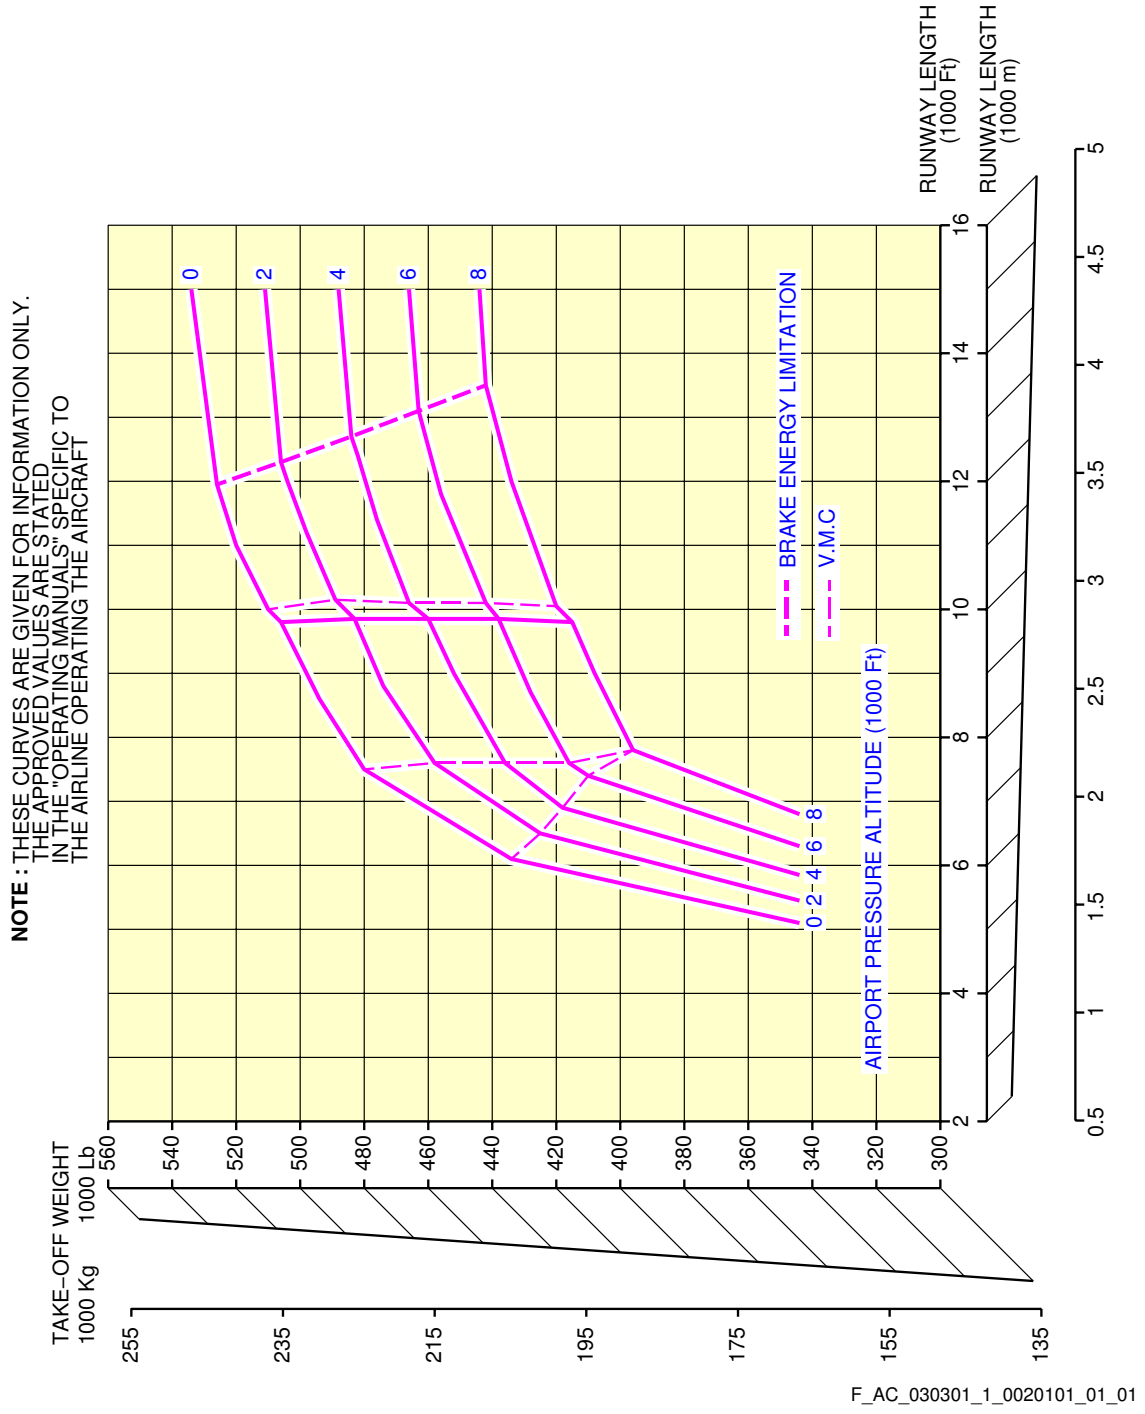

Takeoff Weight Limitation
 ISA Conditions - RR TRENT 700 Series Engine
 FIGURE-3-3-1-991-002-A01

**ON A/C A330-200 A330-300

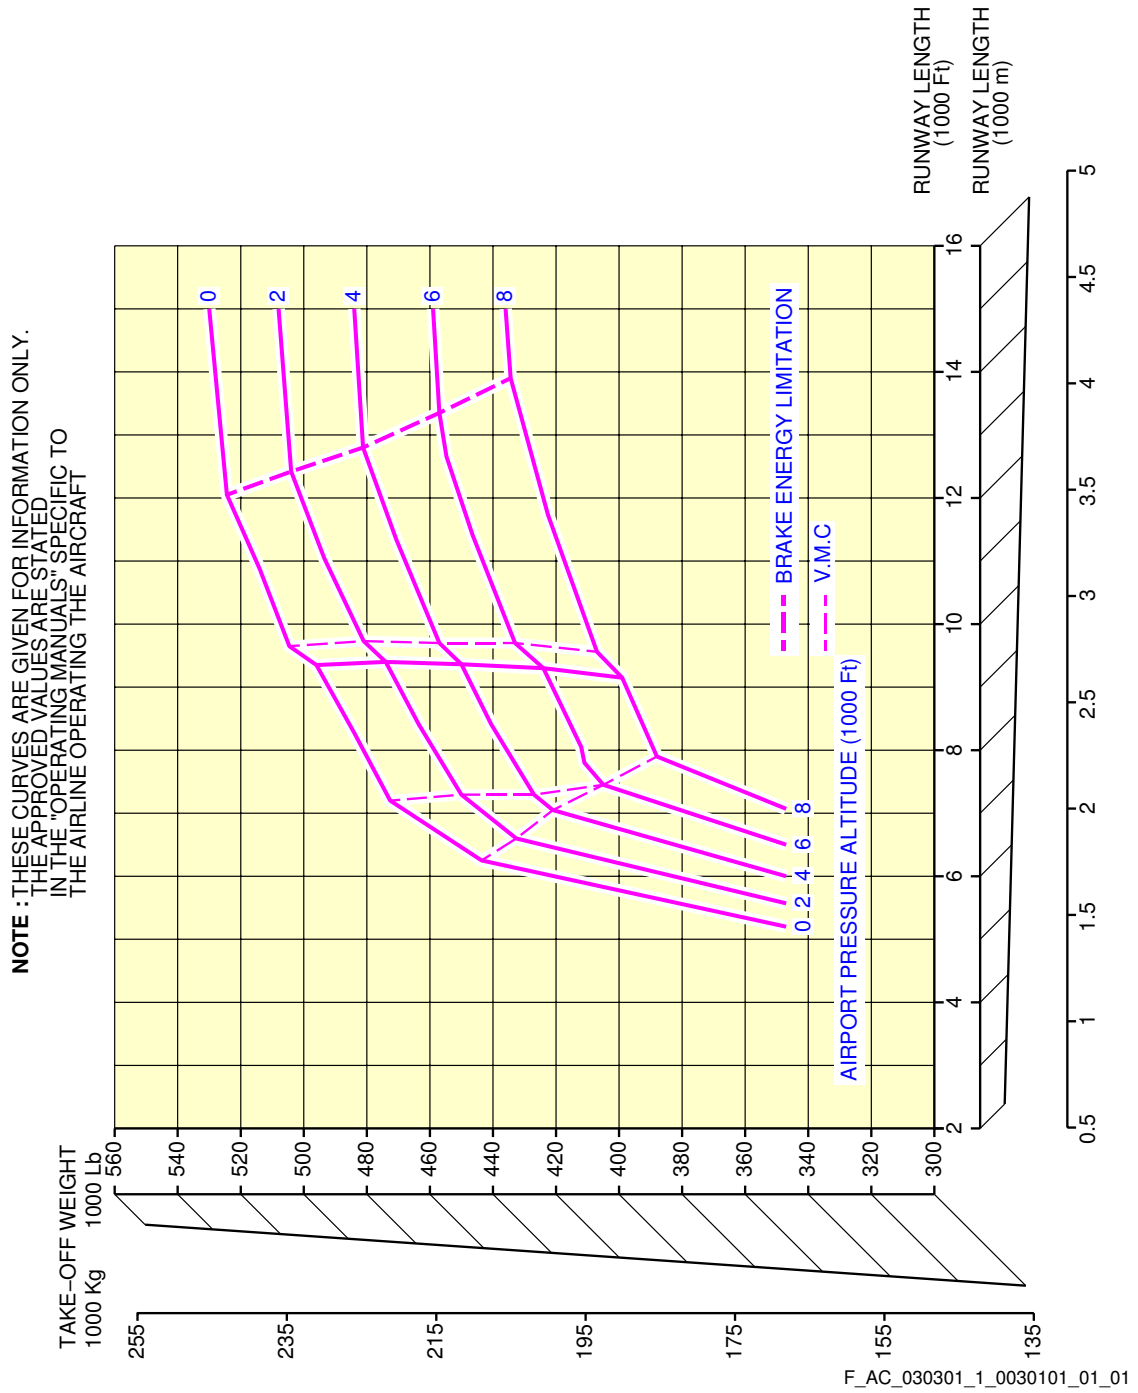

Takeoff Weight Limitation
 ISA Conditions - GE CF6-80E1 Series Engine
 FIGURE-3-3-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


3-3-2 ISA +15 °C (ISA +27 °F) Conditions

****ON A/C A330-200 A330-200F A330-300**

ISA +15 °C (ISA +27 °F) Conditions


1. This section gives the takeoff weight limitation at ISA +15 °C (ISA +27 °F) conditions.

**ON A/C A330-200 A330-200F A330-300

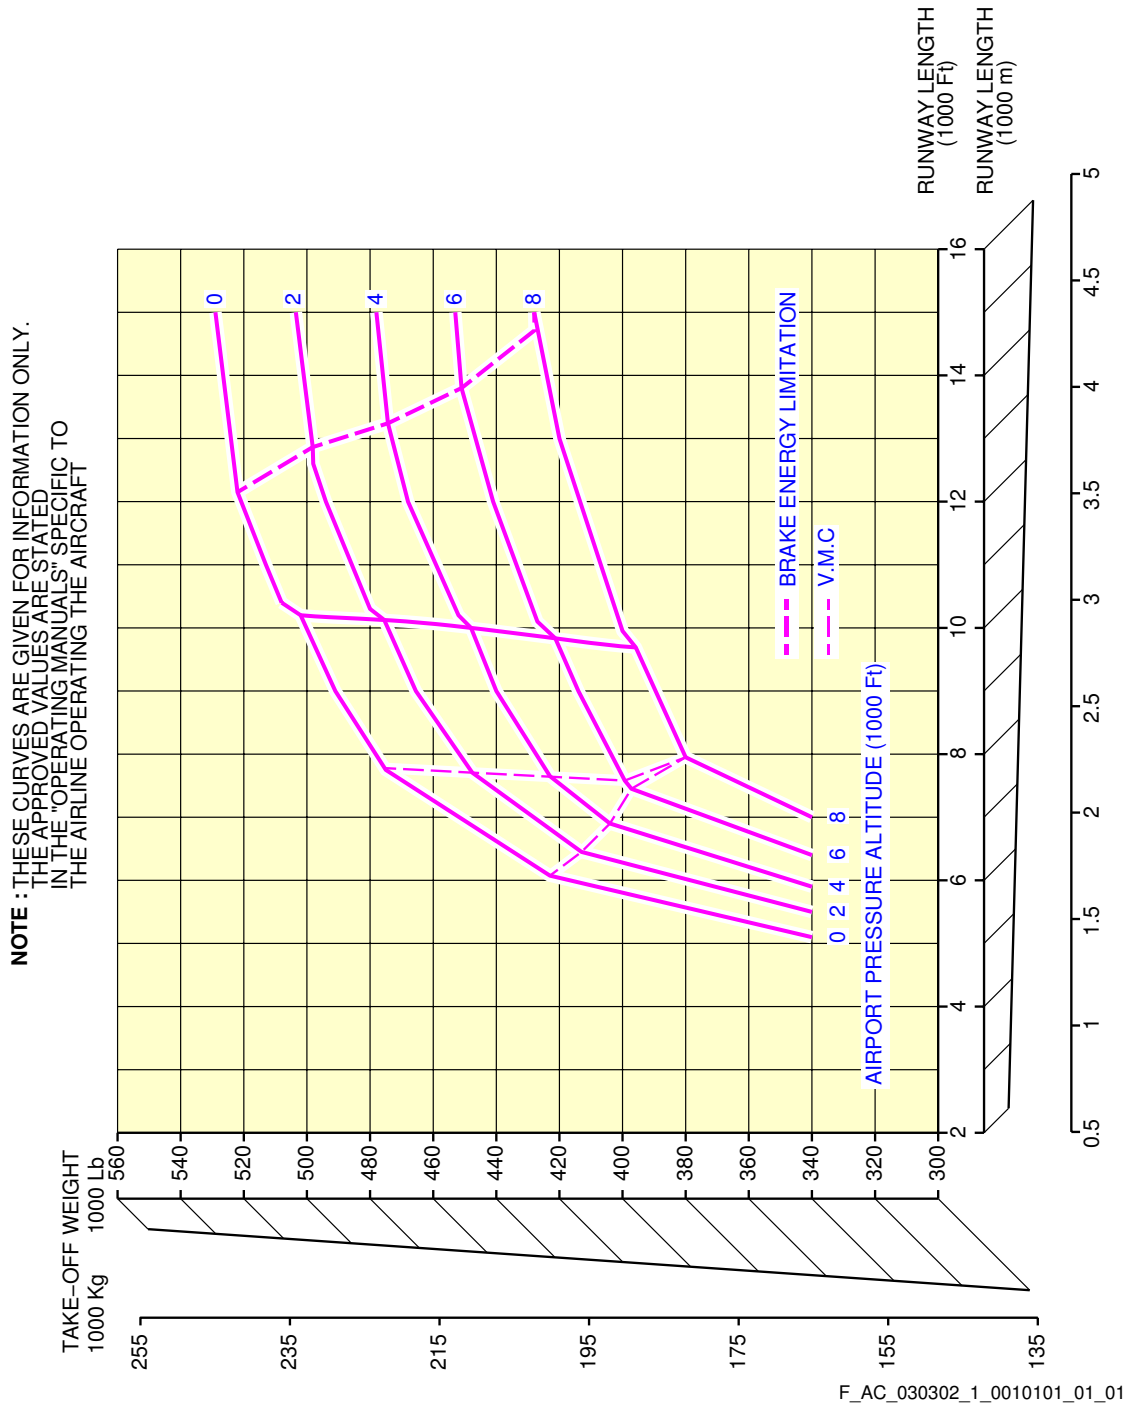


FAR / JAR Takeoff Weight Limitation
 ISA +15 ° C (ISA +27 ° F) Conditions - PW 4000 Series Engine
 FIGURE-3-3-2-991-001-A01

**ON A/C A330-200 A330-200F A330-300

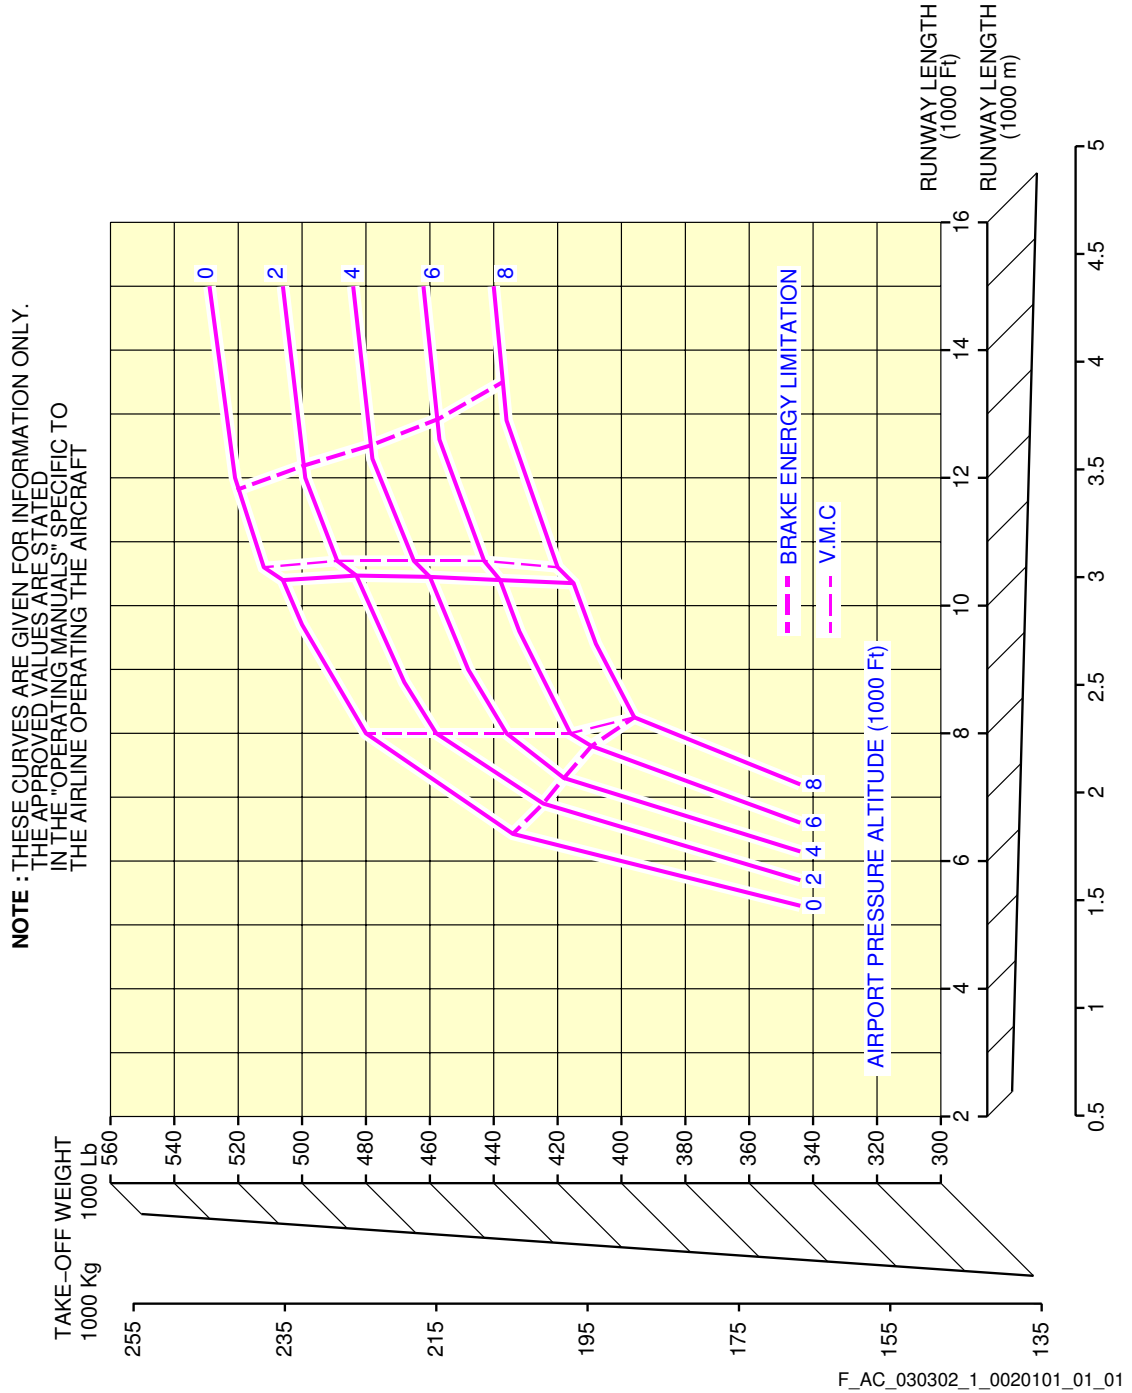

FAR / JAR Takeoff Weight Limitation
 ISA +15 °C (ISA +27 °F) Conditions - RR TRENT 700 Series Engine
 FIGURE-3-3-2-991-002-A01

**ON A/C A330-200 A330-300

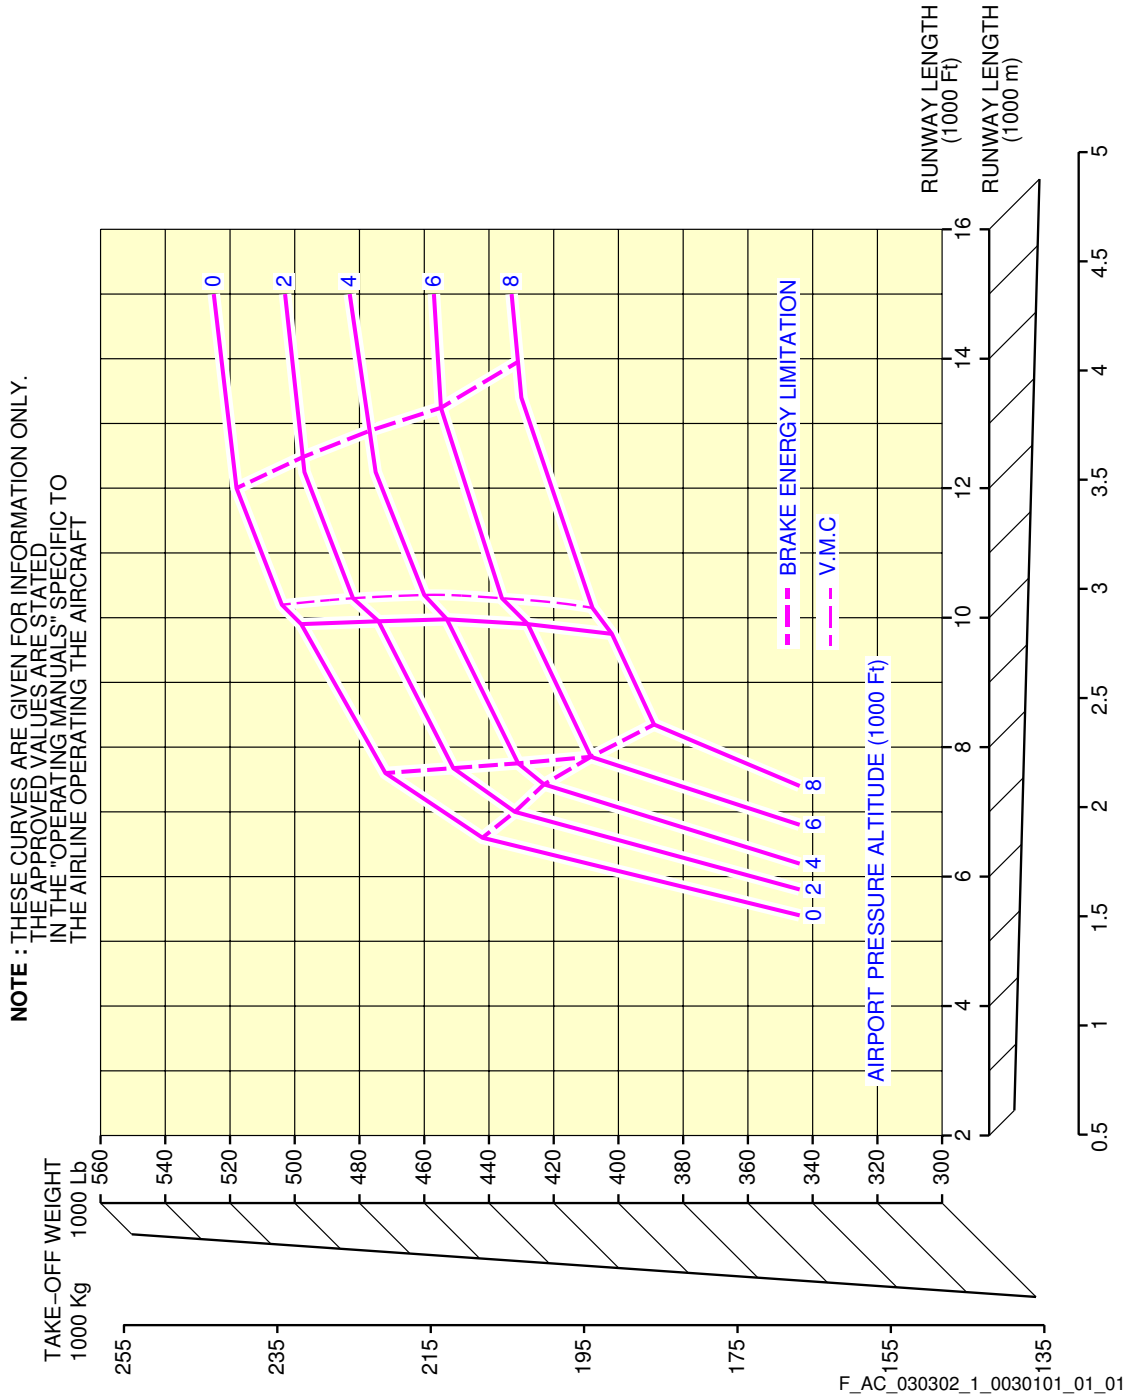

FAR / JAR Takeoff Weight Limitation
 ISA +15 °C (ISA +27 °F) Conditions - GE CF6-80E1 Series Engine
 FIGURE-3-3-2-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-4-0 FAR / JAR Landing Field Length

**ON A/C A330-200 A330-200F A330-300

Landing Field Length

1. Landing Field Length



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


3-4-1 ISA Conditions All series engines

**ON A/C A330-200 A330-200F A330-300

ISA Conditions All series engine


1. This section gives the landing field length.

**ON A/C A330-200 A330-200F A330-300

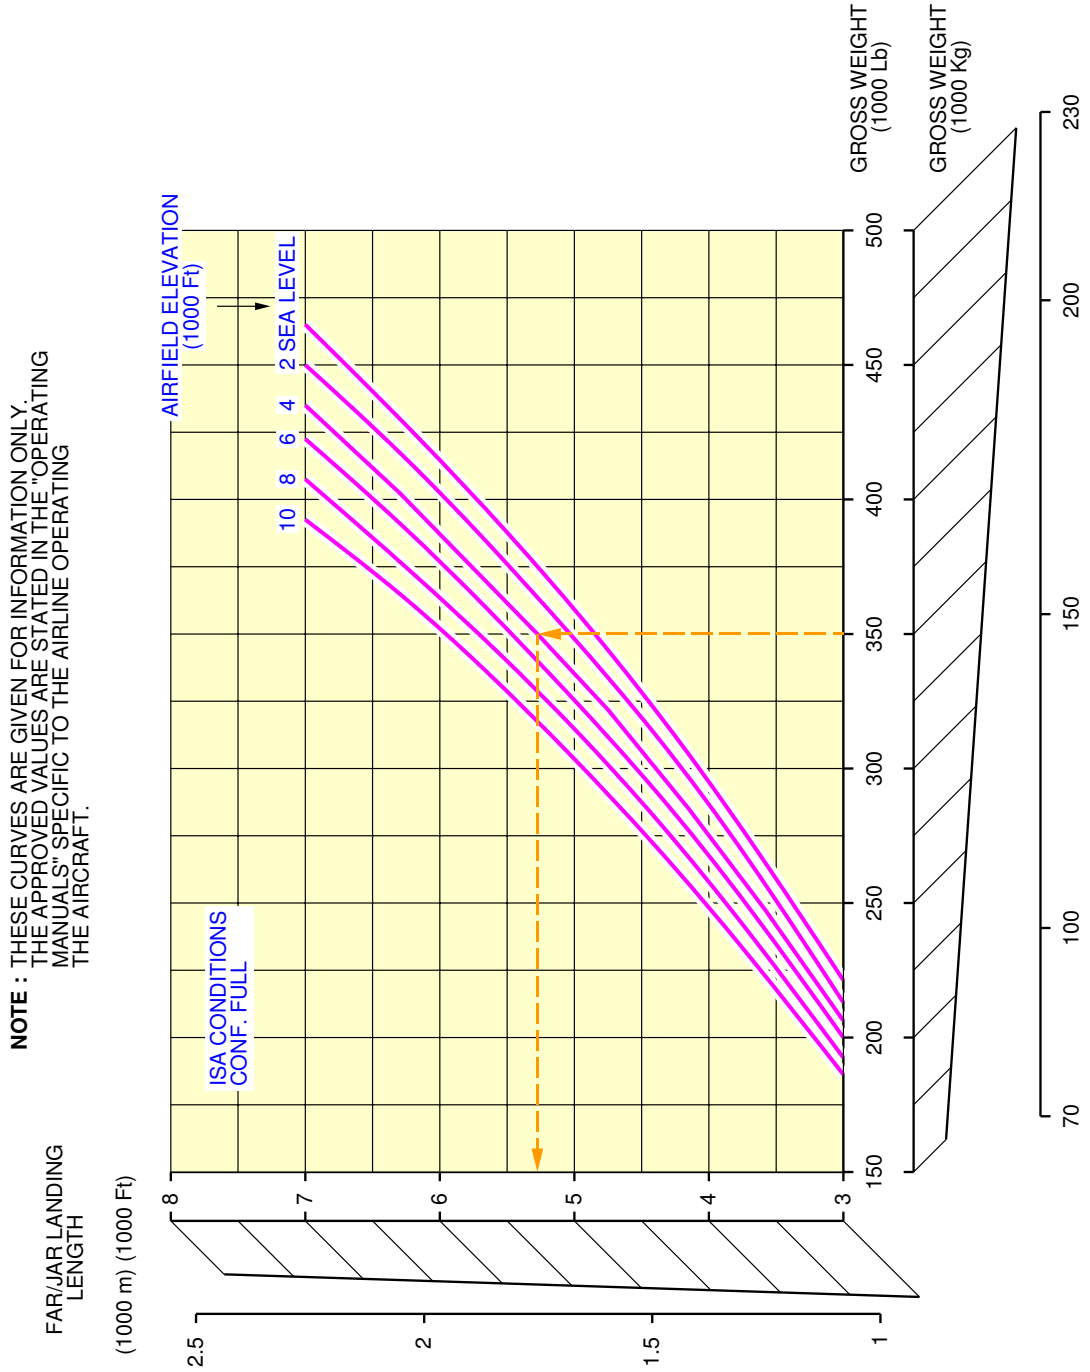


FAR / JAR Landing Field Length
 ISA Conditions - PW 4000 Series Engine
 FIGURE-3-4-1-991-001-A01

**ON A/C A330-200 A330-200F A330-300

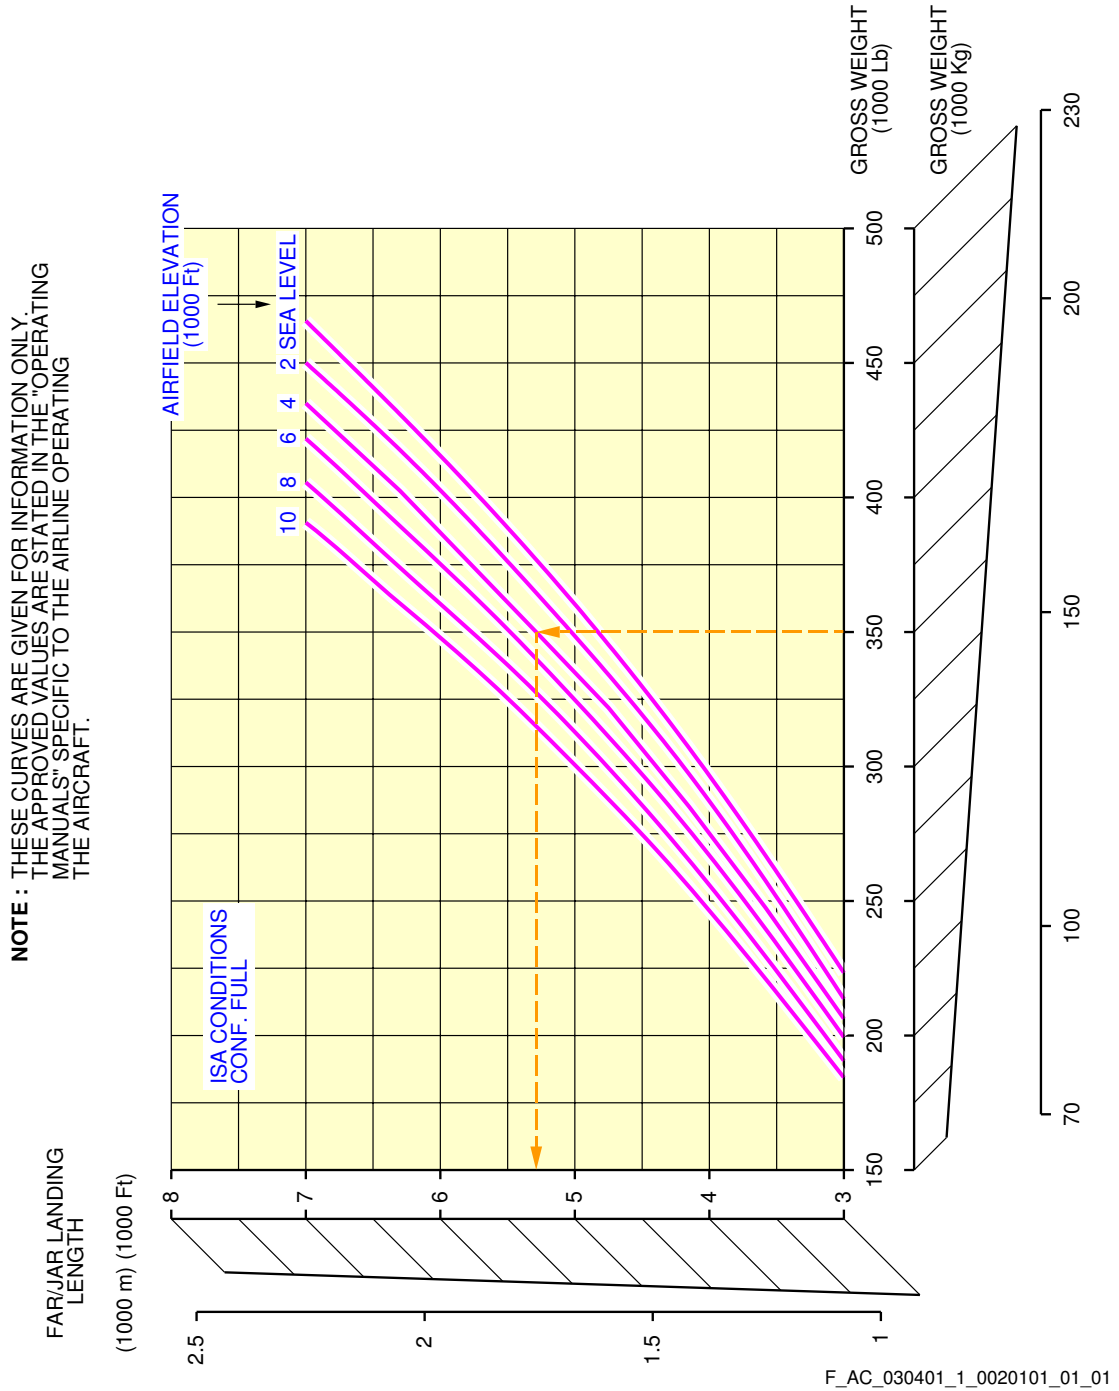

FAR / JAR Landing Field Length
 ISA Conditions - RR TRENT 700 Series Engine
 FIGURE-3-4-1-991-002-A01

**ON A/C A330-200 A330-300

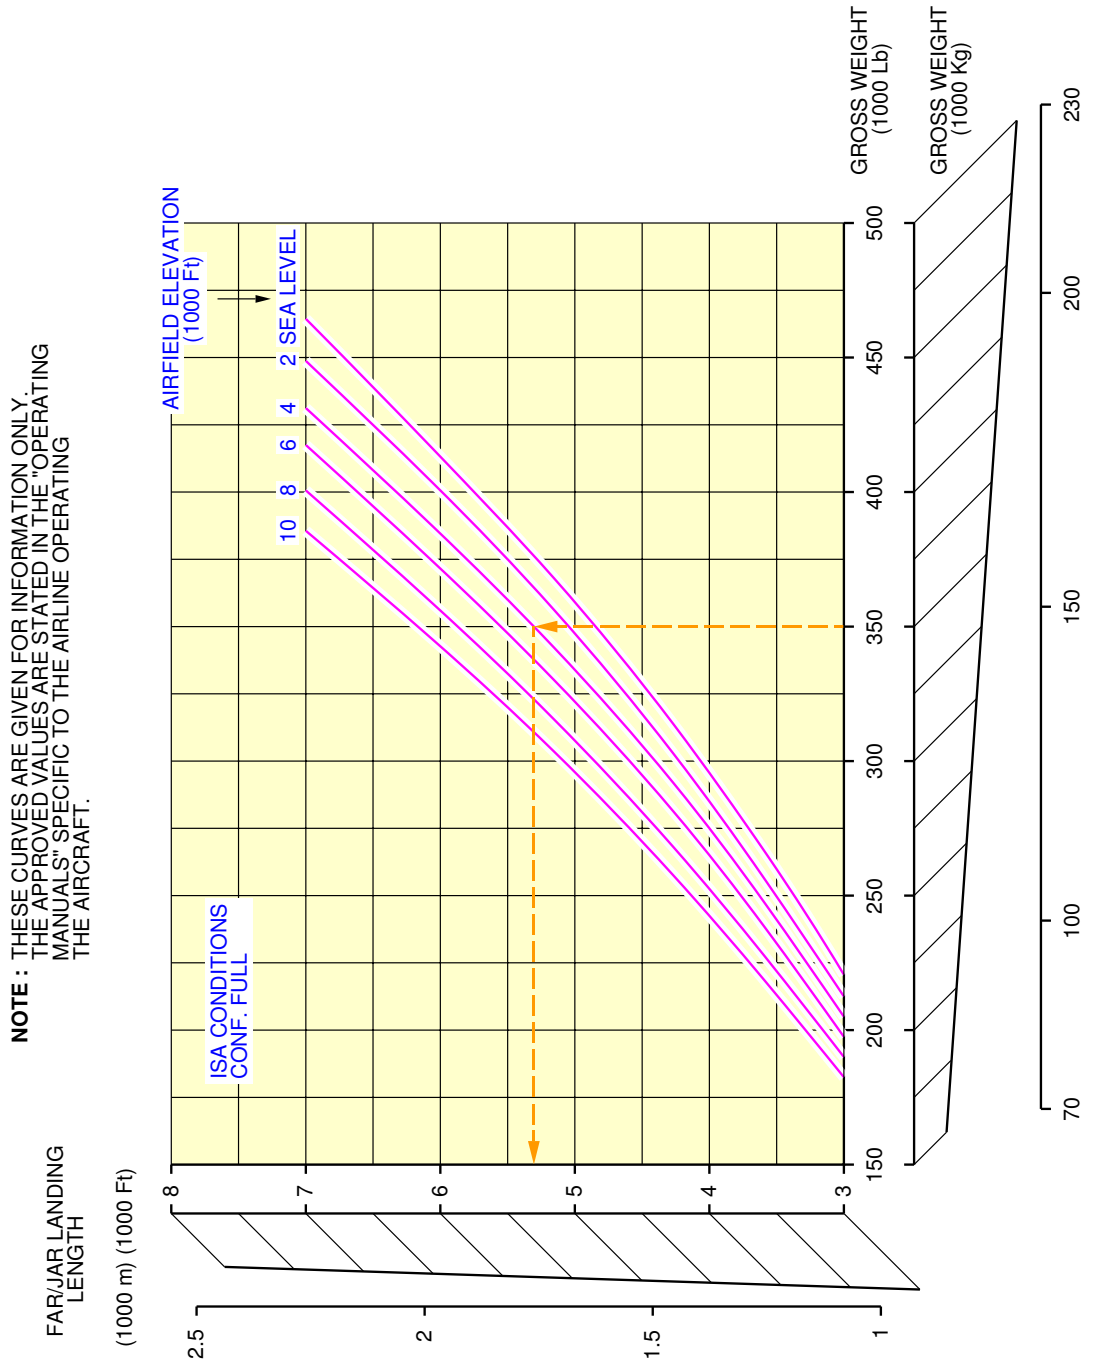

F_AC_030401_1_0030101_01_01

FAR / JAR Landing Field Length
 ISA Conditions - GE CF6-80E1 Series Engine
 FIGURE-3-4-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-5-0 Final Approach Speed

**ON A/C A330-200 A330-200F A330-300

Final Approach Speed

1. Final Approach Speed



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


3-5-1 Final Approach Speed

**ON A/C A330-200 A330-200F A330-300

Final Approach Speed

1. This section gives the final approach speed.


**ON A/C A330-200 A330-200F A330-300

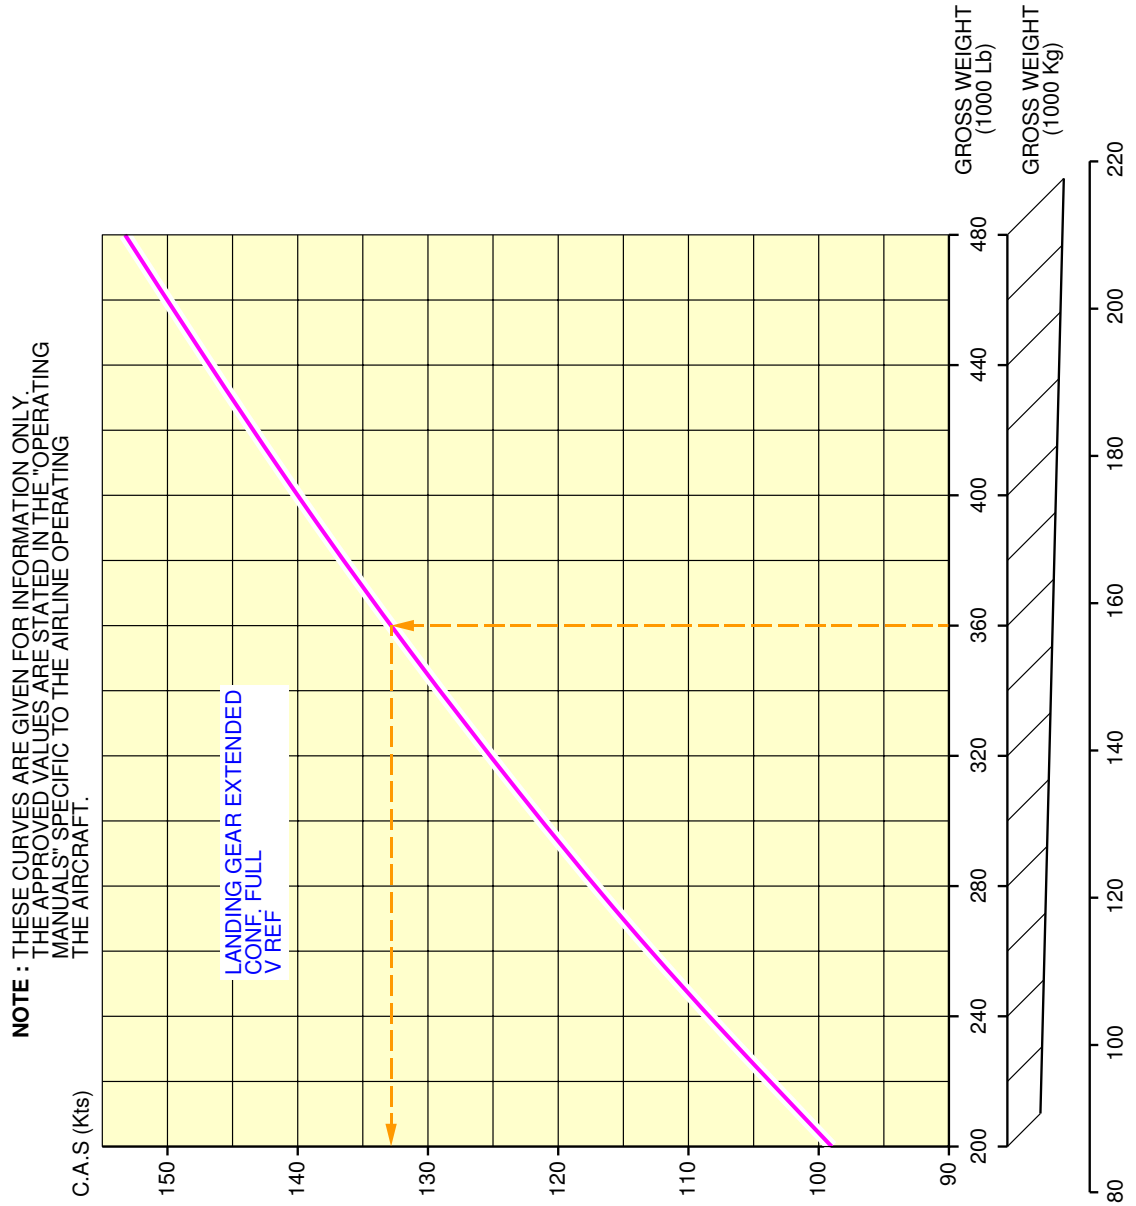

F_AC_030501_1_0010101_01_01

Final Approach Speed
PW 4000 Series Engine
FIGURE-3-5-1-991-001-A01


**ON A/C A330-200 A330-200F A330-300

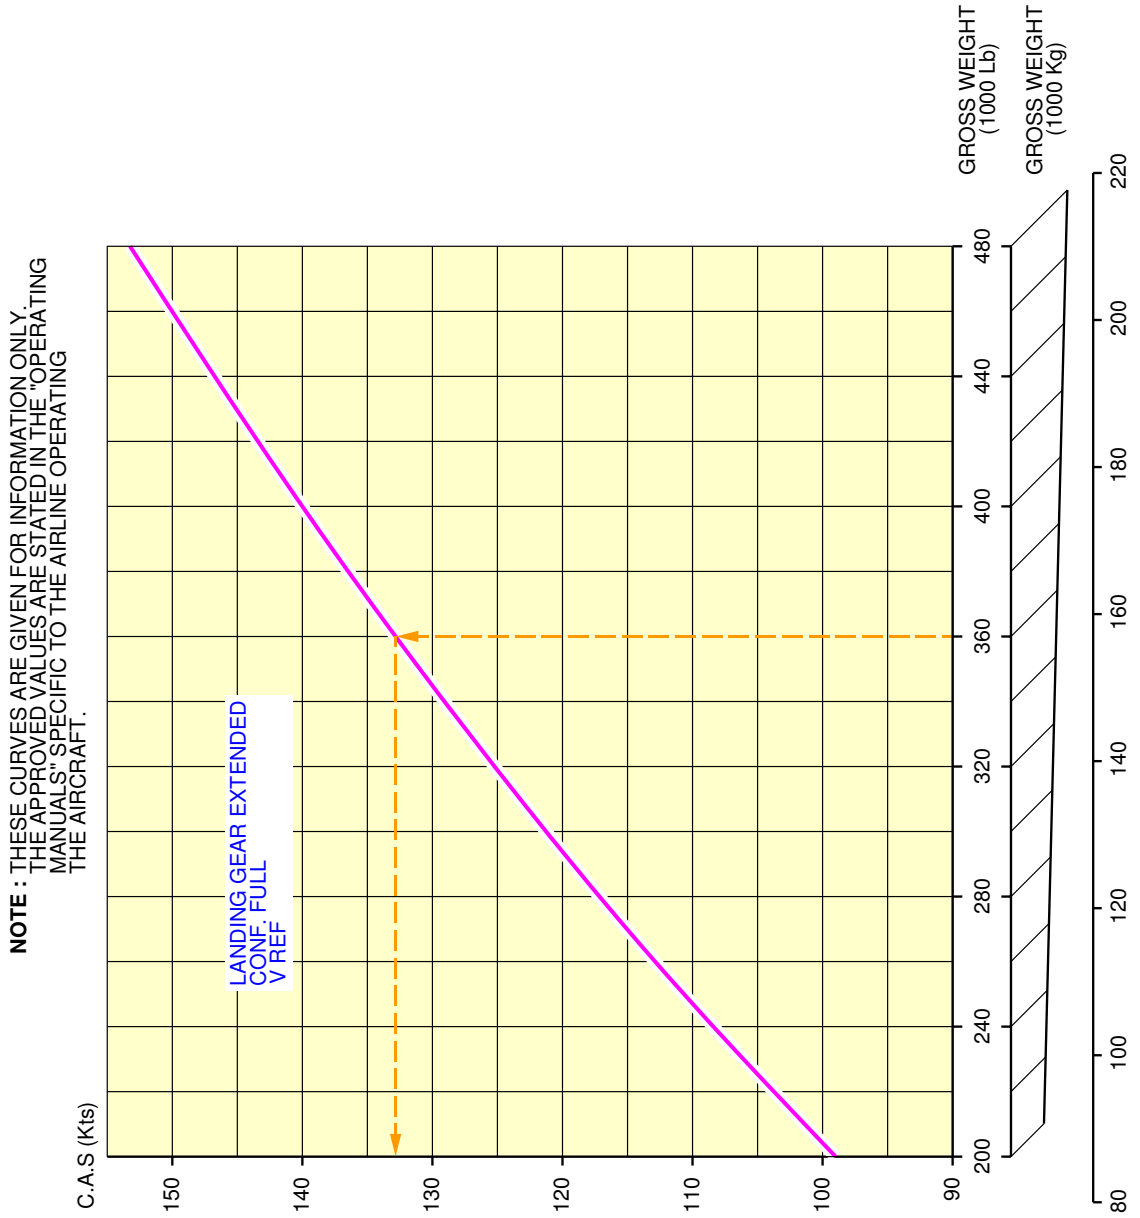

F_AC_030501_1_0020101_01_01

Final Approach Speed
RR TRENT 700 Series Engine
FIGURE-3-5-1-991-002-A01

**ON A/C A330-200 A330-300

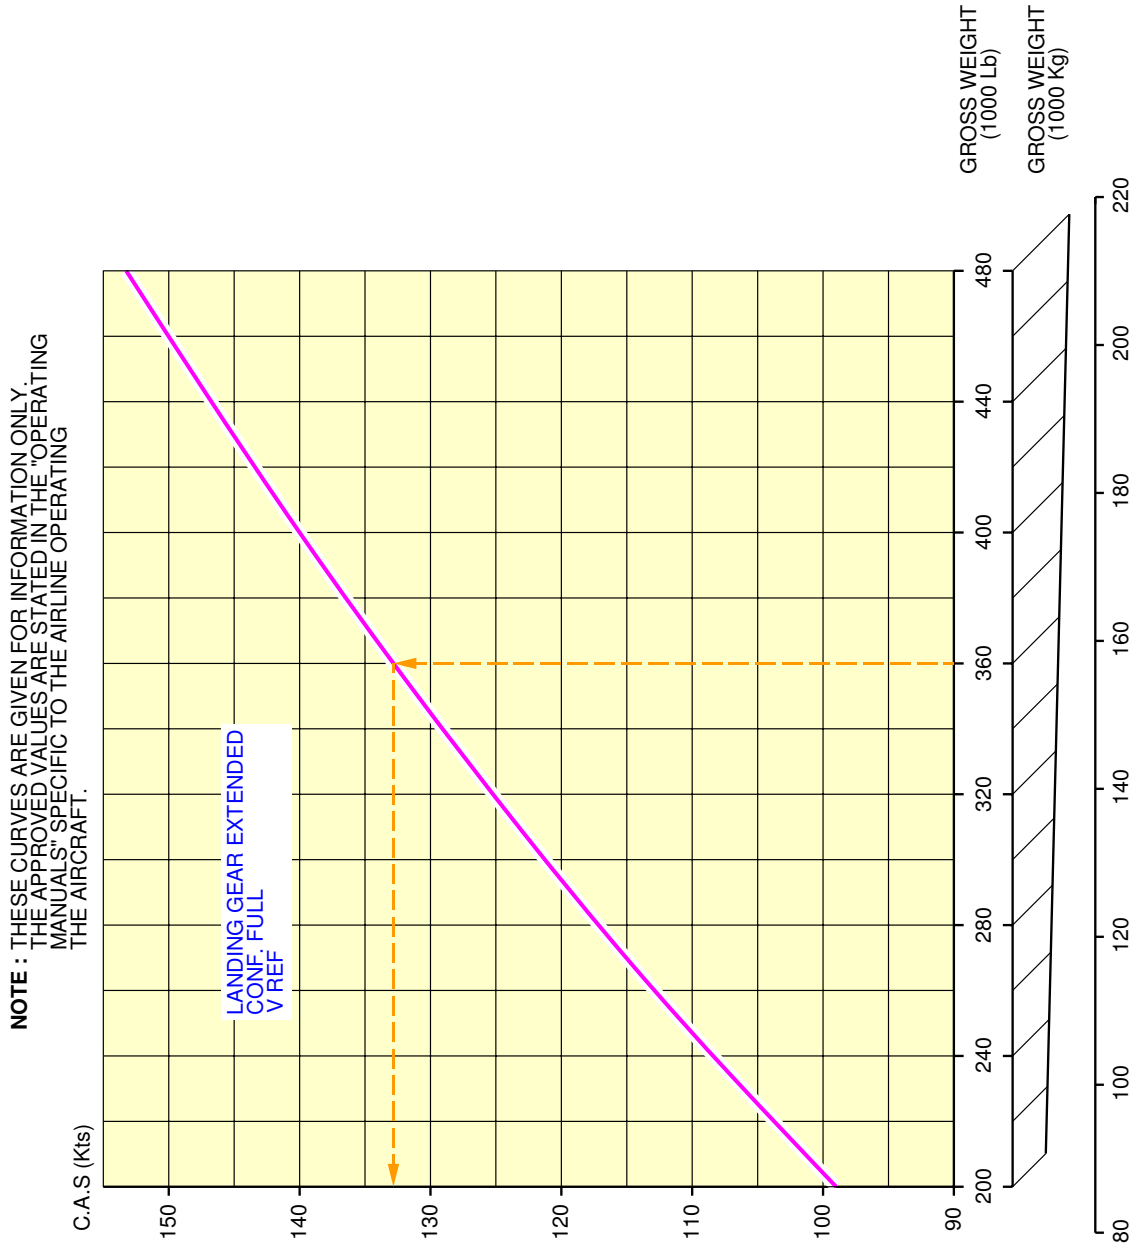

F_AC_030501_1_0030101_01_01

Final Approach Speed
 GE CF6-80E1 Series Engine
 FIGURE-3-5-1-991-003-A01



GROUND MANEUVERING

4-1-0 General Information

**ON A/C A330-200 A330-200F A330-300

General Information

1. This section provides airplane turning capability and maneuvering characteristics.

For ease of presentation, this data has been determined from the theoretical limits imposed by the geometry of the aircraft, and where noted, provides for a normal allowance for tire slippage. As such, it reflects the turning capability of the aircraft in favorable operating circumstances. This data should only be used as guidelines for the method of determination of such parameters and for the maneuvering characteristics of this aircraft type.

In the ground operating mode, varying airline practices may demand that more conservative turning procedures be adopted to avoid excessive tire wear and reduce possible maintenance problems. Airline operating techniques will vary in the level of performance, over a wide range of operating circumstances throughout the world. Variations from standard aircraft operating patterns may be necessary to satisfy physical constraints within the maneuvering area, such as adverse grades, limited area or high risk of jet blast damage. For these reasons, ground maneuvering requirements should be coordinated with the using airlines prior to layout planning.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-2-0 Turning Radii

****ON A/C A330-200 A330-200F A330-300**

Turning Radii

1. This section gives the turning radii.

**ON A/C A330-200 A330-200F A330-300

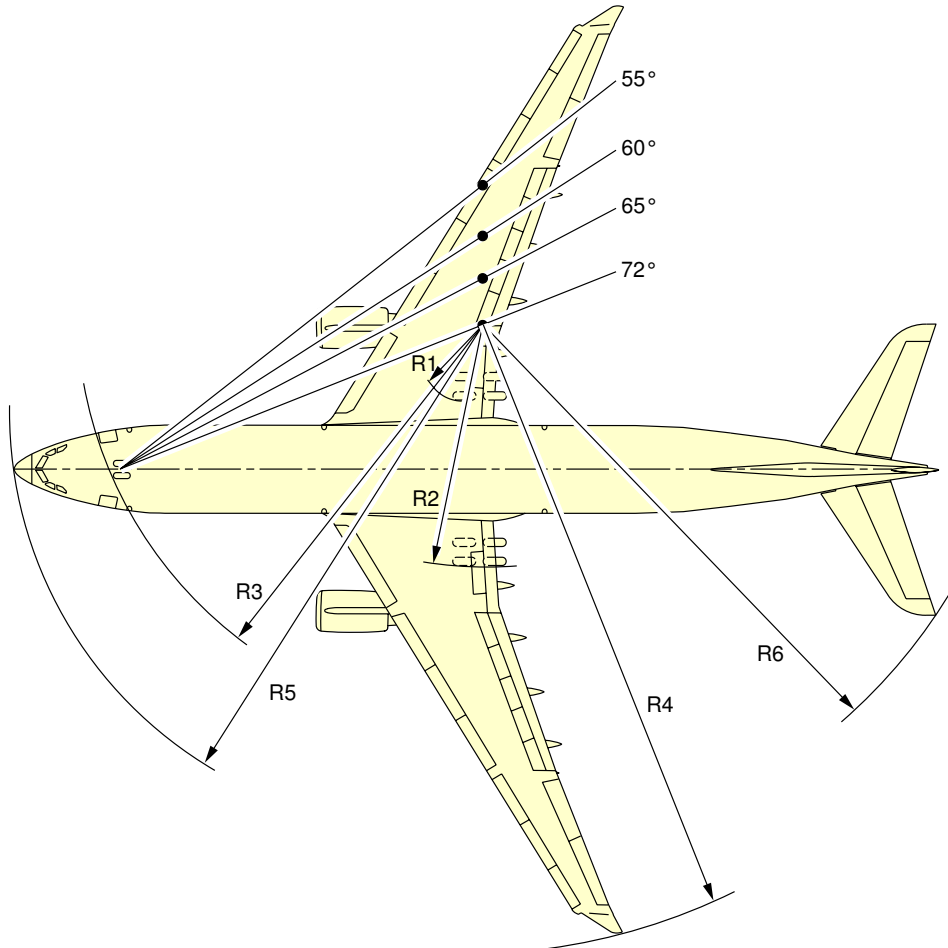

NOTE: SEE NEXT PAGES FOR DIMENSIONS

F_AC_040200_1_0040101_01_02

Turning Radii
All Models
FIGURE-4-2-0-991-004-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

**ON A/C A330-300

| A330-300 TURNING RADII | | | | | | | | | |
|------------------------|----------------|--------------------------|----|---------|---------|--------|---------|---------|---------|
| TYPE OF TURN | STEERING ANGLE | EFFECTIVE STEERING ANGLE | | R1 RMLG | R2 LMLG | R3 NLG | R4 WING | R5 NOSE | R6 TAIL |
| 2 | 20° | 19.4° | m | 68.3 | 80.8 | 79.6 | 105.1 | 81.5 | 89.7 |
| | | | ft | 224 | 265 | 261 | 345 | 267 | 294 |
| 2 | 25° | 24.2° | m | 52.1 | 64.7 | 64.6 | 88.9 | 67.0 | 74.7 |
| | | | ft | 171 | 212 | 212 | 292 | 220 | 245 |
| 2 | 30° | 29.0° | m | 41.0 | 53.6 | 54.7 | 78.0 | 57.6 | 64.8 |
| | | | ft | 135 | 176 | 179 | 256 | 189 | 213 |
| 2 | 35° | 33.8° | m | 32.9 | 45.5 | 47.7 | 70.0 | 51.0 | 58.0 |
| | | | ft | 108 | 149 | 156 | 230 | 167 | 190 |
| 2 | 40° | 38.6° | m | 26.7 | 39.3 | 42.7 | 63.8 | 46.6 | 52.7 |
| | | | ft | 88 | 129 | 140 | 209 | 153 | 173 |
| 2 | 45° | 43.2° | m | 21.7 | 34.3 | 39.1 | 58.8 | 43.3 | 48.5 |
| | | | ft | 71 | 113 | 128 | 193 | 142 | 159 |
| 2 | 50° | 47.8° | m | 17.6 | 30.2 | 36.2 | 54.7 | 40.8 | 45.5 |
| | | | ft | 58 | 99 | 119 | 179 | 134 | 149 |
| 2 | 55° | 52.2° | m | 14.2 | 26.8 | 34.1 | 51.4 | 38.9 | 42.9 |
| | | | ft | 47 | 88 | 112 | 169 | 128 | 141 |
| 2 | 60° | 56.3° | m | 11.3 | 23.9 | 32.4 | 48.5 | 37.5 | 40.9 |
| | | | ft | 37 | 78 | 106 | 159 | 123 | 134 |
| 2 | 65° | 60.1° | m | 8.9 | 21.5 | 31.2 | 46.2 | 36.5 | 39.3 |
| | | | ft | 29 | 71 | 102 | 152 | 120 | 129 |
| 2 | 72° (MAX) | 63.8° | m | 6.7 | 19.3 | 30.0 | 44.1 | 35.5 | 38.1 |
| | | | ft | 22 | 63 | 98 | 145 | 116 | 125 |

| | | | | | | | | | |
|---|-----------|-------|----|------|------|------|------|------|------|
| 1 | 50° | 48.2° | m | 17.3 | 29.9 | 36.1 | 54.5 | 40.7 | 45.1 |
| | | | ft | 57 | 98 | 118 | 179 | 134 | 148 |
| 1 | 55° | 52.9° | m | 13.6 | 26.2 | 33.7 | 50.8 | 38.6 | 42.6 |
| | | | ft | 45 | 86 | 111 | 167 | 127 | 140 |
| 1 | 60° | 57.6° | m | 10.4 | 23.0 | 31.8 | 47.7 | 36.9 | 40.5 |
| | | | ft | 34 | 75 | 104 | 156 | 121 | 133 |
| 1 | 65° | 62.1° | m | 7.6 | 20.1 | 30.5 | 44.9 | 35.9 | 38.5 |
| | | | ft | 25 | 66 | 100 | 147 | 118 | 126 |
| 1 | 72° (MAX) | 67.8° | m | 4.5 | 17.1 | 29.0 | 41.9 | 34.7 | 36.9 |
| | | | ft | 15 | 56 | 95 | 137 | 114 | 121 |

TURNING RADII TABLE

NOTE: ABOVE 50°, AIRLINES MAY USE TYPE 1 OR TYPE 2 TURNS DEPENDING ON THE SITUATION
 TYPE 1 TURNS USE:
 ASYMMETRIC THRUST DURING THE WHOLE TURN; AND DIFFERENTIAL BRAKING TO INITIATE THE TURN ONLY
 TYPE 2 TURNS USE:
 SYMMETRIC THRUST DURING THE WHOLE TURN; AND NO DIFFERENTIAL BRAKING AT ALL
 IT IS POSSIBLE TO GET LOWER VALUES THAN THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL BRAKING DURING THE WHOLE TURN.

F_AC_040200_1_0020101_01_02

Turning Radii
 Steady State Turning Radii
 FIGURE-4-2-0-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

**ON A/C A330-200 A330-200F

| A330-200/200F TURNING RADII | | | | | | | | | |
|-----------------------------|----------------|--------------------------|----|---------|---------|--------|---------|---------|---------|
| TYPE OF TURN | STEERING ANGLE | EFFECTIVE STEERING ANGLE | | R1 RMLG | R2 LMLG | R3 NLG | R4 WING | R5 NOSE | R6 TAIL |
| 2 | 20° | 19.2° | m | 60.5 | 72.7 | 70.8 | 98.2 | 72.7 | 81.3 |
| | | | ft | 198 | 239 | 232 | 322 | 239 | 267 |
| 2 | 25° | 23.9° | m | 46.0 | 58.3 | 57.5 | 84.1 | 59.9 | 68.1 |
| | | | ft | 151 | 191 | 189 | 276 | 197 | 223 |
| 2 | 30° | 28.6° | m | 36.2 | 48.5 | 48.7 | 74.6 | 51.6 | 59.3 |
| | | | ft | 119 | 159 | 160 | 245 | 169 | 195 |
| 2 | 35° | 33.3° | m | 29.1 | 41.4 | 42.6 | 67.6 | 46.0 | 53.2 |
| | | | ft | 95 | 136 | 140 | 222 | 151 | 175 |
| 2 | 40° | 38.0° | m | 23.6 | 35.9 | 38.4 | 62.2 | 42.3 | 48.3 |
| | | | ft | 77 | 118 | 126 | 204 | 139 | 158 |
| 2 | 45° | 42.5° | m | 19.1 | 31.5 | 34.7 | 58.2 | 38.9 | 45.2 |
| | | | ft | 63 | 103 | 114 | 191 | 128 | 148 |
| 2 | 50° | 46.9° | m | 15.6 | 27.9 | 32.2 | 54.7 | 36.7 | 42.2 |
| | | | ft | 51 | 92 | 106 | 179 | 120 | 138 |
| 2 | 55° | 51.2° | m | 12.6 | 24.9 | 30.3 | 51.9 | 35.1 | 40.2 |
| | | | ft | 41 | 82 | 99 | 170 | 115 | 132 |
| 2 | 60° | 5.1° | m | 10.1 | 22.5 | 28.9 | 49.6 | 33.9 | 38.5 |
| | | | ft | 33 | 74 | 95 | 163 | 111 | 126 |
| 2 | 65° | 59.6° | m | 8.2 | 20.5 | 27.8 | 47.7 | 33.0 | 37.2 |
| | | | ft | 27 | 67 | 91 | 156 | 108 | 122 |
| 2 | 72° (MAX) | 62.0° | m | 6.4 | 18.7 | 27.1 | 46.0 | 32.5 | 35.9 |
| | | | ft | 21 | 61 | 89 | 151 | 107 | 118 |

| | | | | | | | | | |
|---|-----------|-------|----|------|------|------|------|------|------|
| 1 | 50° | 48.4° | m | 14.6 | 26.9 | 31.9 | 53.6 | 36.5 | 41.3 |
| | | | ft | 48 | 88 | 105 | 176 | 120 | 135 |
| 1 | 55° | 52.2° | m | 11.8 | 24.1 | 30.1 | 51.0 | 35.0 | 39.4 |
| | | | ft | 39 | 79 | 99 | 167 | 115 | 129 |
| 1 | 60° | 57.7° | m | 8.8 | 21.1 | 28.6 | 47.9 | 33.7 | 37.0 |
| | | | ft | 29 | 69 | 94 | 157 | 111 | 121 |
| 1 | 65° | 62.2° | m | 6.5 | 18.6 | 27.7 | 45.5 | 33.2 | 35.2 |
| | | | ft | 21 | 61 | 91 | 149 | 109 | 115 |
| 1 | 72° (MAX) | 68.1° | m | 3.6 | 15.7 | 26.0 | 43.3 | 32.0 | 34.2 |
| | | | ft | 12 | 52 | 85 | 142 | 105 | 112 |

TURNING RADII TABLE

NOTE: ABOVE 50°, AIRLINES MAY USE TYPE 1 OR TYPE 2 TURNS DEPENDING ON THE SITUATION
 TYPE 1 TURNS USE:
 ASYMMETRIC THRUST DURING THE WHOLE TURN; AND DIFFERENTIAL BRAKING TO INITIATE THE TURN ONLY
 TYPE 2 TURNS USE:
 SYMMETRIC THRUST DURING THE WHOLE TURN; AND NO DIFFERENTIAL BRAKING AT ALL
 IT IS POSSIBLE TO GET LOWER VALUES THAN THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL BRAKING DURING THE WHOLE TURN.

F_AC_040200_1_0030101_01_02

Turning Radii
 Steady State Turning Radii
 FIGURE-4-2-0-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-3-0 Minimum Turning Radii

****ON A/C A330-200 A330-200F A330-300**

Minimum Turning Radii

1. This section gives the minimum turning radii.

****ON A/C A330-300**

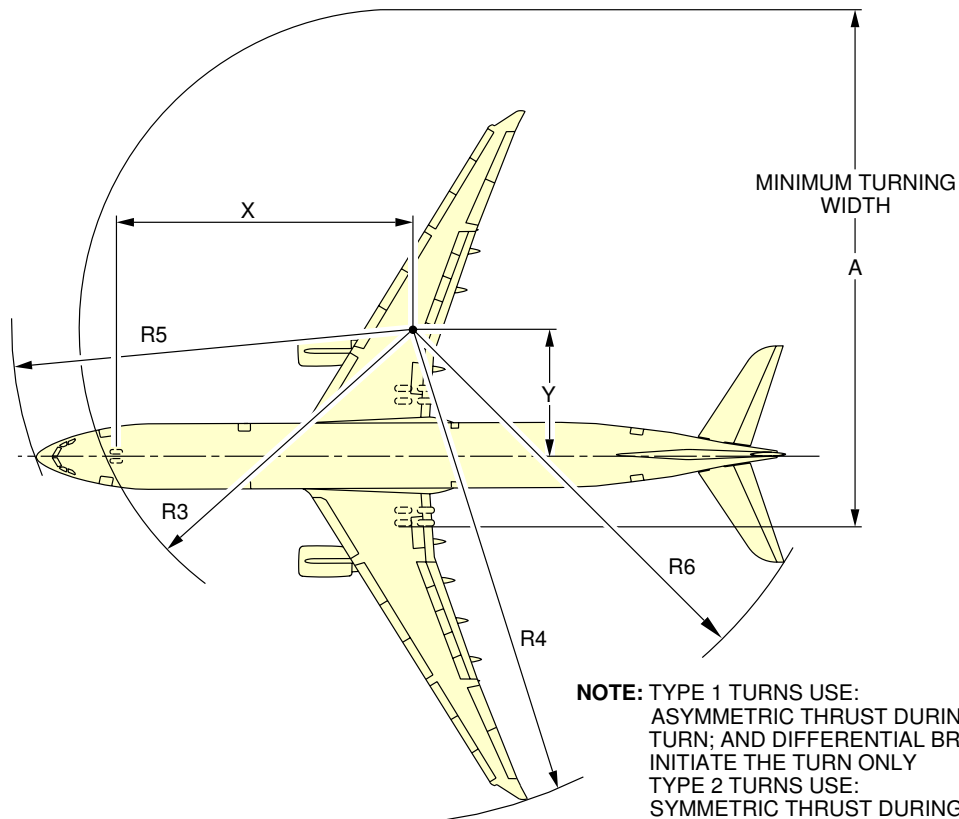

NOTE: TYPE 1 TURNS USE:
ASYMMETRIC THRUST DURING THE WHOLE TURN; AND DIFFERENTIAL BRAKING TO INITIATE THE TURN ONLY
TYPE 2 TURNS USE:
SYMMETRIC THRUST DURING THE WHOLE TURN; AND NO DIFFERENTIAL BRAKING AT ALL


| A330-300 MINIMUM TURNING RADII | | | | | | | | | | | |
|--------------------------------|----------------|--------------------------|----|------|------|------|--------|---------|---------|---------|--|
| TYPE OF TURN | STEERING ANGLE | EFFECTIVE STEERING ANGLE | | X | Y | A | R3 NLG | R4 WING | R5 NOSE | R6 TAIL | |
| 1 | 72° (MAX) | 67.8° | m | 26.4 | 10.7 | 46.2 | 29.0 | 41.9 | 34.7 | 36.9 | |
| | | | ft | 87 | 35 | 152 | 95 | 137 | 114 | 121 | |
| 2 | 72° (MAX) | 63.8° | m | 26.5 | 13.3 | 49.4 | 30.0 | 44.1 | 35.5 | 38.1 | |
| | | | ft | 87 | 44 | 162 | 98 | 145 | 116 | 125 | |

NOTE: IT IS POSSIBLE TO GET LOWER VALUES THAN THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL BRAKING DURING THE WHOLE TURN.

F_AC_040300_1_0010101_01_04

Minimum Turning Radii
FIGURE-4-3-0-991-001-A01

****ON A/C A330-200 A330-200F**

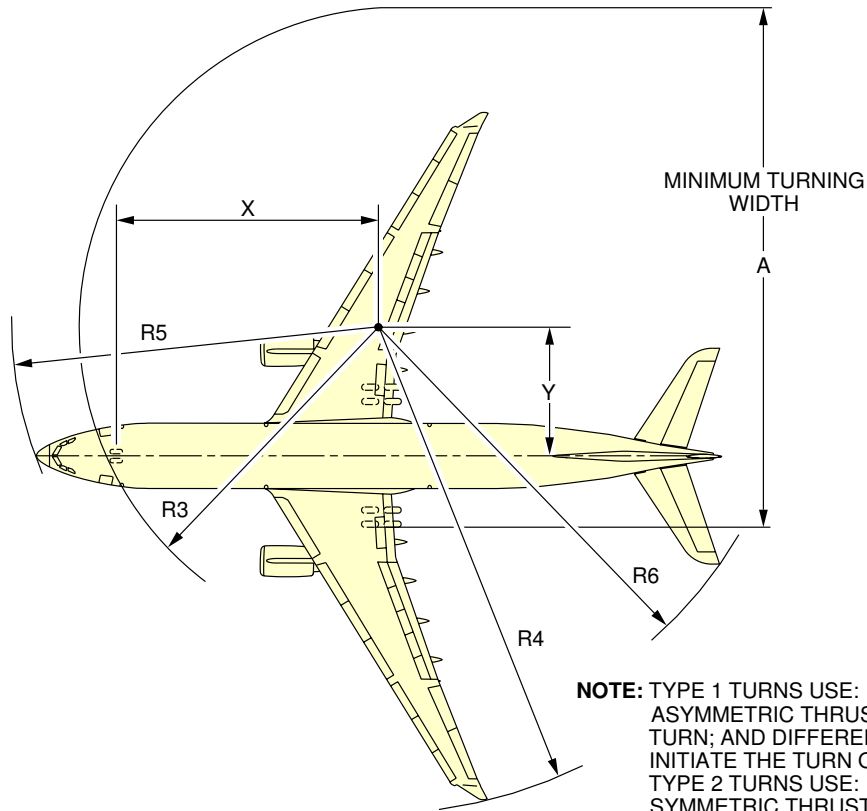

NOTE: TYPE 1 TURNS USE:
ASYMMETRIC THRUST DURING THE WHOLE TURN; AND DIFFERENTIAL BRAKING TO INITIATE THE TURN ONLY
TYPE 2 TURNS USE:
SYMMETRIC THRUST DURING THE WHOLE TURN; AND NO DIFFERENTIAL BRAKING AT ALL

| A330-200/200F MINIMUM TURNING RADII | | | | | | | | | | |
|-------------------------------------|----------------|--------------------------|----|------|------|------|--------|---------|---------|---------|
| TYPE OF TURN | STEERING ANGLE | EFFECTIVE STEERING ANGLE | | X | Y | A | R3 NLG | R4 WING | R5 NOSE | R6 TAIL |
| 1 | 72° (MAX) | 68.1° | m | 24.2 | 9.3 | 41.5 | 26.0 | 41.0 | 32.0 | 34.2 |
| | | | ft | 79 | 31 | 136 | 85 | 135 | 105 | 112 |
| 2 | 72° (MAX) | 62.0° | m | 23.4 | 12.3 | 45.6 | 27.1 | 45.1 | 32.5 | 35.9 |
| | | | ft | 77 | 40 | 150 | 89 | 148 | 107 | 118 |

NOTE: IT IS POSSIBLE TO GET LOWER VALUES THAN THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL BRAKING DURING THE WHOLE TURN.

F_AC_040300_1_0070101_01_00

Minimum Turning Radii
FIGURE-4-3-0-991-007-A01




4-4-0 Visibility from Cockpit in Static Position

****ON A/C A330-200 A330-200F A330-300**

Visibility from Cockpit in Static Position.

1. This section gives the visibility from cockpit in static position.


**ON A/C A330-200 A330-300

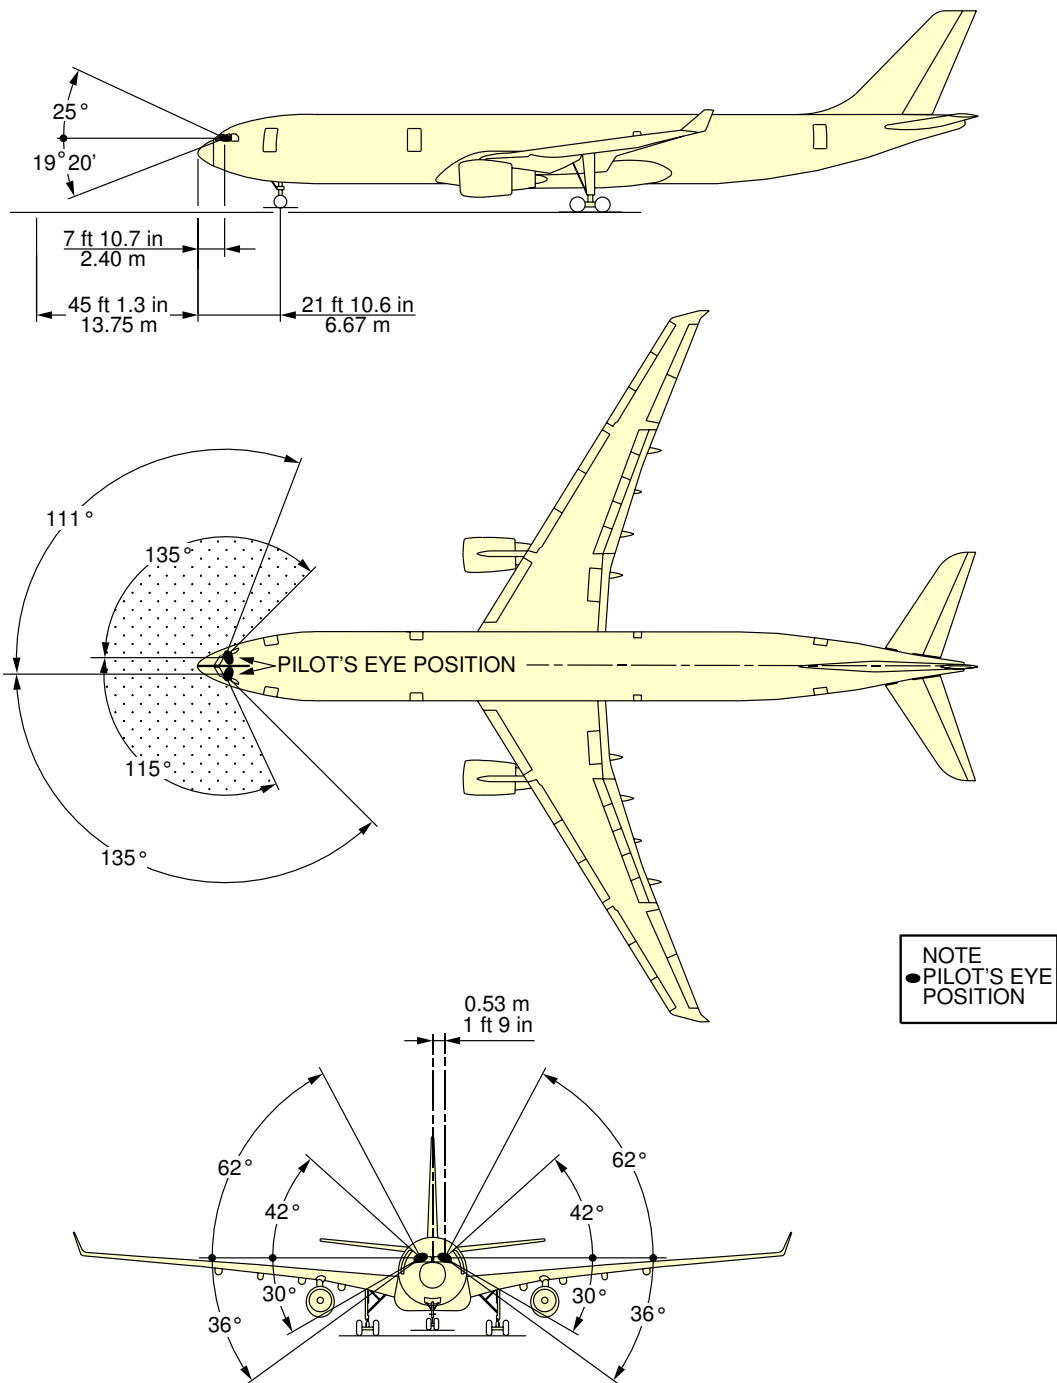

F_AC_040400_1_0010101_01_00

Visibility from Cockpit in Static Position
FIGURE-4-4-0-991-001-A01

**ON A/C A330-200F

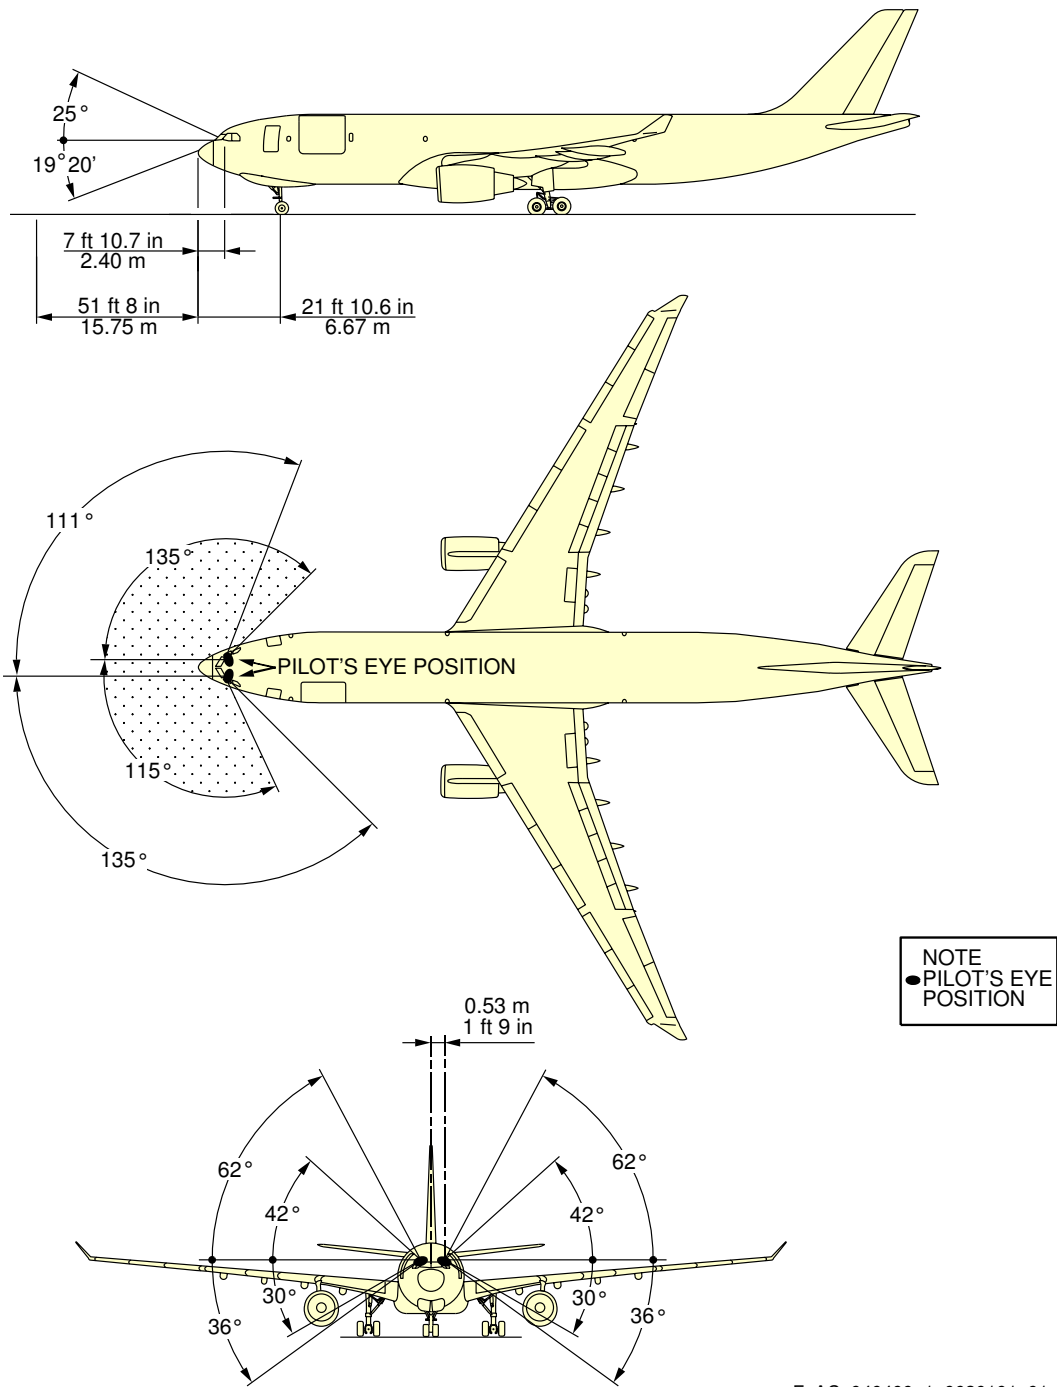

F_AC_040400_1_0030101_01_00

Visibility from Cockpit in Static Position
FIGURE-4-4-0-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

4-5-0 Runway and Taxiway Turn Paths

**ON A/C A330-200 A330-200F A330-300

Runway and Taxiway Turn Paths

1. Runway and Taxiway Turn Paths.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-1 135° Turn - Runway to Taxiway

**ON A/C A330-200 A330-200F A330-300

135° Turn - Runway to Taxiway

1. This section gives the 135° turn - runway to taxiway.


**ON A/C A330-300

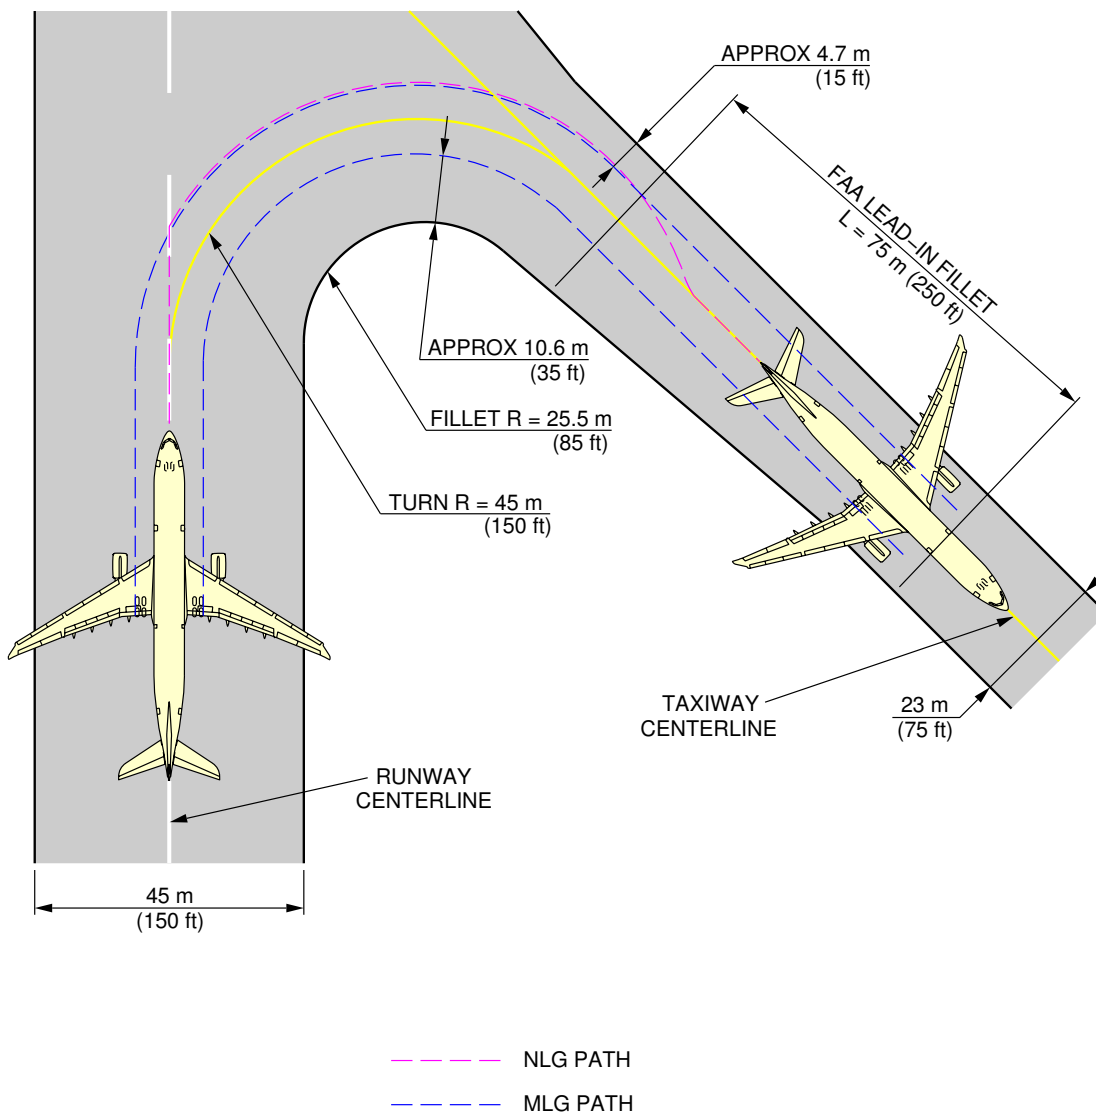

F_AC_040501_1_0010101_01_01

135° Turn - Runway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-1-991-001-A01


**ON A/C A330-300

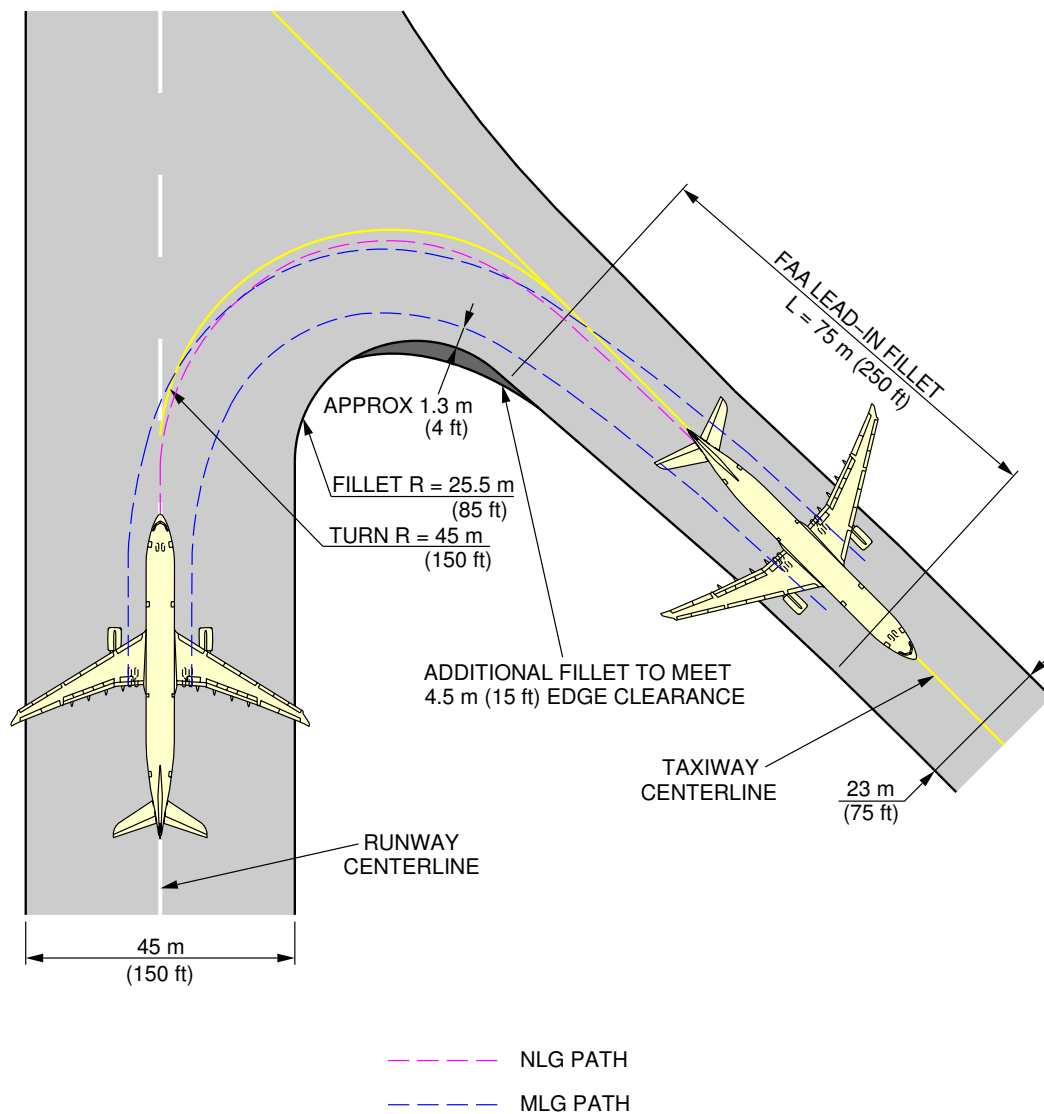

F_AC_040501_1_0060101_01_00

135° Turn - Runway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-1-991-006-A01


**ON A/C A330-200 A330-200F

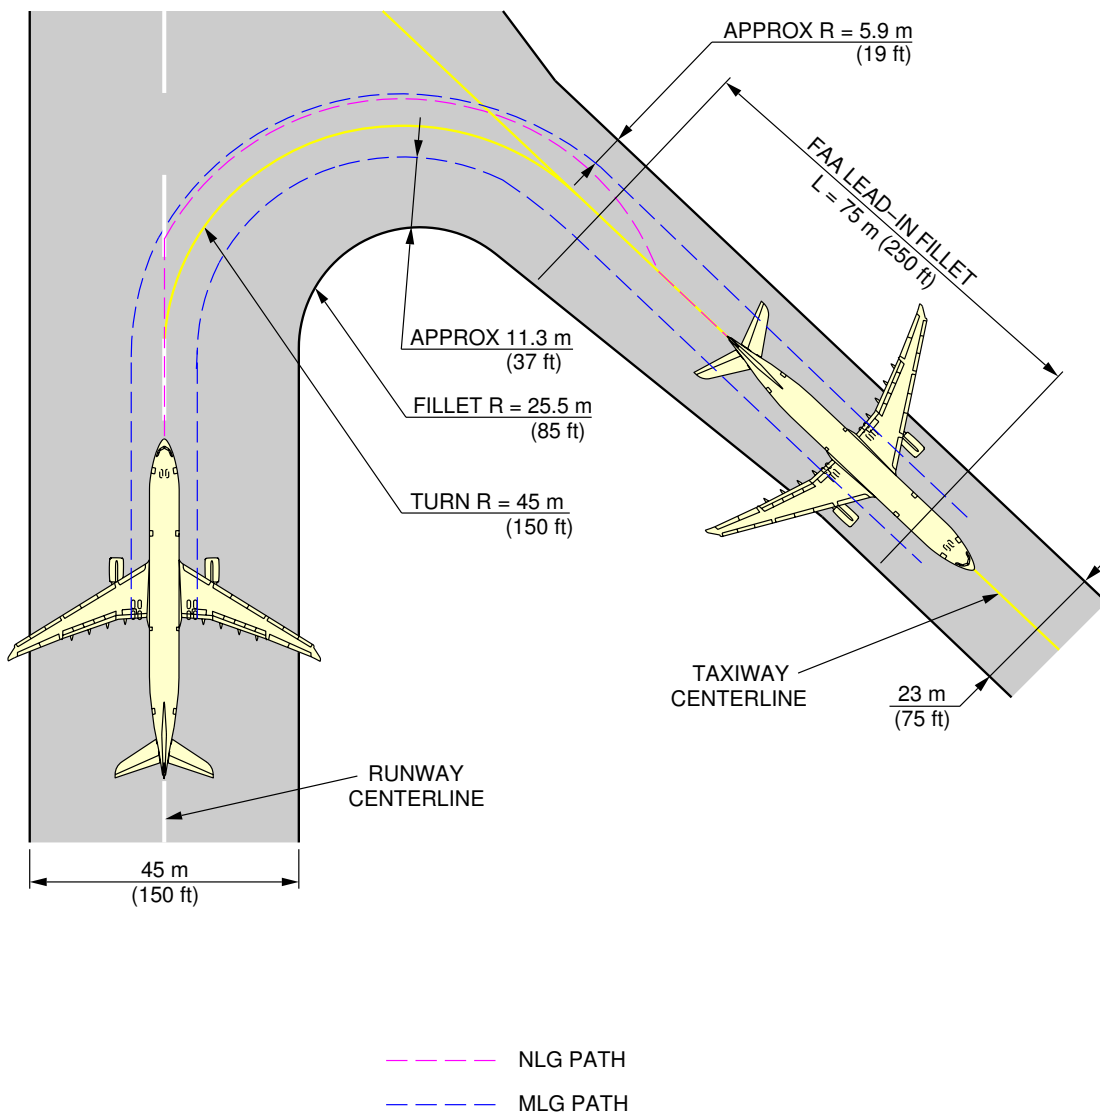

F_AC_040501_1_0020101_01_01

135° Turn - Runway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-1-991-002-A01

**ON A/C A330-200 A330-200F

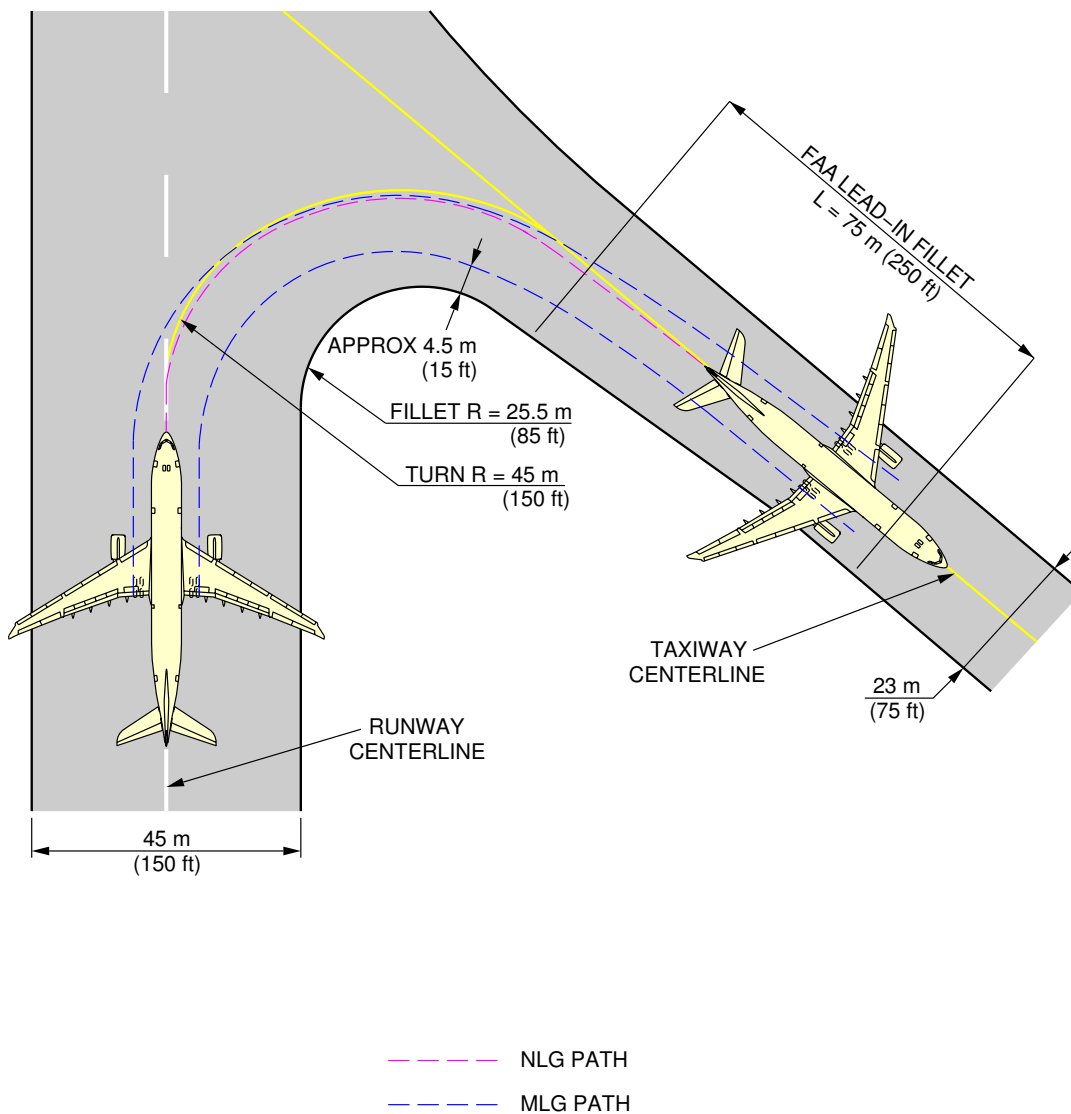

F_AC_040501_1_0070101_01_00

135° Turn - Runway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-1-991-007-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-2 90° Turn - Runway to Taxiway

**ON A/C A330-200 A330-200F A330-300

90° Turn - Runway to Taxiway

1. This section gives the 90° turn - runway to taxiway.


**ON A/C A330-300

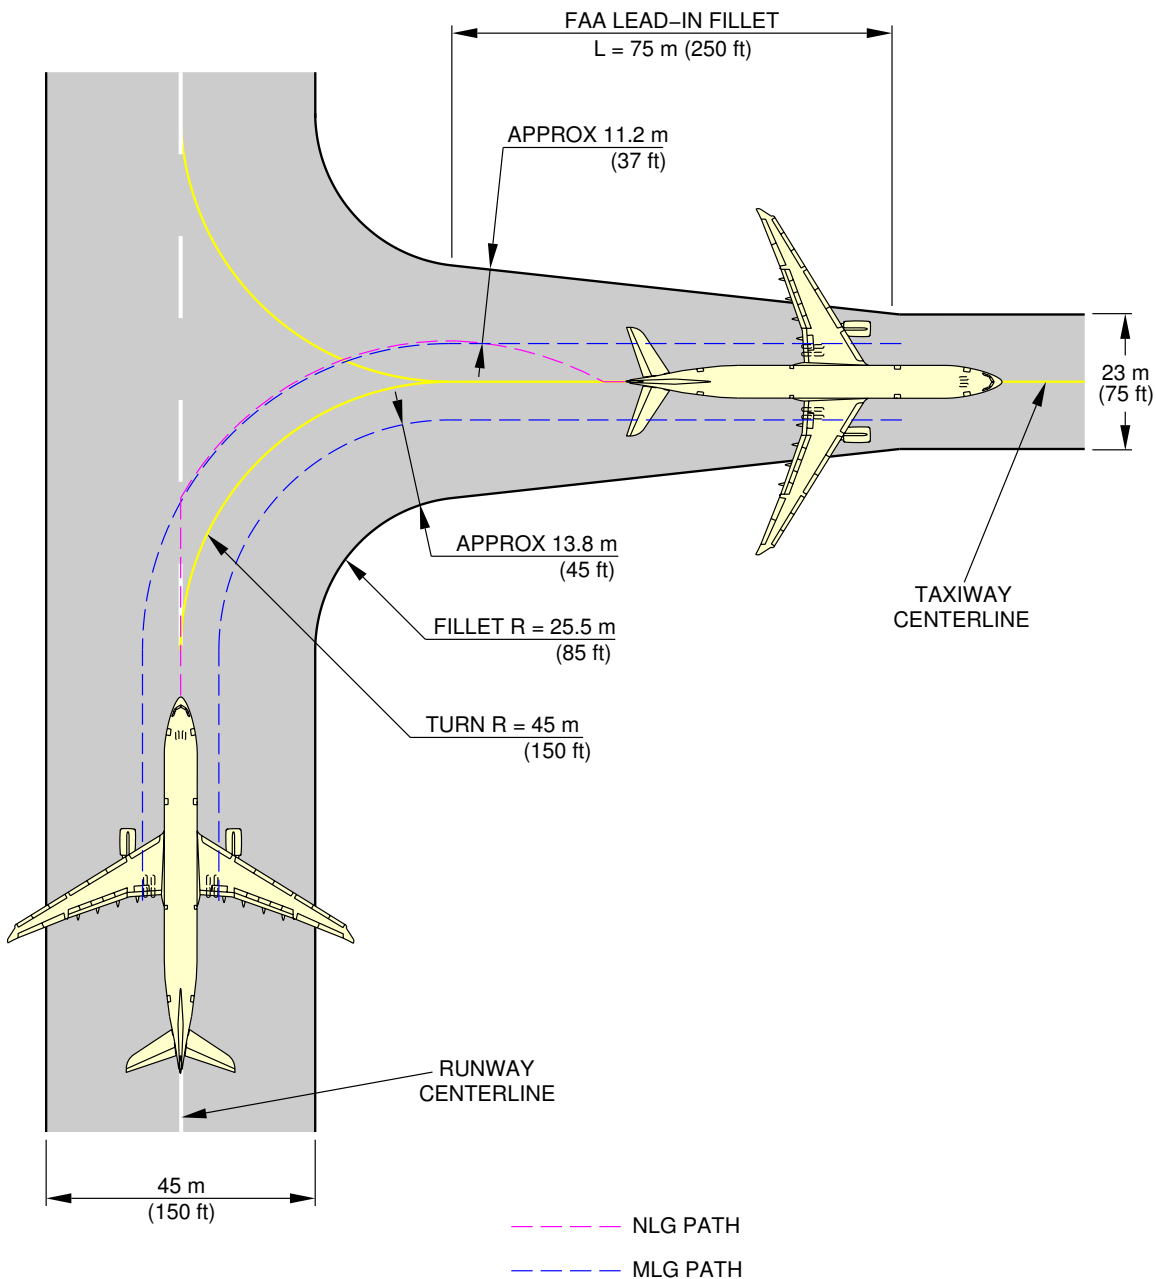

F_AC_040502_1_0010101_01_01

90° Turn - Runway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-2-991-001-A01


**ON A/C A330-300

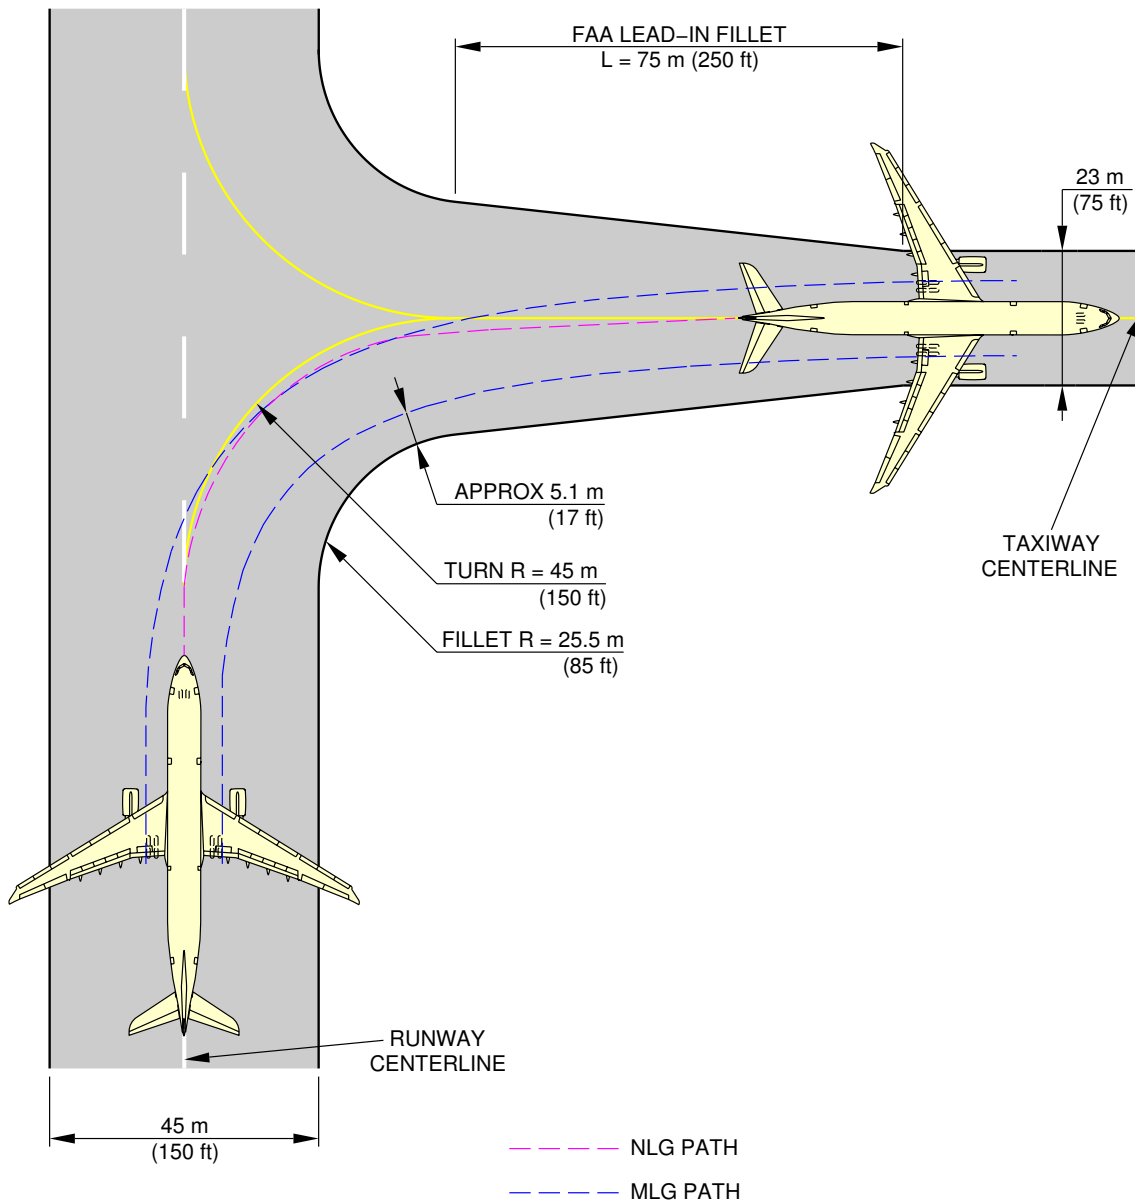

F_AC_040502_1_0080101_01_00

90° Turn - Runway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-2-991-008-A01


**ON A/C A330-200 A330-200F

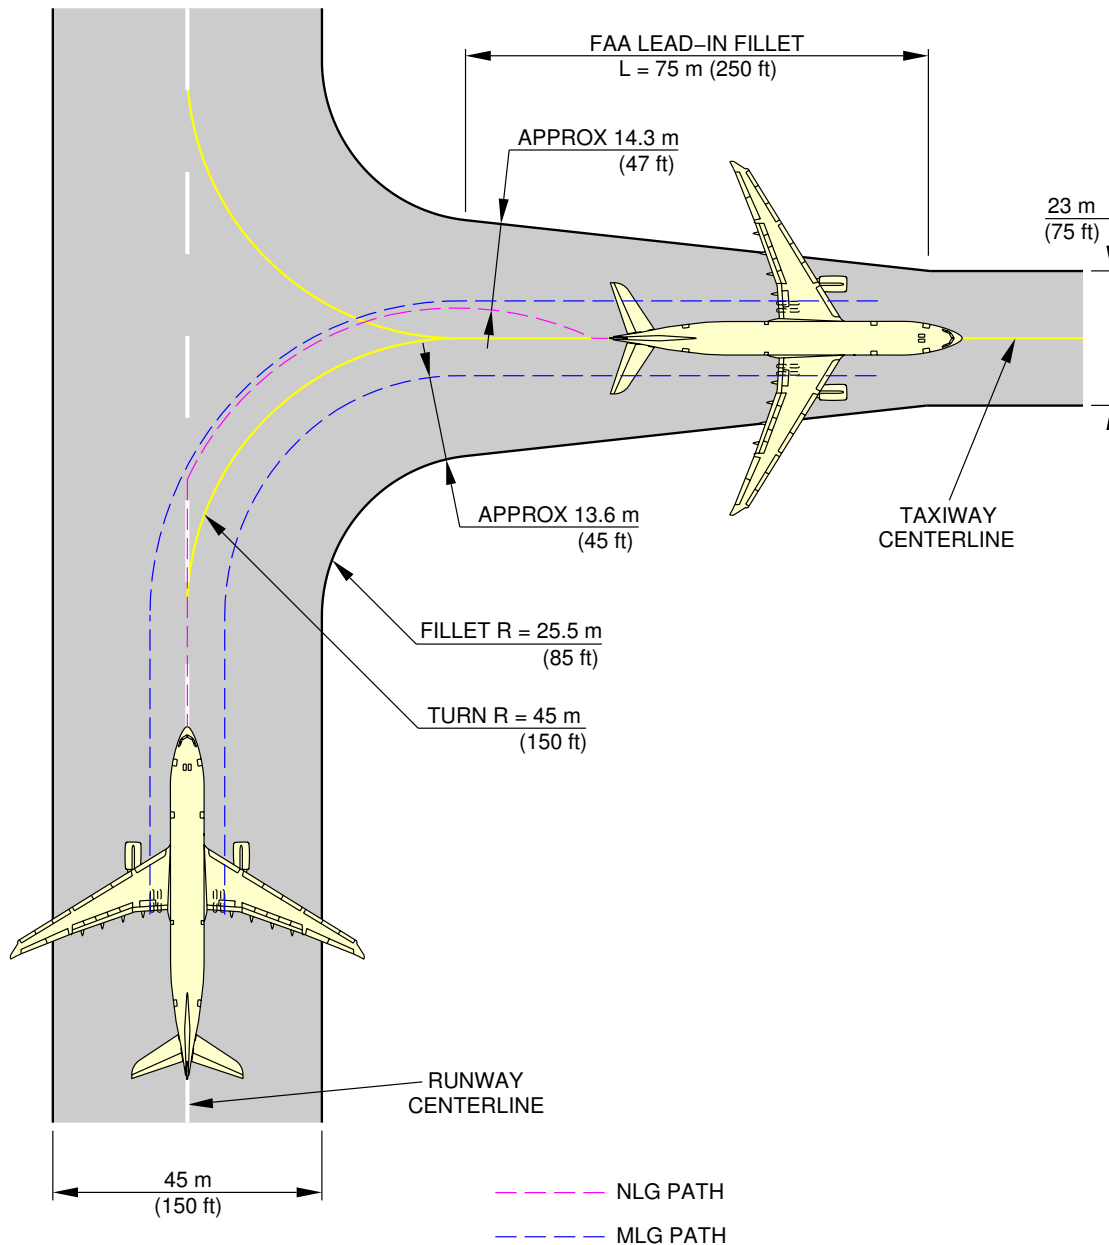

F_AC_040502_1_0020101_01_01

90° Turn - Runway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-2-991-002-A01

**ON A/C A330-200 A330-200F

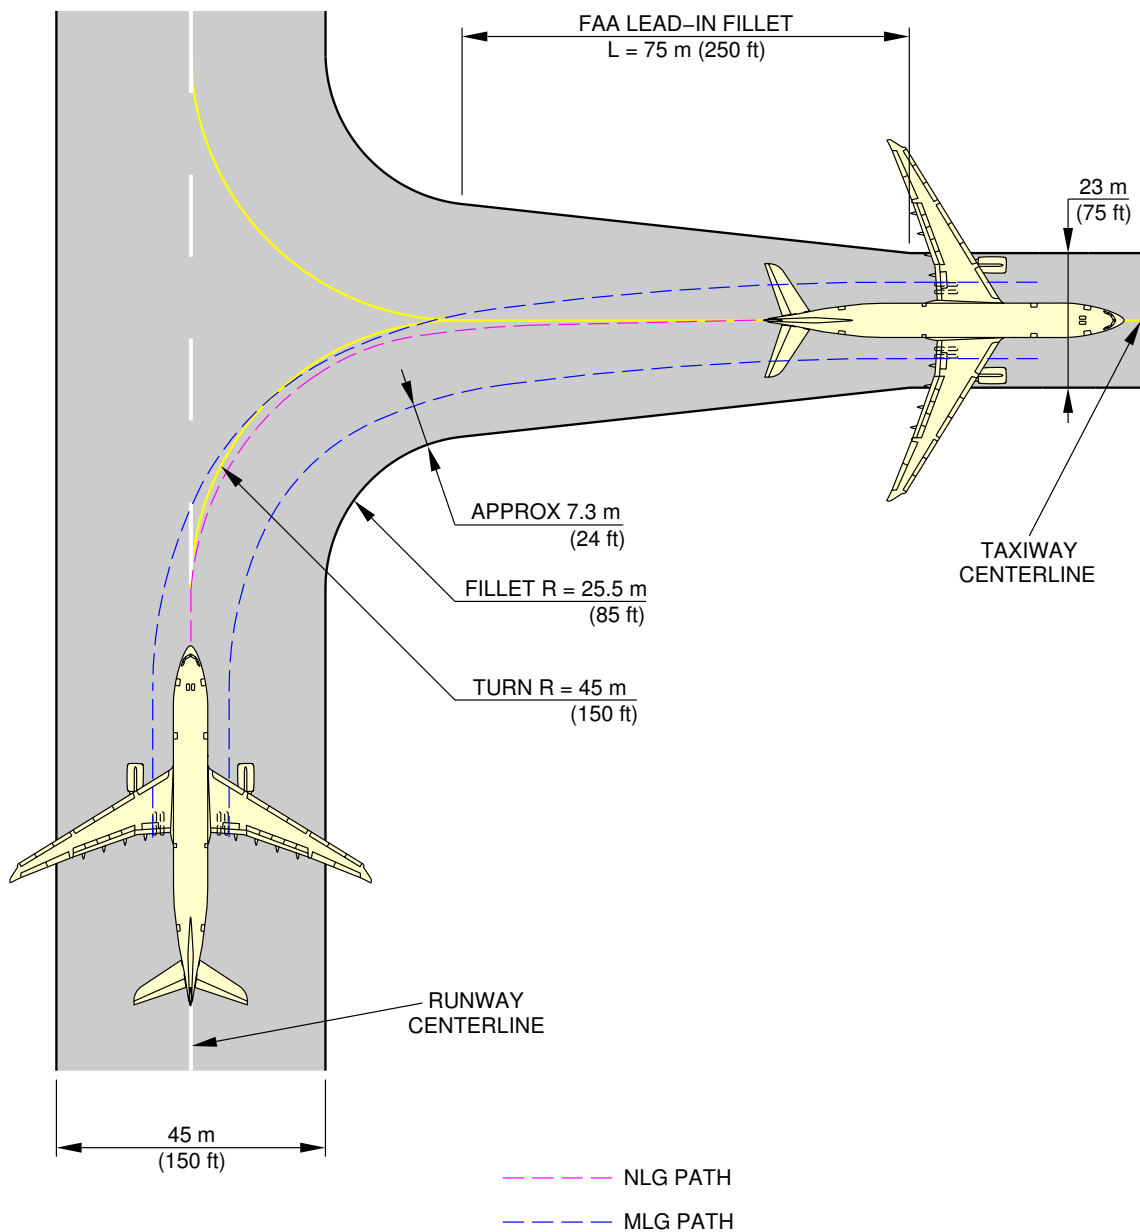

F_AC_040502_1_0090101_01_00

90° Turn - Runway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-2-991-009-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-3 180° Turn on a Runway

**ON A/C A330-200 A330-200F A330-300

180° Turn on a Runway

1. This section gives the 180° turn on a runway.

****ON A/C A330-300**

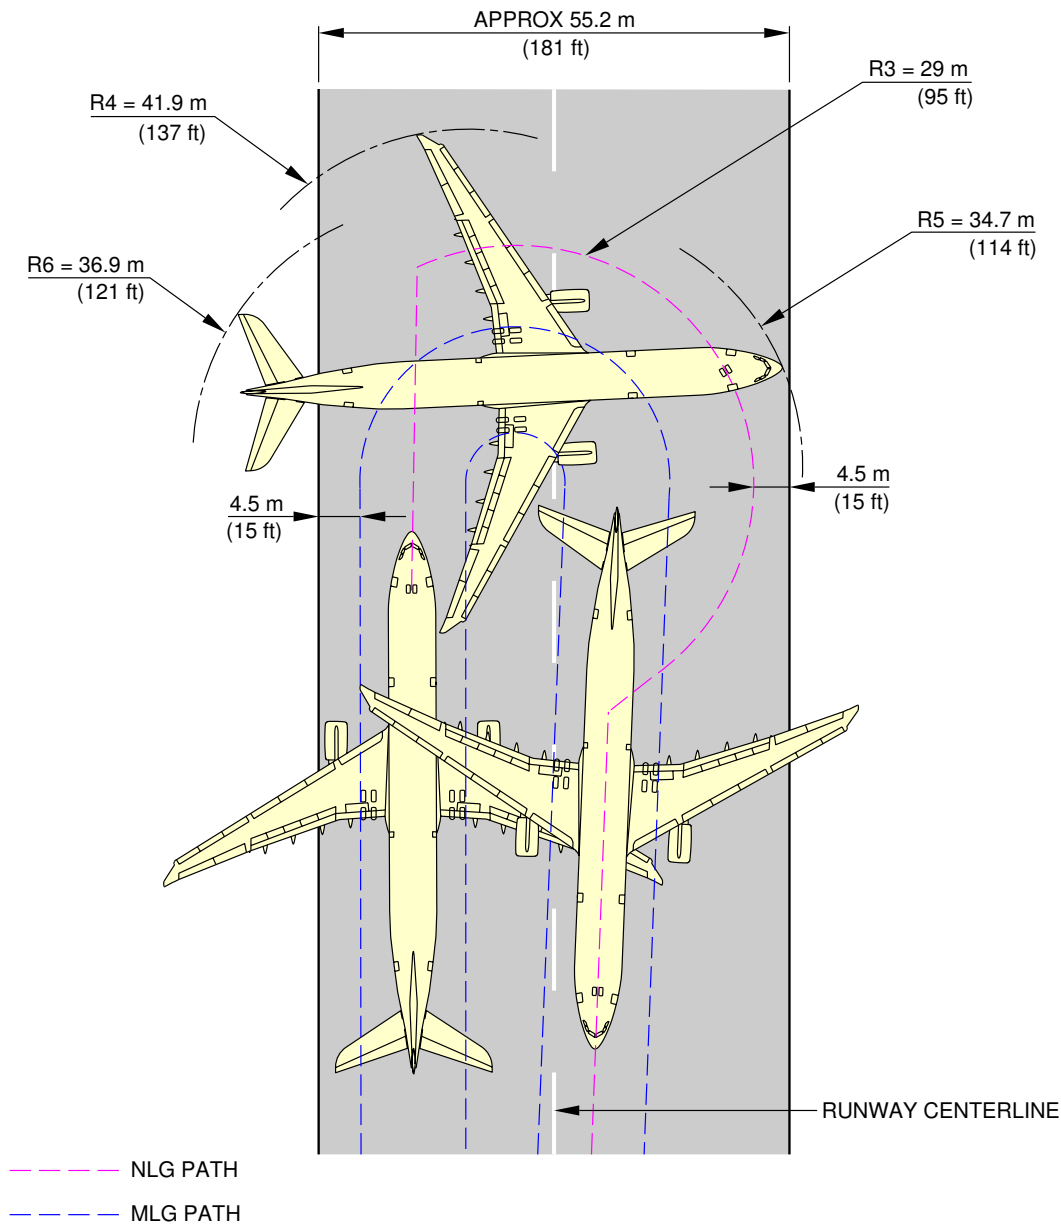


NOTE: TYPE 1 VALUES.
IT IS POSSIBLE TO GET LOWER VALUES THAN
THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL
BRAKING DURING THE WHOLE TURN.

F_AC_040503_1_0130101_01_00

180° Turn on a Runway
180° Turn on a Runway
FIGURE-4-5-3-991-013-A01

**ON A/C A330-200 A330-200F

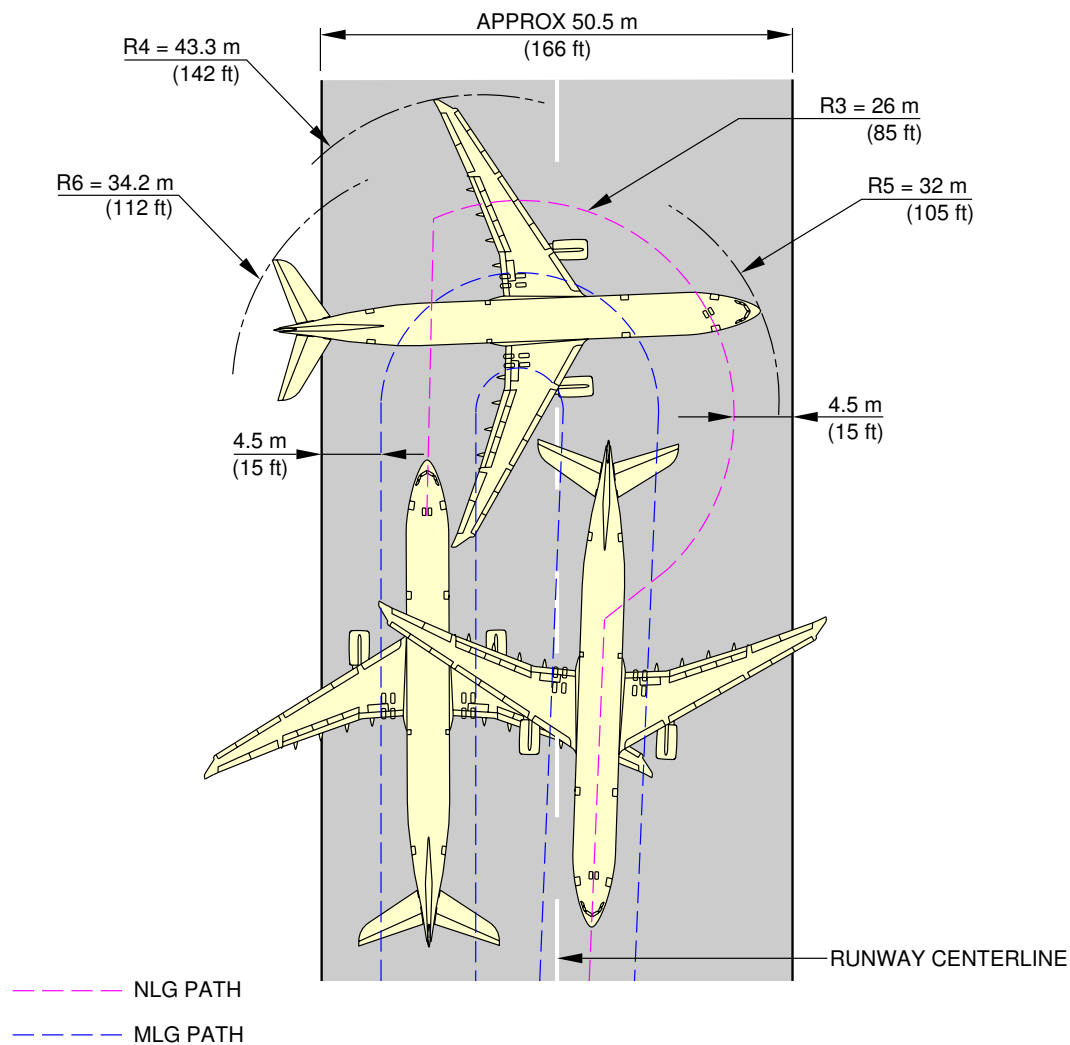

NOTE: TYPE 1 VALUES.
IT IS POSSIBLE TO GET LOWER VALUES THAN
THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL
BRAKING DURING THE WHOLE TURN.

F_AC_040503_1_0140101_01_00

180° Turn on a Runway
180° Turn on a Runway
FIGURE-4-5-3-991-014-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-4 135° Turn - Taxiway to Taxiway

**ON A/C A330-200 A330-200F A330-300

135° Turn - Taxiway to Taxiway

1. This section gives the 135° turn - taxiway to taxiway.


**ON A/C A330-300

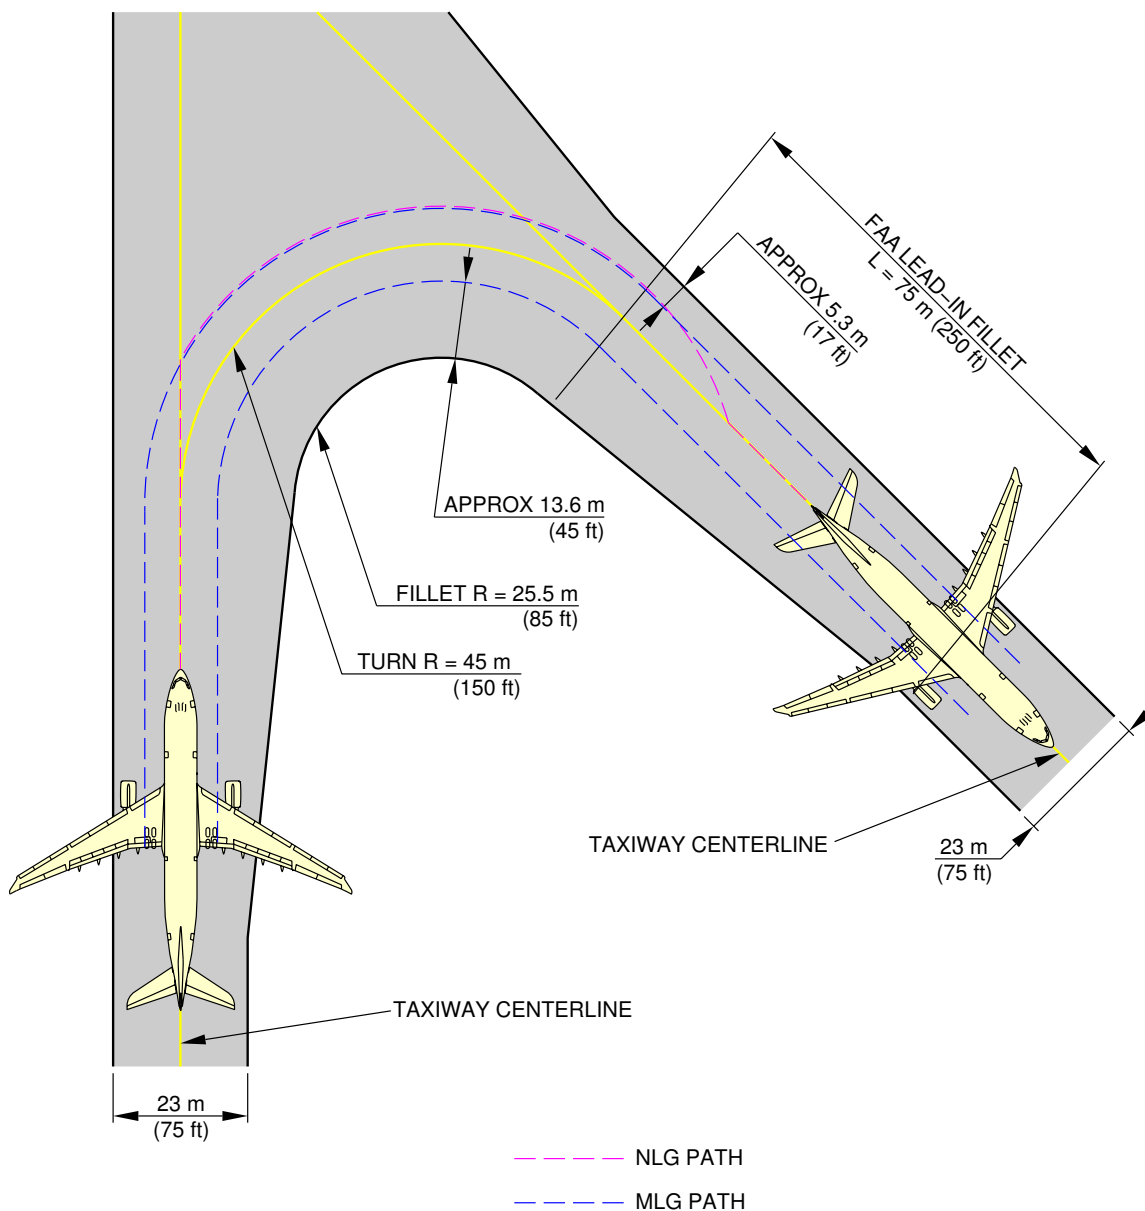

F_AC_040504_1_0030101_01_01

135° Turn - Taxiway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-4-991-003-A01


**ON A/C A330-300

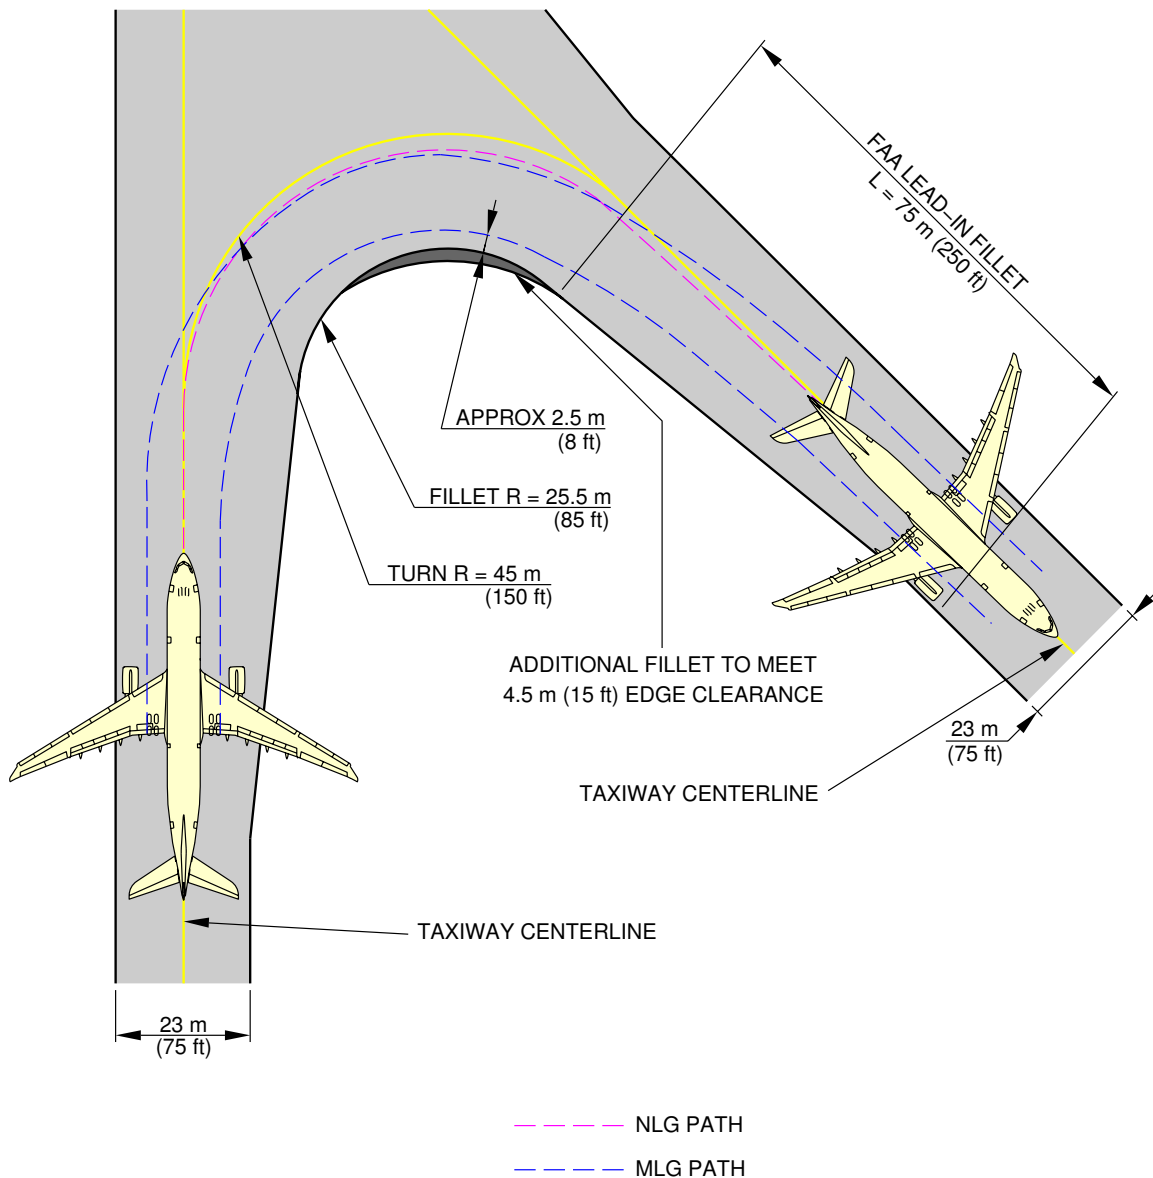

F_AC_040504_1_0070101_01_00

135° Turn - Taxiway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-4-991-007-A01


**ON A/C A330-200 A330-200F

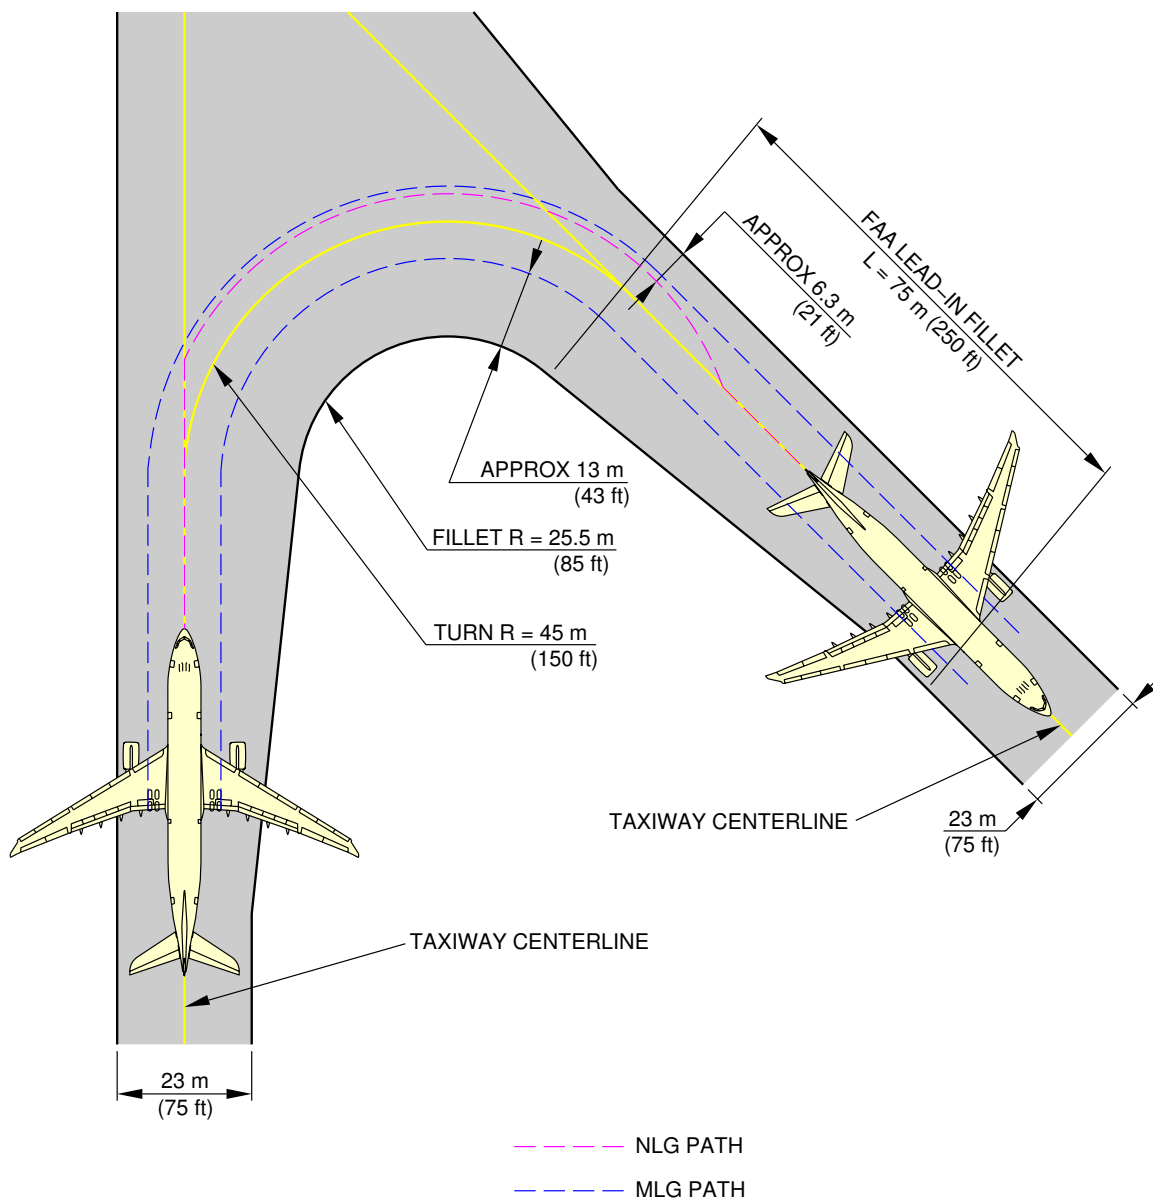

F_AC_040504_1_0040101_01_01

135° Turn - Taxiway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-4-991-004-A01

**ON A/C A330-200 A330-200F

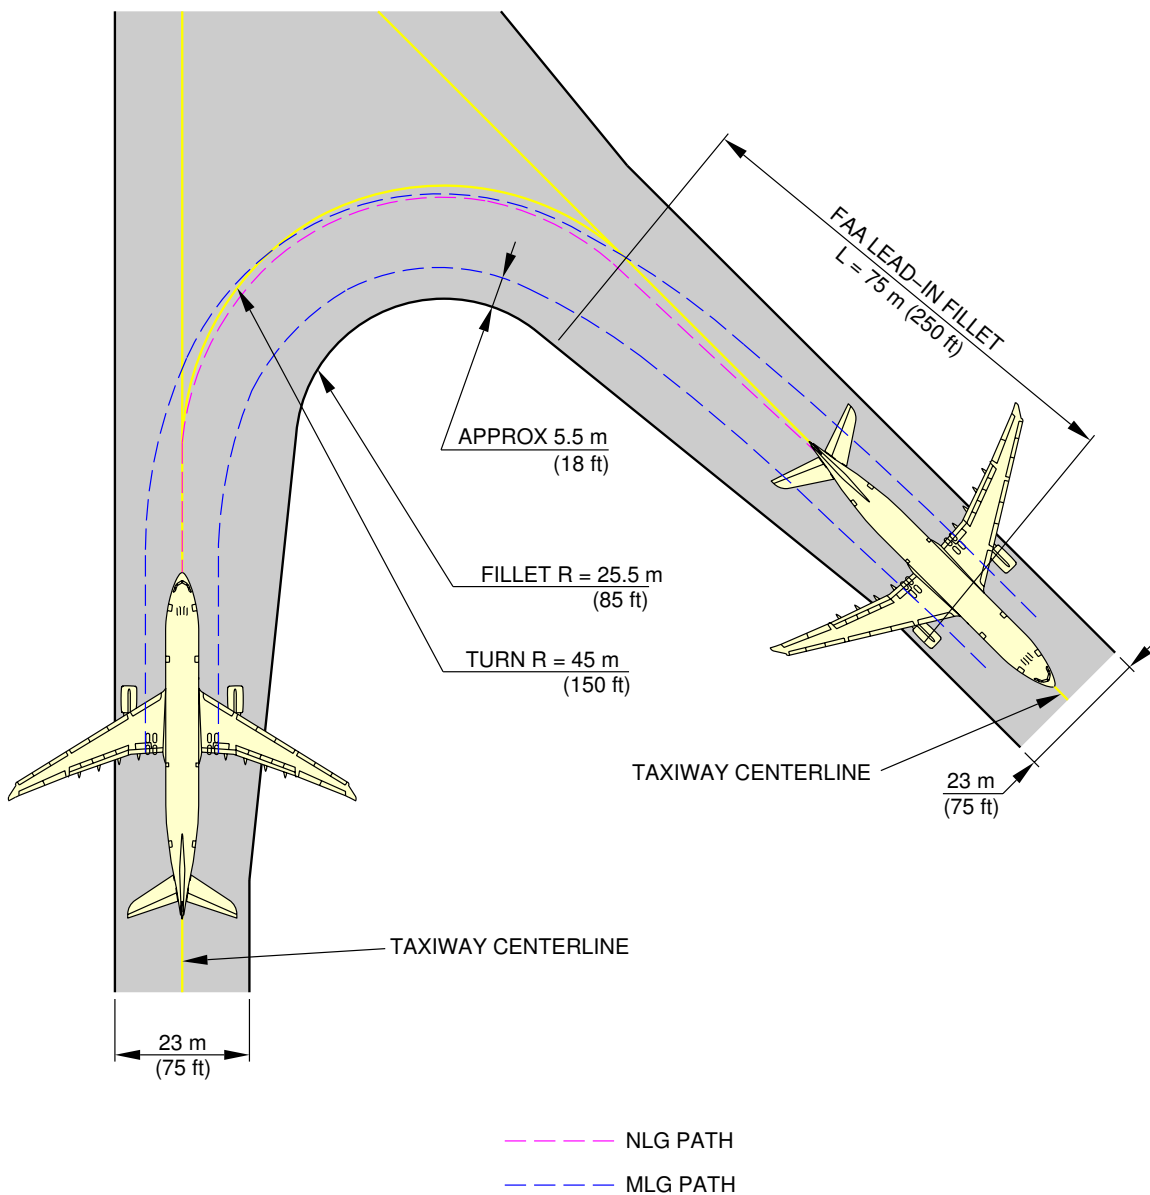

F_AC_040504_1_0080101_01_00

135° Turn - Taxiway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-4-991-008-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-5 90° Turn - Taxiway to Taxiway

****ON A/C A330-200 A330-200F A330-300**

90° Turn - Taxiway to Taxiway

1. This section gives the 90° turn - taxiway to taxiway.


**ON A/C A330-300

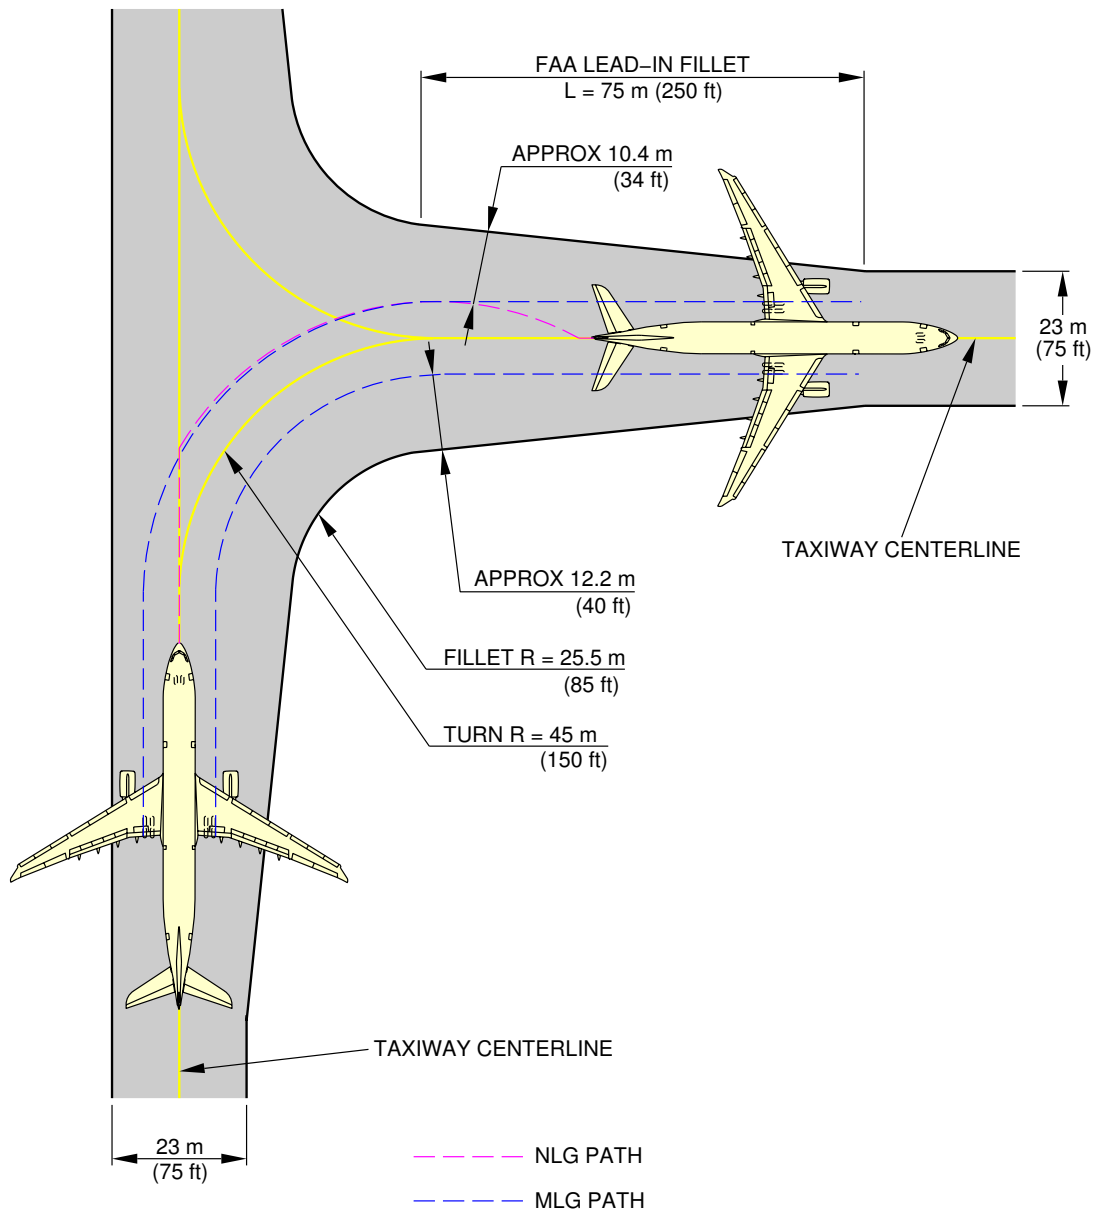

F_AC_040505_1_0030101_01_01

90° Turn - Taxiway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-5-991-003-A01


**ON A/C A330-300

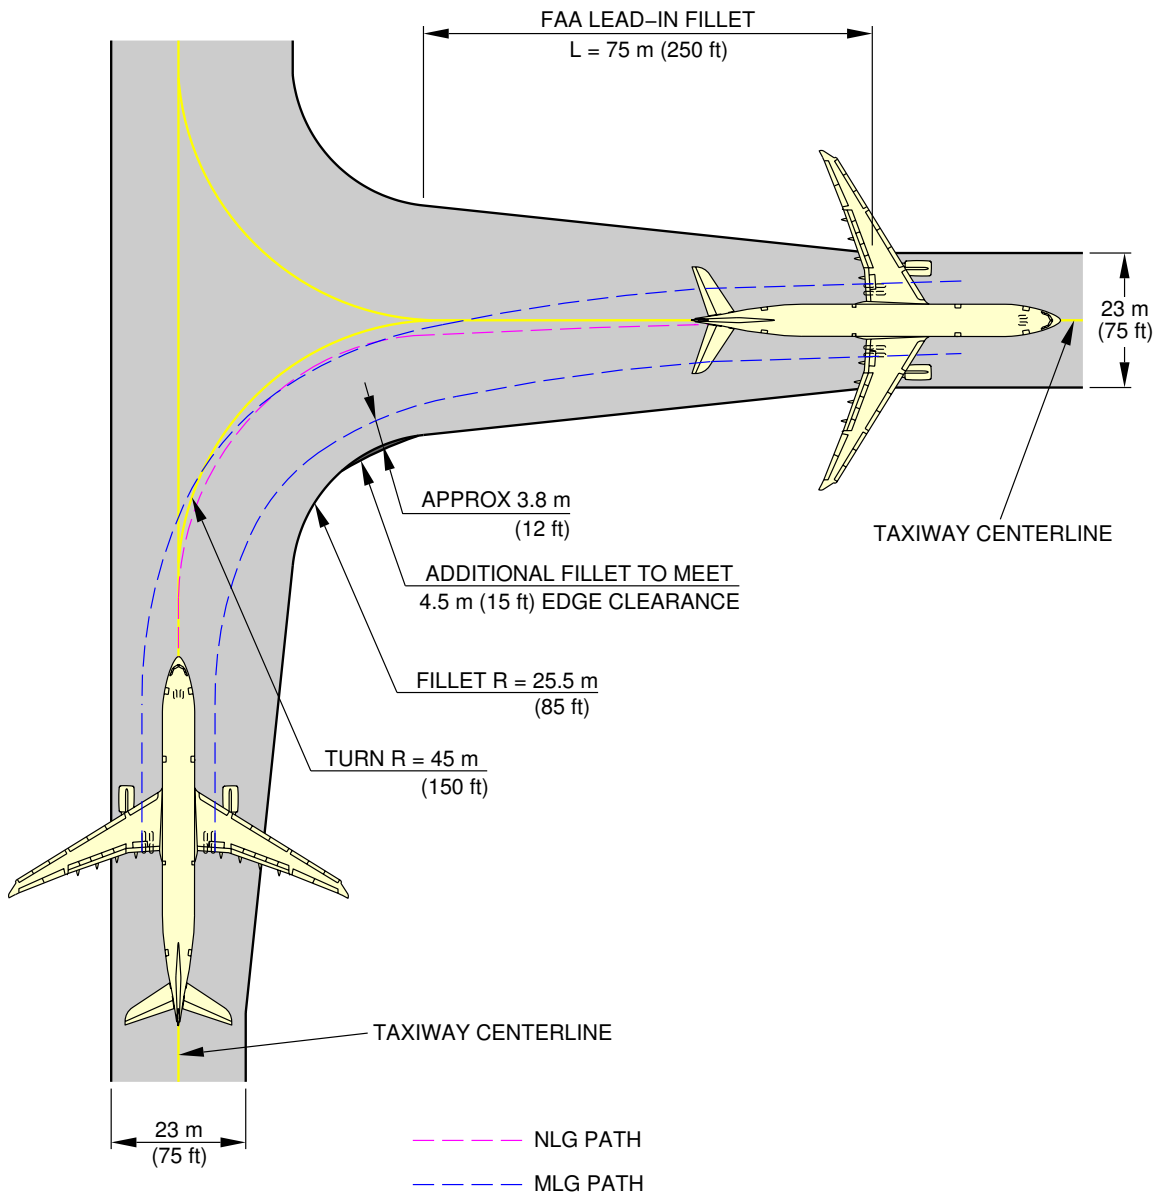

F_AC_040505_1_0100101_01_00

90° Turn - Taxiway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-5-991-010-A01


**ON A/C A330-200 A330-200F

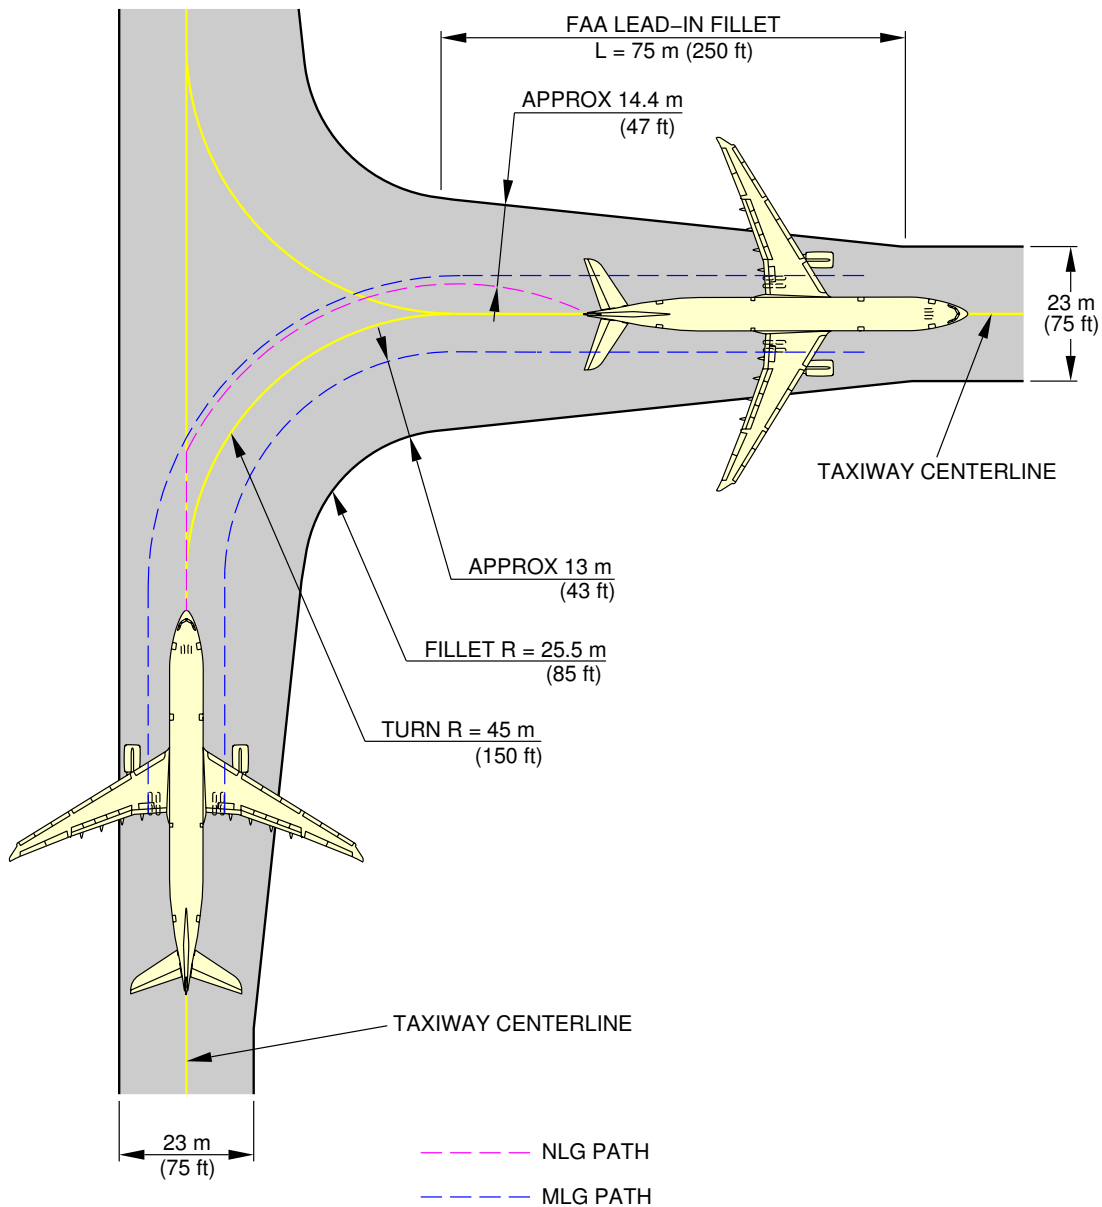

F_AC_040505_1_0040101_01_01

90° Turn - Taxiway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-5-991-004-A01

**ON A/C A330-200 A330-200F

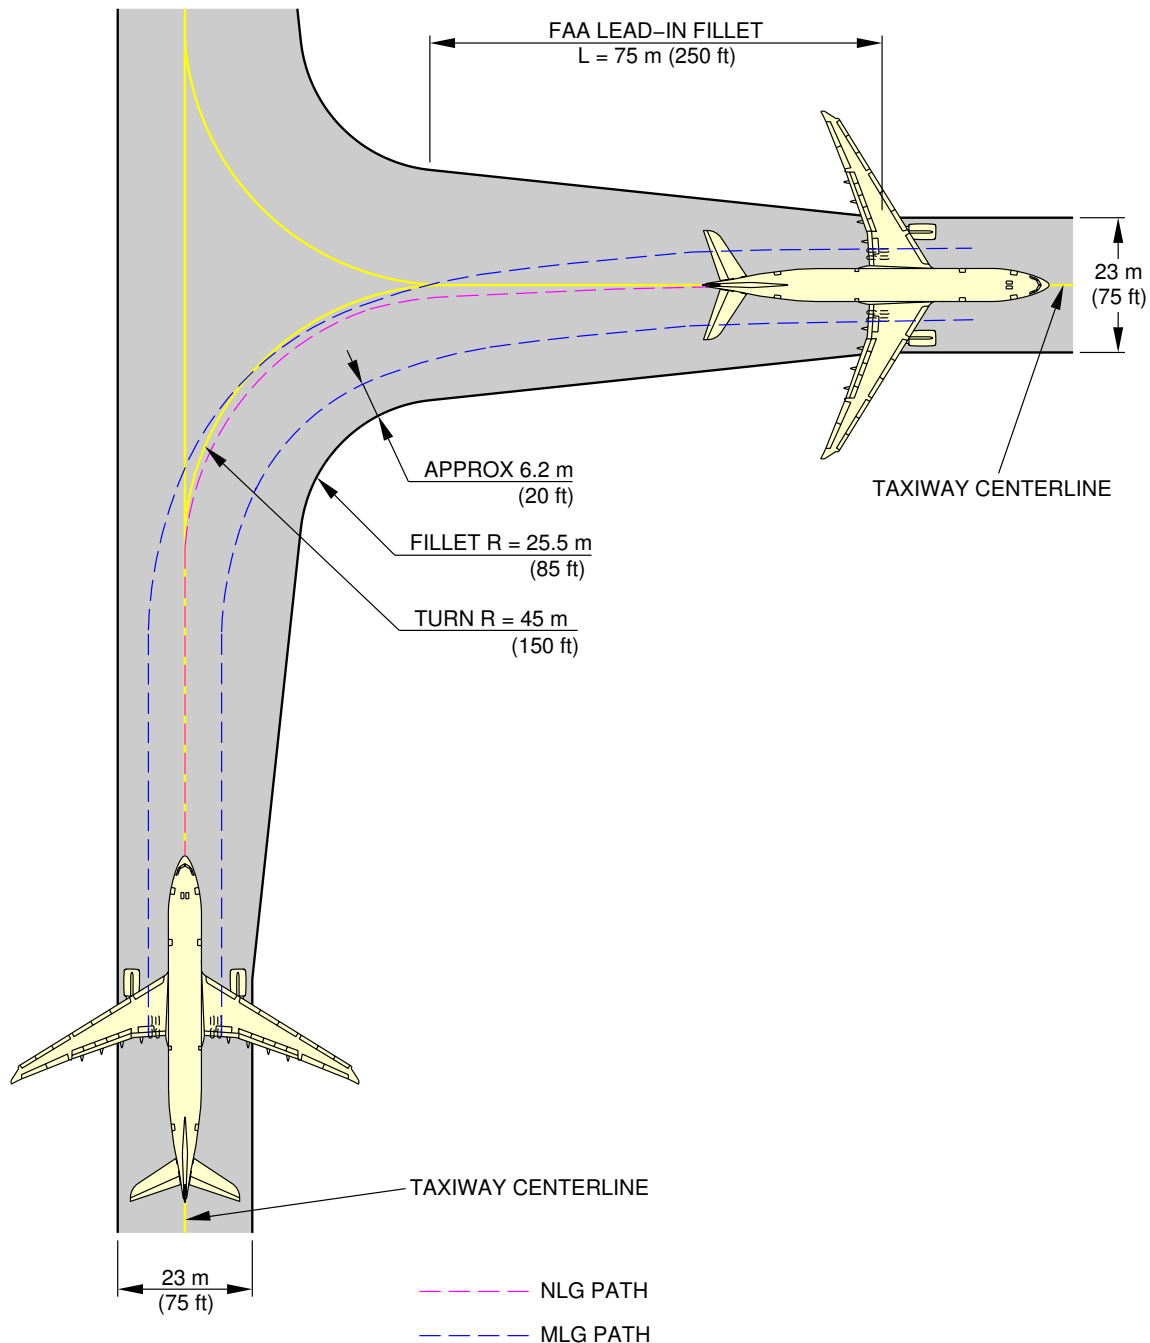

F_AC_040505_1_0110101_01_00

90° Turn - Taxiway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-5-991-011-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-6-0 Runway Holding Bay (Apron)

**ON A/C A330-200 A330-200F A330-300

Runway Holding Bay (Apron)

1. This section gives the runway holding bay (Apron).

**ON A/C A330-200 A330-200F A330-300

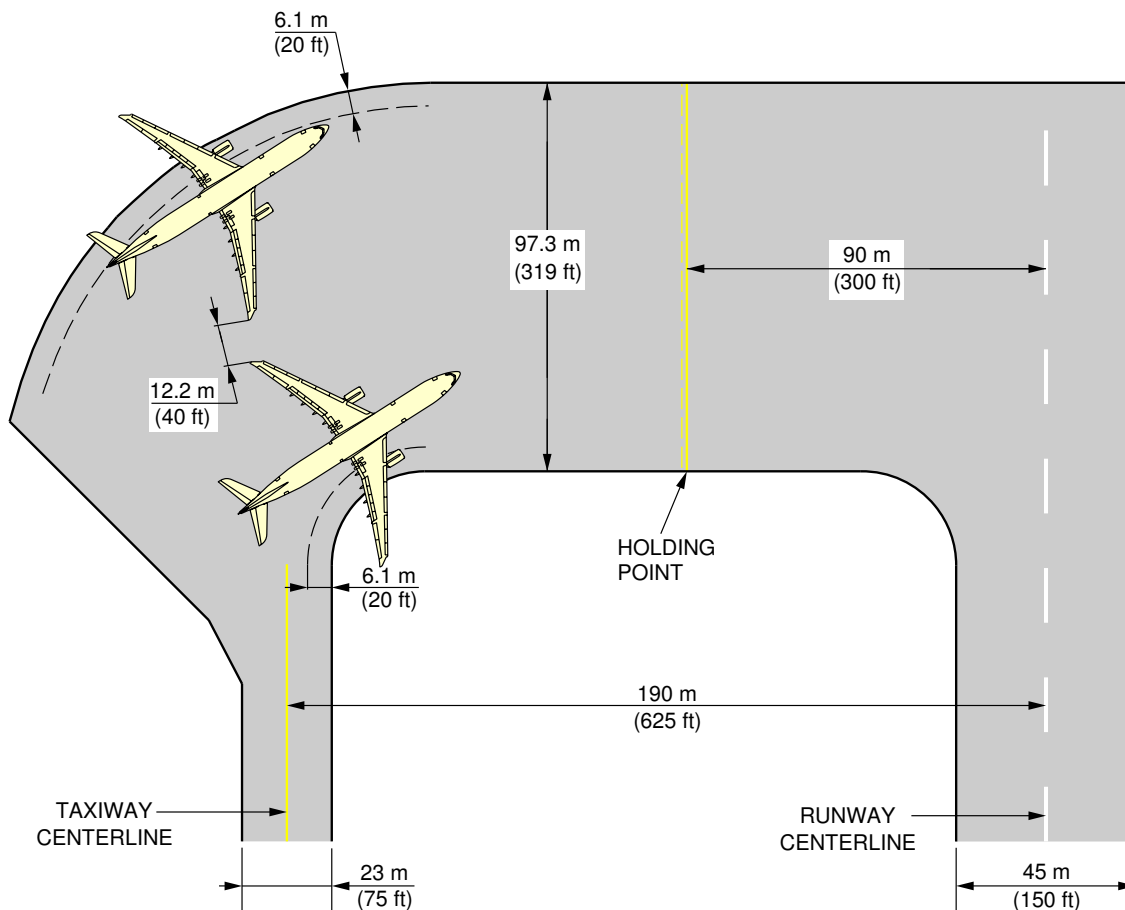

NOTES: COORDINATE WITH USING AIRPLANE FOR SPECIFIC PLANNED OPERATING PROCEDURES.

F_AC_040600_1_0010101_01_01

Runway Holding Bay (Apron)
FIGURE-4-6-0-991-001-A01



4-7-0 Airplane Parking****ON A/C A330-200 A330-200F A330-300**Airplane Parking

1. The following figures and charts show the rectangular space required for parking against the terminal building.

The rectangle includes allowance for swinging the airplane on arrival and departure.

- Steering Geometry
- Minimum Parking Space Requirements



**ON A/C A330-300

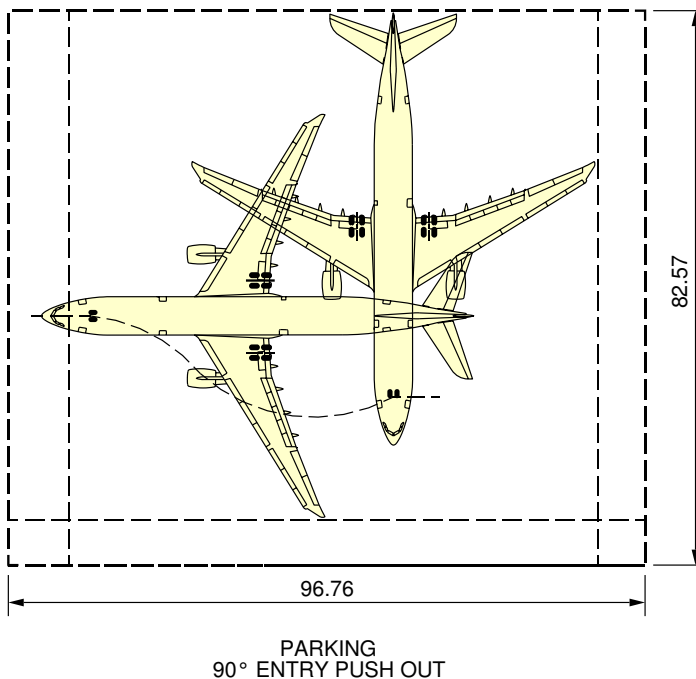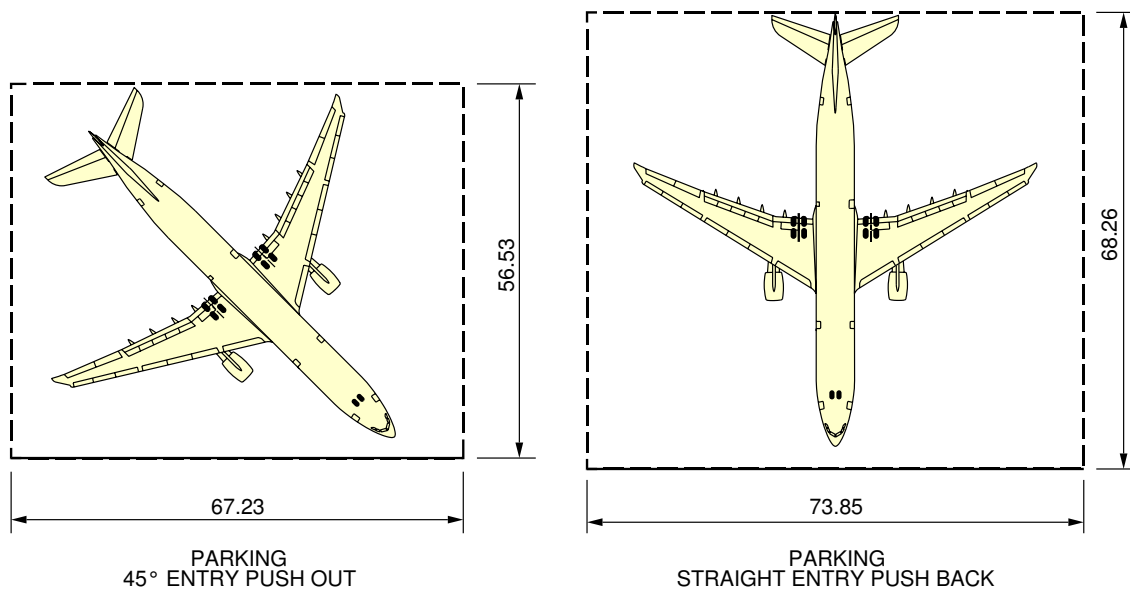

F_AC_040700_1_0010101_01_00

Airplane Parking
Steering Geometry
FIGURE-4-7-0-991-001-A01


**ON A/C A330-300

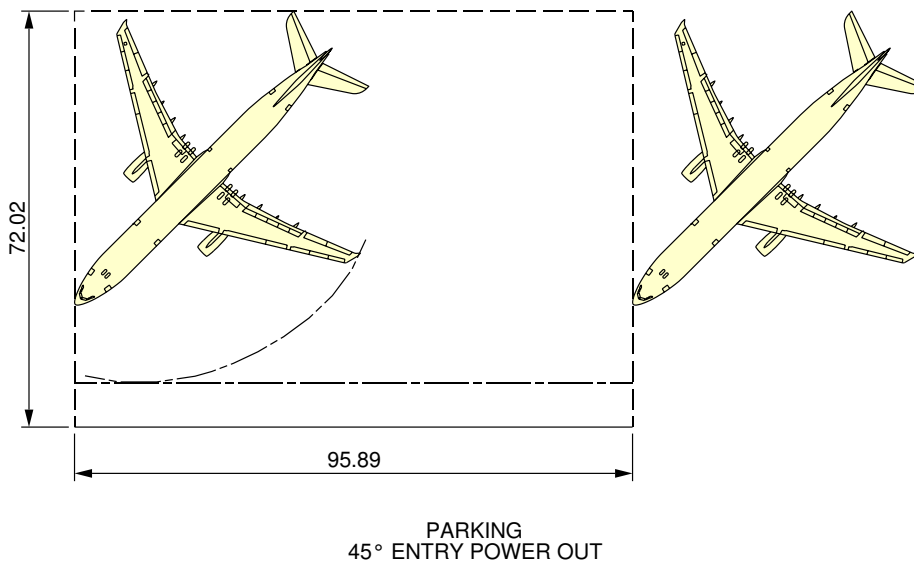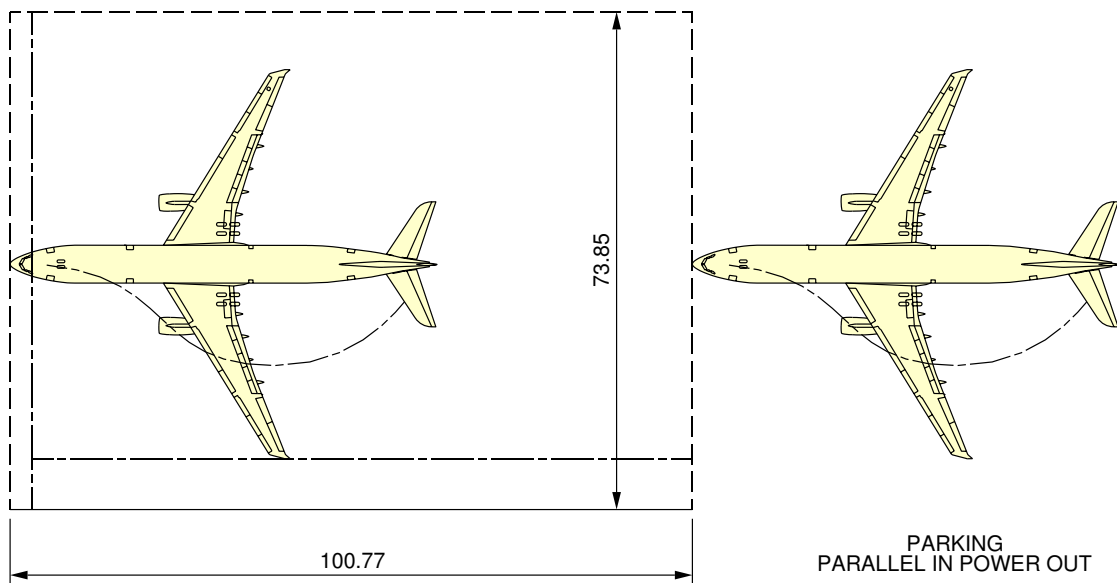

F_AC_040700_1_0020101_01_00

Airplane Parking
Steering Geometry
FIGURE-4-7-0-991-002-A01



**ON A/C A330-300

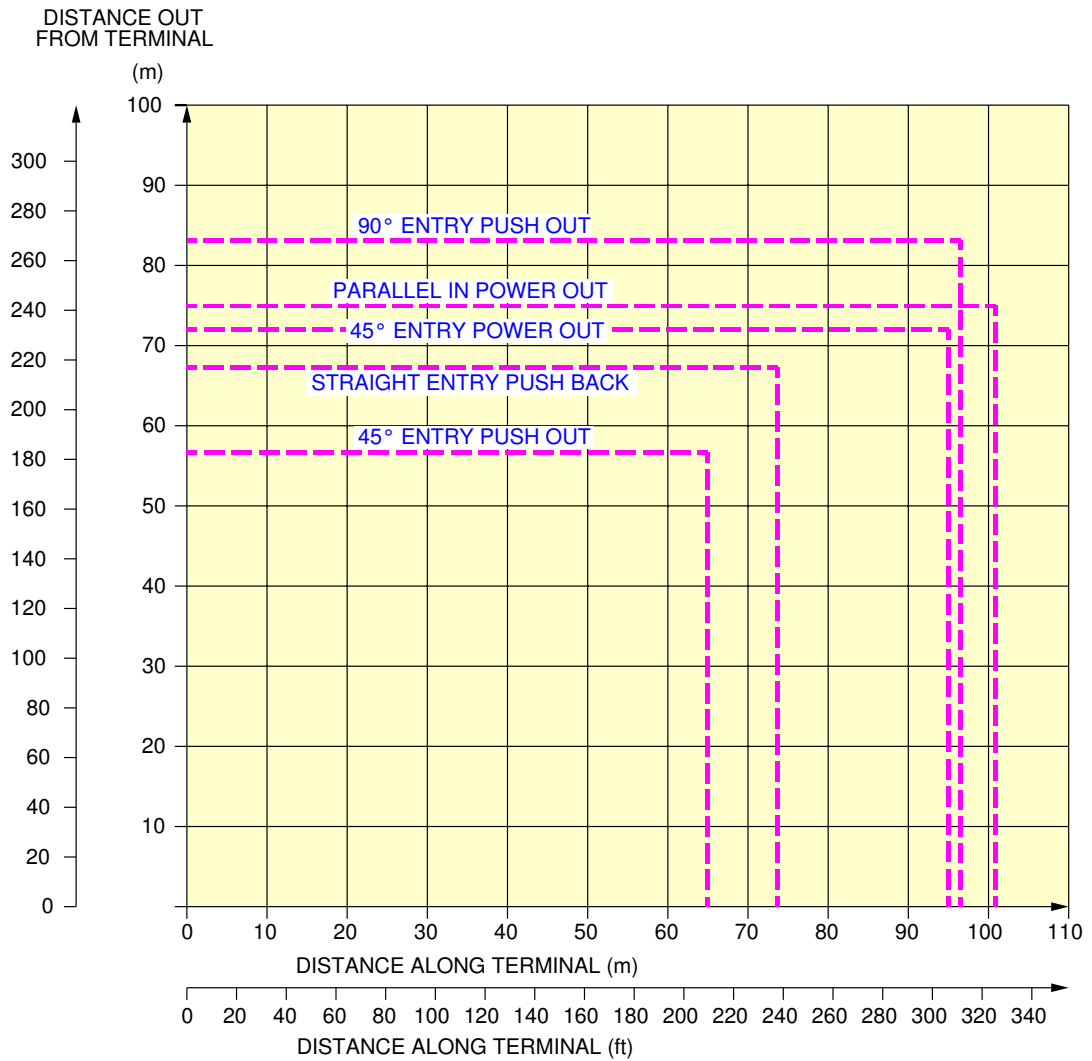

F_AC_040700_1_0040101_01_00

Airplane Parking
Minimum Parking Space Requirements
FIGURE-4-7-0-991-004-A01



**ON A/C A330-200 A330-200F

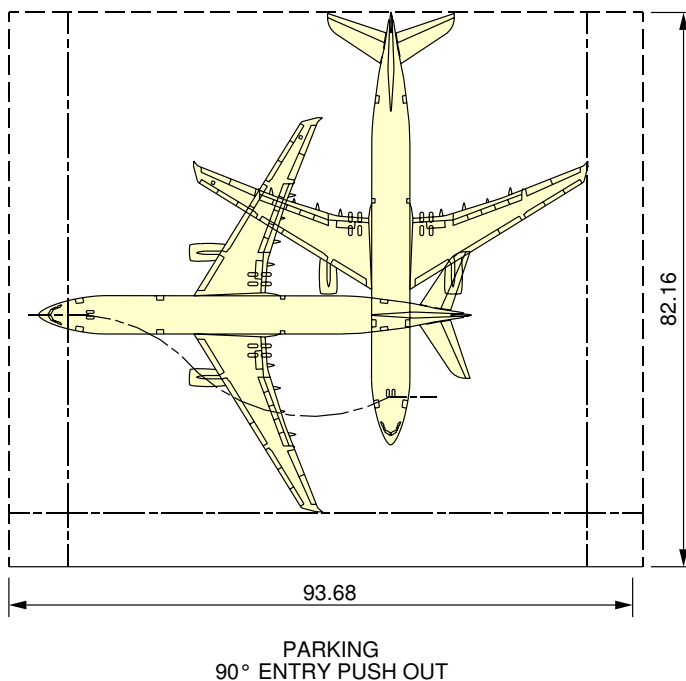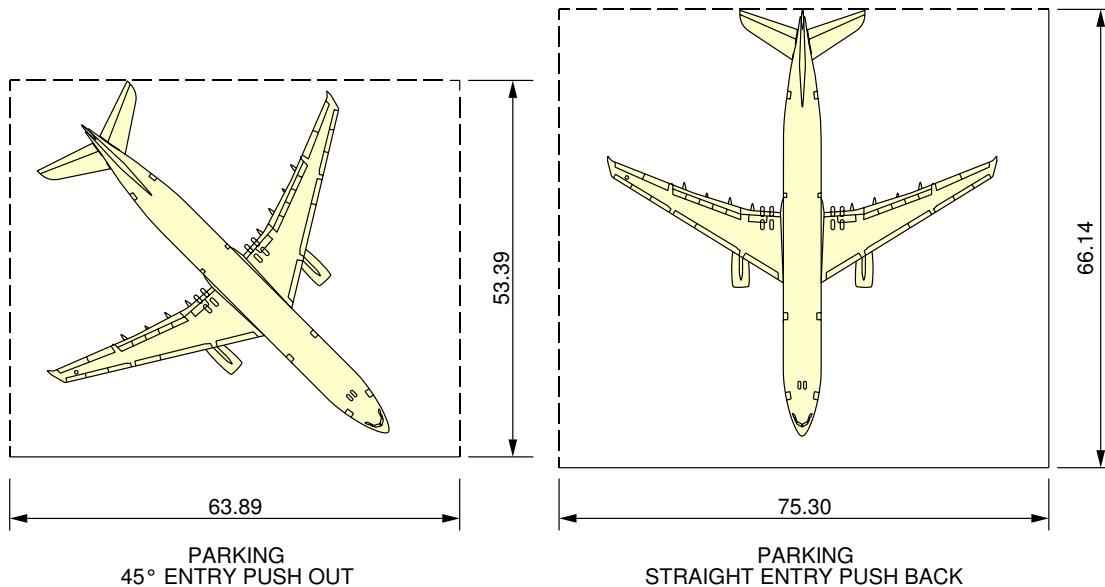

F_AC_040700_1_0030101_01_00

Airplane Parking
Steering Geometry
FIGURE-4-7-0-991-003-A01


**ON A/C A330-200 A330-200F

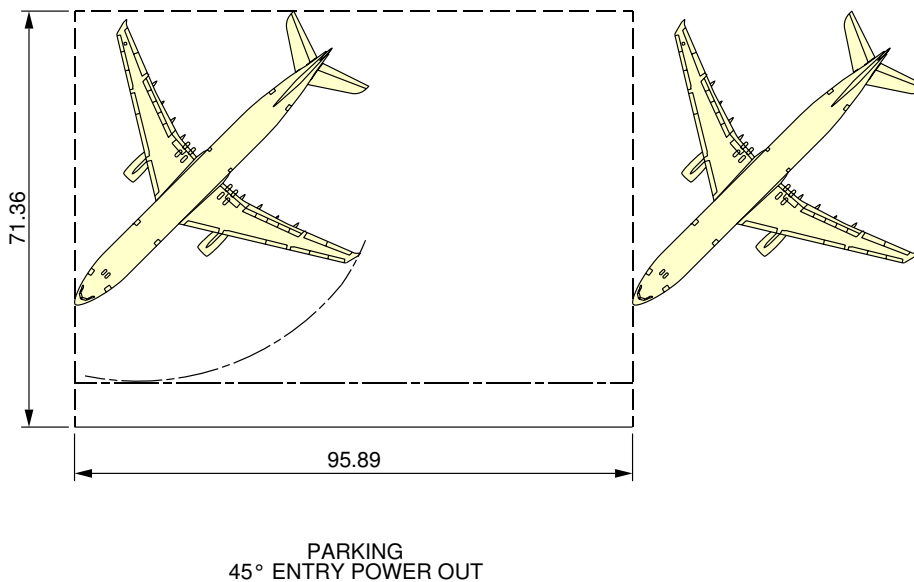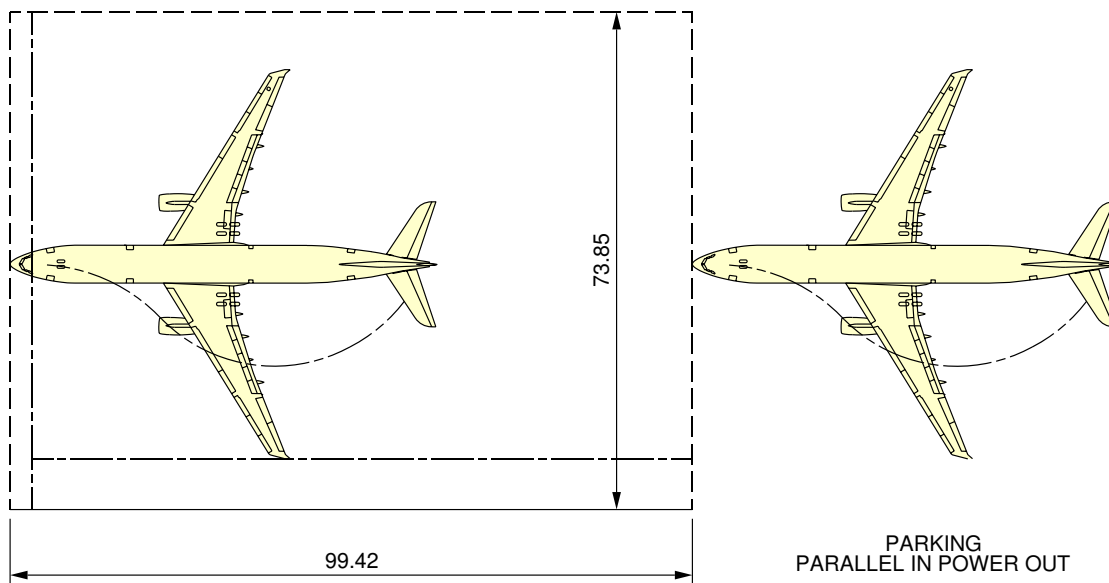

F_AC_040700_1_0050101_01_00

Airplane Parking
Steering Geometry
FIGURE-4-7-0-991-005-A01

**ON A/C A330-200 A330-200F

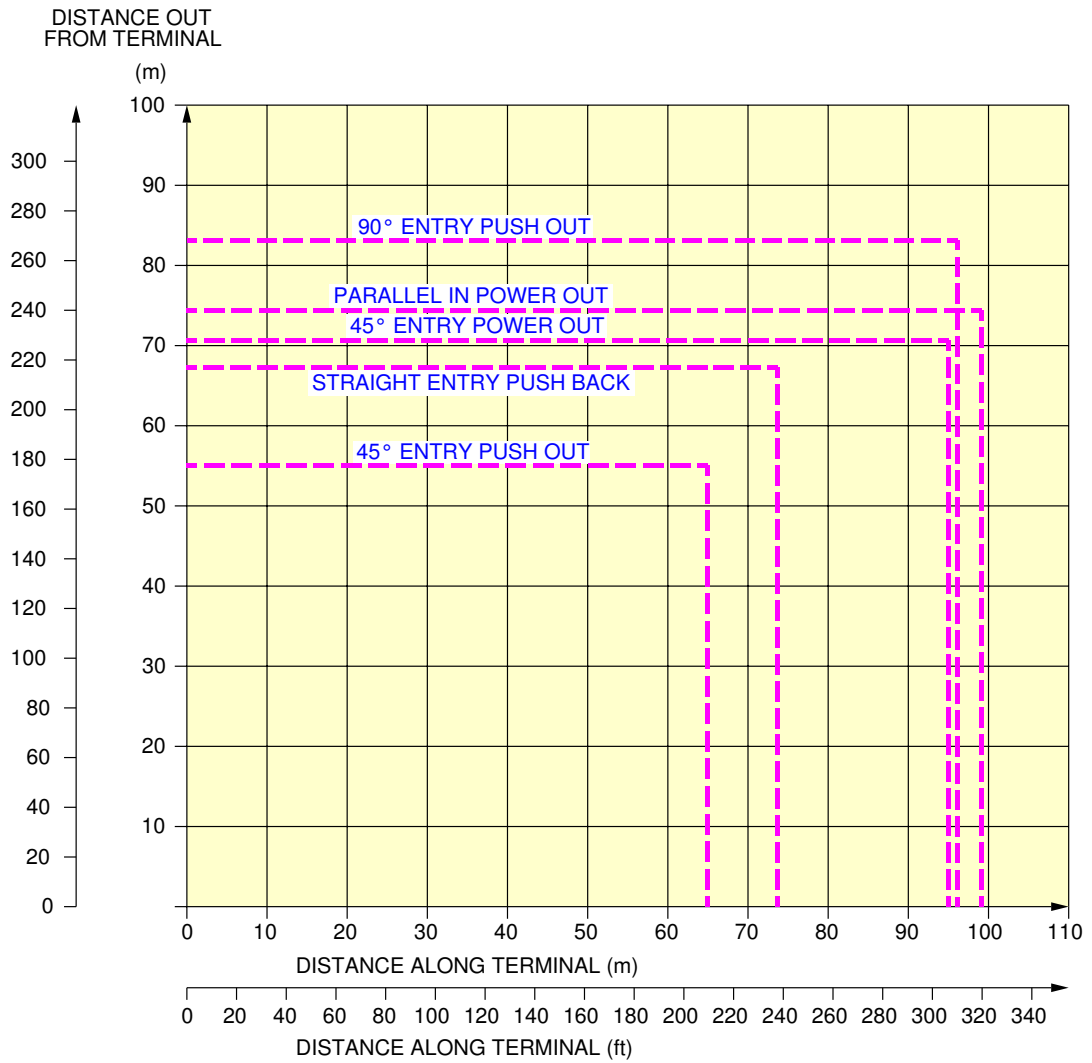

F_AC_040700_1_0060101_01_00

Airplane Parking
Minimum Parking Space Requirements
FIGURE-4-7-0-991-006-A01

TERMINAL SERVICING

5-0-0 TERMINAL SERVICING

****ON A/C A330-200 A330-200F A330-300**

TERMINAL SERVICING

1. Terminal servicing

This chapter provides typical ramp layouts, corresponding minimum turnaround time estimations, locations of ground service points and service requirements.

The information given in this chapter reflects ideal conditions. Actual ramp layouts and service requirements may vary according to local regulations, airline procedures and the airplane condition.

Section 5.1 shows typical ramp layouts for passenger aircraft at the gate or on an Open Apron and freighter aircraft on an Open Apron.

Section 5.2 shows the minimum turnaround schedules for full servicing arrangements (turnaround stations).

Section 5.3 shows the minimum turnaround schedule for reduced servicing arrangements (en route stations).

Section 5.4 gives the locations of ground service connections, the standard of connections used and typical capacities and requirements.

Section 5.5 provides the engine starting pneumatic requirements for different engine types and different ambient temperatures.

Section 5.6 provides the air conditioning requirements for heating and cooling (pull-down and pull-up) using ground conditioned air for different ambient temperatures.

Section 5.7 provides the air conditioning requirements for heating and cooling to maintain a constant cabin air temperature using low pressure conditioned air.

Section 5.8 shows the ground towing requirements taking into account different ground surface and aircraft conditions.

5-1-0 Airplane Servicing Arrangements****ON A/C A330-200 A330-300**Airplane Servicing Arrangements

1. This section provides typical ramp layouts, showing the various GSE items in position during typical turnaround scenarios for the passenger aircraft.

These ramp layouts show typical arrangements only. Each operator will have its own specific requirements/regulations for the positioning and operation on the ramp.

The associated turnaround station is given in the section 5-2-1 for Full Servicing Turn Round Charts.

The associated minimum turnaround time for Transit Turn Round Charts is given in a section 5-3-1.

****ON A/C A330-200F**Airplane Servicing Arrangements

1. Airplane Servicing Arrangements

This section provides typical ramp layouts, showing the various GSE items in position during typical turnaround scenarios for the passenger aircraft.

These ramp layouts show typical arrangements only. Each operator will have its own specific requirements/regulations for the positioning and operation on the ramp.

The associated turnaround station is given in the section 5-2-1 for Full Servicing Turn Round Charts.

5-1-1 Symbols Used on Servicing Diagrams

****ON A/C A330-200 A330-200F A330-300**Symbols Used on Servicing Diagrams

1. This table gives the symbols used on servicing diagrams.

| Ground Support Equipment | |
|--------------------------|----------------------------------|
| AC | AIR CONDITIONING UNIT |
| AS | AIR START UNIT |
| CAT | CATERING TRUCK |
| CB | CONVEYOR BELT |
| CLEAN | CLEANING TRUCK |
| FUEL | FUEL HYDRANT DISPENSER or TANKER |
| GPU | GROUND POWER UNIT |
| LD CL | LOWER DECK CARGO LOADER |
| LV | LAVATORY VEHICLE |
| MD CL | MAIN DECK CARGO LOADER |
| PBB | PASSENGER BOARDING BRIDGE |
| PS | PASSENGER STAIRS |
| TOW | TOW TRACTOR |
| ULD | ULD TRAIN |
| WV | POTABLE WATER VEHICLE |



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-1-2 Loading (Open Apron)

****ON A/C A330-200 A330-300**

Loading (Open Apron)

1. This section gives the typical ramp layout for the passenger aircraft on an Open Apron.


**ON A/C A330-200

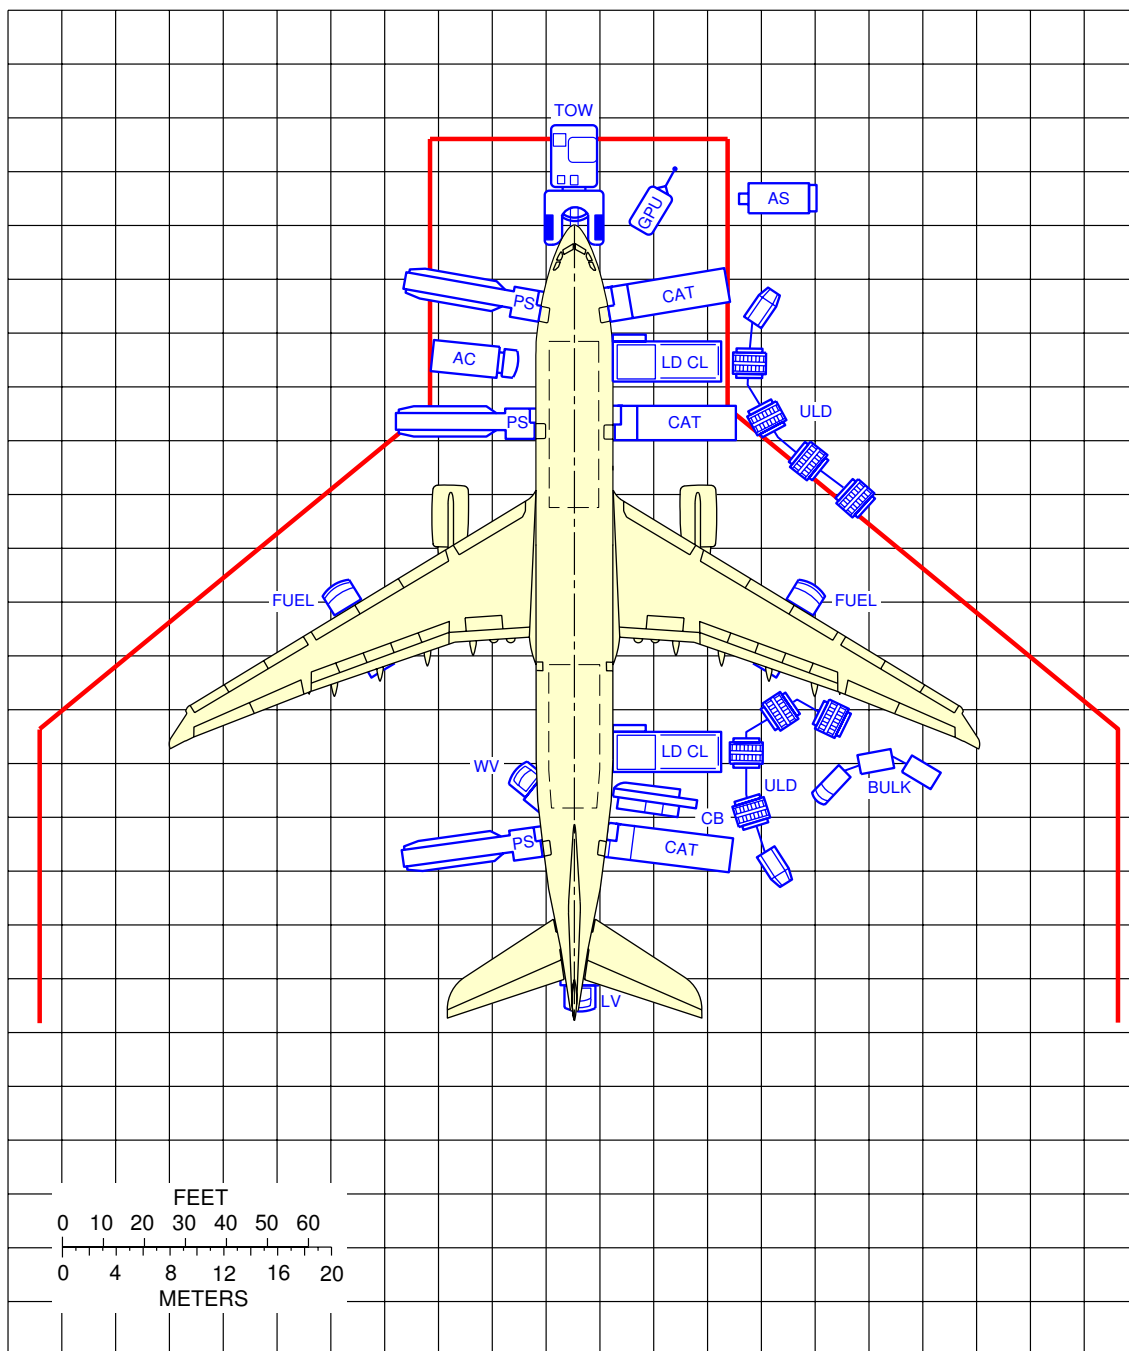

F_AC_050102_1_0010101_01_01

Airplane Servicing Arrangements
Typical Ramp Layout (Open Apron)
FIGURE-5-1-2-991-001-A01

**ON A/C A330-300

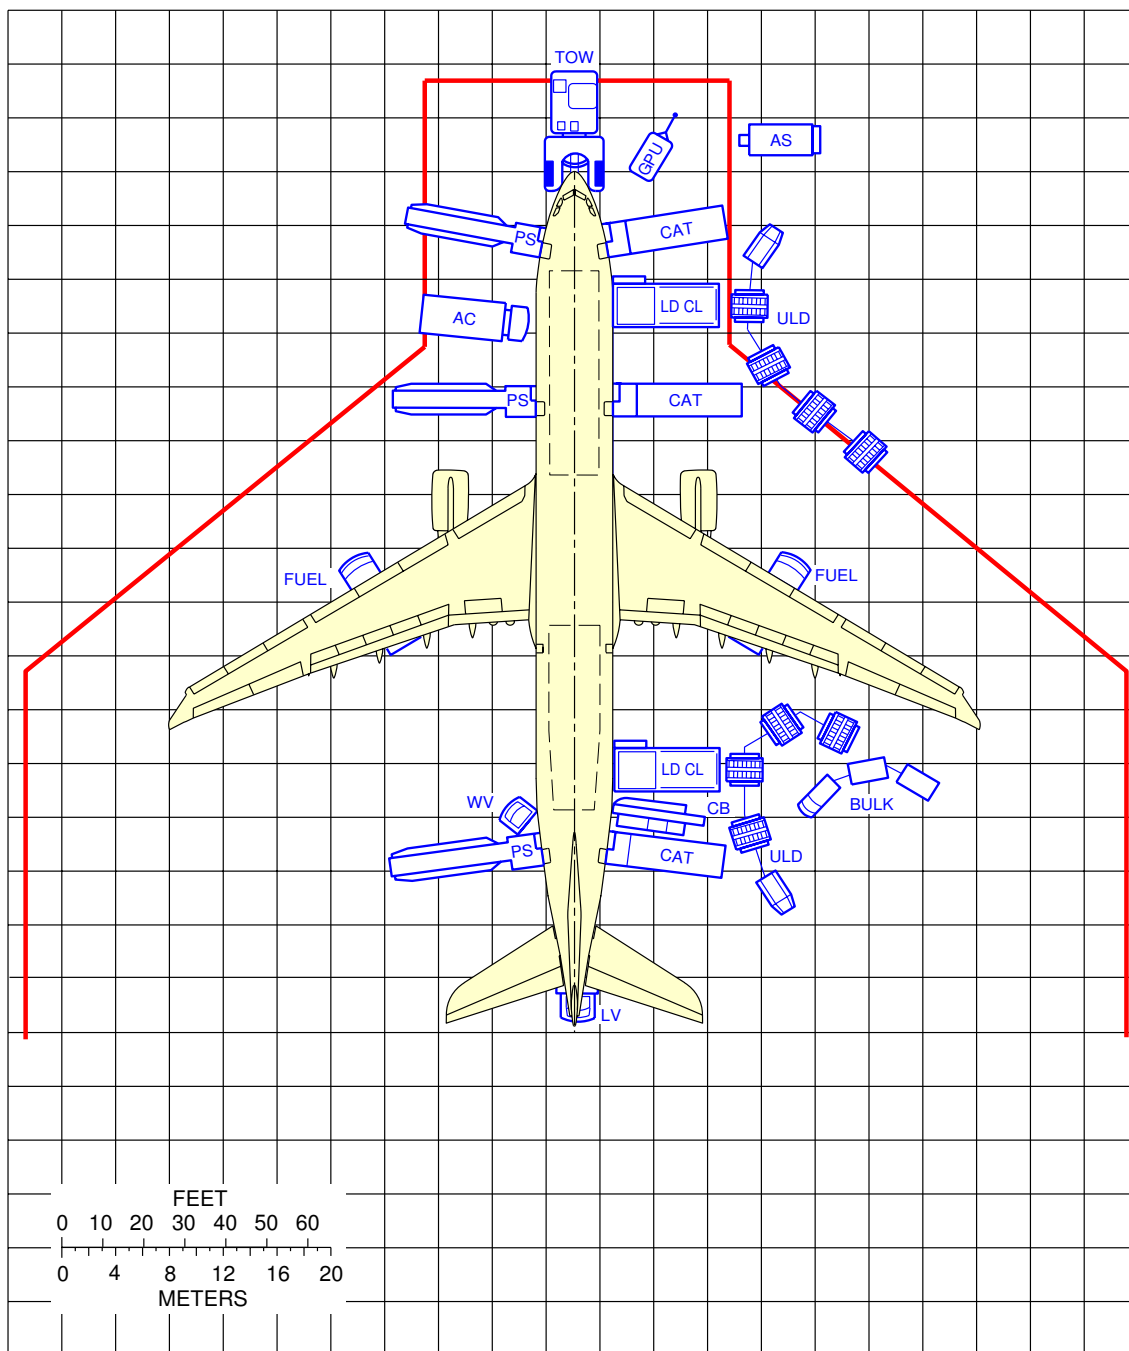

F_AC_050102_1_0070101_01_00

Airplane Servicing Arrangements
Typical Ramp Layout (Open Apron)
FIGURE-5-1-2-991-007-A01




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A330-200F**

Loading (Open Apron)

1. This section gives the typical ramp layout for cargo version on an Open Apron.

**ON A/C A330-200F

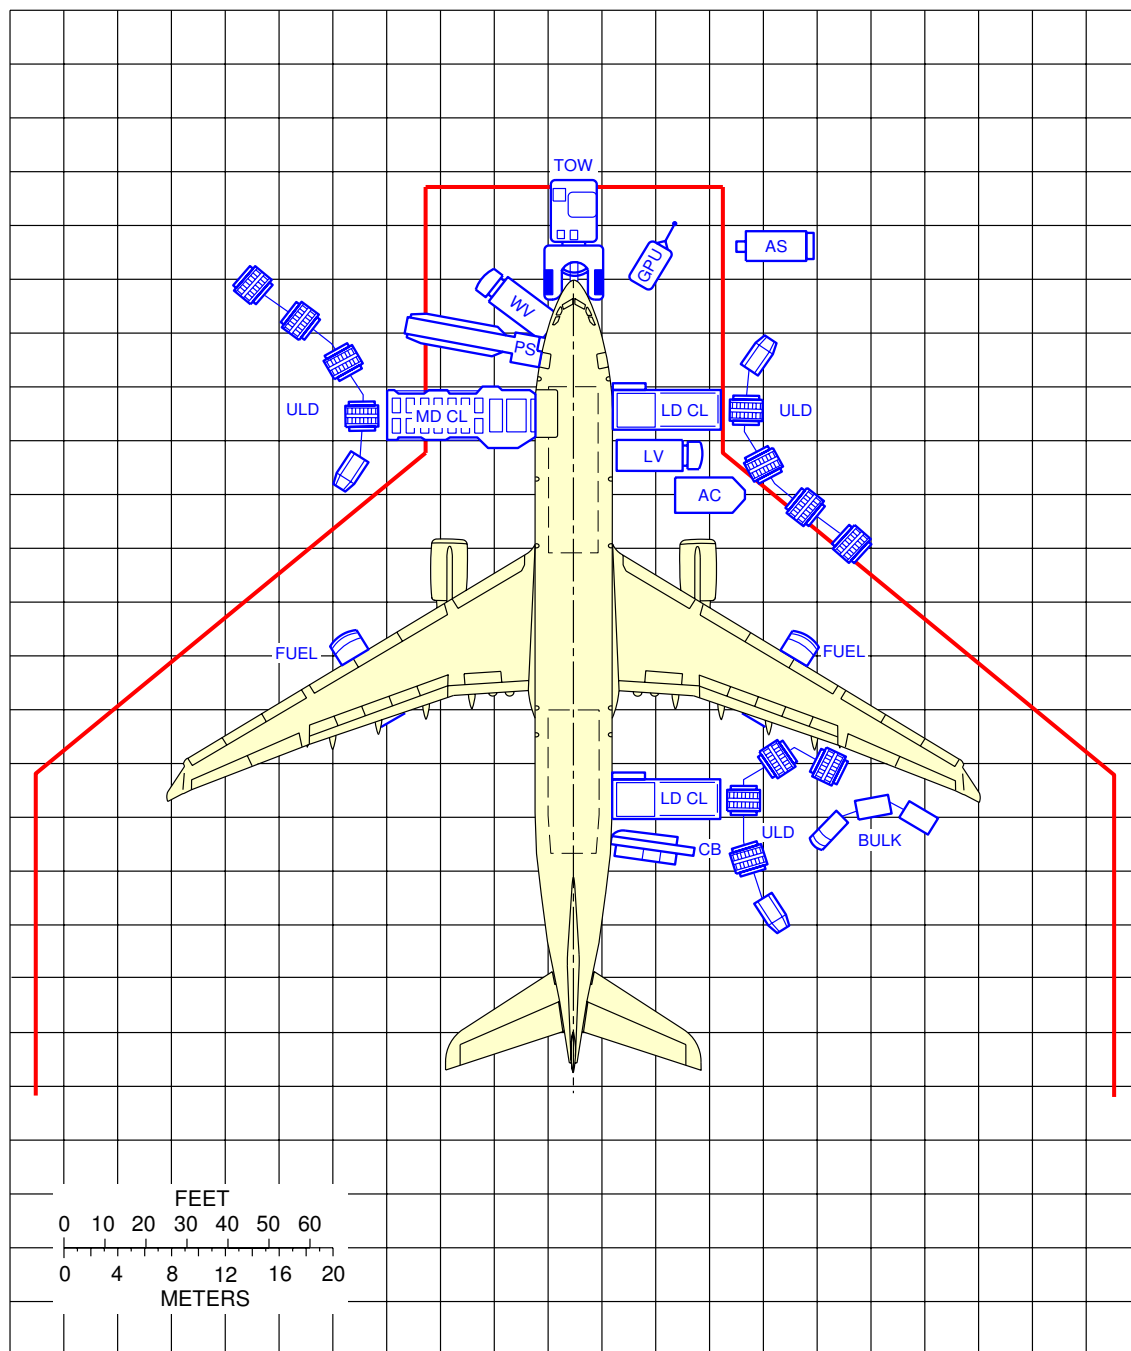

F_AC_050102_1_0020101_01_02

Airplane Servicing Arrangements
Typical Ramp Layout (Open Apron)
FIGURE-5-1-2-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-1-3 Loading (Passenger Bridge)

****ON A/C A330-200 A330-300**

Loading (Passenger Bridge)

1. This section gives the typical ramp layout for the passenger aircraft at a gate with 2 passenger boarding bridges.


**ON A/C A330-200

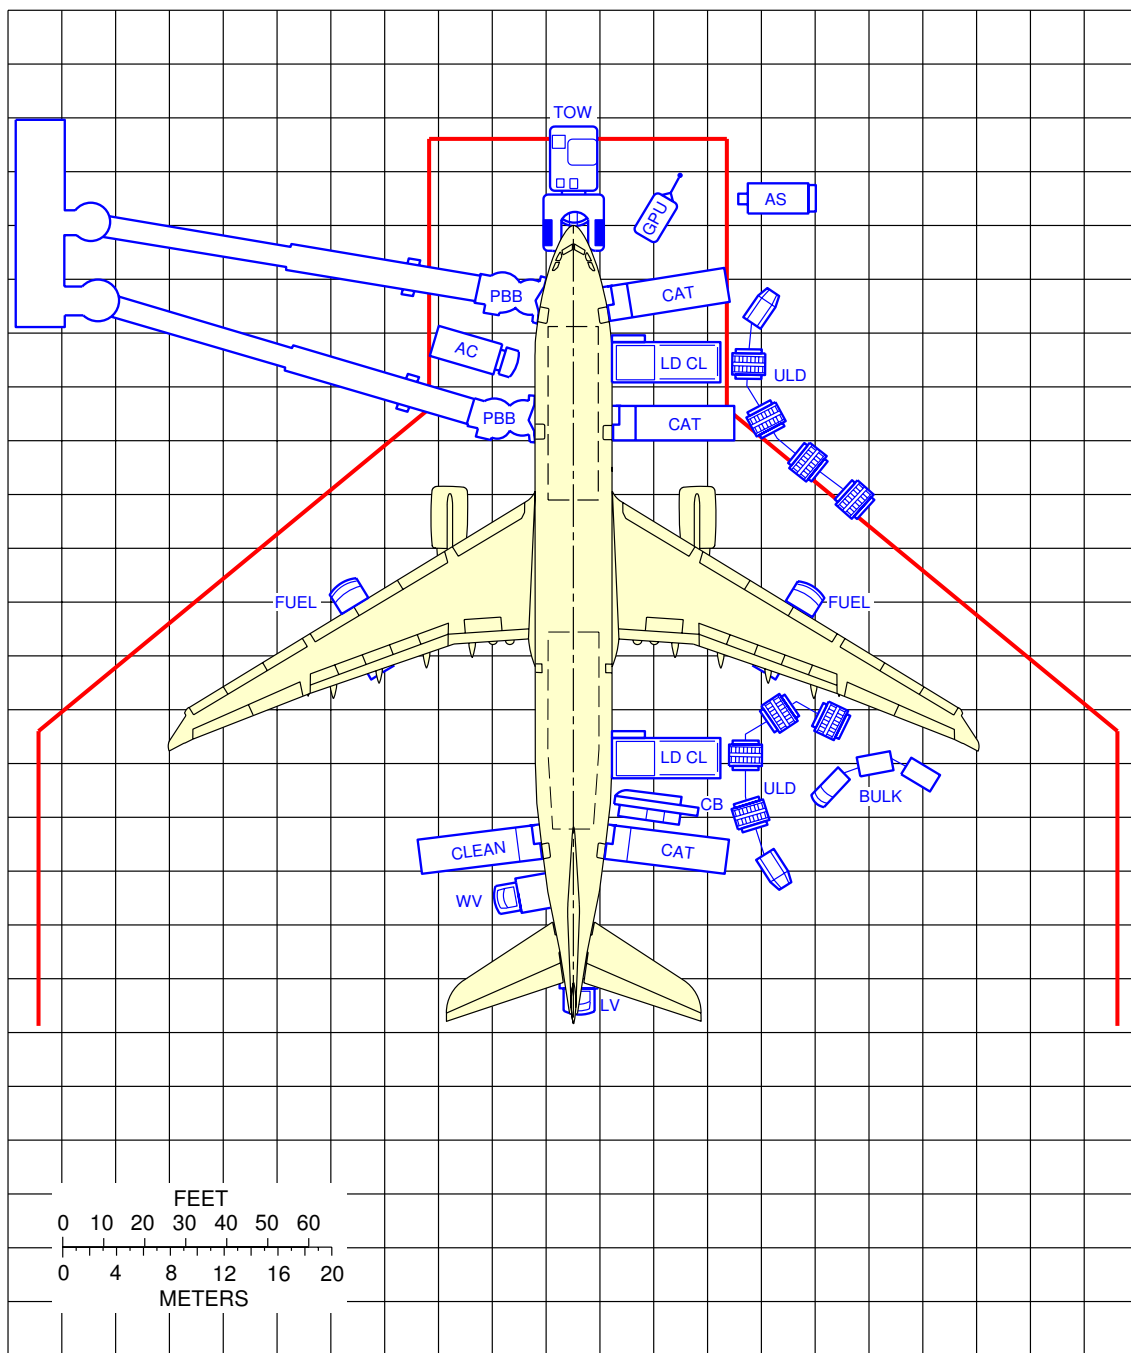

F_AC_050103_1_0010101_01_01

Airplane Servicing Arrangements
Typical Ramp Layout (gate area)
FIGURE-5-1-3-991-001-A01

**ON A/C A330-300

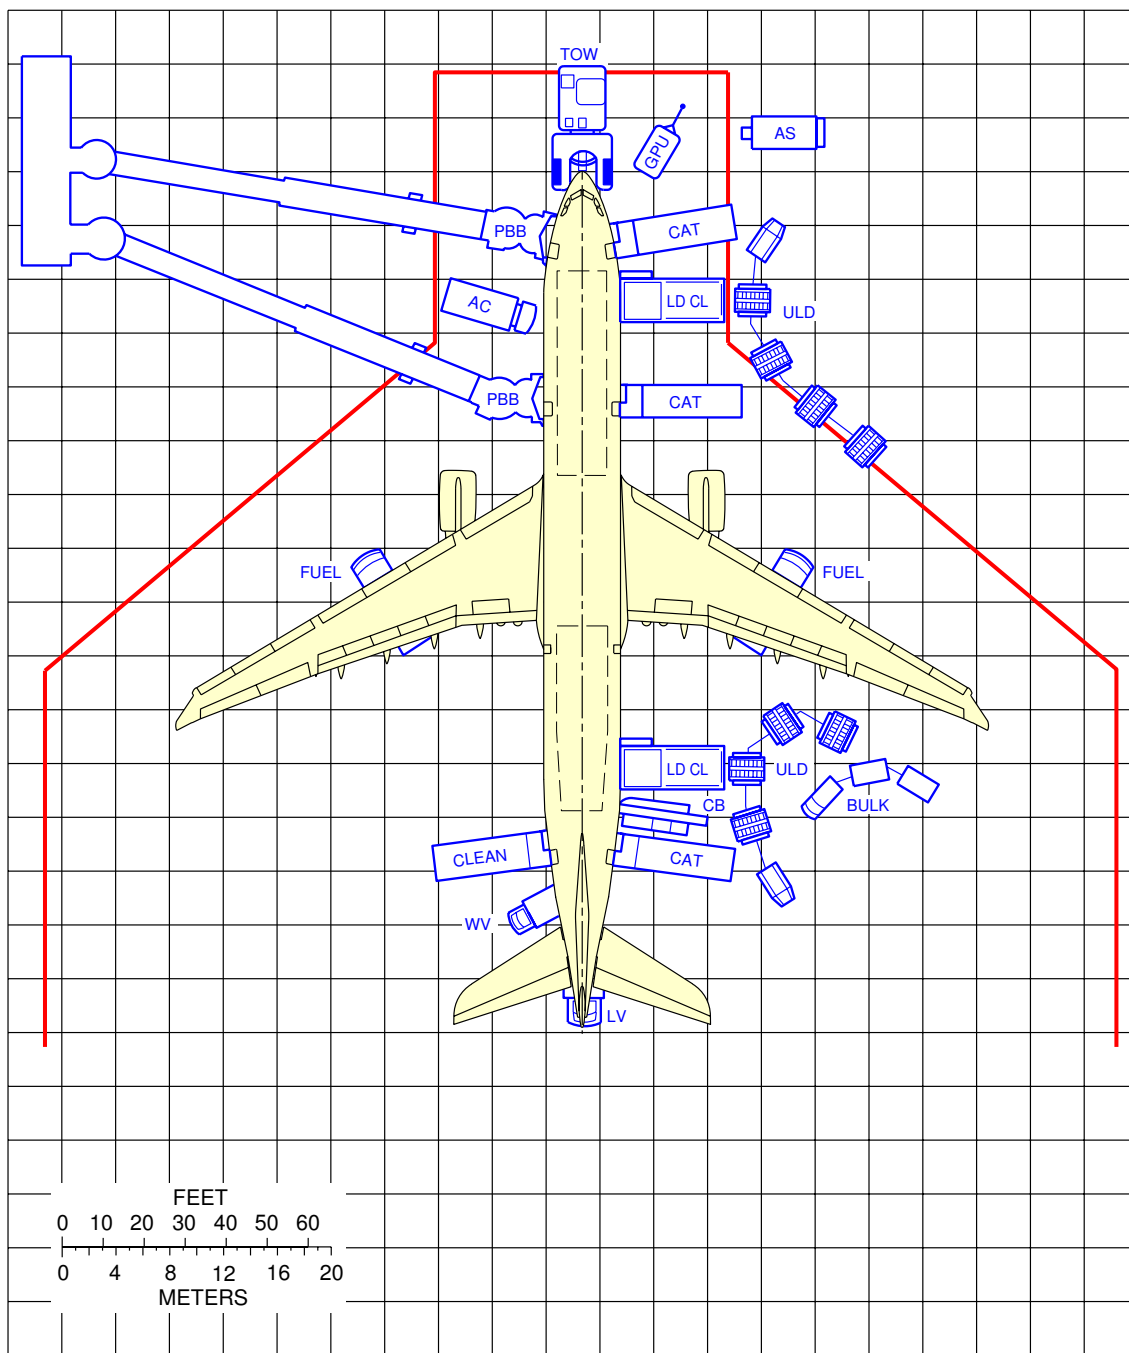

F_AC_050103_1_0060101_01_00

Airplane Servicing Arrangements
Typical Ramp Layout (gate area)
FIGURE-5-1-3-991-006-A01



5-2-0 Terminal Operations

****ON A/C A330-200 A330-200F A330-300**

Terminal Operations - Full Servicing Turn Round Charts

1. This section provides a series of charts showing typical activities during turnaround at destination airports.

This data is provided to show the general scope and type of activities involved in ramp operations during the turnaround of an aircraft.

Varying Airline practices and operating circumstances may result in different sequences and different time intervals to do the activities shown.

5-2-1 Type A and Type B Turn around Charts****ON A/C A330-200 A330-300**Full Servicing Turn Round Charts****ON A/C A330-200**

1. Assumptions for full servicing turn round chart.

A. PASSENGER BOARDING/DEBOARDING (PB/D)

Deboarding : 293 passengers (30 business + 263 tourists)

- For full servicing, all passengers deboard and board
- Doors used: L1 + L2
- Deboarding:
 - 160 pax at L1 (30 business and 130 tourists) and 133 pax at L2
 - Deboarding rate = 25 pax/min
 - Priority deboarding for premium passengers
- Boarding:
 - 30 pax at L1 and 263 pax at L2
 - Boarding rate = 15 pax/min
- Last Pax Seating Allowance (LPS) + headcounting = + 4 min

B. CARGO

- 6 LD3 + 2 pallets for AFT CC
- 8 LD3 + 2 pallets for FWD CC
- 1 000 kg (2 205 lb) in Bulk CC
- LD-3 off-loading/loading times:
 - off-loading = 1.2 min/LD-3
 - loading = 1.4 min/LD-3
- Pallet loading times:
 - off-loading = 2.4 min/pallet
 - loading = 2.8 min/pallet
- Bulk off-loading/loading times:
 - off-loading = 9.2 min/t
 - loading = 10.5 min/t

C. REFUELLING

- Block fuel for Nominal Range through 4 nozzles
- 115 000 liters (30 380 US gal) at 50 psi
- Dispenser positioning or removal = 3 min (fuel truck change) / if any = 5 min

D. CLEANING

- Cleaning is performed in available time

E. CATERING

- 3 catering vehicles
- 36 Full size trolley: 10 FST at R1, 9 FST at R2 and 17 FST at R4
- FST exchange time = 1.5 min/FST

F. GROUND HANDLING/SERVICING

- Start of operations :
 - (1) Bridges = $t_0 = 0$
 - (2) Others = $t_0 + 1$ min
- Vehicle positioning/removal = 2 min (fuel truck excluded)
- Ground Power Unit (GPU) = up to 2×90 kVA
- Air conditioning = two carts
- Potable water servicing: replenish 700 l (185 US gal); flow rate: 60 l/min (15.85 US gal/min)
- Waste water servicing (draining + rinsing): discharge 700 l (185 US gal)
- Dollies per tractor = 4

****ON A/C A330-300**

2. Assumptions for full servicing turn round chart.

A. PASSENGER BOARDING/DEBOARDING (PB/D)

Deboarding : 332 passengers (30 business + 302 tourists)

- For full servicing, all passengers deboard and board
- Doors used: L1 + L2
- Deboarding:
 - 180 pax at L1 (30 business and 150 tourists) and 152 pax at L2
 - Deboarding rate = 25 pax/min
 - Priority deboarding for premium passengers
- Boarding:
 - 30 pax at L1 and 302 pax at L2
 - Boarding rate = 15 pax/min
- Last Pax Seating Allowance (LPS) + headcounting = + 4 min


B. CARGO

- 8 LD3 + 2 pallets for AFT CC
- 12 LD3 + 2 pallets for FWD CC
- 1 000 kg (2 205 lb) in Bulk CC
- LD-3 off-loading/loading times:
 - off-loading = 1.2 min/LD-3
 - loading = 1.4 min/LD-3
- Pallet loading times:
 - off-loading = 2.4 min/pallet
 - loading = 2.8 min/pallet

- Bulk off-loading/loading times:
 - off-loading = 9.2 min/t
 - loading = 10.5 min/t
- C. REFUELLING
 - Block fuel for Nominal Range through 4 nozzles
 - 89 100 l (23 538 US gal) at 50 psi
 - Dispenser positioning or removal = 3 min (fuel truck change) / if any = 5 min
- D. CLEANING
 - Cleaning is performed in available time
- E. CATERING
 - 3 catering vehicles
 - 39 Full size trolley: 8 FSTE at R1, 13 FSTE at R2 and 18 FSTE at R4
 - FST exchange time = 1.5 min/FST
- F. GROUND HANDLING/SERVICING
 - Start of operations :
 - (1) Bridges = $t_0 = 0$
 - (2) Others = $t_0 + 1$ min
 - Vehicle positioning/removal = 2 min (fuel truck excluded)
 - Ground Power Unit (GPU) = up to 2×90 kVA
 - Air conditioning = two carts
 - Potable water servicing: replenish 700 l (185 US gal); flow rate: 60 l/min (15.85 US gal/min)
 - Waste water servicing (draining + rinsing): discharge 700 l (185 US gal)
 - Dollies per tractor = 4

**ON A/C A330-200

TRT : 60 min

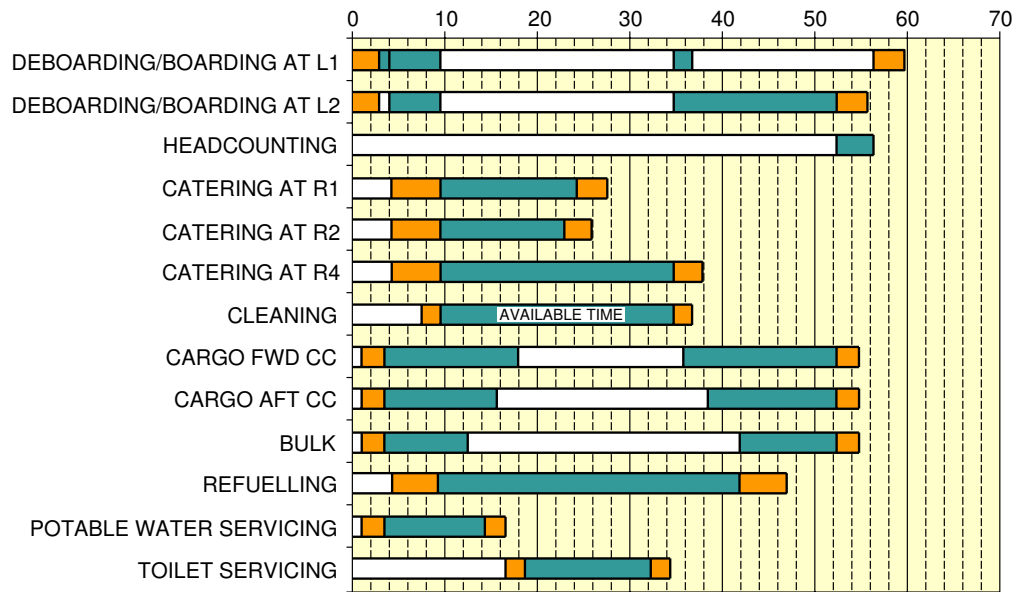


POSITIONING/REMOVAL
 ACTIVITY

F_AC_050201_1_0010101_01_01

Full Servicing Turn Round Charts
 Turn Round Time 60 min.
 FIGURE-5-2-1-991-001-A01

**ON A/C A330-300

TRT : 64 min

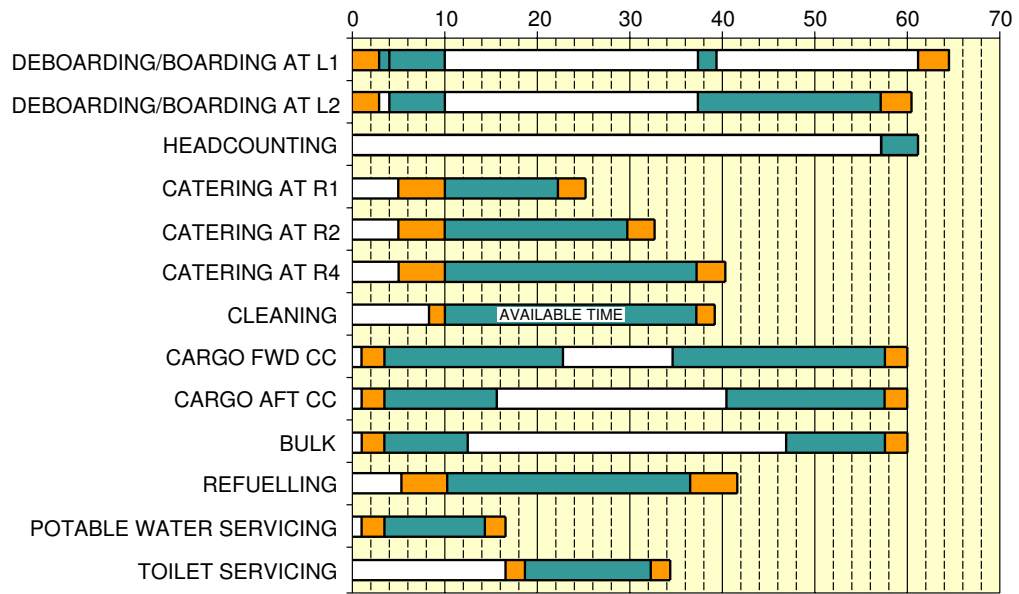

POSITIONING/REMOVAL
 ACTIVITY

F_AC_050201_1_0020101_01_01

Full Servicing Turn Round Charts
 Turn Round Time 64 min.
 FIGURE-5-2-1-991-002-A01


****ON A/C A330-200F**Full Servicing Turn Round Charts

1. Assumptions for full servicing turn round chart.
 - A. PASSENGER BOARDING/DEBOARDING (PB/D)
4 Couriers
 - Door used: L1
 - Deboarding:
 - 4 couriers at L1
 - Deboarding rate = 25 pax/min
 - Boarding:
 - 4 couriers at L1
 - Boarding rate = 15 pax/min
 - B. CARGO
100% cargo exchange
 - 22 pallets on MD CC
 - 4 pallets for AFT CC
 - 2 LD3 + 4 pallets for FWD CC
 - 1 000 kg (2 205 lb) in Bulk CC
 - LD-3 off-loading/loading times:
 - off-loading = 1.2 min/LD-3
 - loading = 1.4 min/LD-3
 - Lower Deck pallet loading times:
 - off-loading = 2.4 min/pallet
 - loading = 2.8 min/pallet
 - Bulk off-loading/loading times:
 - off-loading = 9.2 min/t
 - loading = 10.5 min/t
 - C. REFUELLING
 - Block fuel for Nominal Range through 4 nozzles
 - 115 000 l (30 380 US gal) at 50 psi
 - Dispenser positioning or removal = 3 min (fuel truck change) / if any = 5 min
 - D. CLEANING
 - Courier area cleaning is performed in available time
 - E. CATERING
 - Catering of galley (if installed) is performed through door L1 (standard units only) and in available time.
 - F. GROUND HANDLING/SERVICING
 - Start of operations :

- (1) Stair = $t_0 = 0$
- (2) Others = $t_0 + 1$ min
- Vehicle positioning/removal = 2 min (fuel truck excluded)
- Ground Power Unit (GPU) = up to 2×90 kVA
- Air conditioning = two carts
- Potable water servicing: replenish 700 l (185 US gal); flow rate: 60 l/min (15.85 US gal/min)
- Waste water servicing (draining + rinsing): discharge 700 l (185 US gal)
- Dollies per tractor = 4

**ON A/C A330-200F

TRT : 62 min

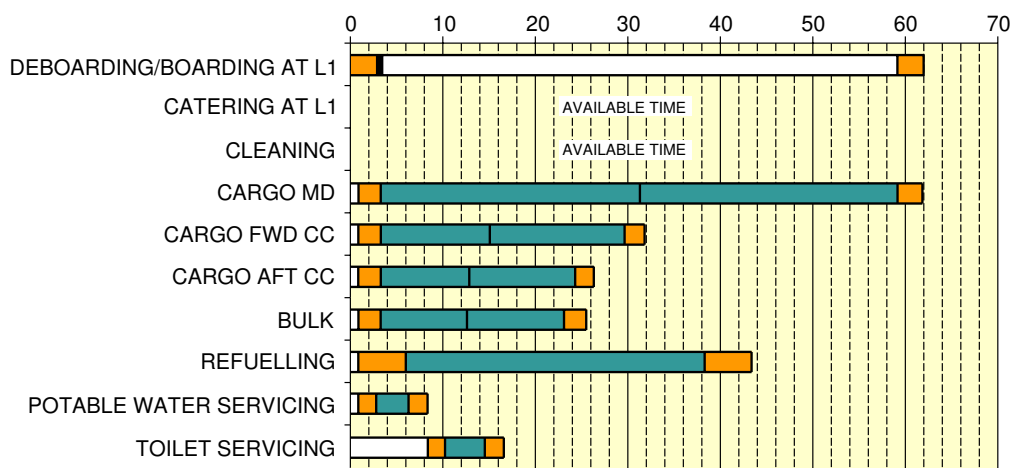

POSITIONING/REMOVAL
 ACTIVITY

F_AC_050201_1_0050101_01_01

Full Servicing Turn Round Charts
 Turn Round Time 62 min.
 FIGURE-5-2-1-991-005-A01



5-3-0 Terminal Operation - en route station

****ON A/C A330-200 A330-300**

Terminal Operations - Transit Turn Round Charts

1. This section provides a series of charts showing typical activities during turnaround at transit airports.

This data is provided to show the general scope and type of activities involved in ramp operations during the turnaround of an aircraft.

Varying Airline practices and operating circumstances may result in different sequences and different time intervals to do the activities shown.

5-3-1 Type C Turn around Chart****ON A/C A330-200 A330-300**Transit Turn Round Charts****ON A/C A330-200**

1. Assumptions for transit turn round chart.

A. PASSENGER BOARDING/DEBOARDING (PB/D)

Deboarding : 293 passengers (30 business + 263 tourists)

- 50% pax in transit, all passengers deboard and board
- Doors used: L1 + L2
- Deboarding:
 - 160 pax at L1 (30 business and 130 tourists) and 133 pax at L2
 - Deboarding rate = 25 pax/min
 - Priority deboarding for premium passengers
- Boarding:
 - 30 pax at L1 and 263 pax at L2
 - Boarding rate = 15 pax/min
- Last Pax Seating Allowance (LPS) + headcounting = + 4 min

B. CARGO

For transit, 50% of luggages are exchanged in one cargo compartment only

- 1 container loader for AFT CC
- 5 LD3 for AFT CC
- LD-3 off-loading/loading times:
 - off-loading = 1.2 min/LD-3
 - loading = 1.4 min/LD-3

C. REFUELLING

- Refueling through 2 nozzles
- For transit, fuel uplift is 30% of maximum fuel uplift. (Max = 139 090 l (36 744 US gal))
Note: local rules and regulations to be respected
- Passengers boarding can start before refuel is finished
- Dispenser positioning or removal = 3 min (fuel truck change) / if any = 5 min

D. CLEANING

- Cleaning is performed in available time

E. CATERING

- Time needed just for additional meals
- Assumptions: 10 min

F. GROUND HANDLING/SERVICING

- Start of operations :
 - (1) Bridges = $t_0 = 0$
 - (2) Others = $t_0 + 1$ min
- Vehicle positioning/removal = 2 min (fuel truck excluded)
- Ground Power Unit (GPU) = up to 2×90 kVA
- Air conditioning = two carts
- No potable water servicing
- No waste water servicing
- Dollies per tractor = 4

****ON A/C A330-300**

2. Assumptions for transit turn round chart.

A. PASSENGER BOARDING/DEBOARDING (PB/D)

Deboarding : 332 passengers (30 business + 302 tourists)

- 50% pax in transit, all passengers deboard and board
- Doors used: L1 + L2
- Deboarding:
 - 165 pax at L1 (30 business and 135 tourists) and 167 pax at L2
 - Deboarding rate = 25 pax/min
 - Priority deboarding for premium passengers
- Boarding:
 - 30 pax at L1 and 302 pax at L2
 - Boarding rate = 15 pax/min
- Last Pax Seating Allowance (LPS) + headcounting = + 4 min

B. CARGO

For transit, 50% of luggages are exchanged in one cargo compartment only

- 1 container loader for AFT CC
- 5 LD3 for AFT CC
- LD-3 off-loading/loading times:
 - off-loading = 1.2 min/LD-3
 - loading = 1.4 min/LD-3

C. REFUELLING

- Refueling through 2 nozzles
- For transit, fuel uplift is 30% of maximum fuel uplift. (Max = 97 530 l (25 765 US gal))
Note: local rules and regulations to be respected
- Passengers boarding can start before refuel is finished
- Dispenser positioning or removal = 3 min (fuel truck change) / if any = 5 min

D. CLEANING

- Cleaning is performed in available time

E. CATERING


- Time needed just for additional meals
- Assumptions: 10 min

F. GROUND HANDLING/SERVICING

- Start of operations :
 - (1) Bridges = $t_0 = 0$
 - (2) Others = $t_0 + 1$ min
- Vehicle positioning/removal = 2 min (fuel truck excluded)
- Ground Power Unit (GPU) = up to 2×90 kVA
- Air conditioning = two carts
- No potable water servicing
- No waste water servicing
- Dollies per tractor = 4

**ON A/C A330-200

TRT : 44 min

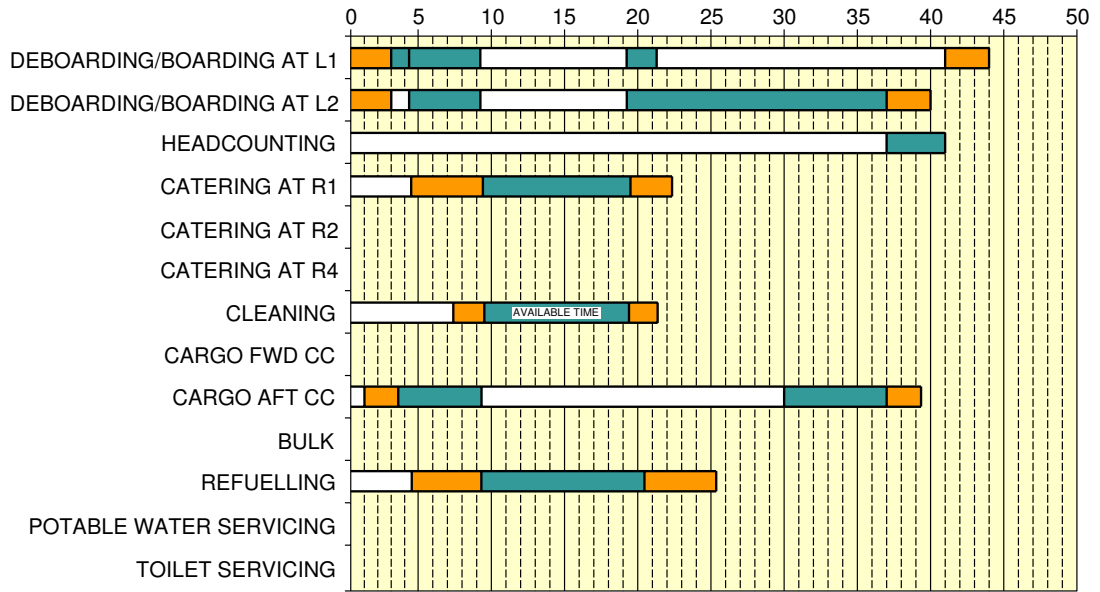


POSITIONING/REMOVAL
 ACTIVITY

F_AC_050301_1_0010101_01_01

Transit Turn Round Charts
 Turn Round Time 44 min.
 FIGURE-5-3-1-991-001-A01

**ON A/C A330-300

TRT : 48 min

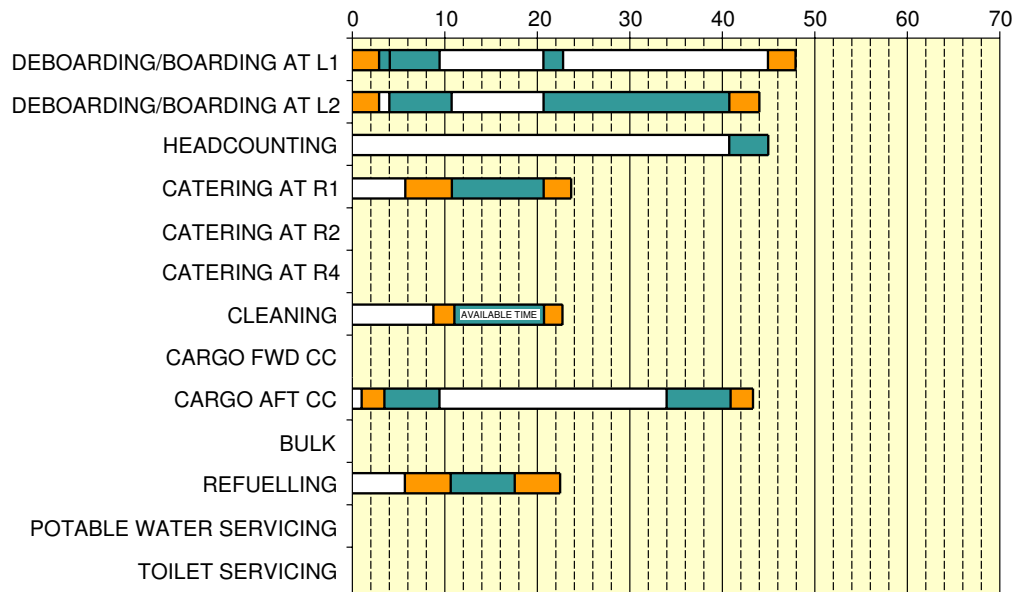

POSITIONING/REMOVAL
 ACTIVITY

F_AC_050301_1_0020101_01_01

Transit Turn Round Charts
 Turn Round Time 48 min.
 FIGURE-5-3-1-991-002-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

5-4-0 Ground Service Connections

**ON A/C A330-200 A330-200F A330-300

Ground Service Connections


1. Ground Service Connections.

5-4-1 Ground Service Connections Layout****ON A/C A330-200 A330-300**Ground Service Connections Layout

1. This section gives the ground service connections layout.

| Ground Service Connections Layout | |
|-----------------------------------|---|
| 1 | – OXYGEN SYSTEM |
| 2 | – EXTERNAL POWER (ELECTRICAL) |
| 3 | – POTABLE WATER DRAIN |
| 4 | – LOW PRESSURE PRE-CONDITIONING |
| 5 | – HIGH PRESSURE AIR PRE-CONDITIONING AND ENGINE STARTING |
| 6 | – IDG OIL FILLING |
| 7 | – ENGINE OIL FILLING |
| 8 | – PRESSURE REFUEL |
| 9 | – OVERWING REFUEL |
| 10 | – HYDRAULIC GROUND POWER SUPPLY (YELLOW) |
| 11 | – HYD RESERVOIR FILLING AND GROUND POWER SUPPLY (GREEN) |
| 12 | – HYD RESERVOIR AIR PRESSURIZATION & GROUND POWER SUPPLY (BLUE) |
| 13 | – NITROGEN CHARGING FOR HYDRAULIC ACCUMULATORS |
| 14 | – REFUEL/DEFUEL PANEL |
| 15 | – POTABLE WATER FILLING |
| 16 | – TOILET SERVICING |
| 17 | – APU OIL FILLING |
| 18 | – GROUNDING POINTS |

**ON A/C A330-200 A330-300

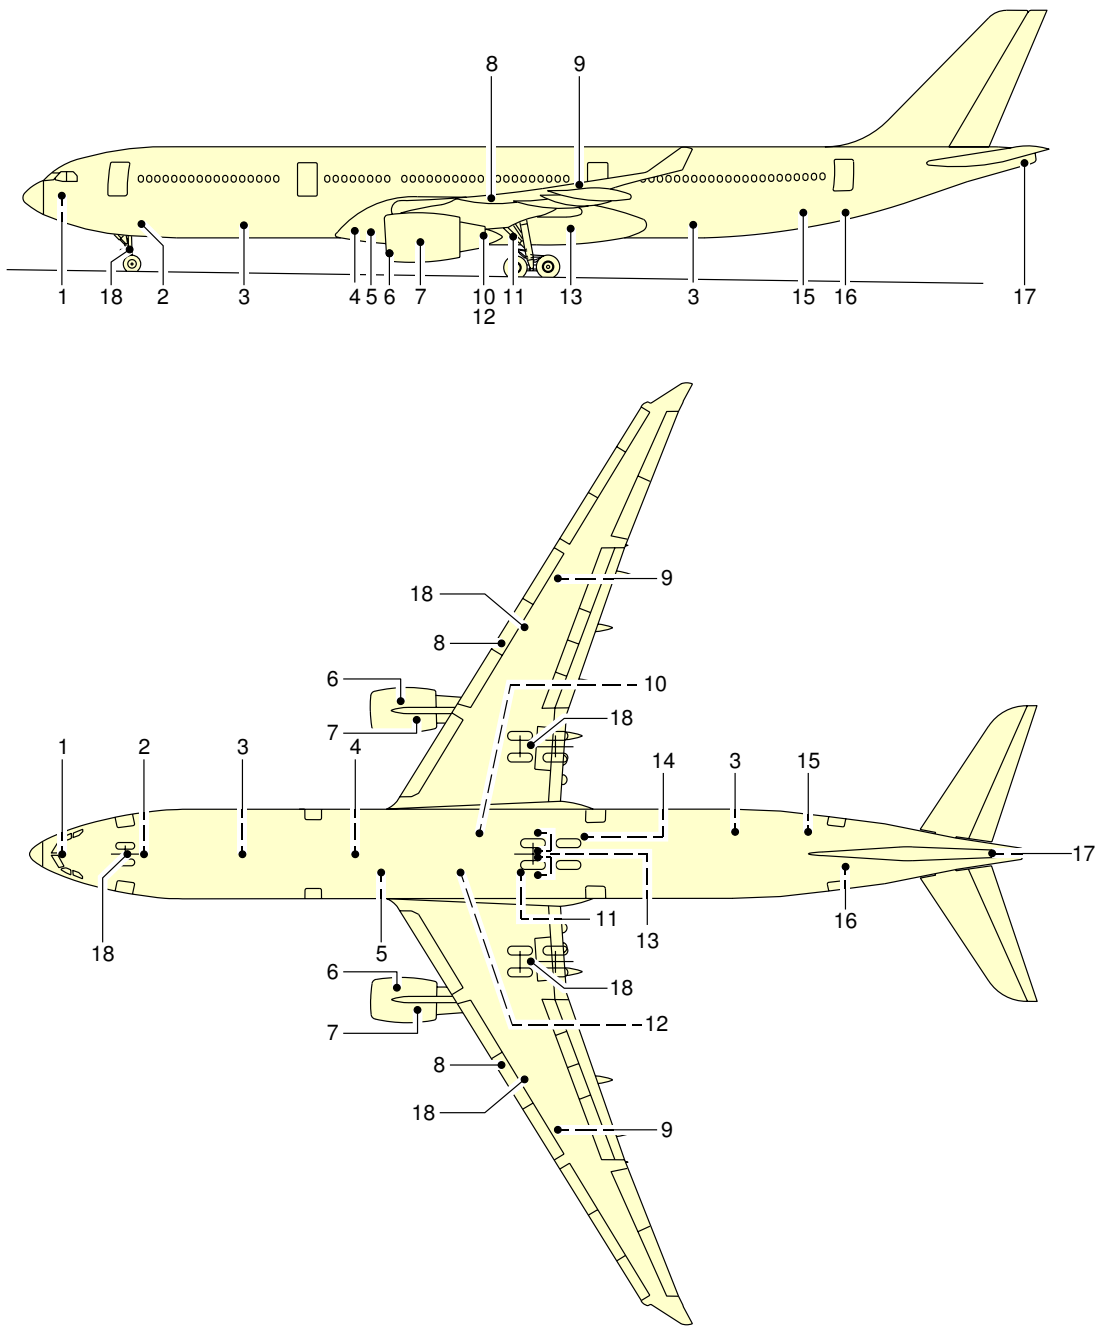

F_AC_050401_1_0010101_01_00



Ground Service Connections
FIGURE-5-4-1-991-001-A01

****ON A/C A330-200F**Ground Service Connections Layout

1. Ground Service Connections Layout

| Ground Service Connections Layout | |
|-----------------------------------|--|
| 1 | - POTABLE WATER SERVICE PANEL |
| 2 | - REMOTE WATER DRAIN |
| 3 | - HYDRAULIC GROUND POWER SUPPLY (YELLOW) |
| 4 | - IDG OIL FILLING |
| 4.1 | - ENGINE OIL FILLING |
| 5 | - WASTE WATER PANEL |
| 6 | - ELECTRICAL GROUND POWER RECEPTACLES |
| 7 | - LOW PRESSURE AIR |
| 8 | - FUEL GRAVITY FILLING |
| 9 | - AIR CHARGING FOR HYDRAULIC ACCUMULATORS |
| 10 | - HYD RESERVOIR FILLING AND GROUND POWER (GREEN) |
| 11 | - HYD RESERVOIR AIR CHARGING & GROUND POWER (BLUE) |
| 12 | - REFUEL/DEFUEL COUPLING |
| 13 | - HIGH PRESSURE AIR |
| 14 | - APU OIL FILLING |
| 15 | - REFUEL/DEFUEL PANEL |

**ON A/C A330-200F

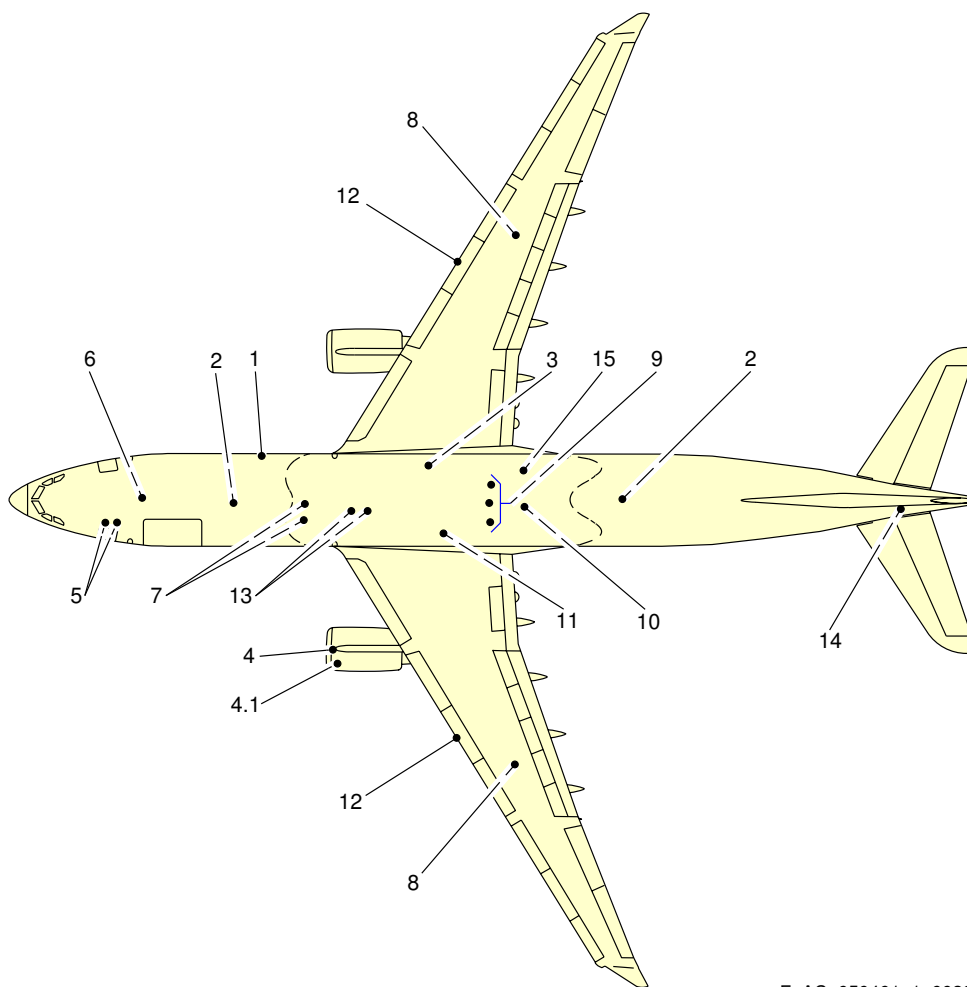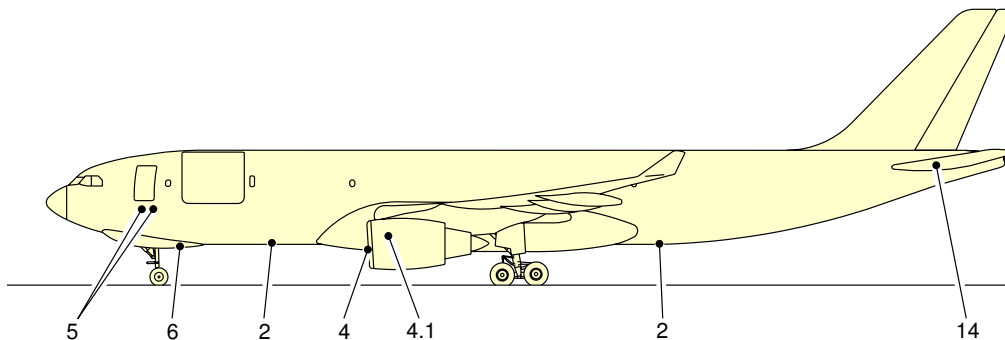

F_AC_050401_1_0020101_01_01

Ground Service Connections
FIGURE-5-4-1-991-002-A01

5-4-2 Grounding Points

****ON A/C A330-200 A330-200F A330-300**

Grounding Points

****ON A/C A330-200 A330-200F**

1. Grounding Points.

| | DISTANCE : Meters (ft) | | | |
|----------------------------------|------------------------|--------------------------|----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| On Nose Landing Gear leg : | 6.67 m (21.88 ft) | on centerline | | 1.40 m (4.59 ft) |
| On left Main Landing Gear leg : | 28.37 m (93.08 ft) | | 5.34 m (17.52 ft) | 1.50 m (4.92 ft) |
| On right Main Landing Gear leg : | 28.37 m (93.08 ft) | 5.34 m (17.52 ft) | | 1.50 m (4.92 ft) |

- A. The grounding stud on each landing gear leg is designed for use with a clip-on connector (such as Appleton TGR).
- B. The grounding studs are used to connect the aircraft to an approved ground connection on the ramp or in the hangar for :
 - refuel/defuel operations.
 - maintenance operations.
 - bad weather conditions.

NOTE : In all other conditions, the electrostatic discharge through the tyre is sufficient.

****ON A/C A330-300**

2. Grounding Points.


| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| | | | | |

| | DISTANCE : Meters (ft) | | | |
|----------------------------------|------------------------|----------------------|----------------------|---------------------|
| On Nose Landing Gear leg : | 6.67 m (21.88 ft) | on centerline | | 1.40 m (4.59 ft) |
| On left Main Landing Gear leg : | 31.53 m (103.44 ft) | | 5.34 m (17.52 ft) | 1.50 m (4.92 ft) |
| On right Main Landing Gear leg : | 31.53 m (103.44 ft) | 5.34 m (17.52 ft) | | 1.50 m (4.92 ft) |

- A. The grounding stud on each landing gear leg is designed for use with a clip-on connector (such as Appleton TGR).
- B. The grounding studs are used to connect the aircraft to an approved ground connection on the ramp or in the hangar for :
- refuel/defuel operations.
 - maintenance operations.
 - bad weather conditions.

NOTE : In all other conditions, the electrostatic discharge through the tyre is sufficient.


**ON A/C A330-200 A330-200F A330-300

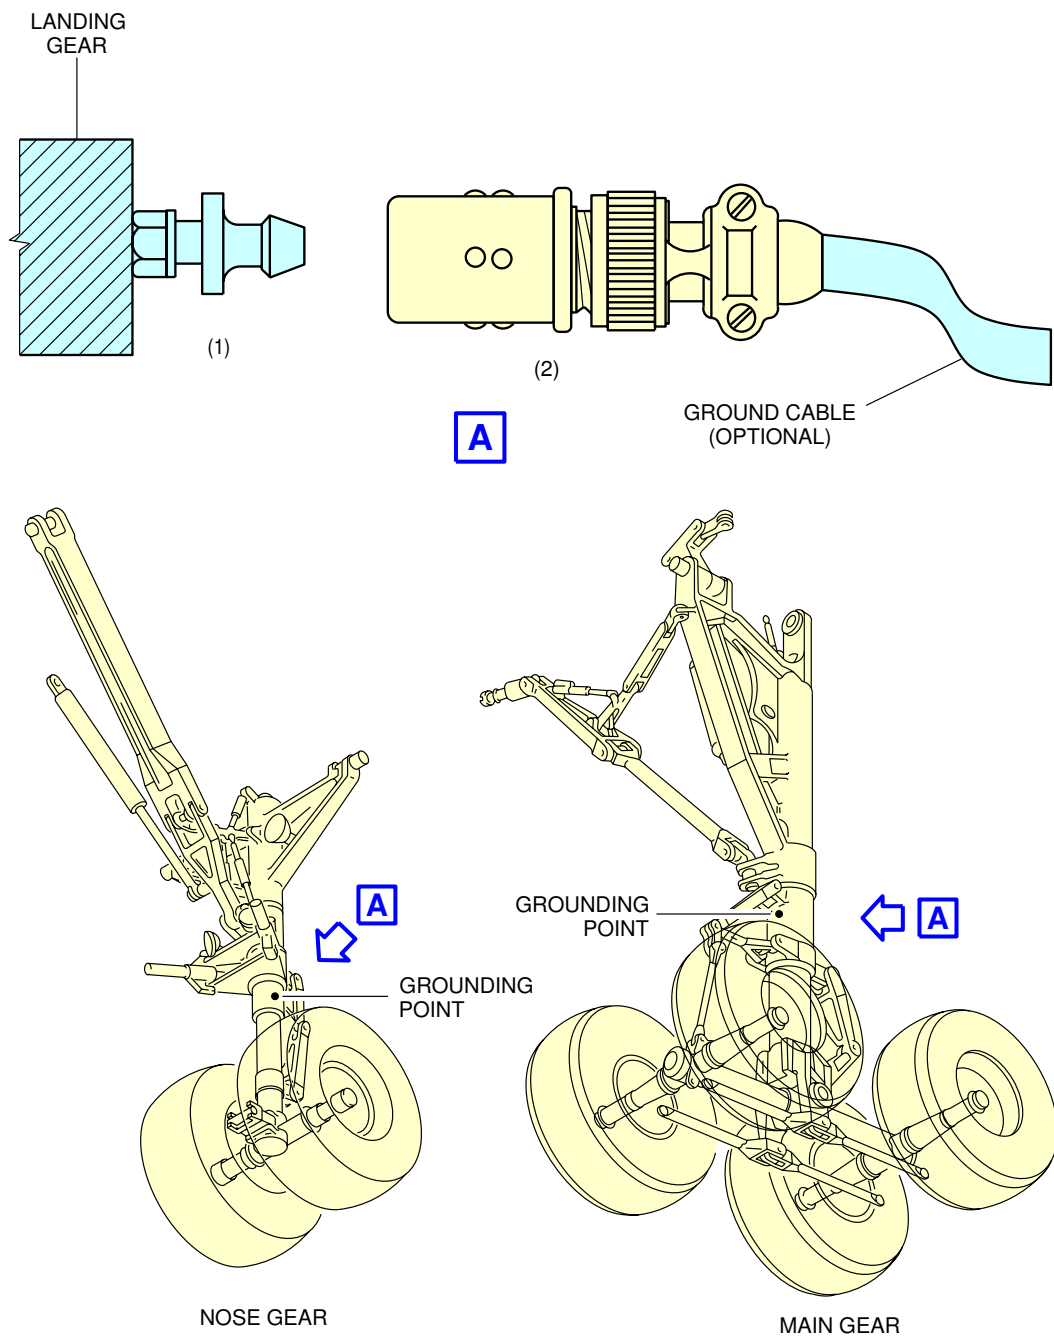

F_AC_050402_1_0010101_01_00


Ground Service Connections
Grounding Points
FIGURE-5-4-2-991-001-A01

**ON A/C A330-200 A330-200F A330-300

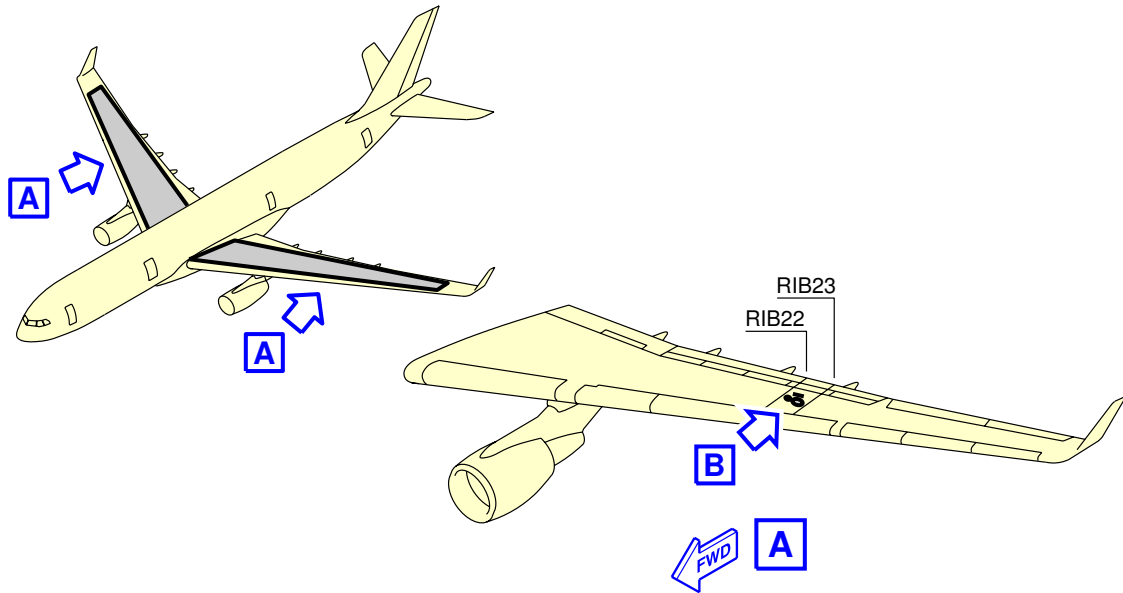

JET FUEL

FOR SPECIFICATIONS REFER TO FLIGHT MANUAL

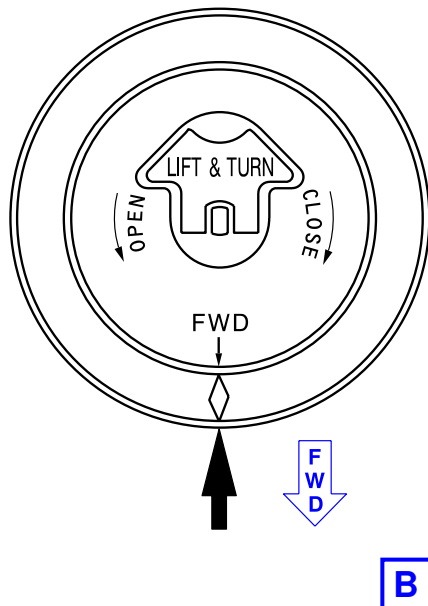

NOTE: R SIDE SYMETRICAL

F_AC_050402_1_0020101_01_00

Ground Service Connections
Grounding Points
FIGURE-5-4-2-991-002-A01

5-4-3 Hydraulic System

****ON A/C A330-200 A330-200F A330-300**

Hydraulic System

1. Ground service panels.

| DISTANCE : Meters (ft) | | | | |
|------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Green System : | 41.3 m (135.50 ft) | | 1.34 m (4.40 ft) | 2.23 m (7.32 ft) |
| Yellow System : | 35.4 m (116.14 ft) | 1.30 m (4.27 ft) | | 1.95 m (6.40 ft) |
| Blue System : | 34.41 m (112.89 ft) | | 1.28 m (4.20 ft) | 1.94 m (6.36 ft) |

2. Reservoir Pressurization.

| DISTANCE : Meters (ft) | | | | |
|--|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| One 1/4 in. self sealing connection common to the 3 reservoirs. (Blue System Ground Service Panel) : | 34.47 m (113.09 ft) | | 1.41 m (4.63 ft) | 1.89 m (6.20 ft) |

****ON A/C A330-200 A330-200F**

3. Accumulator Charging, 5 connections.

(one for each accumulator) for :

| | DISTANCE : Meters (ft) | | | |
|--------------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Yellow System accumulator: | 35.55 m (116.63 ft) | 1.43 m (4.69 ft) | | 1.91 m (6.27 ft) |
| Green System accumulator: | 41.52 m (136.22 ft) | | 1.33 m (4.36 ft) | 2.19 m (7.19 ft) |
| Blue System accumulator: | 34.54 m (113.32 ft) | | 1.38 m (4.53 ft) | 1.9 m (6.23 ft) |
| Blue system brake accumulator: | 34.54 m (113.32 ft) | | 1.24 m (4.07 ft) | 1.9 m (6.23 ft) |

****ON A/C A330-300**

4. Accumulator Charging, 5 connections.

(one for each accumulator) for :

| | DISTANCE : Meters (ft) | | | |
|--------------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Yellow System accumulator: | 35.55 m (116.63 ft) | 1.43 m (4.69 ft) | | 1.91 m (6.27 ft) |
| Green System accumulator: | 41.52 m (136.22 ft) | | 1.33 m (4.36 ft) | 2.19 m (7.19 ft) |
| Blue System accumulator: | 34.54 m (113.32 ft) | | 1.38 m (4.53 ft) | 1.9 m (6.23 ft) |
| Blue system brake accumulator: | 34.54 m (113.32 ft) | | 1.18 m (3.87 ft) | 1.9 m (6.23 ft) |

****ON A/C A330-200 A330-200F A330-300**

5. Reservoir Filling, 2 connections.

One self-sealing connection for pressurized supply on the Green system ground service panel.

| | DISTANCE : Meters (ft) | | | |
|----------------------------------|------------------------|--------------------------|--------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| One handpump filling connection. | 41.31 m (135.53 ft) | | 1.3 m (4.27 ft) | 2.11 m (6.92 ft) |

6. Reservoir Drain.

One 3/8 in. self-sealing connection on reservoir for :

| | DISTANCE : Meters (ft) | | | |
|-----------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Green System : | 29.03 m (95.24 ft) | 2.12 m (6.96 ft) | | 2.40 m (7.87 ft) |
| Yellow System : | 33.17 m (108.83 ft) | | 0.70 m (2.30 ft) | 3.80 m (12.47 ft) |
| Blue System : | 29.03 m (95.24 ft) | | 2.12 m (6.96 ft) | 2.40 m (7.87 ft) |

7. Ground Test.

Three 1 in. self-sealing connections and three 1-1/2 in. self-sealing connections (one pair per system)

| | DISTANCE : Meters (ft) | | | |
|-------------------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Green System ground service panel: | 34.92 m (114.57 ft) | | 1.35 m (4.43 ft) | 2.2 m (7.22 ft) |
| Yellow System ground service panel: | 29.03 m (95.24 ft) | 1.30 m (4.27 ft) | | 2.0 m (6.56 ft) |
| Blue System ground service panel: | 28.03 m (91.96 ft) | | 1.28 m (4.20 ft) | 2.0 m (6.56 ft) |

5-4-4 Electrical System

****ON A/C A330-200 A330-200F A330-300**

Electrical System

****ON A/C A330-200 A330-300**

1. Electrical System.

| | DISTANCE : Meters (ft) | | | MEAN HEIGHT FROM GROUND |
|--|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | |
| | | R SIDE | L SIDE | |
| Two standard 6 pin connectors ISO R 461 specification. | 7.2 m (23.62 ft) | on centerline | | 1.98 m (6.50 ft) |

- A. Supply :
115/200 Volt, 3-Phase, 400 Hz.
- B. Electrical connectors for servicing :
 - AC outlets : Hubbel 5258.
 - DC outlets : Hubbel 7472.
 - Vacuum cleaner outlets : Hubbel 5258.

****ON A/C A330-200F**

2. Electrical System.

| | DISTANCE : Meters (ft) | | | MEAN HEIGHT FROM GROUND |
|--|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | |
| | | R SIDE | L SIDE | |
| Two standard 6 pin connectors ISO R 461 specification. | 7.2 m (23.62 ft) | on centerline | | 2.29 m (7.51 ft) |

- A. Supply :
115/200 Volt, 3-Phase, 400 Hz.
- B. Electrical connectors for servicing :
 - AC outlets : Hubbel 5258.
 - DC outlets : Hubbel 7472.
 - Vacuum cleaner outlets : Hubbel 5258.

5-4-5 Oxygen System

****ON A/C A330-200 A330-200F A330-300**

Oxygen System

1. Oxygen System.

| | DISTANCE : Meters (ft) | | | |
|------------|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| OPTION 1 : | 2.50 m (8.20 ft) | 0.53 m (1.74 ft) | | 3.20 m (10.50 ft) |
| OPTION 2 : | 2.50 m (8.20 ft) | 0.68 m (2.23 ft) | | 3.20 m (10.50 ft) |

- 0 – Basic : external charging in the avionic compartment.
- 1 – Option.
- 2 – Option.

Zero, one or two service connections (external charging in the avionics compartment) MS22066 Std.

NOTE : Internal Charging Connection Provided.

5-4-6 Fuel System

****ON A/C A330-200 A330-200F A330-300**

Fuel System

****ON A/C A330-200**

1. Refuel/defuel access

| | DISTANCE : Meters (ft) | | | |
|-----------------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Refuel/defuel coupling | 26.80 m (87.92 ft) | 12.60 m (41.33 ft) | 12.60 m (41.33 ft) | 5.00 m (16.40 ft) |
| Overwing gravity refuel cap | 31.30 m (102.69 ft) | 17.20 m (56.43 ft) | 17.20 m (56.43 ft) | 5.80 m (19.03 ft) |

A. Four Standard 2.5 in. connections – ISO R45 SPEC.

B. Two service connections (gravity refuel).

2. Refuel/defuel control panel.

| | DISTANCE : Meters (ft) | | | |
|-----------------------------|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Refuel/defuel control panel | 31.10 m (102.03 ft) | 0.8 m (2.62 ft) | | 1.90 m (6.23 ft) |

A. Flow Rate : 1580 l/min (417 U.S. gal/min) per connection.

B. Maximum Pressure : 50.00 psi (3.45 bar).

****ON A/C A330-200F**

3. Refuel/defuel access

| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |

| | DISTANCE : Meters (ft) | | | |
|-----------------------------|------------------------|-----------------------|-----------------------|----------------------|
| refuel/defuel coupling | 26.80 m (87.92 ft) | 12.60 m (41.33 ft) | 12.60 m (41.33 ft) | 5.10 m (16.73 ft) |
| Overwing gravity refuel cap | 31.30 m (102.69 ft) | 17.20 m (56.43 ft) | 17.20 m (56.43 ft) | 6.10 m (20.01 ft) |

A. Four Standard 2.5 in. connections – ISO R45 SPEC.

B. Two service connections (gravity refuel).

4. Refuel/defuel control panel.

| | DISTANCE : Meters (ft) | | | |
|-------------------------------|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Refuel/defuel control panel : | 31.10 m (102.03 ft) | 0.8 m (2.62 ft) | | 1.90 m (6.23 ft) |

A. Flow Rate : 1580 l/min (417 U.S. gal/min) per connection.

B. Maximum Pressure : 50.00 psi (3.45 bar).

****ON A/C A330-300**

5. Refuel/defuel access

| | DISTANCE : Meters (ft) | | | |
|-----------------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Refuel/defuel coupling | 30.00 m (98.45 ft) | 12.60 m (41.33 ft) | 12.60 m (41.33 ft) | 5.00 m (16.40 ft) |
| Overwing gravity refuel cap | 34.50 m (113.19 ft) | 17.20 m (56.43 ft) | 17.20 m (56.43 ft) | 5.80 m (19.02 ft) |

A. Four Standard 2.5 in. connections – ISO R45 SPEC.

B. Left side option.


C. Two service connections (gravity refuel).

6. Refuel/defuel control panel.

| | DISTANCE : Meters (ft) | | | |
|-------------------------------|------------------------|--------------------------|--------|-------------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Refuel/defuel control panel : | 34.30 m (112.53 ft) | 0.8 m (2.62 ft) | | 1.90 m (6.23 ft) |

- A. Flow Rate : 1580 l/min (417 U.S. gal/min) per connection.
- B. Maximum Pressure : 50.00 psi (3.45 bar).

**ON A/C A330-200 A330-200F A330-300

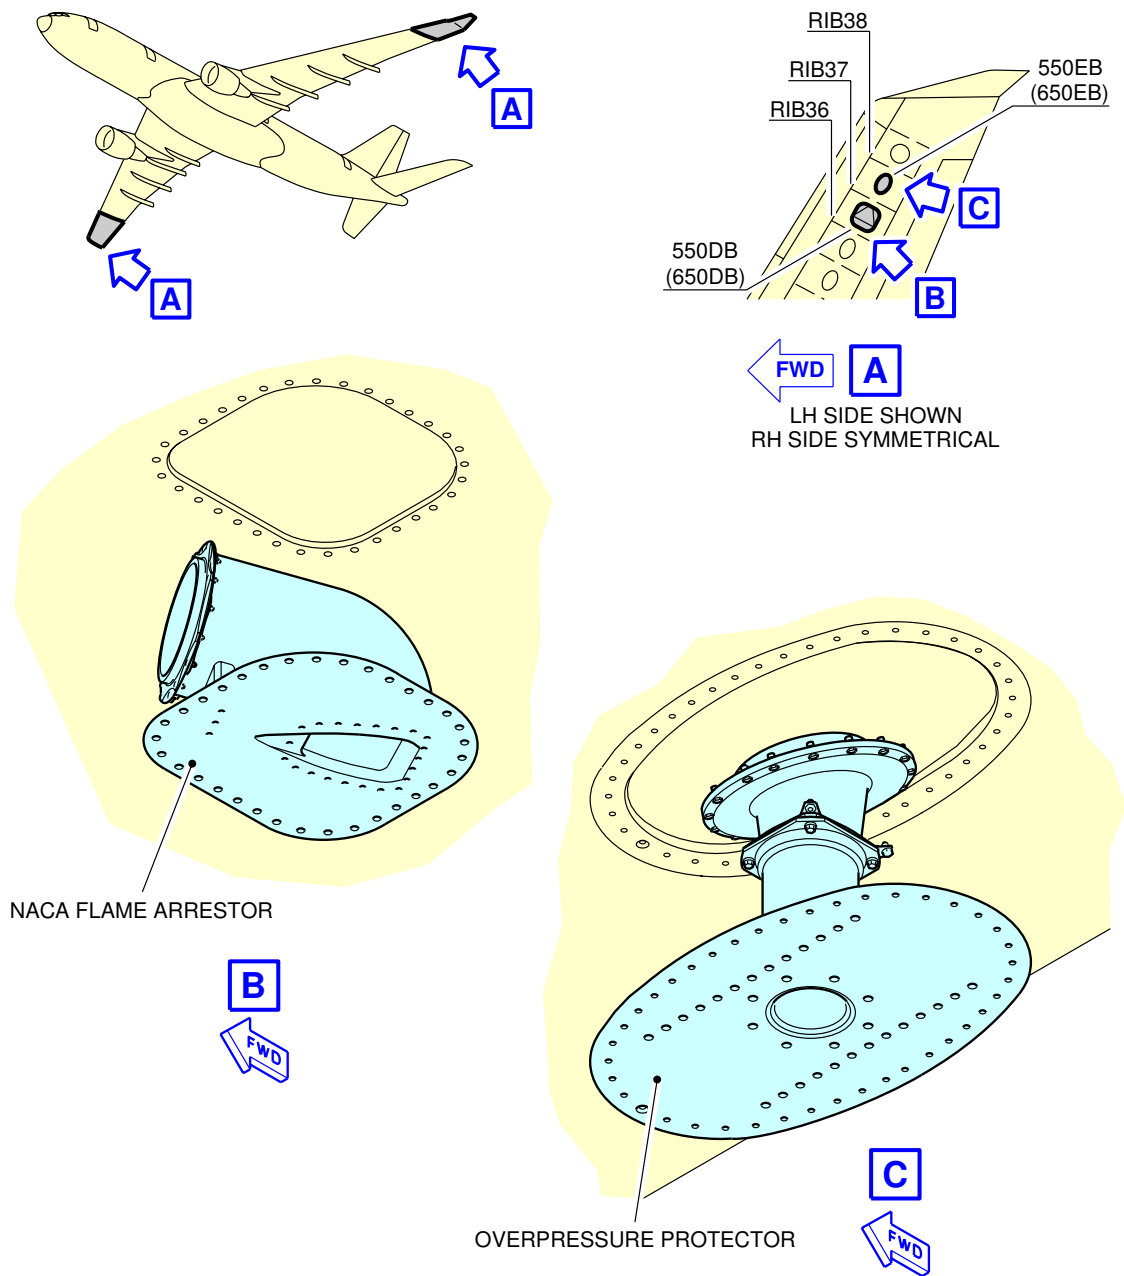

F_AC_050406_1_0020101_01_00

Overpressure Protector and NACA Flame Arrestor
FIGURE-5-4-6-991-002-A01

5-4-7 Pneumatic System

****ON A/C A330-200 A330-200F A330-300**

Pneumatic System

****ON A/C A330-200 A330-200F**

1. High Pressure Connectors.

| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Connections for engine starting and cabin air conditioning : | 20.72 m (67.98 ft) | | 0.84 m (2.76 ft) | 1.96 m (6.43 ft) |
| | 21.08 m (69.16 ft) | | 0.84 m (2.76 ft) | 1.94 m (6.36 ft) |

A. Two standard 3 in. TC20 connections for engine starting and cabin air conditioning.

2. Low Pressure Connectors.

| | DISTANCE : Meters (ft) | | | |
|------------------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Connections for preconditioned air | 19.29 m (63.29 ft) | | 0.31 m (1.02 ft) | 2.08 m (6.82 ft) |
| | 19.29 m (63.29 ft) | | 0.76 m (2.49 ft) | 2.11 m (6.92 ft) |

A. Two standard 8 in. connections (SAE - AS4262 TYPE B) for preconditioned air.

****ON A/C A330-300**

3. High Pressure Connectors.

| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Connections for engine starting and cabin air conditioning : | 23.9 m (78.41 ft) | | 0.84 m (2.76 ft) | 1.79 m (5.87 ft) |
| | 24.25 m (79.56 ft) | | 0.84 m (2.76 ft) | 1.79 m (5.87 ft) |

- A. Two standard 8 in. connections (SAE - AS4262 TYPE B) for preconditioned air.
4. Low Pressure Connectors.

| | DISTANCE : Meters (ft) | | | |
|------------------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Connections for preconditioned air | 22.48 m (73.75 ft) | | 0.31 m (1.02 ft) | 1.86 m (6.10 ft) |
| | 22.48 m (73.75 ft) | | 0.76 m (2.49 ft) | 0.76 m (2.49 ft) |

- A. Two standard 8 in. connections (SAE - AS4262 TYPE B) for preconditioned air.

5-4-8 Potable Water System

****ON A/C A330-200 A330-200F A330-300**

Potable Water System

****ON A/C A330-200 A330-300**

1. Service panel.

| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Service panel, located between frame 69-70 : | 48.15 m (157.97 ft) | 0.51 m (1.67 ft) | | 3.15 m (10.33 ft) |

- one heated 3/4 in. quick release filling connection.
- one heated 3/4 in. overflow and discharge connection.
- one ground pressurization connection.

****ON A/C A330-200F**

2. Service panel.

| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Service panel, located between frame 33-34 : | 14.03 m (46.03 ft) | | 0.76 m (2.49 ft) | 2.64 m (8.66 ft) |

- one heated 3/4 in. quick release filling connection.
- one heated 3/4 in. overflow and discharge connection.
- one ground pressurization connection.

****ON A/C A330-200 A330-300**

3. Fwd drainage panel.

| | DISTANCE : Meters (ft) | | | |
|--|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Fwd drainage panel, located between frame 28-29 comprising : | 14.70 m (48.23 ft) | | 0.60 m (1.97 ft) | 1.90 m (6.23 ft) |

- one standard 3/4 in. drain connection with back-up mechanical control.

****ON A/C A330-200F**

4. Fwd drainage panel.

| | DISTANCE : Meters (ft) | | | |
|---|------------------------|--------------------------|--------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Fwd drainage panel, located between frame 15A-16 comprising : | 6.1 m (20.01 ft) | | 1.7 m (5.58 ft) | 3.07 m (10.07 ft) |

- one standard 3/4 in. drain connection with back-up mechanical control.
- Usable capacity : 100 l (26.42 US gal).

****ON A/C A330-200**

5. Aft drainage panel.

| | DISTANCE : Meters (ft) | | | |
|---|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Aft drainage panel, located between frame 55-56 : | 40.18 m (131.82 ft) | 0.72 m (2.36 ft) | | 2.46 m (8.07 ft) |

- one standard 3/4 in. drain connection with back-up mechanical control.
- one standard 3/4 in. overflow and discharge connection with back-up mechanical control.

- A. Usable capacity :
- 700 l (184.92 US gal) standard.
 - 1050 l (277.38 US gal) standard option.

****ON A/C A330-300**

6. Aft drainage panel.

| | DISTANCE : Meters (ft) | | | |
|---|------------------------|--------------------------|--------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Aft drainage panel, located between frame 51.1-57.2 : | 40.18 m (131.82 ft) | 0.72 m (2.36 ft) | | 2.46 m (8.07 ft) |

- one standard 3/4 in. drain connection with back-up mechanical control.
- one standard 3/4 in. overflow and discharge connection with back-up mechanical control.

- A. Usable capacity :
- 700 l (184.92 US gal) standard.
 - 1050 l (277.38 US gal) standard option.

****ON A/C A330-200 A330-200F A330-300**

7. Fill rate :

| | Potable water storage tank installed in ... or ... | | | |
|------------|--|--------------------------------|--------------------------------|--------------------------------|
| | Fwd-tank (and opt-tank) [sect.15/16] | | aft-tank [sect.18] | |
| Pressure : | 50 psi (3.45 bar) | 125 psi (8.62 bar) | 50 psi (3.45 bar) | 125 psi (8.62 bar) |
| Flow : | 45 l/min (11.89 US gal/min) | 73 l/min (19.28 US gal/min) | 56 l/min (14.79 US gal/min) | 85 l/min (22.45 US gal/min) |

5-4-9 Oil System

****ON A/C A330-200 A330-200F A330-300**

Oil System

1. Engine Oil Tank and IDG for PW 4000 series engine.

A. Engine Oil Replenishment :

One gravity filling cap and one pressure filling connection per engine.

| | DISTANCE : Meters (ft) | | | |
|---------------------|------------------------|--------------------------|----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | ENGINE 1 (Left) | ENGINE 2 (Right) | |
| Engine Oil Filling: | 25.7 m (84.32 ft) | 10.6 m (34.78 ft) | 8.07 m (26.48 ft) | 2.23 m (7.32 ft) |

(1) Tank capacity :

- Full level : 8.00 US gal (30.28 l).
- Usable : 5.75 US gal (21.77 l).

B. IDG Oil Replenishment :

One pressure filling connection per engine.

| | DISTANCE : Meters (ft) | | | |
|--------------------------------------|------------------------|--------------------------|----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | ENGINE 1 (Left) | ENGINE 2 (Right) | |
| IDG Oil Pressure Filling Connection: | 26.16 m (85.83 ft) | 10.07 m (33.04 ft) | 8.66 m (28.41 ft) | 1.50 m (4.92 ft) |

- Max delivery pressure required : 40 psi (2.76 bar).
- Max OIL capacity of the IDG : 1.1 US gal (4.16 l).

2. Engine Oil Tank and IDG for RR Trent 700 series engine

A. Engine Oil Replenishment :

One gravity filling cap.

One ozone self sealing pressure fill and overflow connector per engine.

| | DISTANCE : Meters (ft) | | | |
|---------------------|------------------------|--------------------------|-----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | ENGINE 1 (Left) | ENGINE 2 (Right) | |
| Engine Oil Filling: | 23.9 m (78.41 ft) | 7.92 m (25.98 ft) | 10.82 m (35.50 ft) | 2.05 m (6.73 ft) |

- (1) Tank capacity :
- Full level : 7.18 US gal (27.18 l).
 - Usable : 6.00 US gal (22.71 l).

B. IDG Oil Replenishment :

One ozone self sealing pressure fill and overflow connector per engine.

| | DISTANCE : Meters (ft) | | | |
|--------------------------------------|------------------------|--------------------------|----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | ENGINE 1 (Left) | ENGINE 2 (Right) | |
| IDG Oil Pressure Filling Connection: | 24.38 m (79.99 ft) | 9.65 m (31.66 ft) | 9.09 m (29.82 ft) | 0.8 m (2.62 ft) |

- Max delivery pressure required : 40 psi (2.76 bar).
- Max OIL capacity of the IDG : 1.12 US gal (4.24 l).

****ON A/C A330-200 A330-300**

3. Engine Oil Tank and IDG for GE CF6-80E1 series engine

A. Engine Oil Replenishment :

One gravity filling cap and one pressure filling connection per engine.

| | DISTANCE : Meters (ft) | | | |
|---------------------|------------------------|--------------------------|----------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | ENGINE 1 (Left) | ENGINE 2 (Right) | |
| Engine Oil Filling: | 24.93 m (81.79 ft) | 10.00 m (32.81 ft) | 8.73 m (28.64 ft) | 1.71 m (5.61 ft) |

- (1) Tank capacity :
- Full level : 6.49 US gal (24.57 l).
 - Usable : 6.09 US gal (23.05 l).


B. IDG Oil Replenishment :

One pressure filling connection per engine.

| | DISTANCE : Meters (ft) | | | |
|---|------------------------|--------------------------|-----------------------|-------------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | ENGINE 1 (Left) | ENGINE 2 (Right) | |
| IDG Oil Pressure Filling Connection: | 23.03 m (75.56 ft) | 7.96 m (26.12 ft) | 10.77 m (35.33 ft) | 2.35 m (7.71 ft) |

- Max delivery pressure required : 40 psi (2.76 bar).
- Max OIL capacity of the IDG : 1.1 US gal (4.16 l).


**ON A/C A330-200 A330-200F A330-300

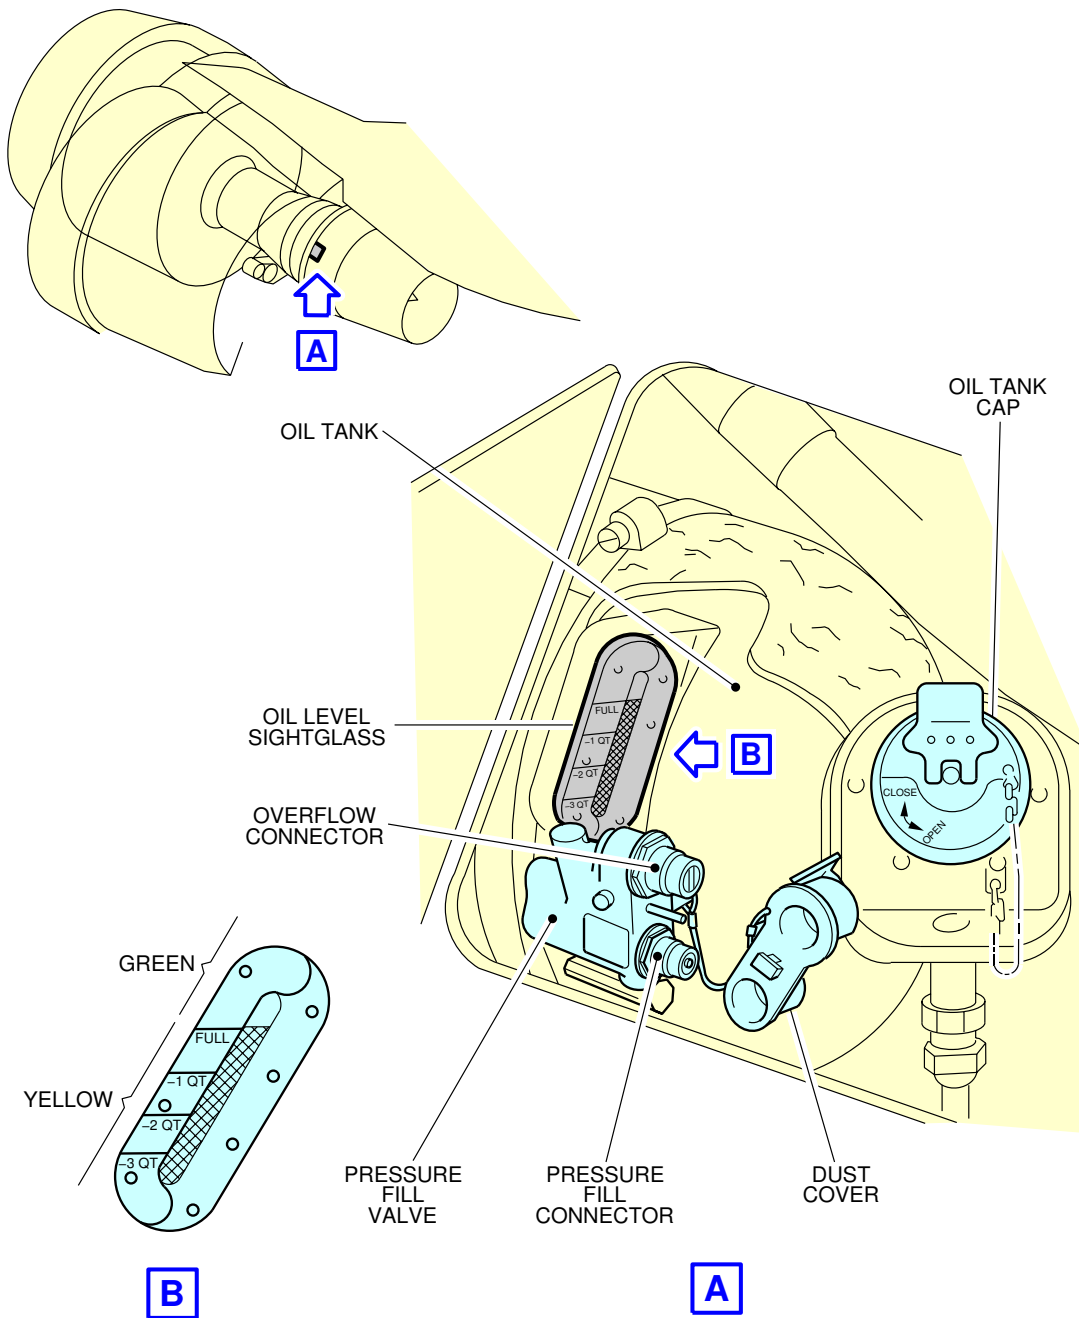

F_AC_050409_1_0010101_01_00

Ground Service Connections
Engine Oil Tank - PW 4000 series engine
FIGURE-5-4-9-991-001-A01

**ON A/C A330-200 A330-200F A330-300

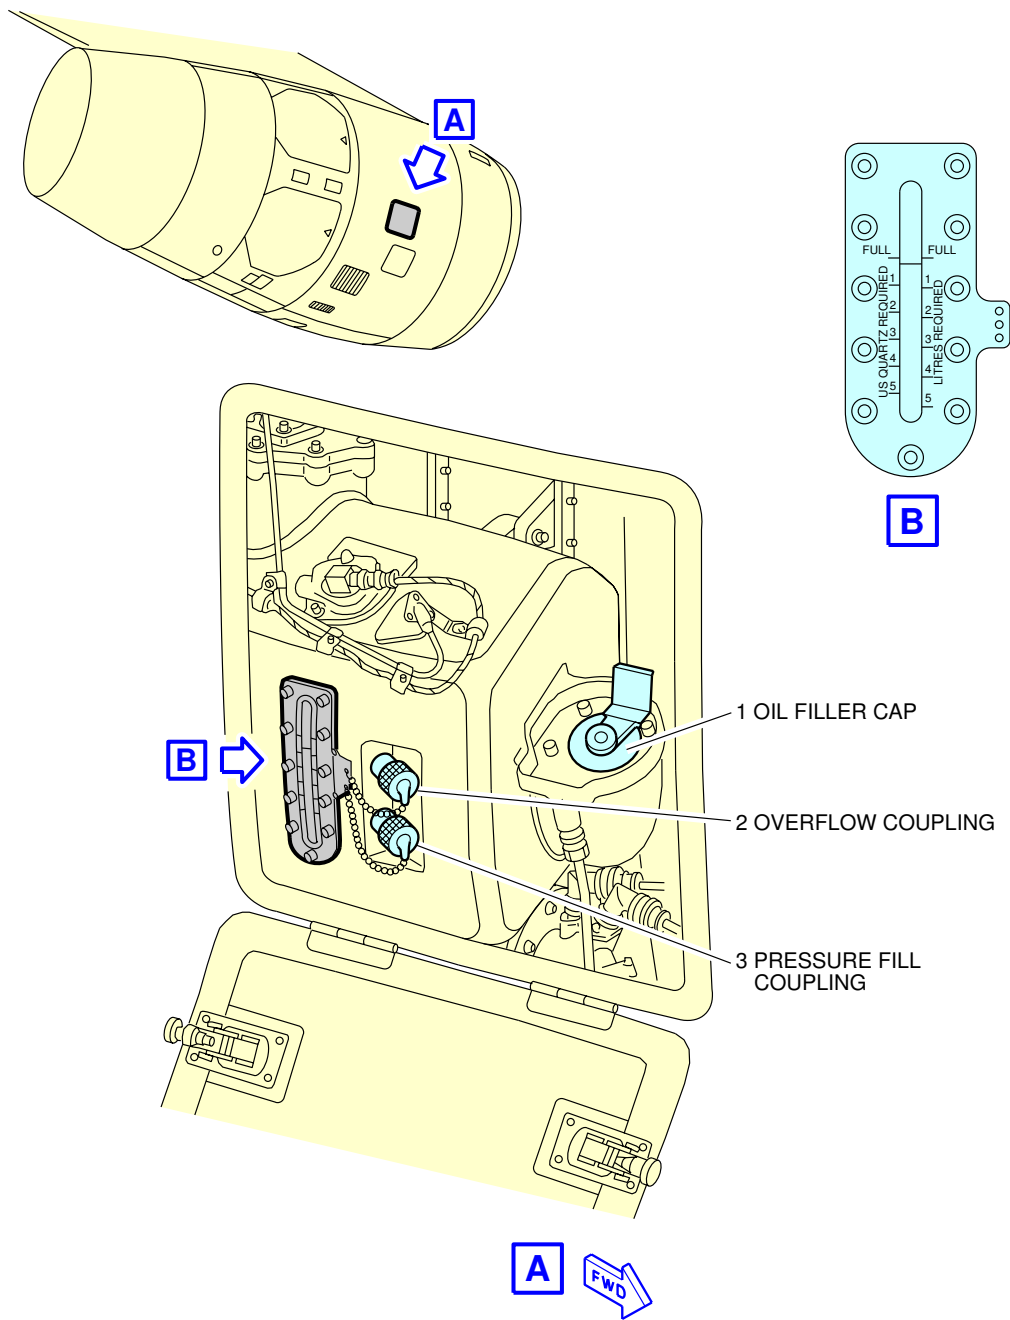


D5324

F_AC_050409_1_0020101_01_00

Ground Service Connections
Engine Oil Tank - RR Trent 700 series engine
FIGURE-5-4-9-991-002-A01


**ON A/C A330-200 A330-300

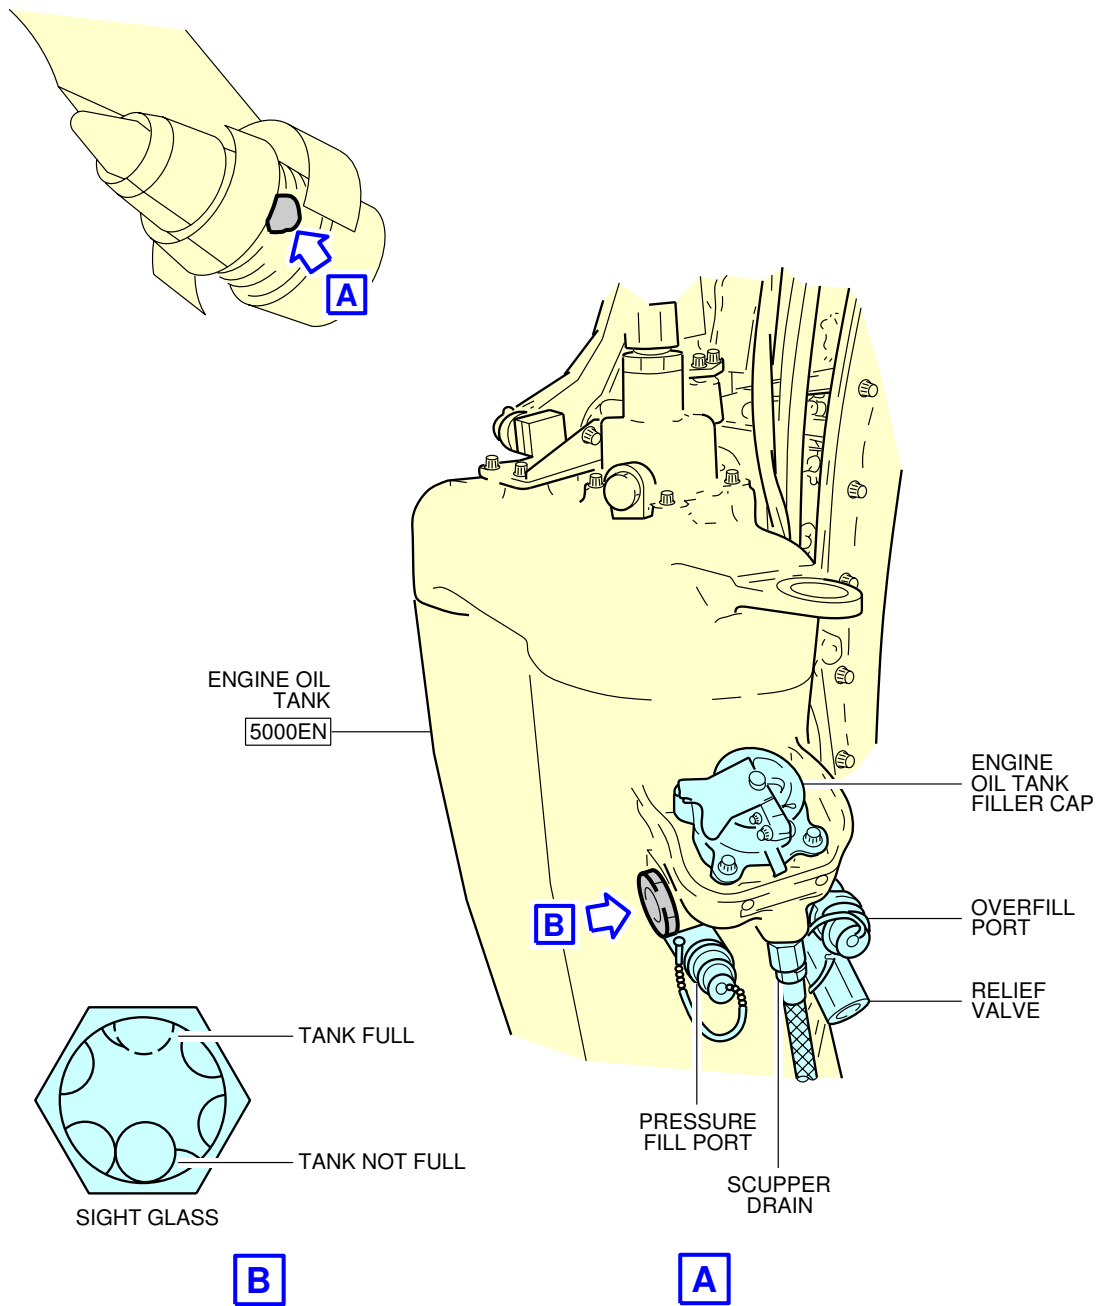

F_AC_050409_1_0030101_01_00

Ground Service Connections
Engine Oil Tank - GE CF6-80E1 series engine
FIGURE-5-4-9-991-003-A01


**ON A/C A330-200 A330-200F A330-300

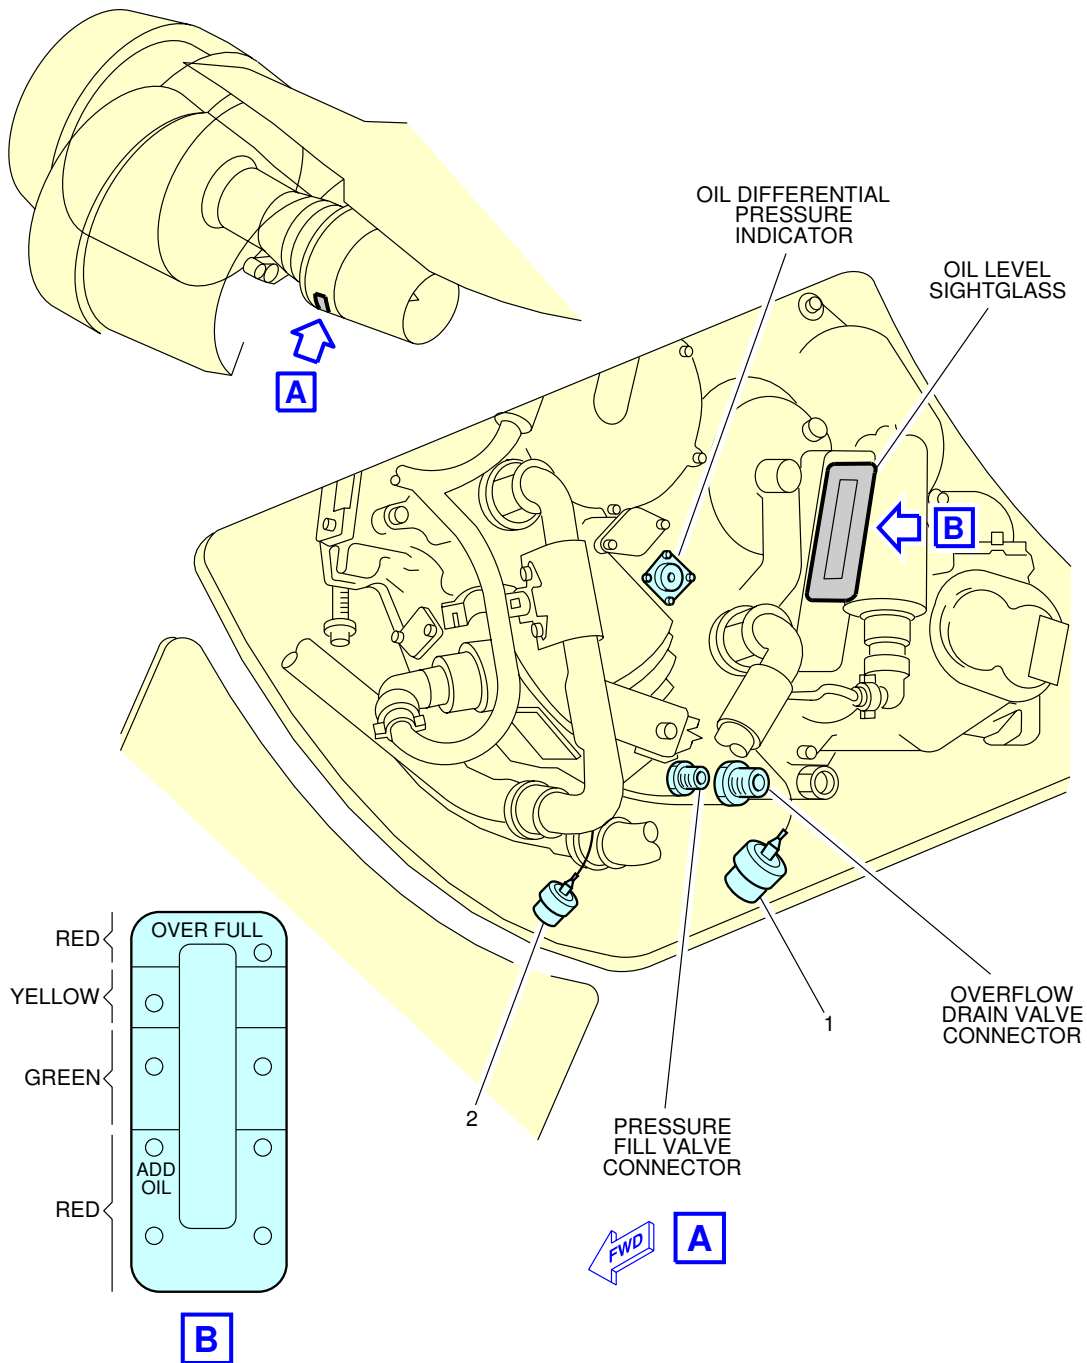

F_AC_050409_1_0040101_01_00

Ground Service Connections
IDG Oil Tank - PW 4000 series engine
FIGURE-5-4-9-991-004-A01


**ON A/C A330-200 A330-200F A330-300

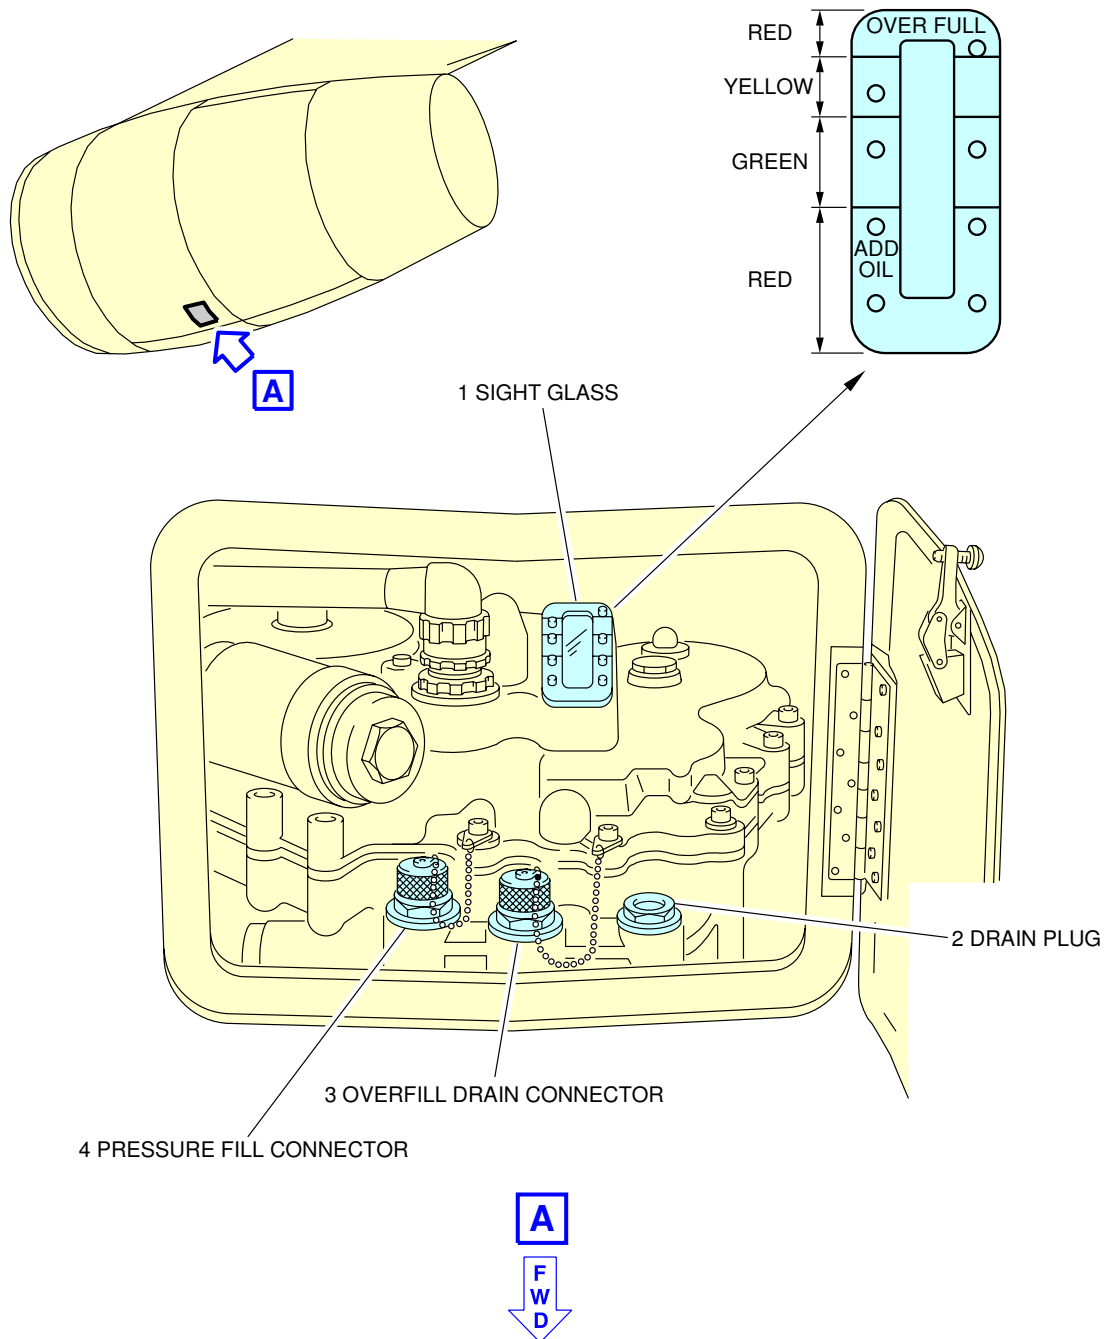

F_AC_050409_1_0050101_01_00

Ground Service Connections
IDG Oil Tank - RR Trent 700 series engine
FIGURE-5-4-9-991-005-A01

**ON A/C A330-200 A330-300

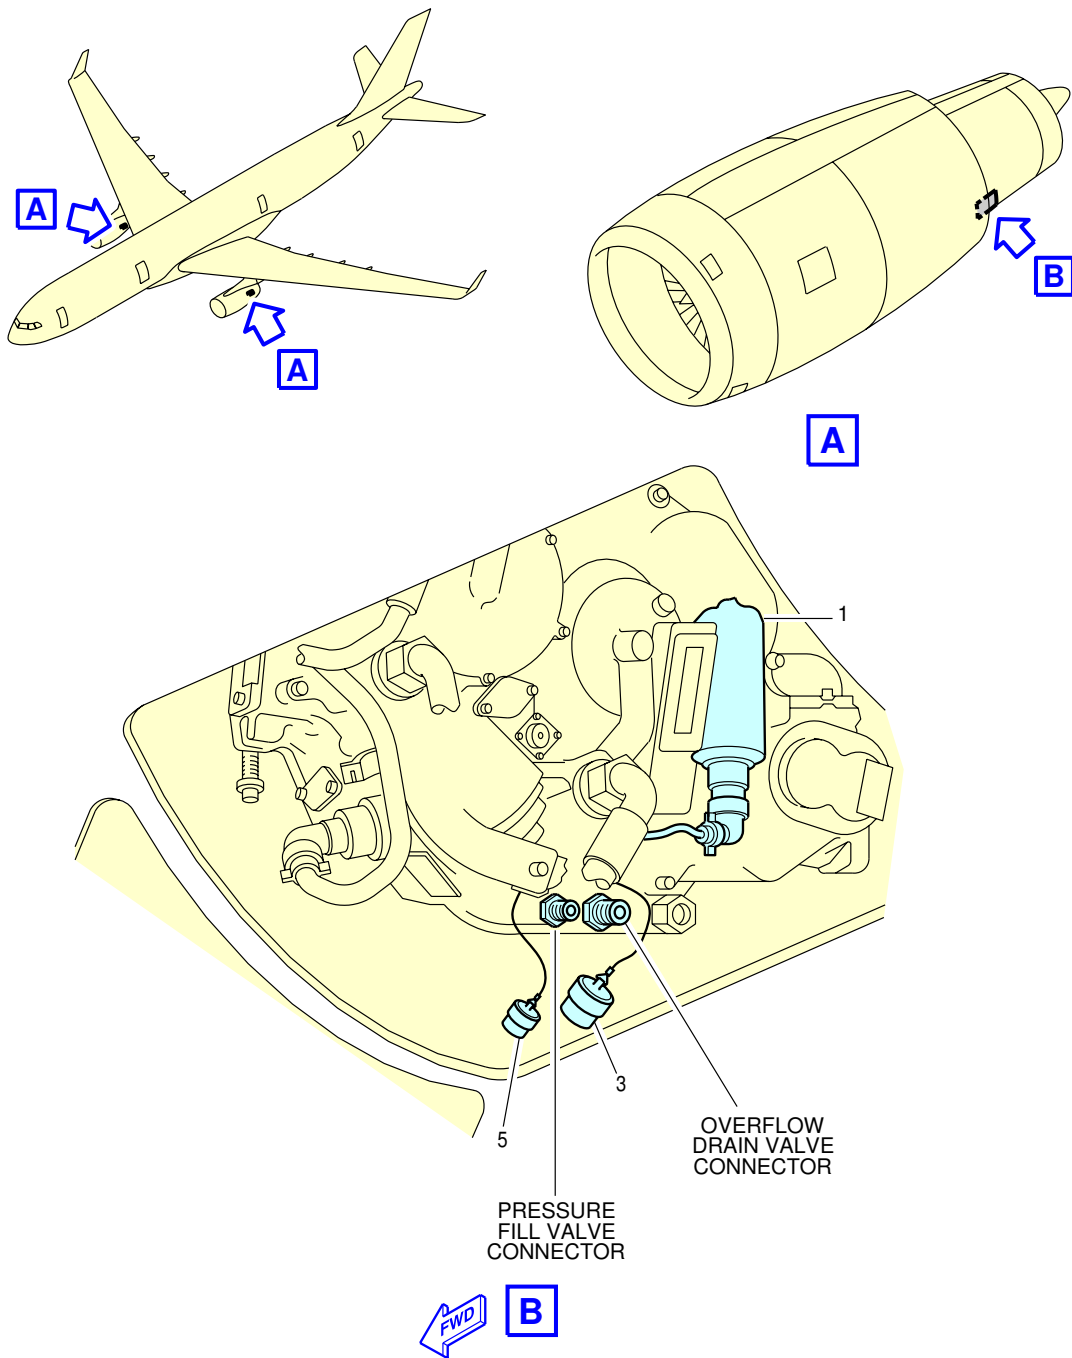

F_AC_050409_1_0060101_01_00

Ground Service Connections
IDG Oil Tank - GE CF6-80E1 series engine
FIGURE-5-4-9-991-006-A01

****ON A/C A330-200 A330-200F A330-300**

APU Oil System

****ON A/C A330-200 A330-200F**

1. APU Oil System.

APU oil gravity filling cap.

| | DISTANCE : Meters (ft) | | |
|-------------------------|------------------------|--------------------------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE (LEFT HAND) | MEAN HEIGHT FROM GROUND |
| APU Oil Replenishment : | 55.00 m (180.45 ft) | 0.4 m (1.31 ft) | 8.00 m (26.25 ft) |

- A. Tank capacity (usable) :
 - APU Type : 331-350 : 7.3 l (1.93 US gal).

****ON A/C A330-300**


2. APU Oil System.

APU oil gravity filling cap.

| | DISTANCE : Meters (ft) | | |
|-------------------------|------------------------|--------------------------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE (LEFT HAND) | MEAN HEIGHT FROM GROUND |
| APU Oil Replenishment : | 60.3 m (197.83 ft) | 0.4 m (1.31 ft) | 8.00 m (26.25 ft) |

- A. Tank capacity (usable) :
 - APU Type : 331-350 : 7.3 l (1.93 US gal).

**ON A/C A330-200 A330-200F A330-300

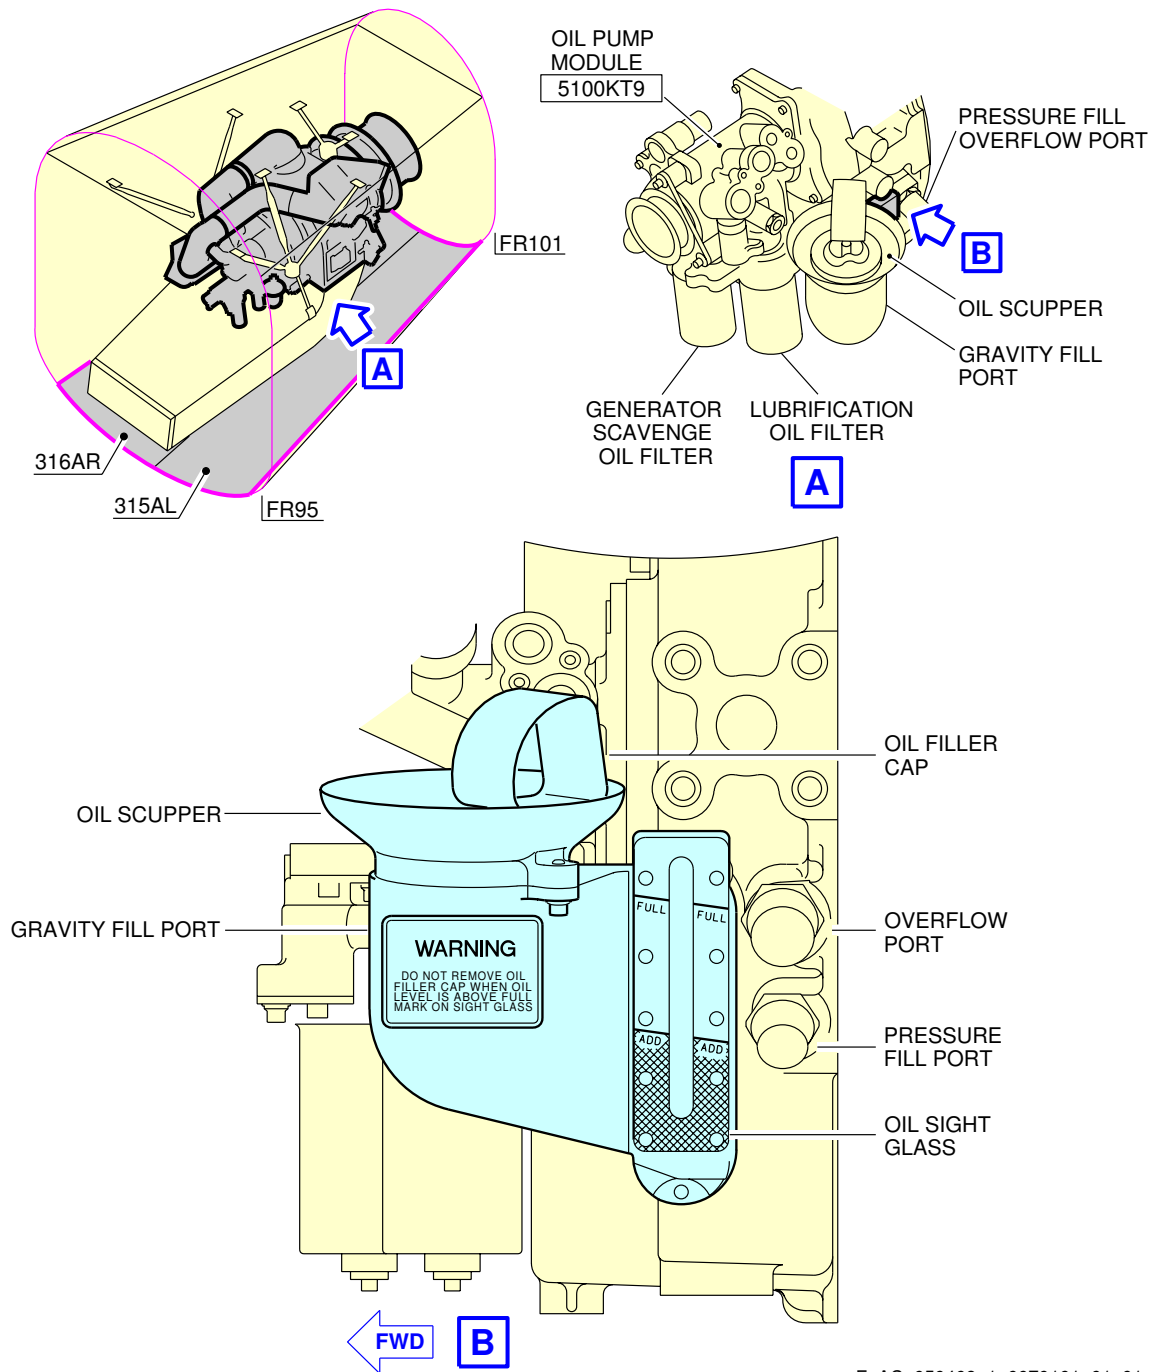

F_AC_050409_1_0070101_01_01

Ground Service Connections
APU Oil Tank
FIGURE-5-4-9-991-007-A01

5-4-10 Vacuum Toilet System

****ON A/C A330-200 A330-200F A330-300**

Vacuum Toilet System

****ON A/C A330-200 A330-300**

1. Vacuum Toilet System

| | DISTANCE : Meters (ft) | | | |
|----------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Waste Service panel: | 50.65 m (166.17 ft) | | 0.09 m (0.30 ft) | 3.6 m (11.81 ft) |

- A. Waste Service panel comprising :
 - Standard : One standard 4 in. drain connection and two 1 in. flushing connections.
 - Standard option : One standard 4 in. drain connection and three 1 in. flushing connections.
- B. Capacity waste tanks :
 - Standard : 700 l (184.92 US gal).
 - Standard option : 1050 l (277.38 US gal).
- C. Chemical fluid :
 - Standard : 36 l (9.51 US gal).
 - Standard option : 54 l (14.27 US gal).

****ON A/C A330-200F**

2. Vacuum Toilet System

| | DISTANCE : Meters (ft) | | | |
|------------------------|------------------------|--------------------------|---------------------|-------------------------|
| | AFT OF NOSE | FROM AIRPLANE CENTERLINE | | MEAN HEIGHT FROM GROUND |
| | | R SIDE | L SIDE | |
| Waste Service panel 1: | 5.61 m (18.41 ft) | | 1.43 m (4.69 ft) | 2.95 m (9.68 ft) |
| Waste Service panel 2: | 6.1 m (20.01 ft) | | 1.69 m (5.54 ft) | 3.15 m (10.33 ft) |

- A. A330-200F has two waste service panels :
 - First panel : One standard connection Roylyn 1 in for Flushing and filling.

- Second panel : One standard Taco type valve 4 in for draining.

NOTE : Handle used for drainage is located on the first panel.

- B. Capacity waste tanks :
 - Standard : 35 l (9.25 US gal).
- C. Chemical fluid :
 - Standard : 9.5 l (2.51 US gal).

5-5-0 Engine Starting Pneumatic Requirements

****ON A/C A330-200 A330-200F A330-300**

Engine Starting Pneumatic Requirements


1. Engine Starting Pneumatic Requirements.

To determinate the airflow required at ground connection, refer to the example given in FIGURE 5--0-99--001-A.

For engine starting pneumatic requirements for:

- Low ambient temperatures, refer to 5-5-1,
- Medium ambient temperatures, refer to 5-5-2,
- High ambient temperatures, refer to 5-5-3.

****ON A/C A330-200 A330-200F A330-300**

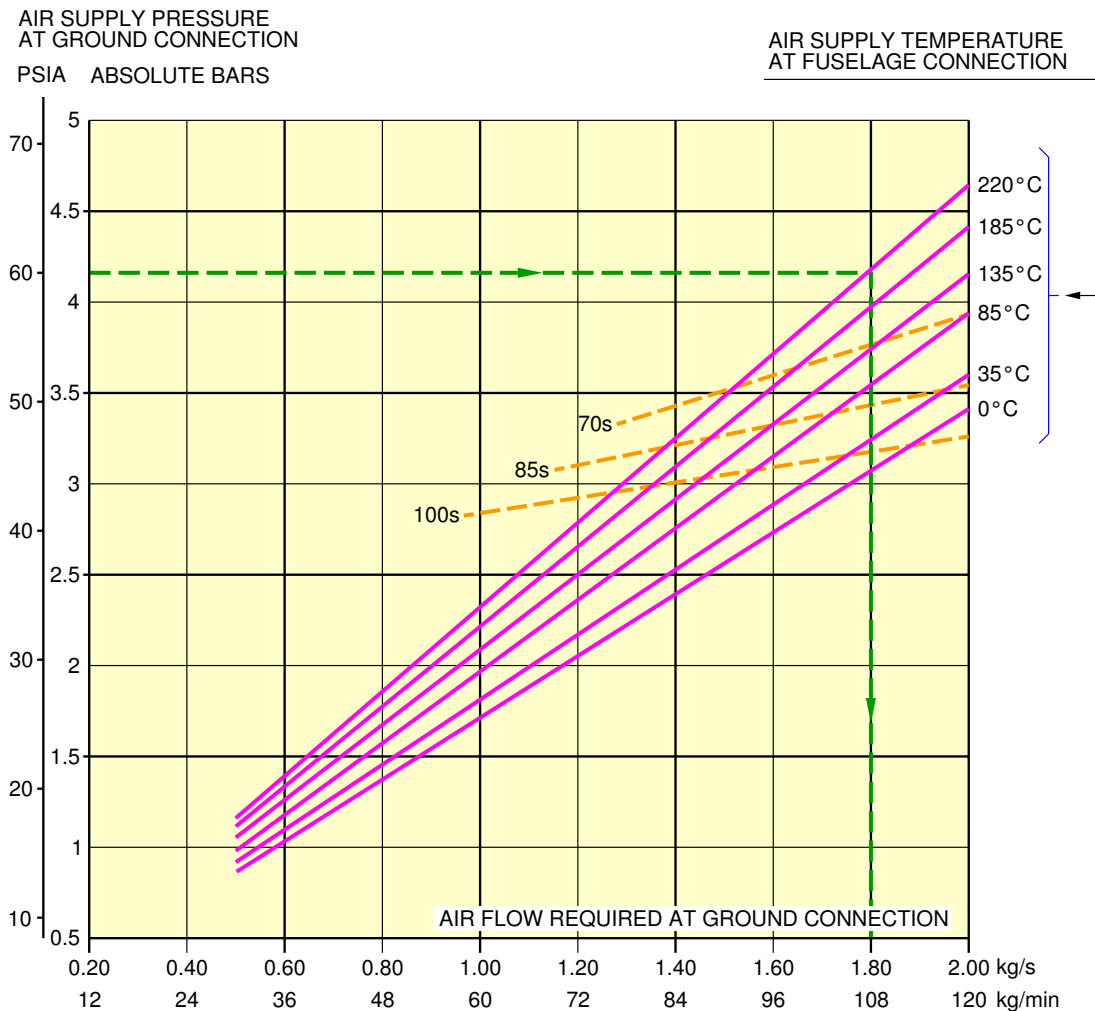

EXAMPLE TO DETERMINATE THE AIRFLOW REQUIRED AT THE FUSELAGE CONNECTION:

- FOR AN AIR START UNIT DELIVERING 60 PSIA (4.14 BARS) AIR PRESSURE AT THE FUSELAGE CONNECTOR
- AT A SUPPLIED AIR TEMPERATURE OF 220°C (428°F) AT THE FUSELAGE CONNECTOR

1. DRAW AN HORIZONTAL LINE FROM THE SUPPLIED AIR PRESSURE (60 PSIA (4.14 BARS)).
2. FROM THE INTERSECTION WITH THE AIR SUPPLY TEMPERATURE AT FUSELAGE CONNECTION (220°C (428°F)), DRAW A VERTICAL LINE.
3. THE INTERSECTION WITH THE HORIZONTAL AXIS GIVES THE REQUIRED AIRFLOW AT GROUND CONNECTION (107 kg/min (1.78 kg/s)).

F_AC_050500_1_0010101_01_00

Engine Starting Pneumatic Requirements
FIGURE-5-5-0-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-5-1 Low Ambient Temperatures

****ON A/C A330-200 A330-200F A330-300**

Low Ambient Temperatures

1. This section provides the engine starting pneumatic requirements for an ambient temperatures of -40°C (-40°F) and -55°C (-67°F).


**ON A/C A330-200 A330-200F A330-300

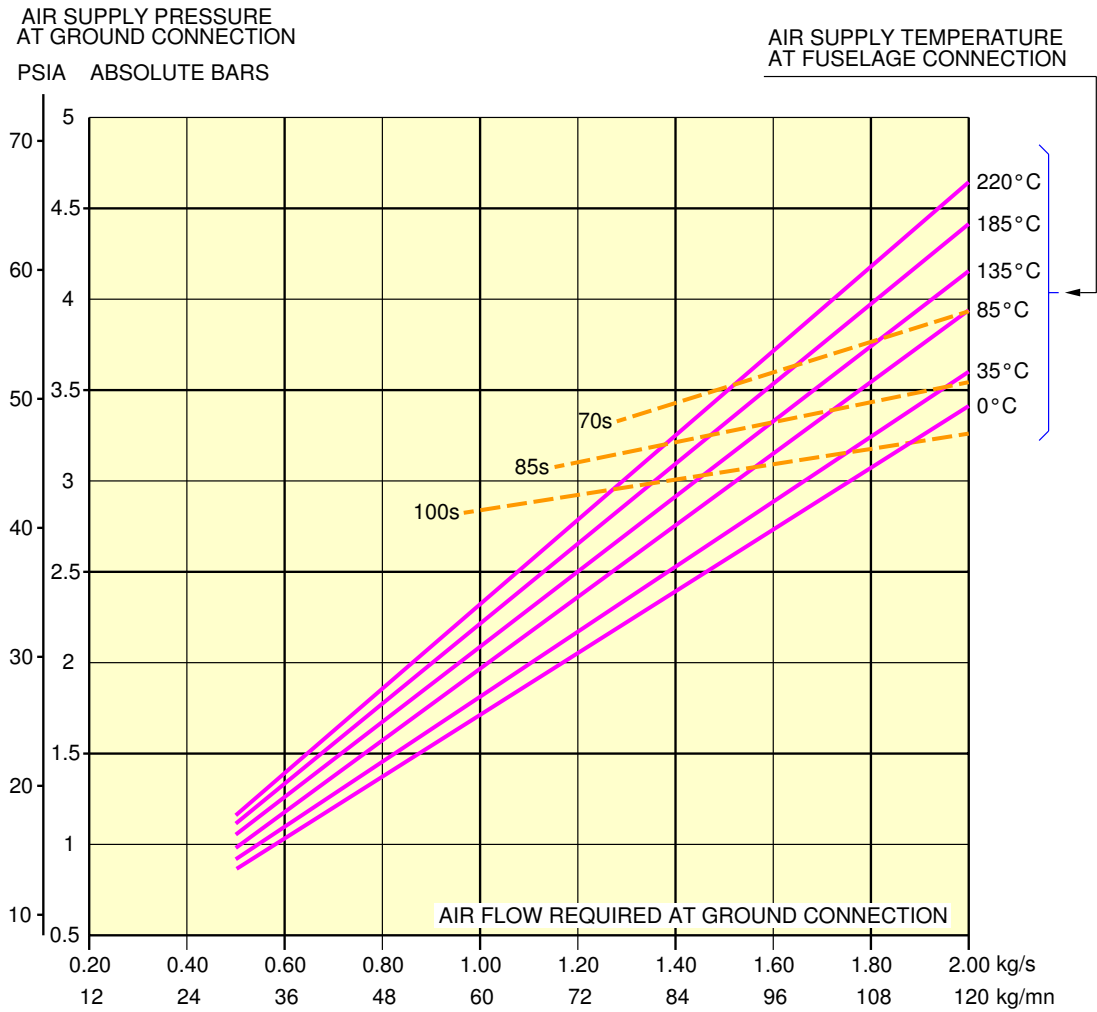

F_AC_050501_1_0010101_01_00

Engine Starting Pneumatic Requirements
 Low Ambient Temperature - 40 °C (- 40 °F) – PW 4000 series engine
 FIGURE-5-5-1-991-001-A01


**ON A/C A330-200 A330-200F A330-300

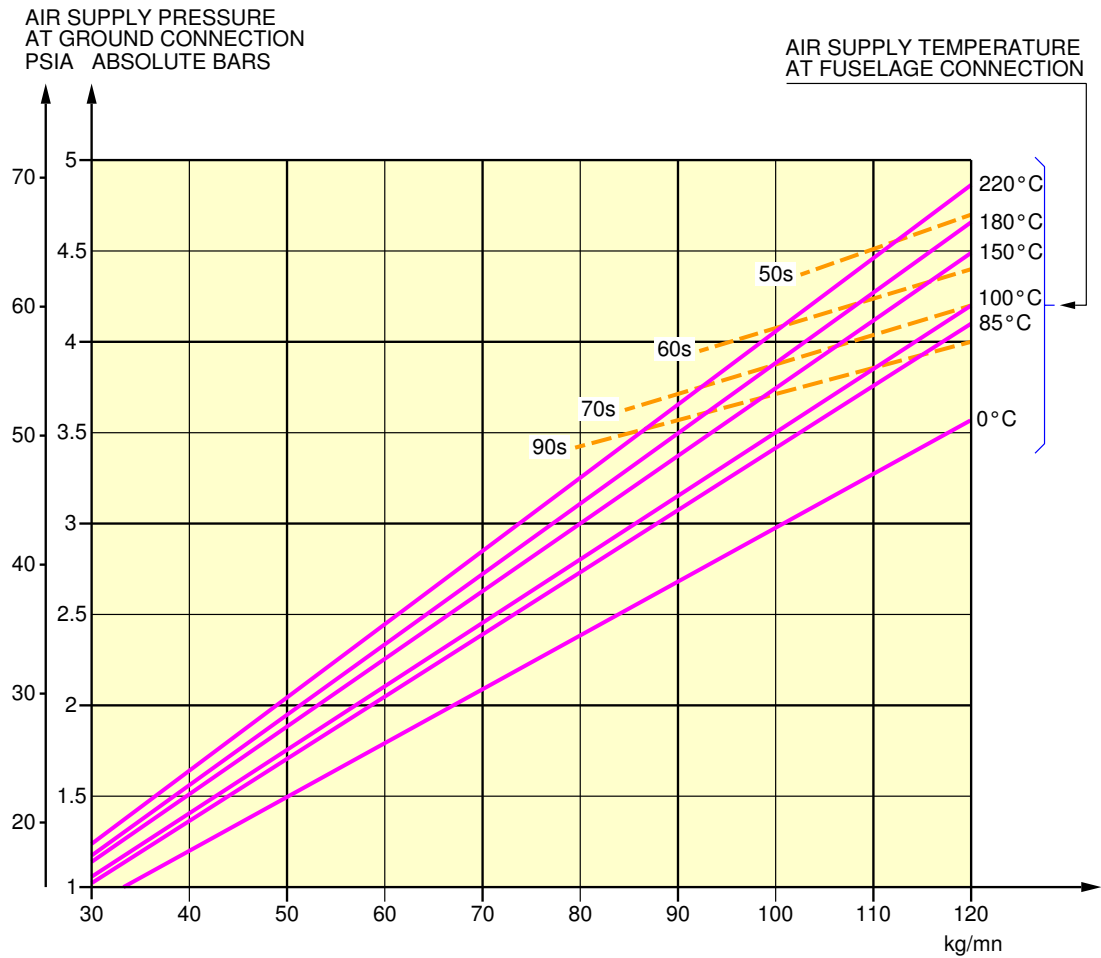

F_AC_050501_1_0020101_01_00

Engine Starting Pneumatic Requirements
Low Ambient Temperature - 55 °C (- 67 °F) – RR Trent 700 series engine
FIGURE-5-5-1-991-002-A01

**ON A/C A330-200 A330-300

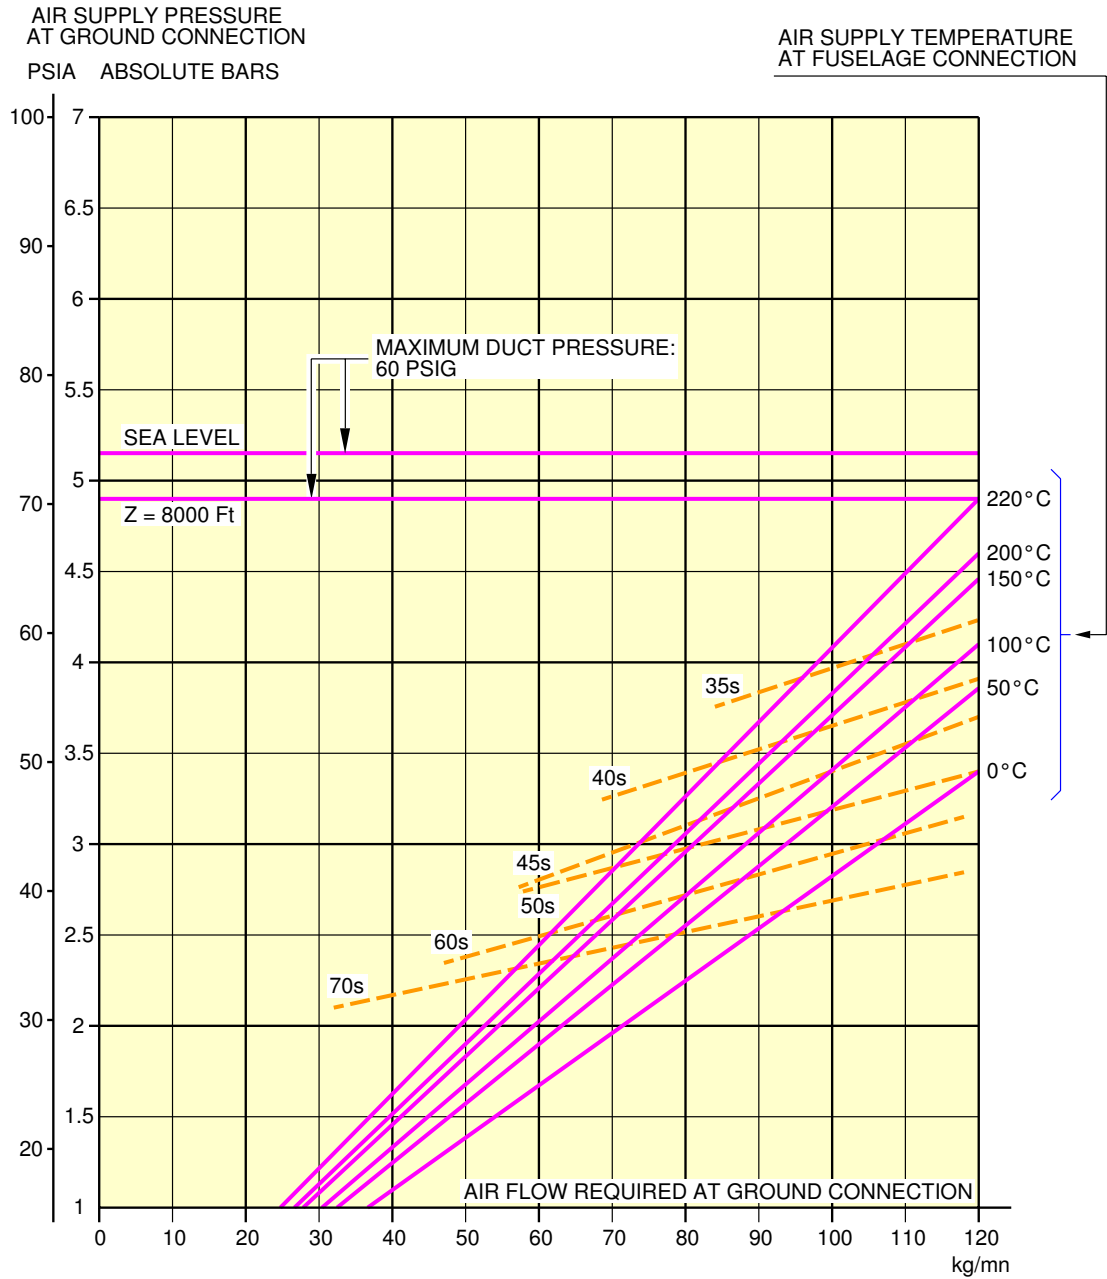

F_AC_050501_1_0030101_01_00

Engine Starting Pneumatic Requirements
 Low Ambient Temperature - 40 °C (- 40 °F) – GE CF6-80E1 series engine
 FIGURE-5-5-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-5-2 Medium Ambient Temperatures

****ON A/C A330-200 A330-200F A330-300**

Medium Ambient Temperatures

1. This section provides the engine starting pneumatic requirements for an ambient temperatures of 0 °C (+32 °F) and +15 °C (+59 °F)


**ON A/C A330-200 A330-200F A330-300

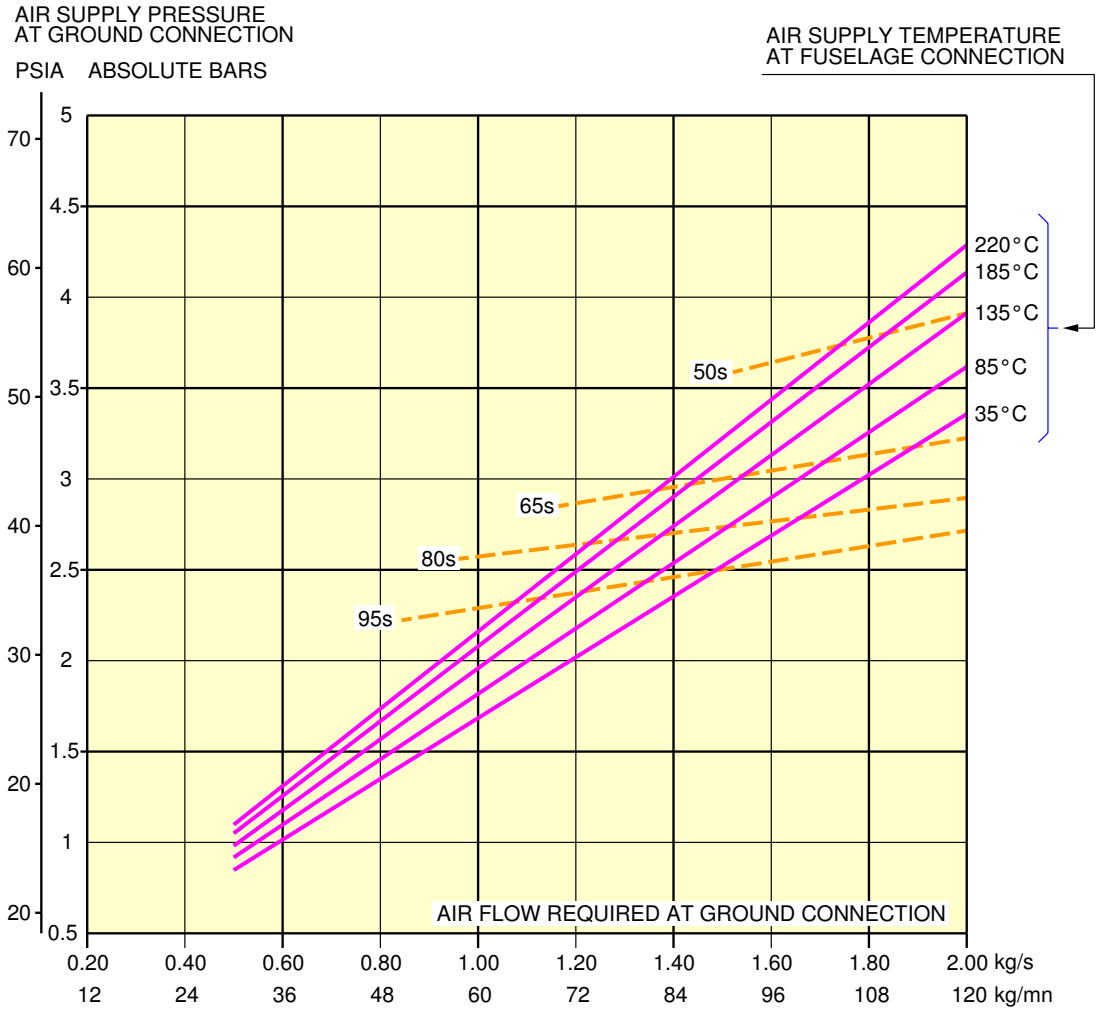

F_AC_050502_1_0010101_01_00

Engine Starting Pneumatic Requirements
 Medium Ambient Temperature +15 °C (+59 °F) – PW 4000 series engine
 FIGURE-5-5-2-991-001-A01


**ON A/C A330-200 A330-200F A330-300

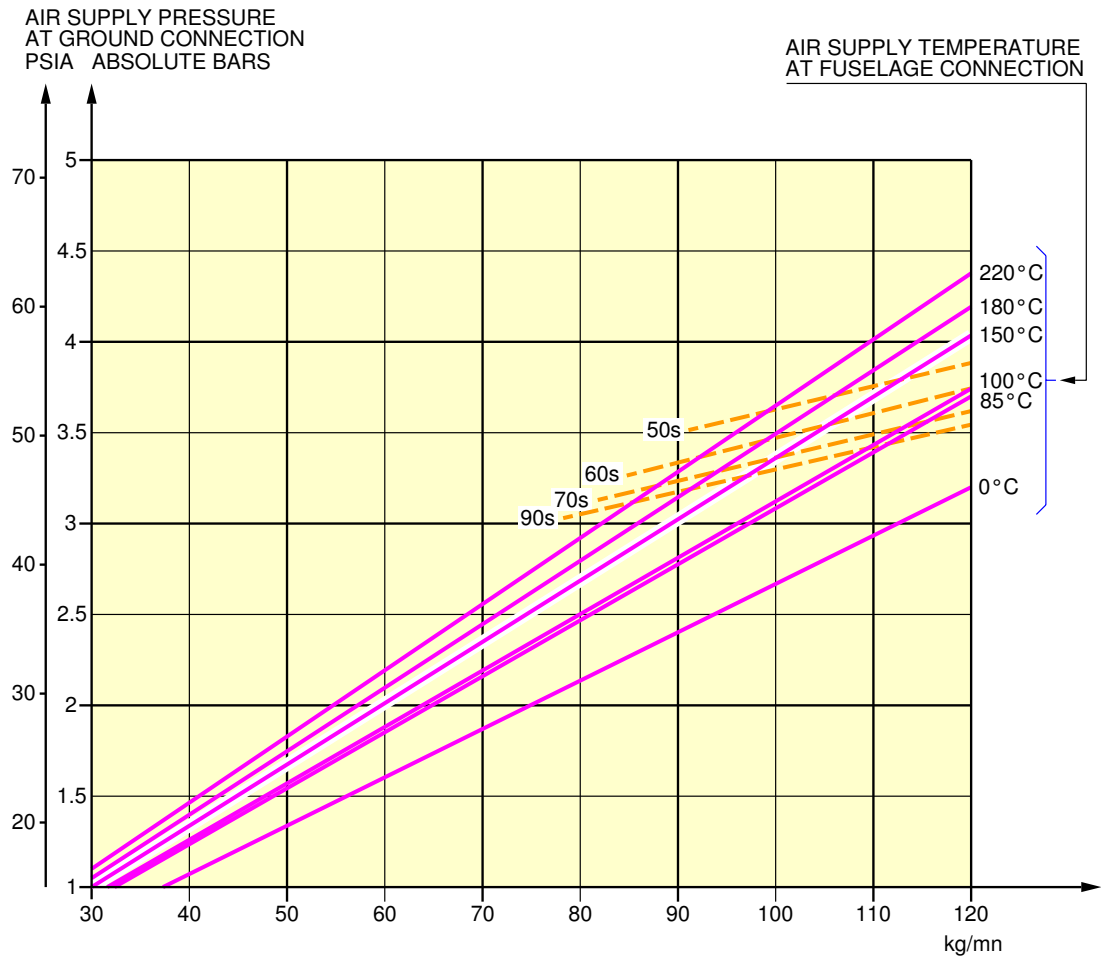

F_AC_050502_1_0020101_01_00

Engine Starting Pneumatic Requirements
 Medium Ambient Temperature 0 °C (+32 °F) – RR Trent 700 series engine
 FIGURE-5-5-2-991-002-A01

**ON A/C A330-200 A330-300

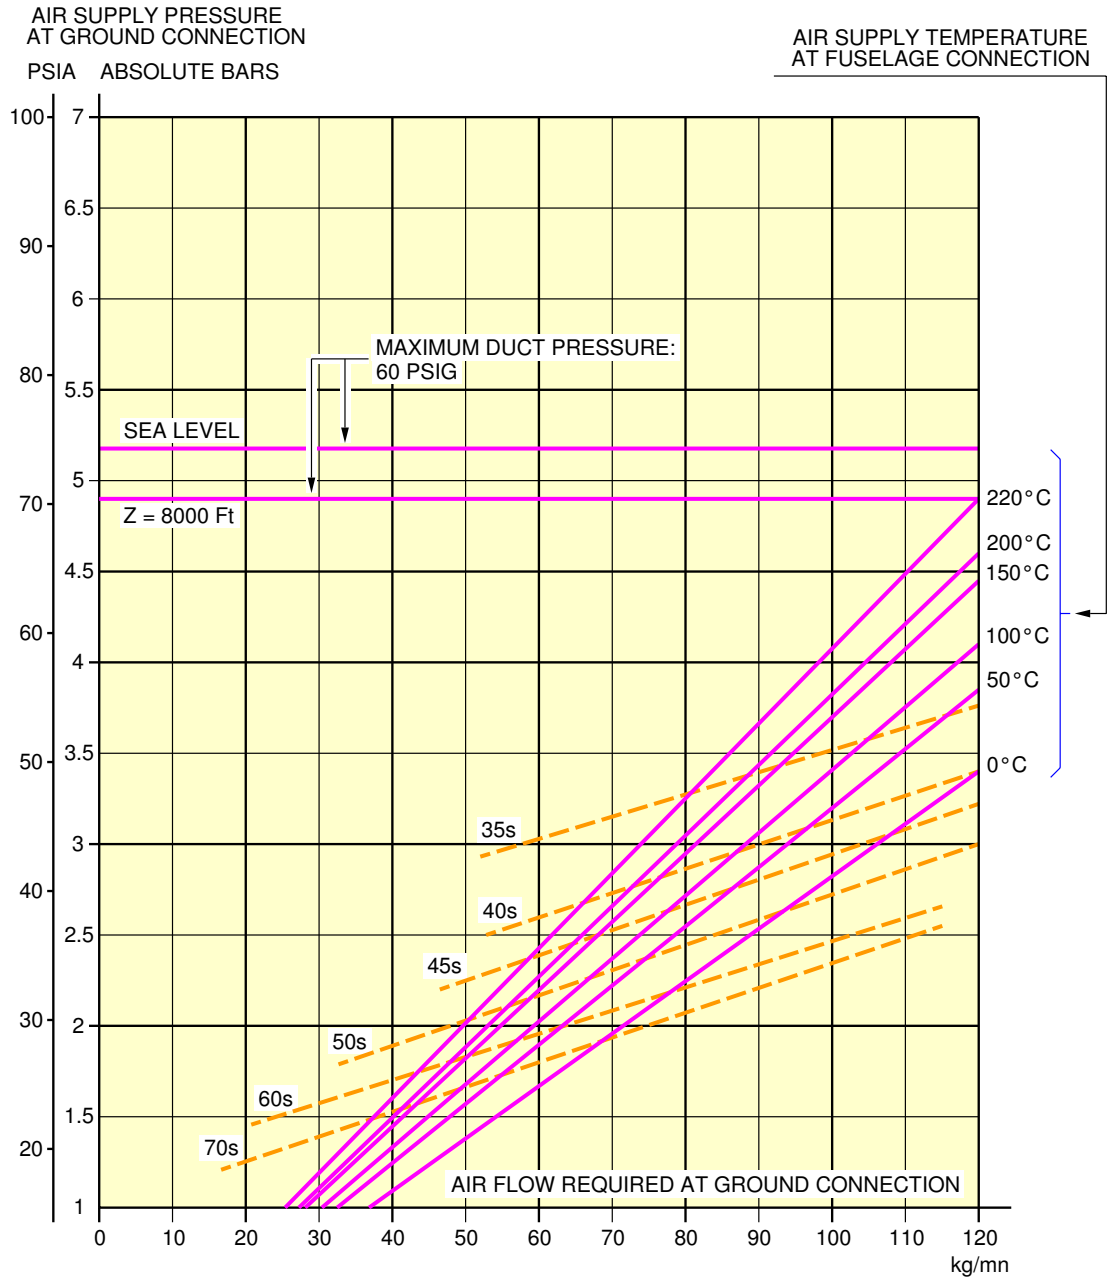

F_AC_050502_1_0030101_01_00

Engine Starting Pneumatic Requirements
 Medium Ambient Temperature +15 °C (+59 °F) – GE CF6-80E1 series engine
 FIGURE-5-5-2-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-5-3 High Ambient Temperatures

**ON A/C A330-200 A330-200F A330-300

High Ambient Temperatures

1. This section provides the engine starting pneumatic requirements for an ambient temperature upper +38 °C (+100 °F)


**ON A/C A330-200 A330-200F A330-300

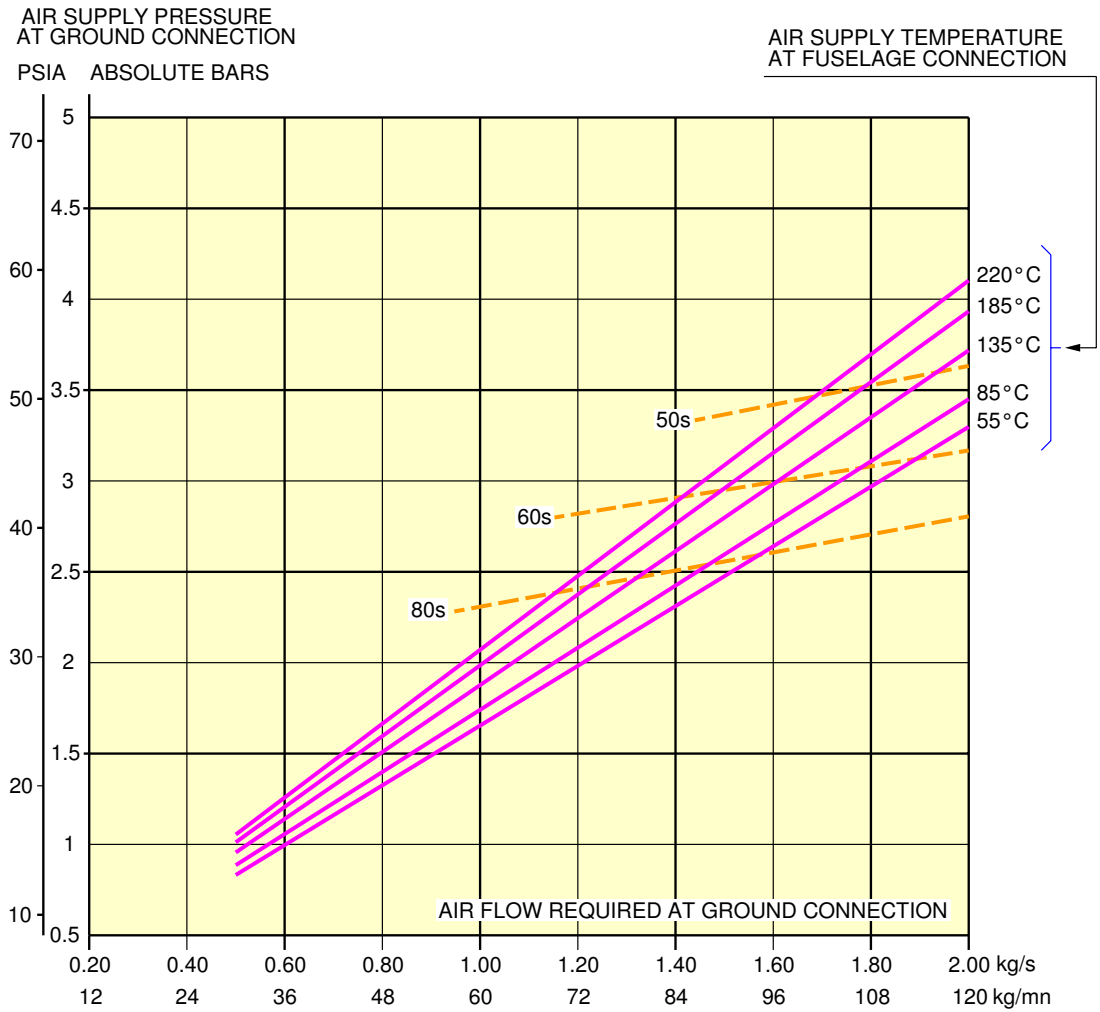

F_AC_050503_1_0010101_01_00

Engine Starting Pneumatic Requirements
 High Ambient Temperature +55 °C (+131 °F) – PW 4000 series engine
 FIGURE-5-5-3-991-001-A01


**ON A/C A330-200 A330-200F A330-300

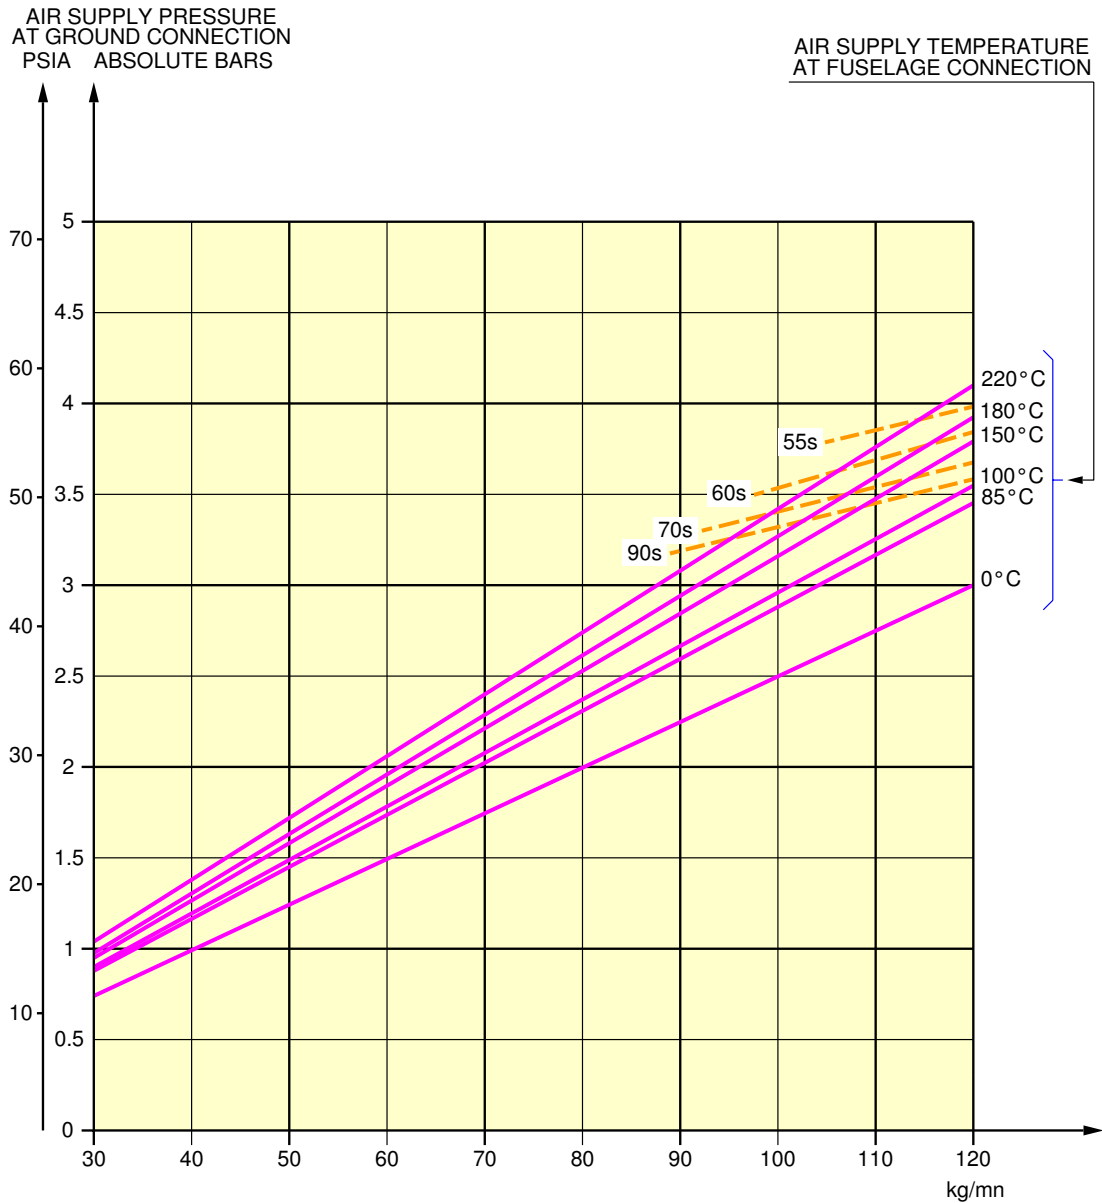

F_AC_050503_1_0020101_01_00

Engine Starting Pneumatic Requirements
 High Ambient Temperature +40°C (+104°F) – RR Trent 700 series engine
 FIGURE-5-5-3-991-002-A01

****ON A/C A330-200 A330-300**

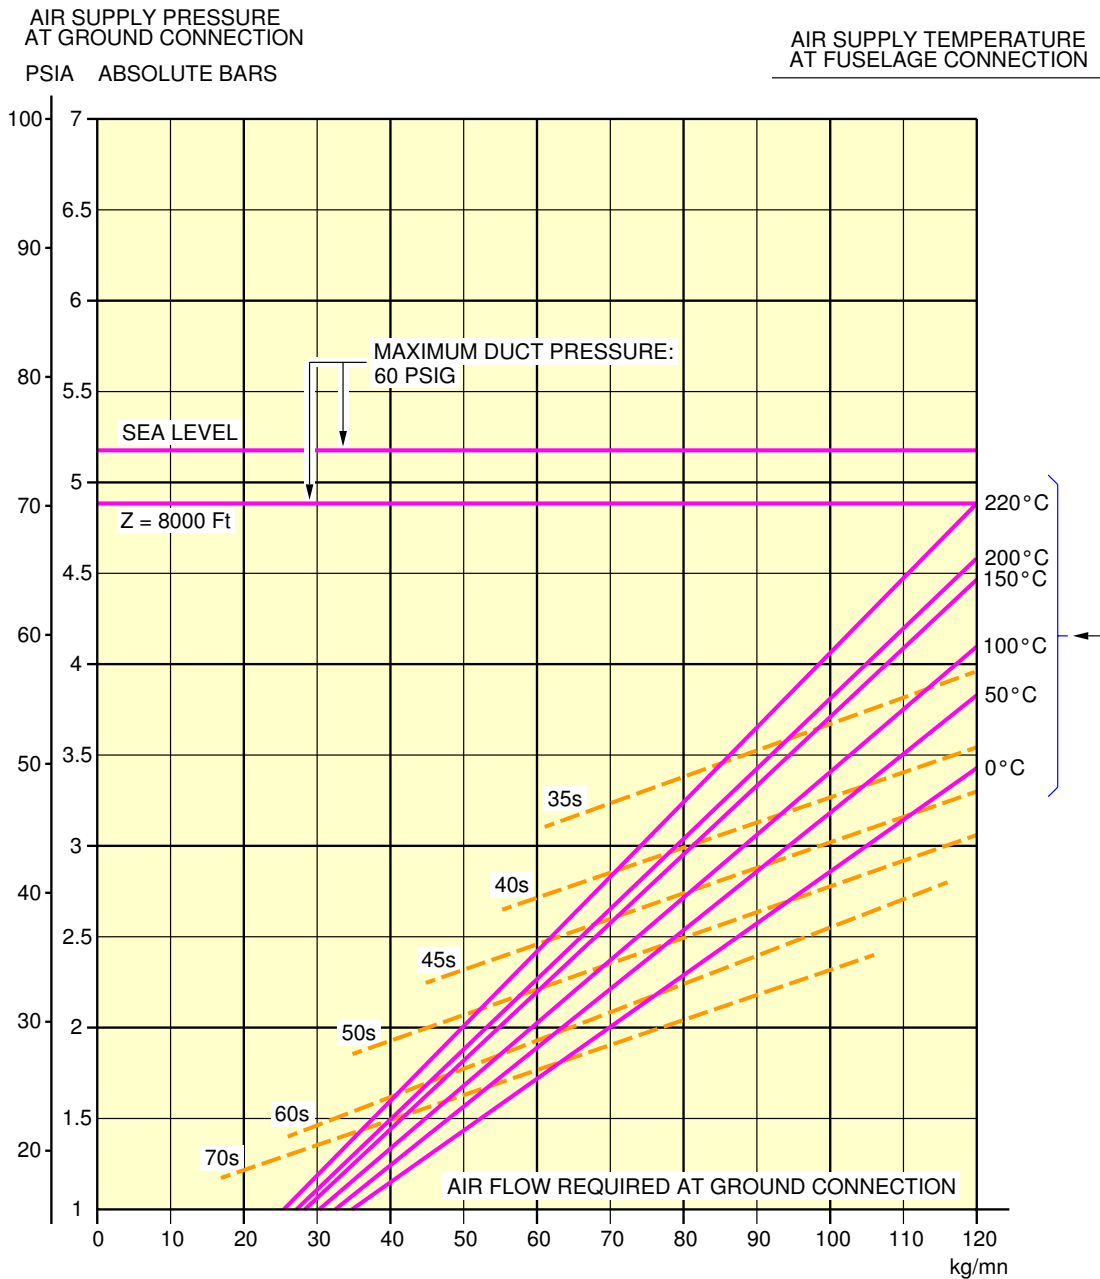

F_AC_050503_1_0030101_01_00

Engine Starting Pneumatic Requirements
 High Ambient Temperature +50 °C (122 °F) – GE CF6-80E1 series engine
 FIGURE-5-5-3-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

5-6-0 Ground Pneumatic Power Requirements

**ON A/C A330-200 A330-200F A330-300

Ground Pneumatic Power Requirements

1. Ground Pneumatic Power Requirements.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-6-1 Heating

****ON A/C A330-200 A330-200F A330-300**

Heating

1. This section provides the ground pneumatic power requirements heating.

**ON A/C A330-200 A330-200F A330-300

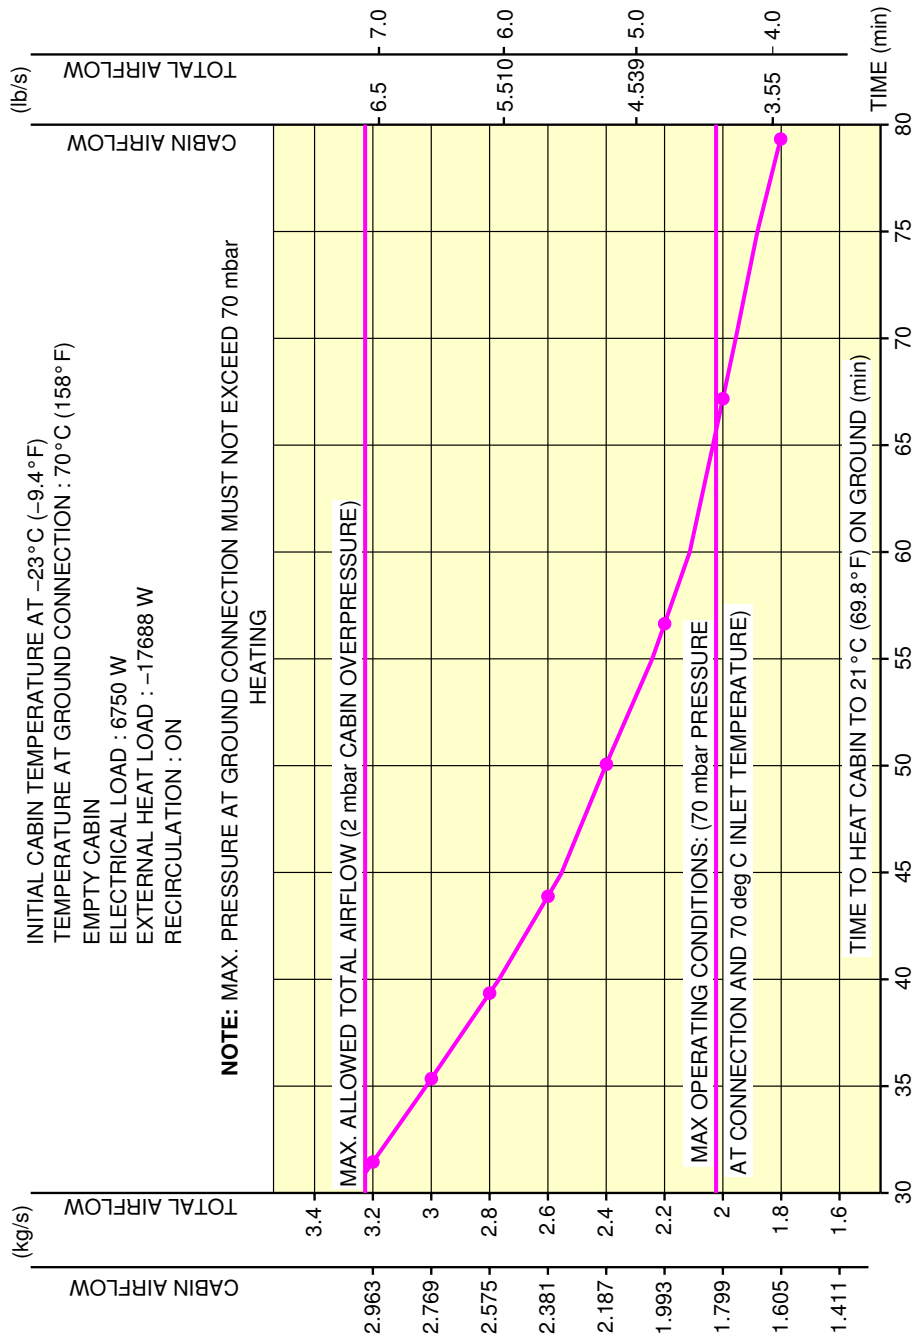

F_AC_050601_1_0010101_01_01

Ground Pneumatic Power Requirements
 Heating

FIGURE-5-6-1-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-6-2 Cooling

****ON A/C A330-200 A330-200F A330-300**

Cooling

1. This section provides the ground pneumatic power requirements cooling.

**ON A/C A330-200 A330-200F A330-300

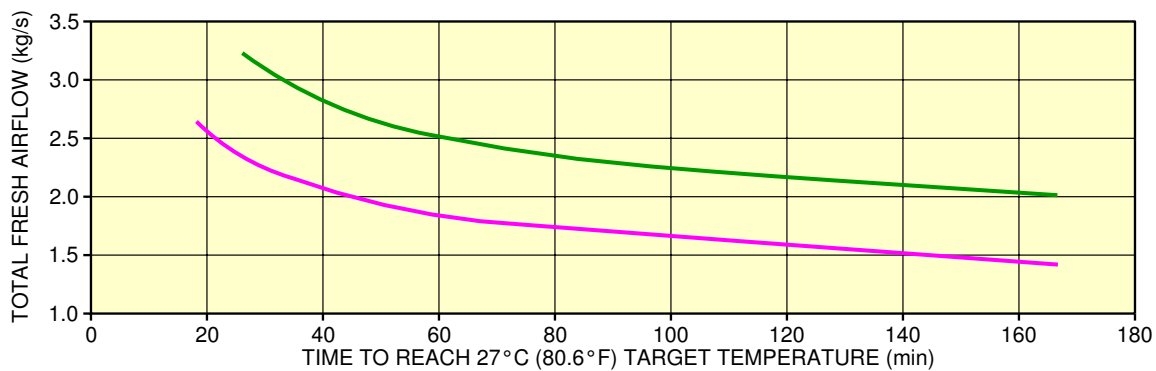

— COOLING (ISA+23 NO PAX/ATT/CRW, IFE ON), 1.5°C (34.7°F)
— COOLING (ISA+23 NO PAX/ATT/CRW, IFE ON), -10°C (14°F)

F_AC_050602_1_0010101_01_03

Ground Pneumatic Power Requirements
Cooling
FIGURE-5-6-2-991-001-A01



5-7-0 Preconditioned Airflow Requirements


****ON A/C A330-200 A330-200F A330-300**

Preconditioned Airflow Requirements

1. This section gives the preconditioned airflow requirements for cabin air conditioning.

The total airflow must be not more than 3.2 kg/s. If the total airflow is more than this value, it will be more than the capacity of the outflow valve in the fully open position and a cabin overpressure of more than 2 mbar will occur.

**ON A/C A330-200 A330-200F A330-300

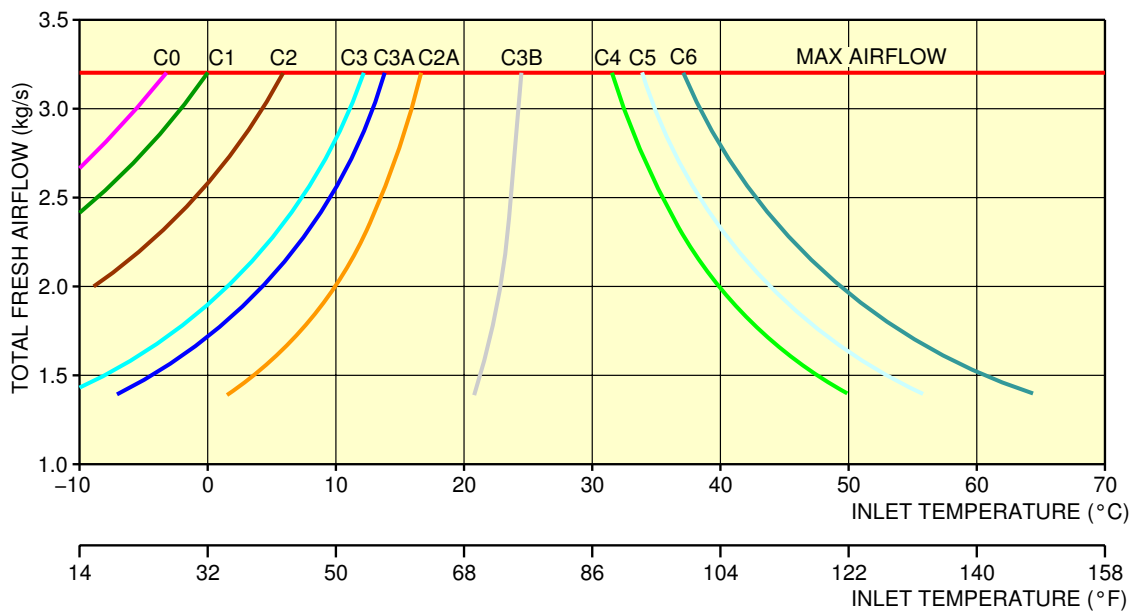

- C0 (ISA+30, IFE ON)
- C1 (ISA+23, IFE ON)
- C2 (ISA+23, IFE OFF)
- C2A (ISA, IFE ON)
- C3 (ISA+23, NO PAX/ATT/CRW, IFE ON)
- C3A (ISA+23, NO PAX/ATT/CRW, IFE OFF)
- C3B (ISA, NO PAX/ATT/CRW, IFE OFF)
- C4 (ISA-38, NO PAX/ATT/CRW)
- C5 (ISA-45, NO PAX/ATT/CRW)
- C6 (ISA-55, NO PAX/ATT/CRW)
- MAX AIRFLOW: 3.2 kg/s

F_AC_050700_1_0010101_01_02

Preconditioned Airflow Requirements
FIGURE-5-7-0-991-001-A01

5-8-0 Ground Towing Requirements

****ON A/C A330-200 A330-200F A330-300**

Ground Towing Requirements

1. This section provides information on aircraft towing.

The A330 is designed with means for conventional or towbarless towing.

Information/procedures can be found for both in chapter 9 of the Aircraft Maintenance Manual.

Status on towbarless towing equipment qualification can be found in SIL 09-002.

It is possible to tow or push the aircraft, at maximum ramp weight with engines at zero or up to idle thrust, using a tow bar attached to the nose gear leg (refer to AMM chapter 9 for conditions and limitations). One tow bar fitting is installed at the front of the leg (optional towing fitting for towing from the rear of the NLG available).

The Main Landing Gears have attachment points for towing or debogging (for details refer to chapter 7 of the Aircraft Recovery Manual).

- The first part of this section shows the chart to determine the draw bar pull and tow tractor mass requirements as function of the following physical characteristics:
 - aircraft weight
 - slope
 - number of engines at idle

The chart is based on the A330 engine type with the biggest idle thrust.

The chart is therefore valid for all A330 models

- The second part of this section supplies guidelines for the tow bar.

Note: information on aircraft towing procedures and corresponding aircraft limitations are given in chapter 9 of the Aircraft Maintenance Manual.

2. Tow bar design guidelines

The aircraft tow bar shall respect the following norms:

- SAE AS 1614, "Main Line Aircraft Tow Bar Attach Fitting Interface"
- SAE ARP1915 Revision C, "Aircraft Tow Bar"
- ISO 8267-1, "Aircraft - Tow bar attachment fitting - Interface requirements - Part 1: Main line aircraft"
- ISO 9667, "Aircraft ground support equipment - Tow bars"
- IATA Airport Handling Manual AHM 958, "Functional Specification for an Aircraft Tow bar"


A conventional type tow bar is required which should be equipped with a damping system to protect the nose gear against jerks and with towing shear pins :

- A traction shear pin calibrated at 28 620 daN (64 340 lbf)

- A torsion pin calibrated at 3 130 m.daN (27 7028 lbf.in)
The towing head is designed according to SAE/AS 1614 (issue C) cat. III.

There is a variety of shear pin arrangements and the values of the shear pins depend on them. We hereafter show two arrangements classically used on tow bars.

**ON A/C A330-200 A330-200F A330-300

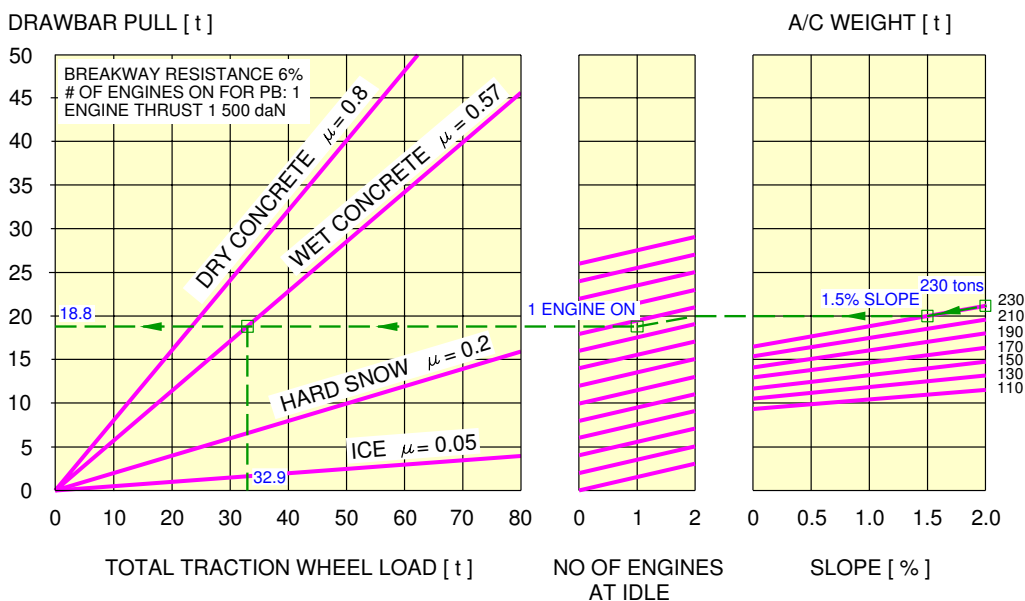


EXAMPLE HOW TO DETERMINE THE MASS REQUIREMENT TO TOW A A330 AT 230 t, AT 1.5% SLOPE, 1 ENGINE AT IDLE AND FOR WET TARMAC CONDITIONS:

- ON THE RIGHT HAND SIDE OF THE GRAPH, CHOOSE THE RELEVANT AIRCRAFT WEIGHT (230 t),
 - FROM THIS POINT DRAW A PARALLEL LINE TO THE REQUIRED SLOPE PERCENTAGE (1.5%),
 - FROM THIS POINT OBTAINED DRAW A STRAIGHT HORIZONTAL LINE UNTIL NO OF ENGINES AT IDLE = 2,
 - FROM THIS POINT DRAW A PARALLEL LINE TO THE REQUESTED NUMBER OF ENGINES (1),
 - FROM THIS POINT DRAW A STRAIGHT HORIZONTAL LINE TO THE DRAWBAR PULL AXIS,
 - THE Y-COORDINATE OBTAINED IS THE NECESSARY DRAWBAR PULL FOR THE TRACTOR (18.8 t),
 - SEARCH THE INTERSECTION WITH THE "WET CONCRETE" LINE.
- THE OBTAINED X-COORDINATE IS THE RECOMMENDED MINIMUM TRACTOR WEIGHT (32.9 t).

F_AC_050800_1_0020101_01_01

Ground Towing Requirements
FIGURE-5-8-0-991-002-A01

**ON A/C A330-200 A330-200F A330-300

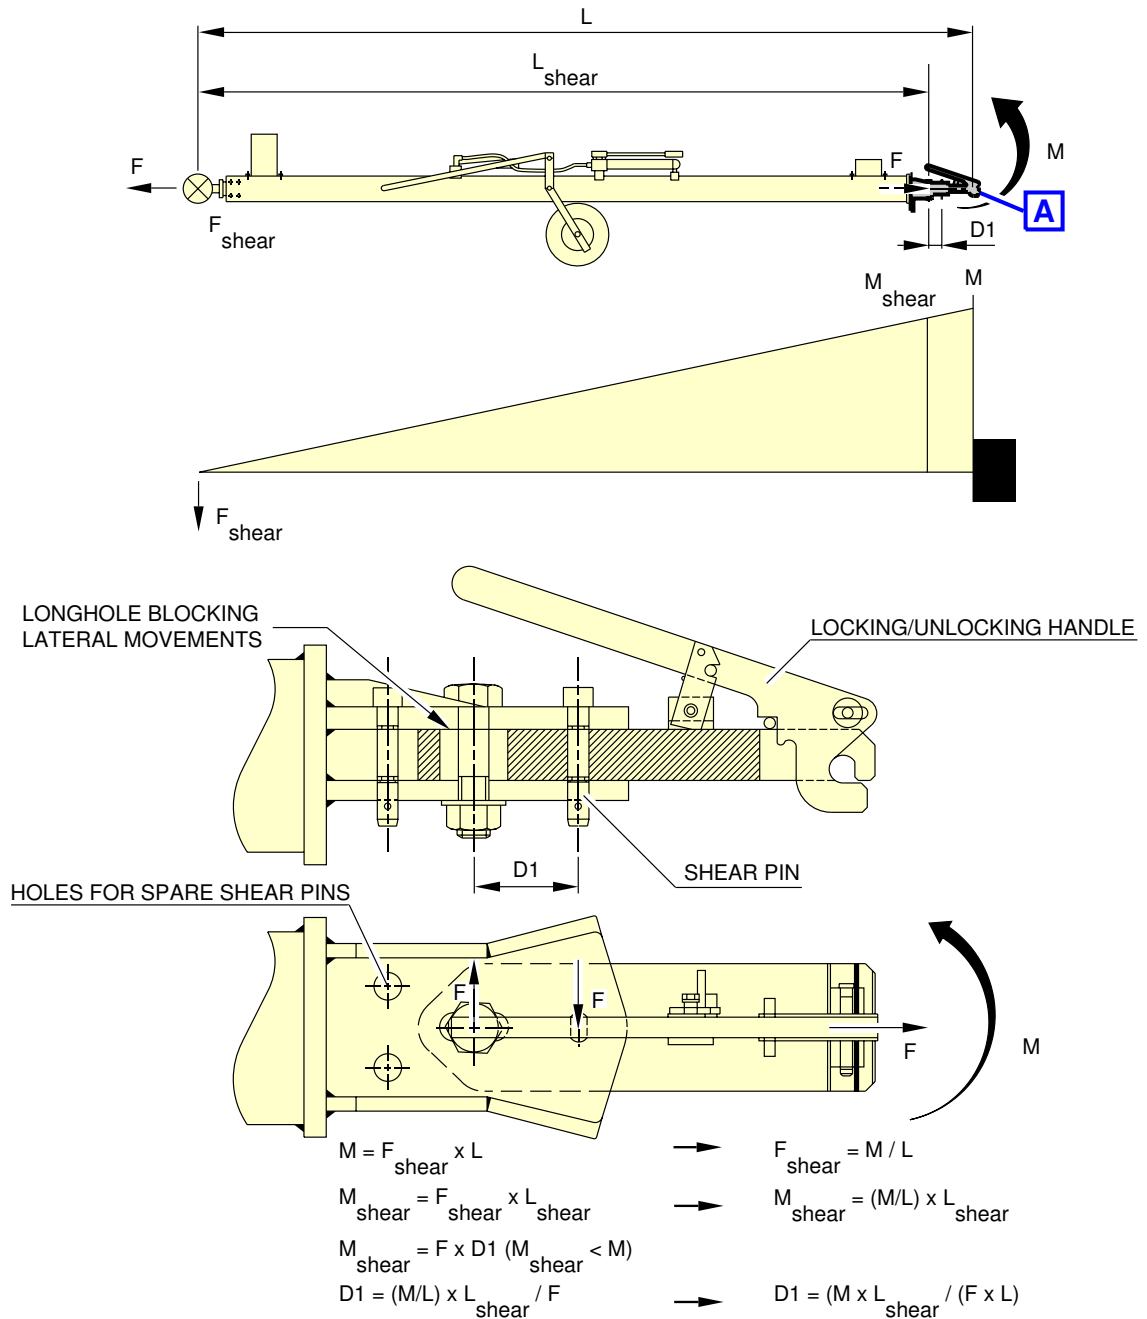


A

F_AC_050800_1_0030101_01_00

Ground Towing Requirements
 Typical tow bar configuration 1
 FIGURE-5-8-0-991-003-A01

**ON A/C A330-200 A330-200F A330-300

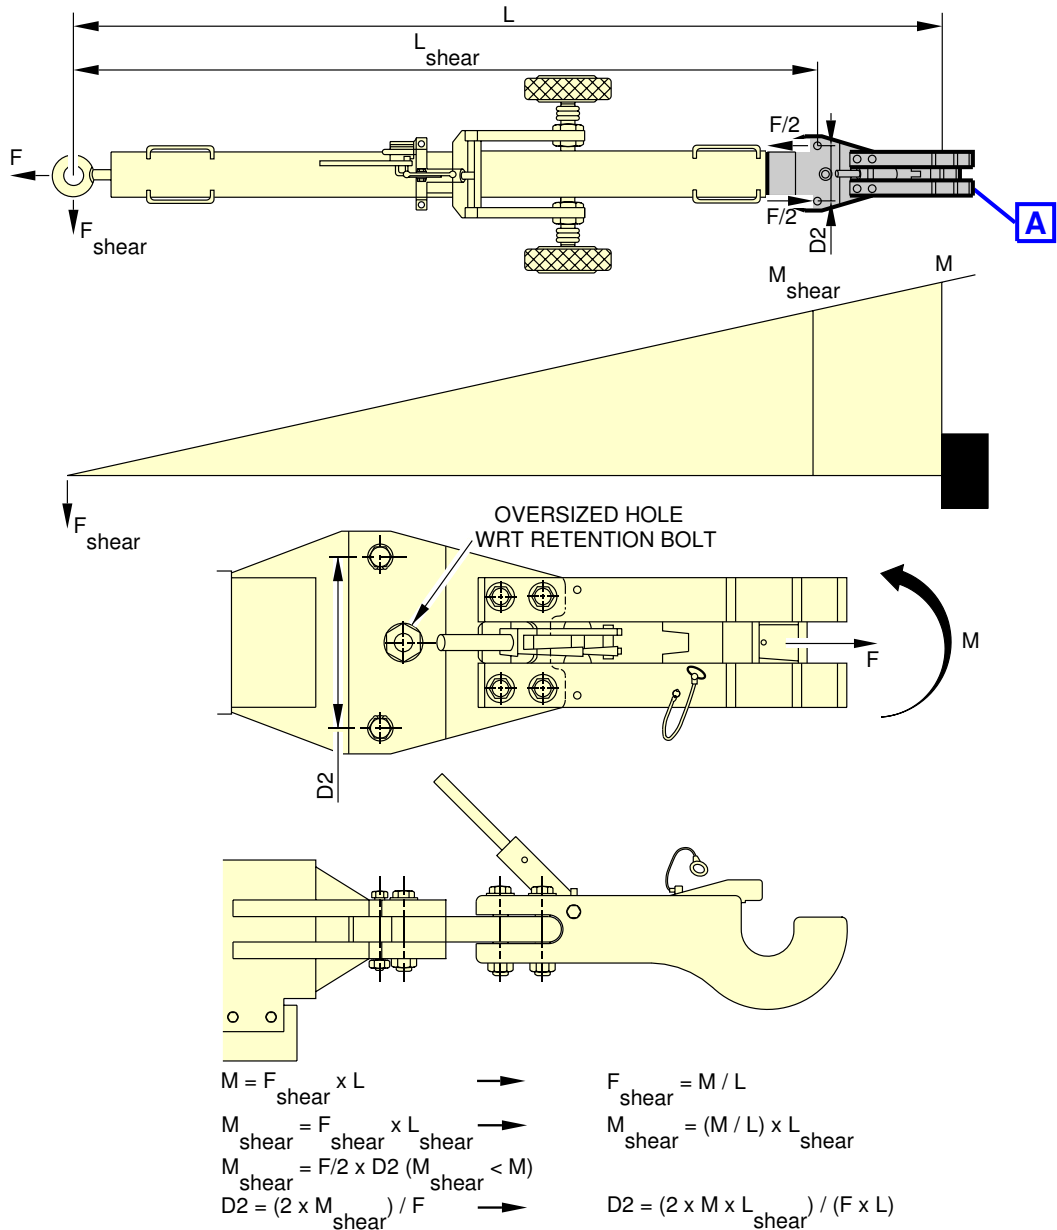

| F [daN] | M [m.daN] | D1 [mm] | D2 [mm] |
|---------|-----------|---------|---------|
| 28620 | 3130 | 98.4 | 210.0 |


RESULTS FOR A TOWBAR LENGTH OF $L_{\text{shear}} / L = 0.90$

A

F_AC_050800_1_0040101_01_00

Ground Towing Requirements
 Typical tow bar configuration 2
 FIGURE-5-8-0-991-004-A01

**ON A/C A330-200 A330-200F A330-300

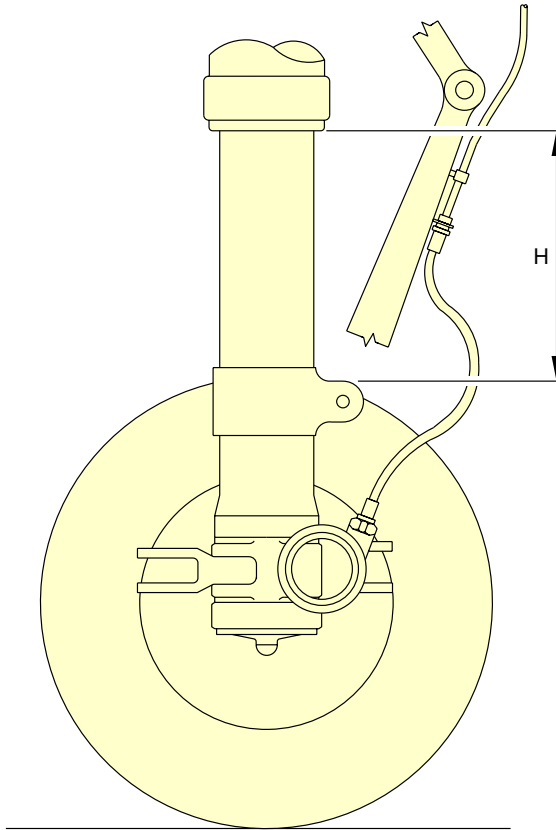

MAKE SURE THAT THE DIMENSION "H" OF THE NLG IS NEVER GREATER THAN 310 mm (12.2047 in.) WHEN YOU TOW THE AIRCRAFT.

F_AC_050800_1_0050101_01_00

Ground Towing Requirements
Maximum Extension of the NLG Shock Absorber
FIGURE-5-8-0-991-005-A01



OPERATING CONDITIONS

6-1-0 Engine Exhaust Velocities and Temperatures

**ON A/C A330-200 A330-200F A330-300

Engine Exhaust Velocities and Temperatures

1. General

This section shows the estimated engine exhaust efflux velocities and temperatures contours for Ground Idle, Breakaway, Maximum Takeoff conditions.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-1-1 Engine Exhaust Velocities Contours - Ground Idle Power


****ON A/C A330-200 A330-200F A330-300**

Engine Exhaust Velocities Contours - Ground Idle Power

1. This section gives engine exhaust velocities contours at ground idle power

**ON A/C A330-200 A330-200F A330-300

NOTE : ALL VELOCITY VALUES ARE IN STATUTE MILES PER HOUR. GROUND IDLE POWER, SEA LEVEL STATIC, ZERO WIND STANDARD DAY, ZERO RAMP GRADIENT ENGINE TYPE.


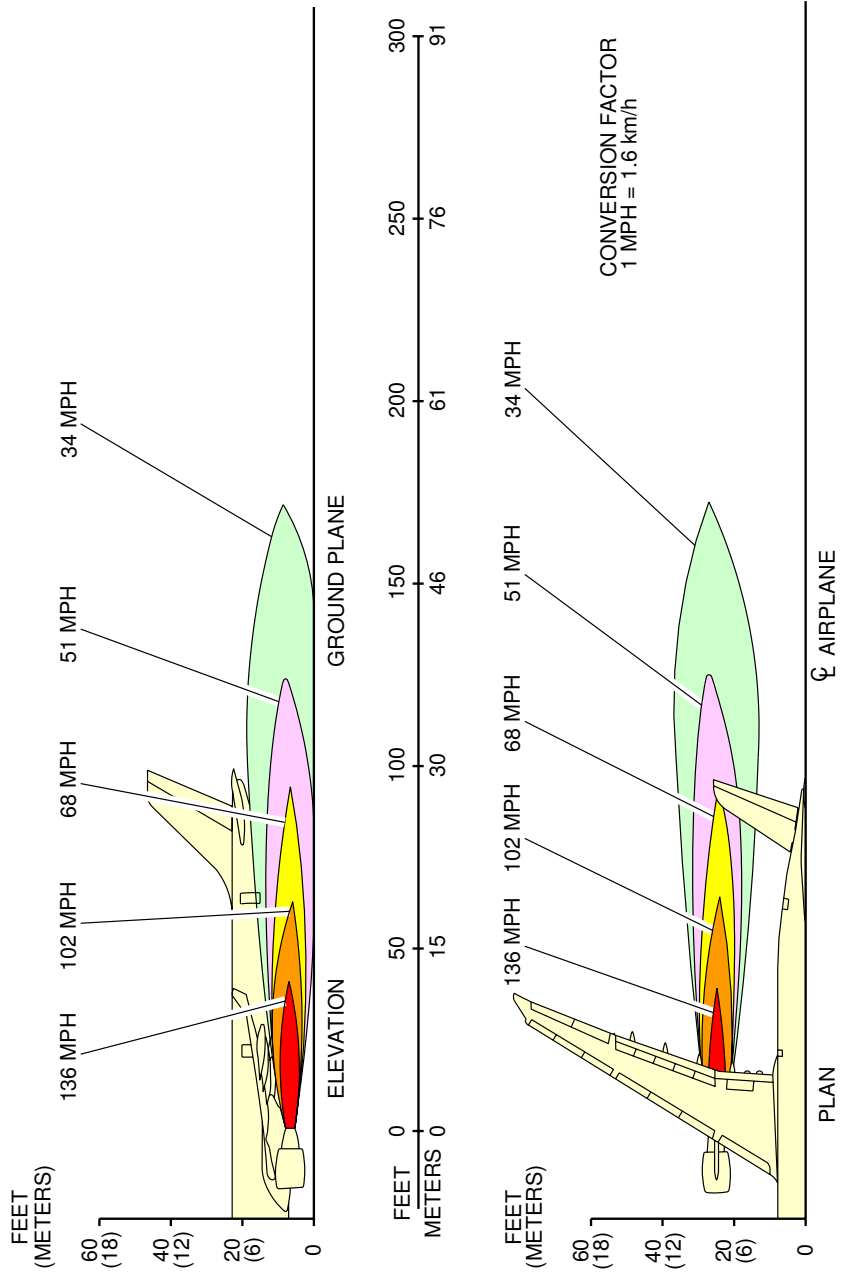


G-00226 (0000)

F_AC_060101_1_0010101_01_00

Engine Exhaust Velocities
Ground Idle Power - PW 4000 series engine
FIGURE-6-1-1-991-001-A01

****ON A/C A330-200 A330-200F A330-300**

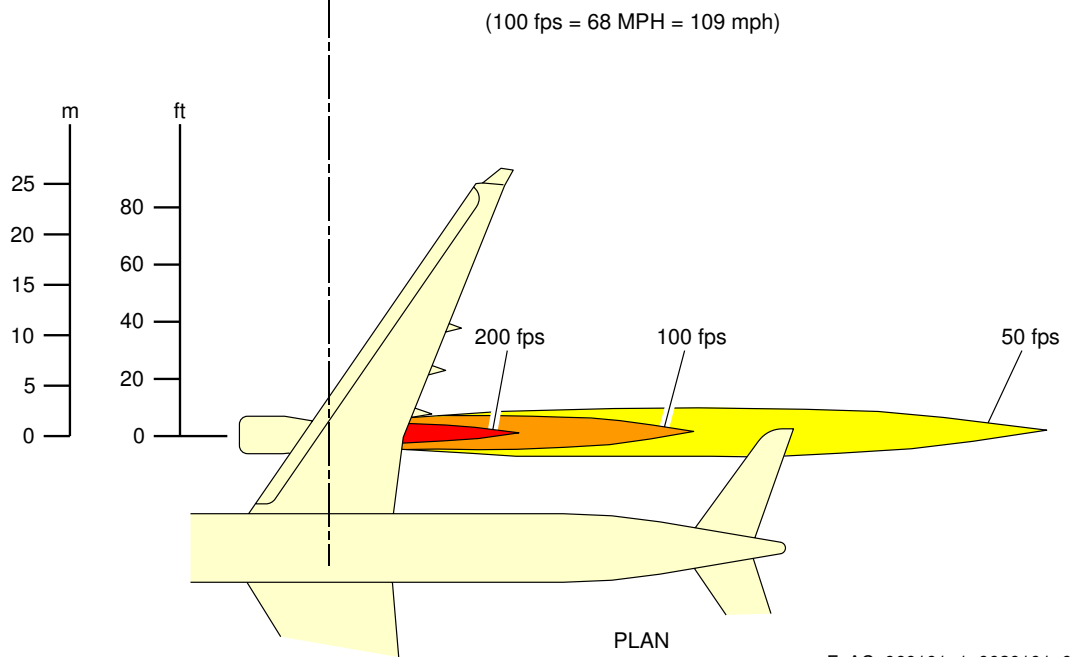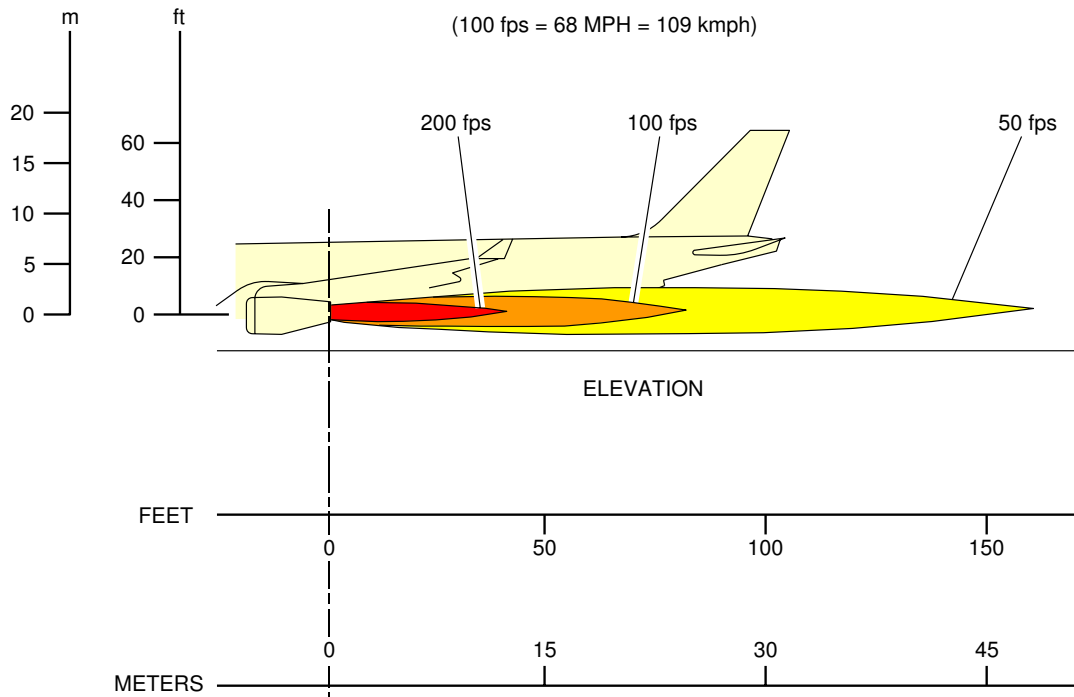


F_AC_060101_1_0020101_01_00


Engine Exhaust Velocities
Ground Idle Power - RR Trent 700 series engine
FIGURE-6-1-1-991-002-A01

**ON A/C A330-200 A330-300

(100 fps = 68 MPH = 109 kmph)

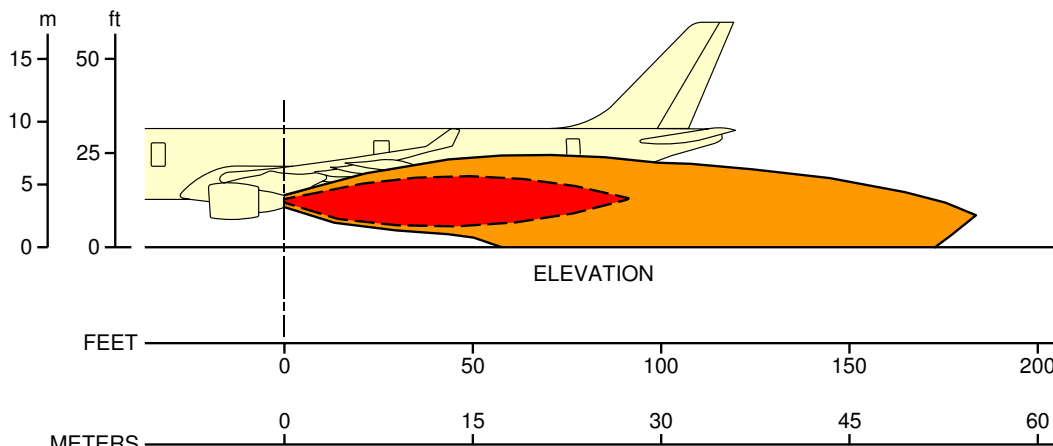

(100 fps = 68 MPH = 109 kmph)

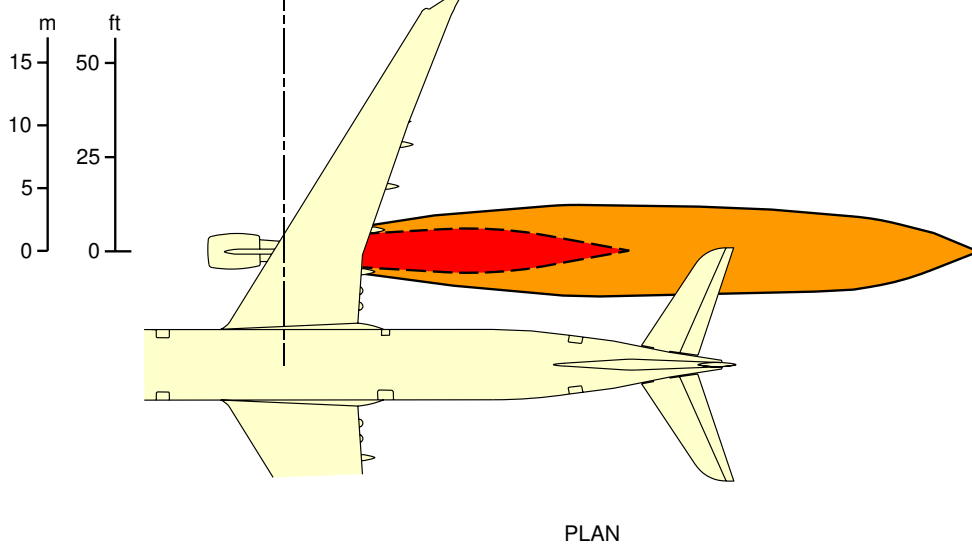

——— V=51.3 ft/s 35 MPH 56 km/h
 - - - - V=95.3 65 105

F_AC_060101_1_0030101_01_01

Engine Exhaust Velocities
 Ground Idle Power - GE CF6-80E1 series engine
 FIGURE-6-1-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-1-2 Engine Exhaust Temperatures Contours - Ground Idle Power


**ON A/C A330-200 A330-200F A330-300

Engine Exhaust Temperatures Contours - Ground Idle Power

1. This section gives engine exhaust temperatures contours at ground idle power.

****ON A/C A330-200 A330-200F A330-300**

NOTE : TEMPERATURES ARE IN DEGREES FAHRENHEIT (DEGREES C)
GROUND IDLE POWER - SEA LEVEL STATIC, ZERO WIND,
STANDARD DAY, ZERO RAMP GRADIENT ENGINE TYPE.

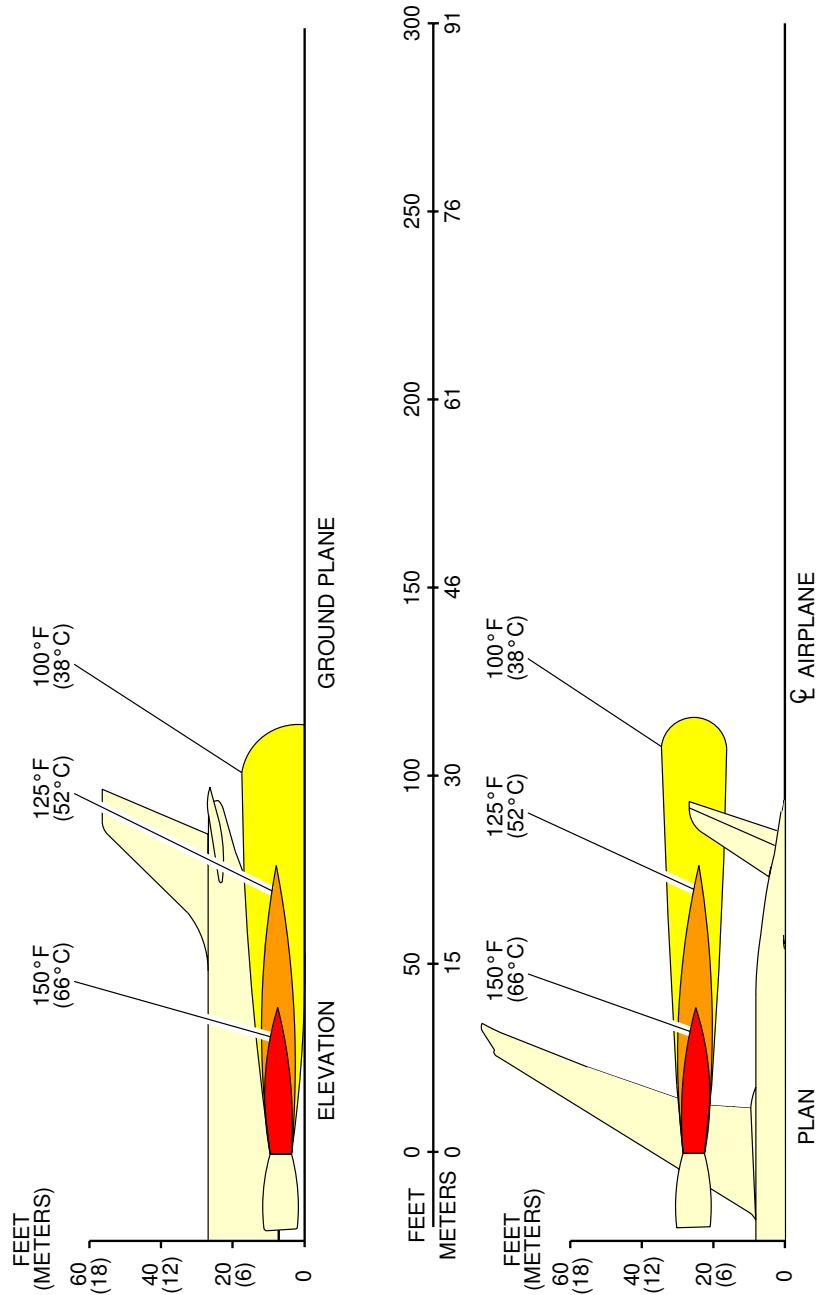


F_AC_060102_1_0010101_01_00

Engine Exhaust Temperatures
Ground Idle Power - PW 4000 series engine
FIGURE-6-1-2-991-001-A01

G-00229 (1294)


**ON A/C A330-200 A330-200F A330-300

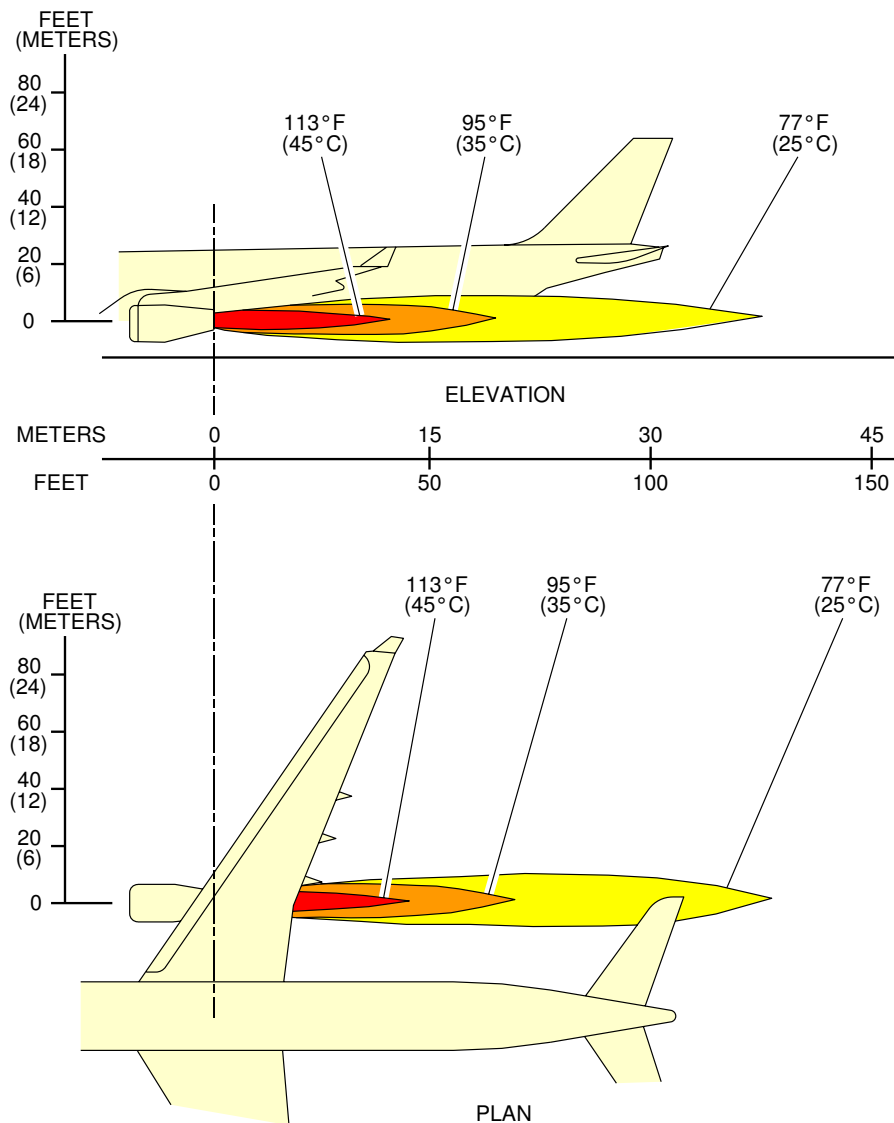

F_AC_060102_1_0020101_01_00

Engine Exhaust Temperatures
Ground Idle Power - RR Trent 700 series engine
FIGURE-6-1-2-991-002-A01

**ON A/C A330-200 A330-300

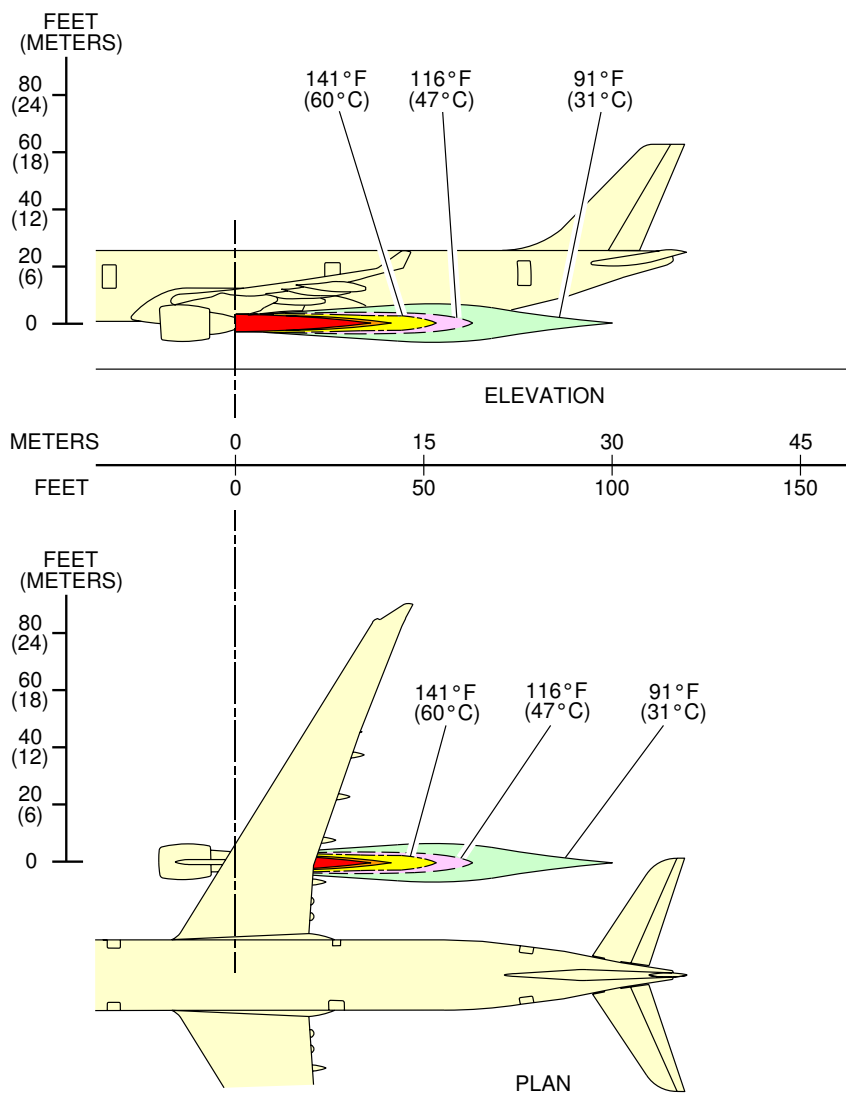

F_AC_060102_1_0030101_01_01

Engine Exhaust Temperatures
Ground Idle Power - GE CF6-80E1 series engine
FIGURE-6-1-2-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-1-3 Engine Exhaust Velocities Contours - Breakaway Power

****ON A/C A330-200 A330-200F A330-300**

Engine Exhaust Velocities Contours - Breakaway Power

1. This section gives engine exhaust velocities contours at breakaway power


**ON A/C A330-200 A330-200F A330-300

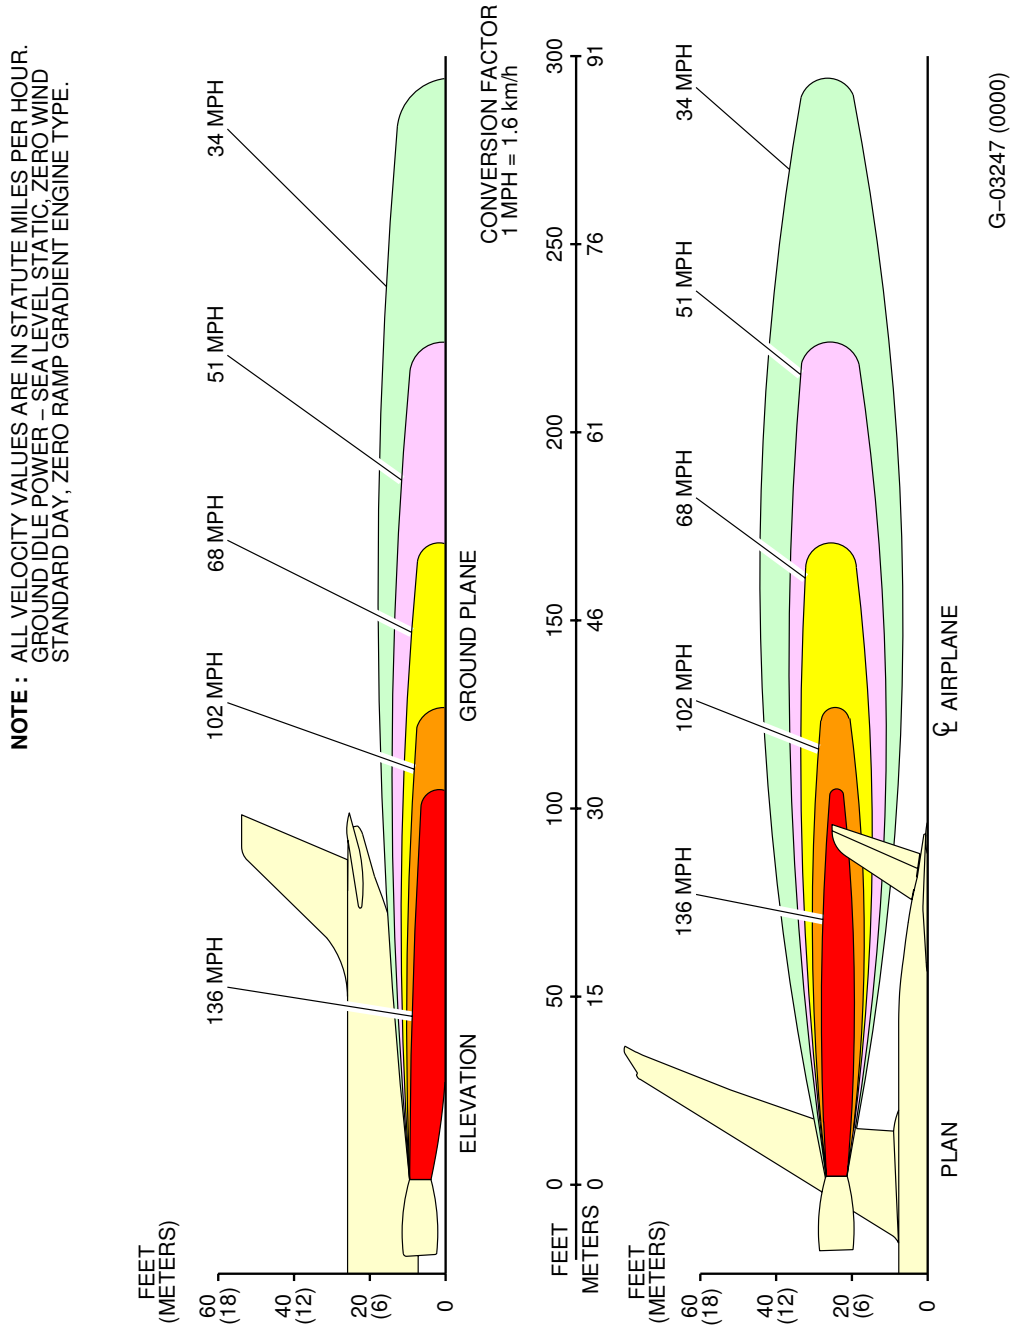

F_AC_060103_1_0010101_01_00

Engine Exhaust Velocities
Breakaway Power - PW 4000 series engine
FIGURE-6-1-3-991-001-A01


**ON A/C A330-200 A330-200F A330-300

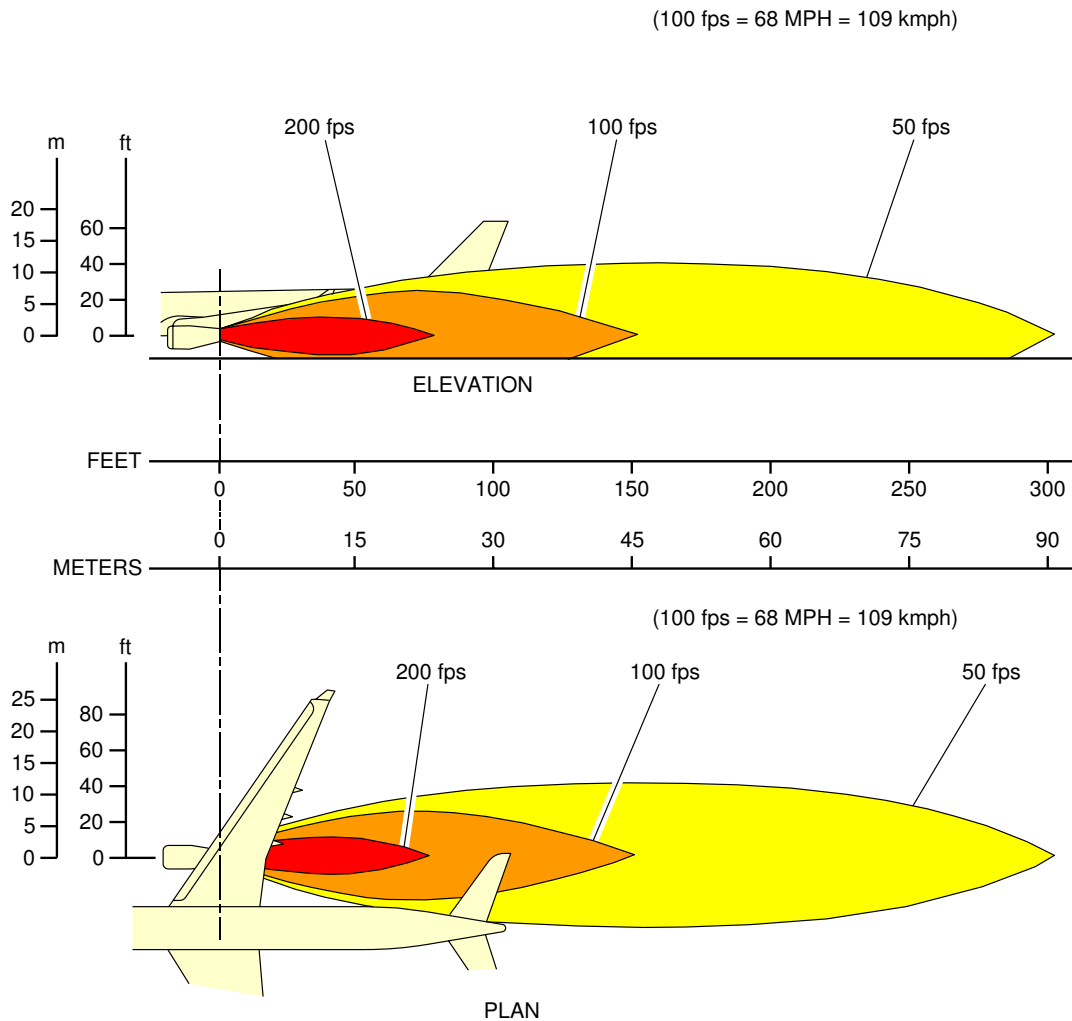

F_AC_060103_1_0020101_01_00

Engine Exhaust Velocities
Breakaway Power - RR Trent 700 series engine
FIGURE-6-1-3-991-002-A01

**ON A/C A330-200 A330-300

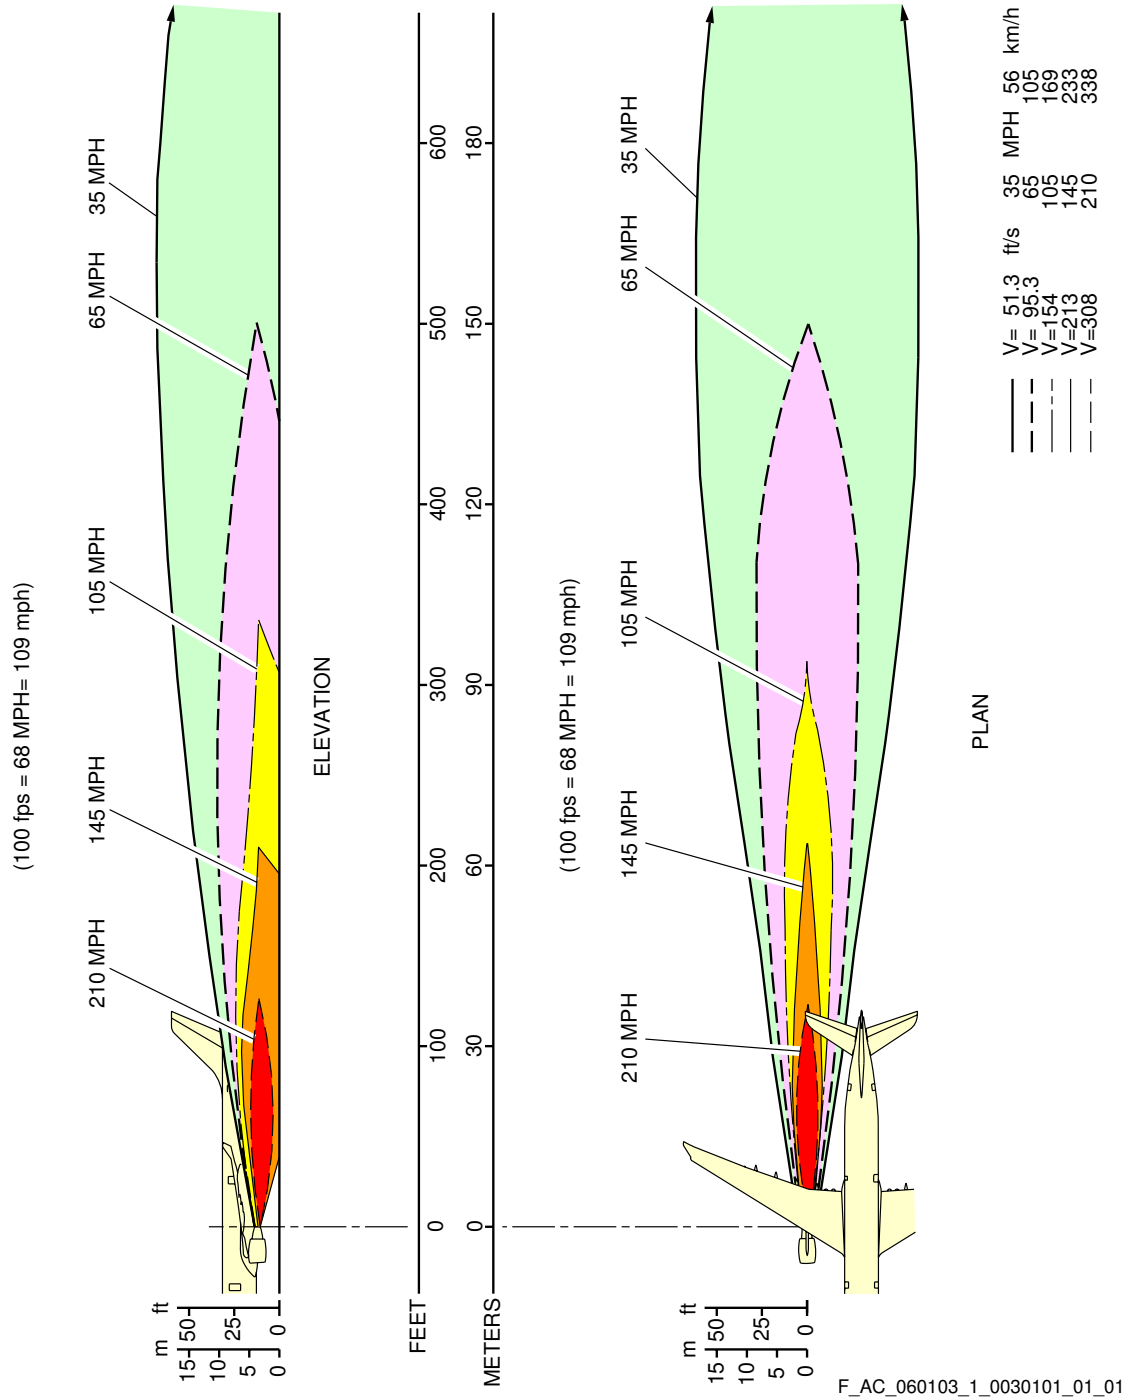

Engine Exhaust Velocities
 Breakaway Power - GE CF6-80E1 series engine
 FIGURE-6-1-3-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-1-4 Engine Exhaust Temperatures Contours - Breakaway Power


**ON A/C A330-200 A330-200F A330-300

Engine Exhaust Temperatures Contours - Breakaway Power

1. This section gives engine exhaust temperatures contours at breakaway power.

****ON A/C A330-200 A330-200F A330-300**

NOTE : TEMPERATURES ARE IN DEGREES FAHRENHEIT (DEGREES C)
 GROUND IDLE POWER - SEA LEVEL STATIC, ZERO WIND,
 STANDARD DAY, ZERO RAMP GRADIENT ENGINE TYPE.

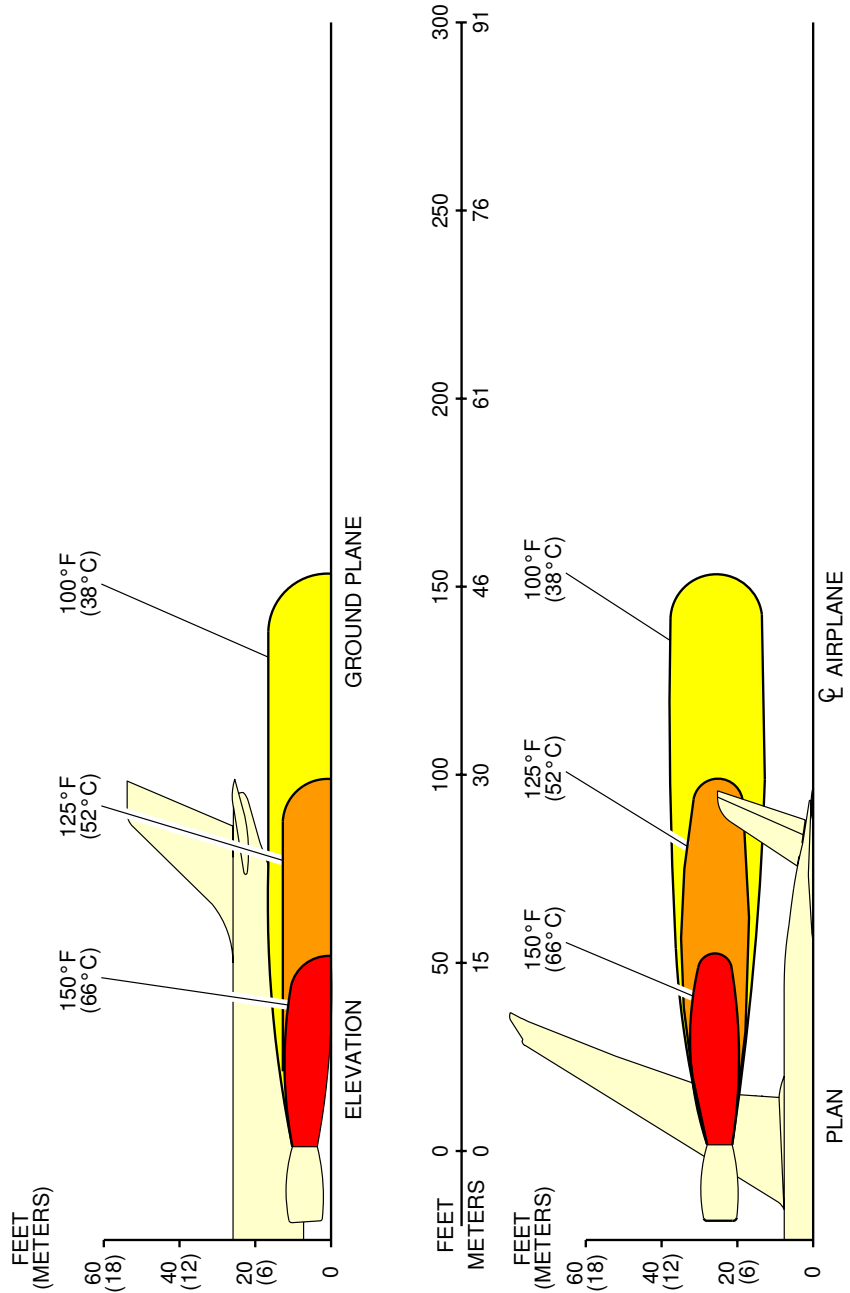


G-03246 (0000)

F_AC_060104_1_0010101_01_00

Engine Exhaust Temperatures
 Breakaway Power - PW 4000 series engine
 FIGURE-6-1-4-991-001-A01


**ON A/C A330-200 A330-200F A330-300

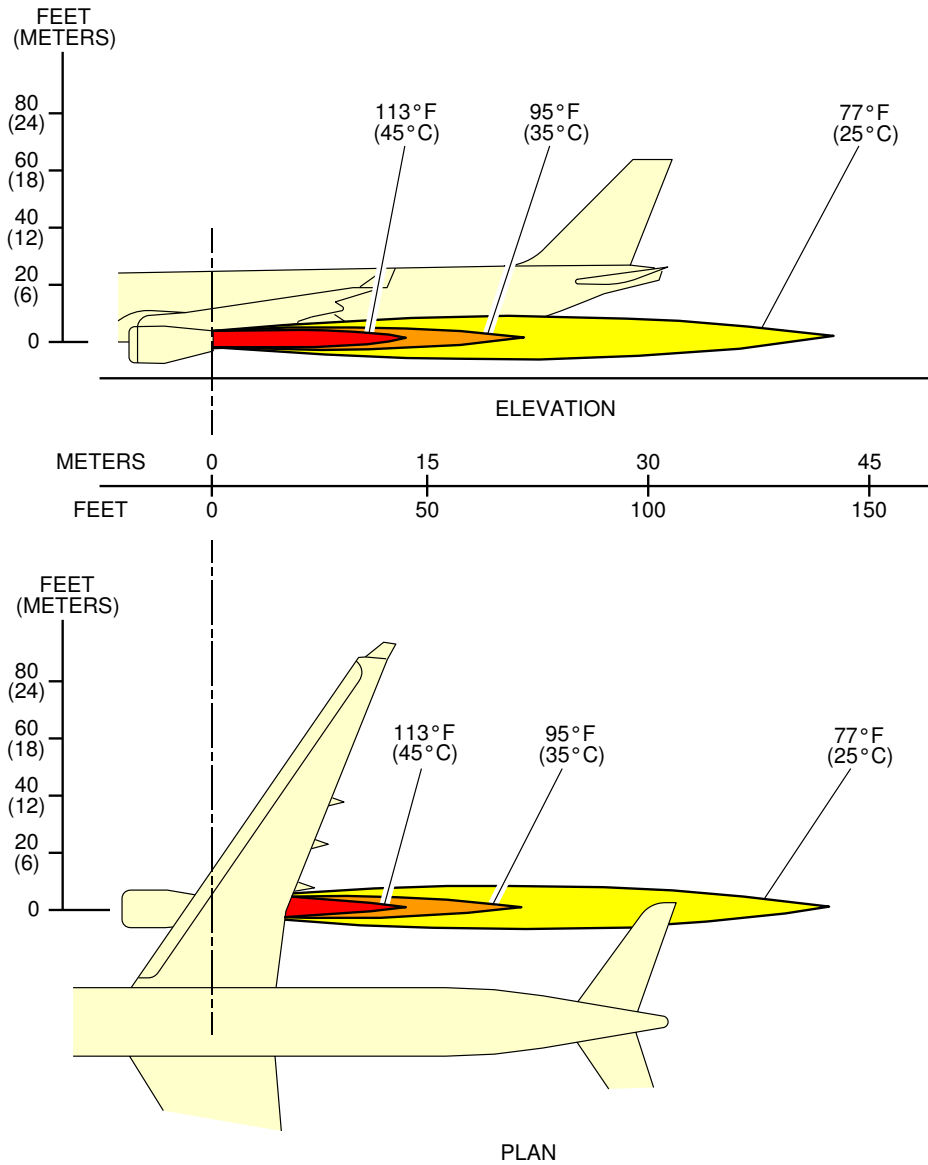

F_AC_060104_1_0020101_01_00

Engine Exhaust Temperatures
Breakaway Power - RR Trent 700 series engine
FIGURE-6-1-4-991-002-A01

**ON A/C A330-200 A330-300

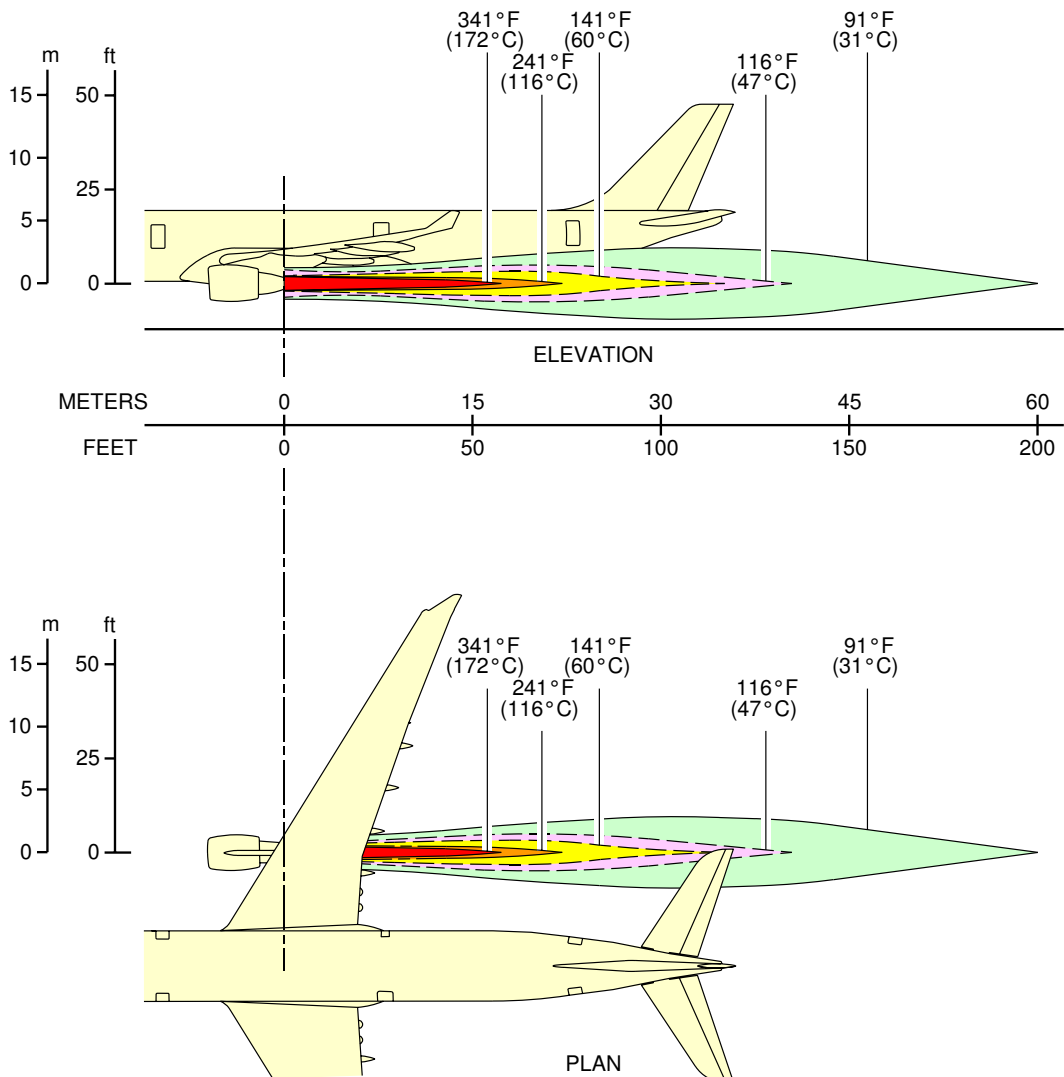

F_AC_060104_1_0030101_01_01

Engine Exhaust Temperatures
Breakaway Power - GE CF6-80E1 series engine
FIGURE-6-1-4-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-1-5 Engine Exhaust Velocities Contours - Takeoff Power


**ON A/C A330-200 A330-200F A330-300

Engine Exhaust Velocities Contours - Takeoff Power

1. This section gives engine exhaust velocities contours at takeoff power

**ON A/C A330-200 A330-200F A330-300

NOTE : ALL VELOCITY VALUES ARE IN STATUTE MILES PER HOUR.
TAKEOFF POWER – SEA LEVEL STATIC, ZERO WIND
STANDARD DAY, ZERO RAMP GRADIENT ENGINE TYPE.

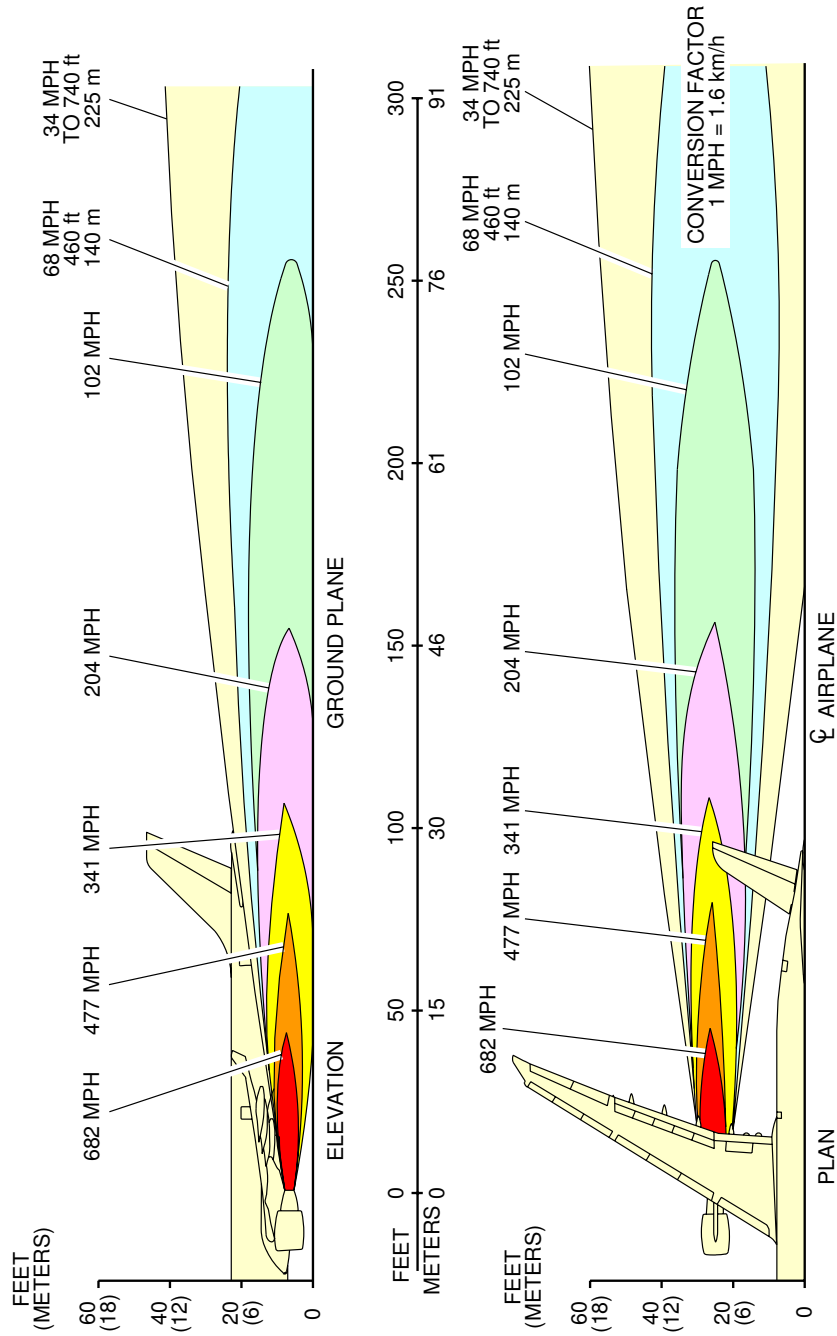


G-00228 (1294)

F_AC_060105_1_0010101_01_00

Engine Exhaust Velocities
Takeoff Power - PW 4000 series engine
FIGURE-6-1-5-991-001-A01


**ON A/C A330-200 A330-200F A330-300

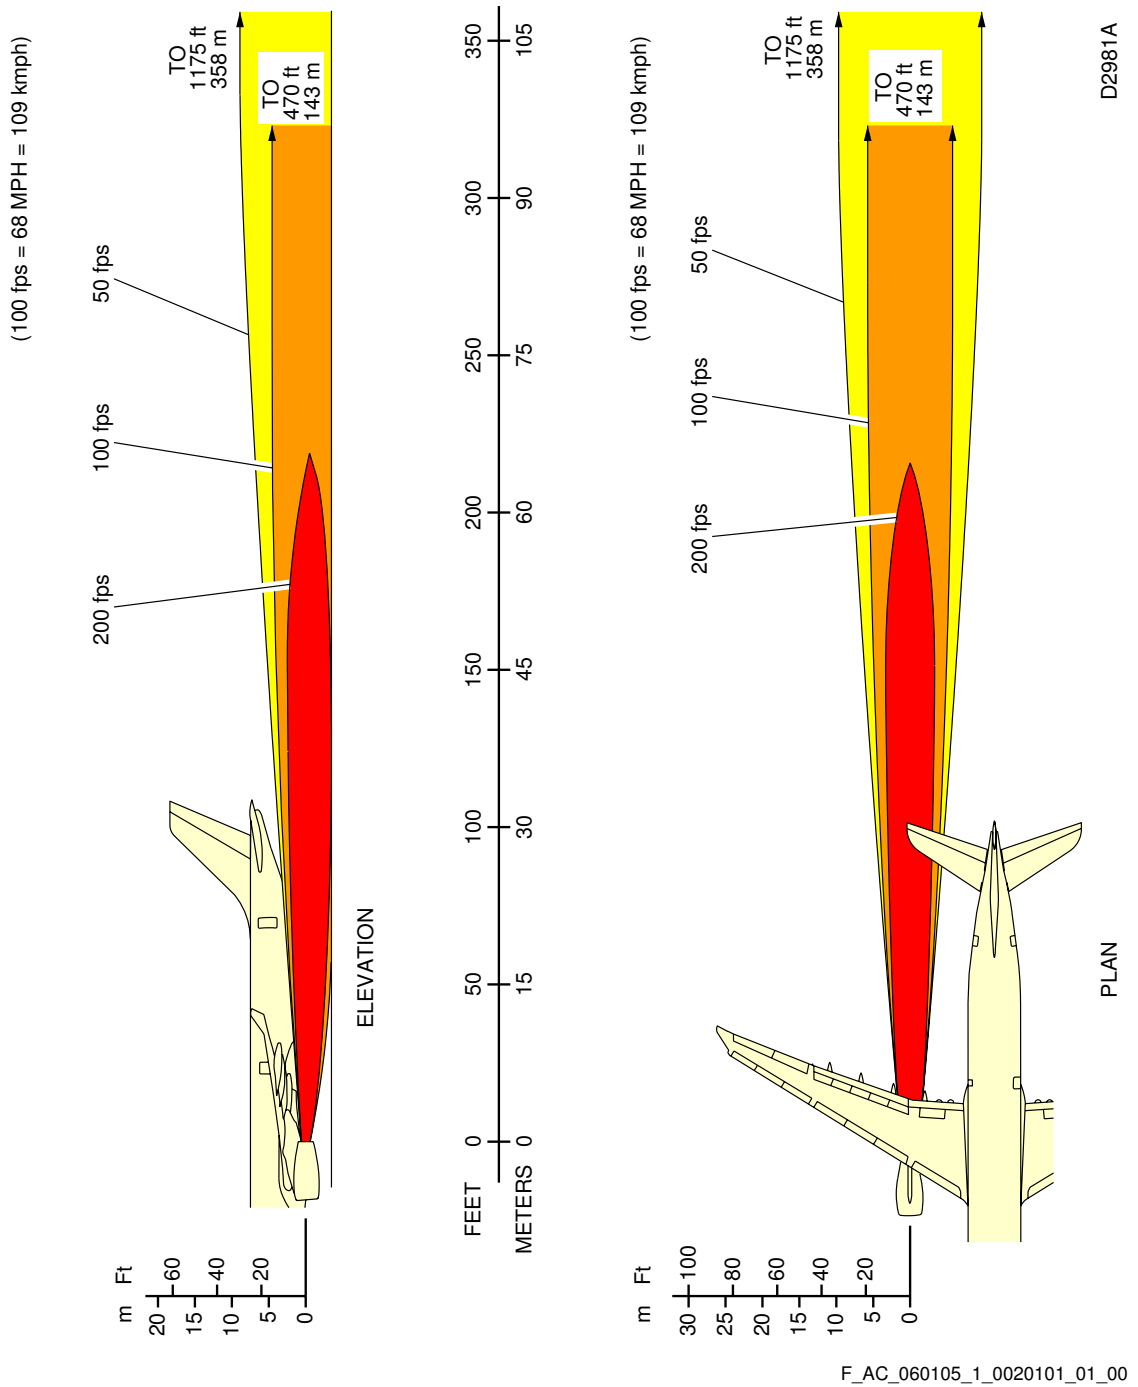

D2981A

Engine Exhaust Velocities
Takeoff Power - RR Trent 700 series engine
FIGURE-6-1-5-991-002-A01

**ON A/C A330-200 A330-300

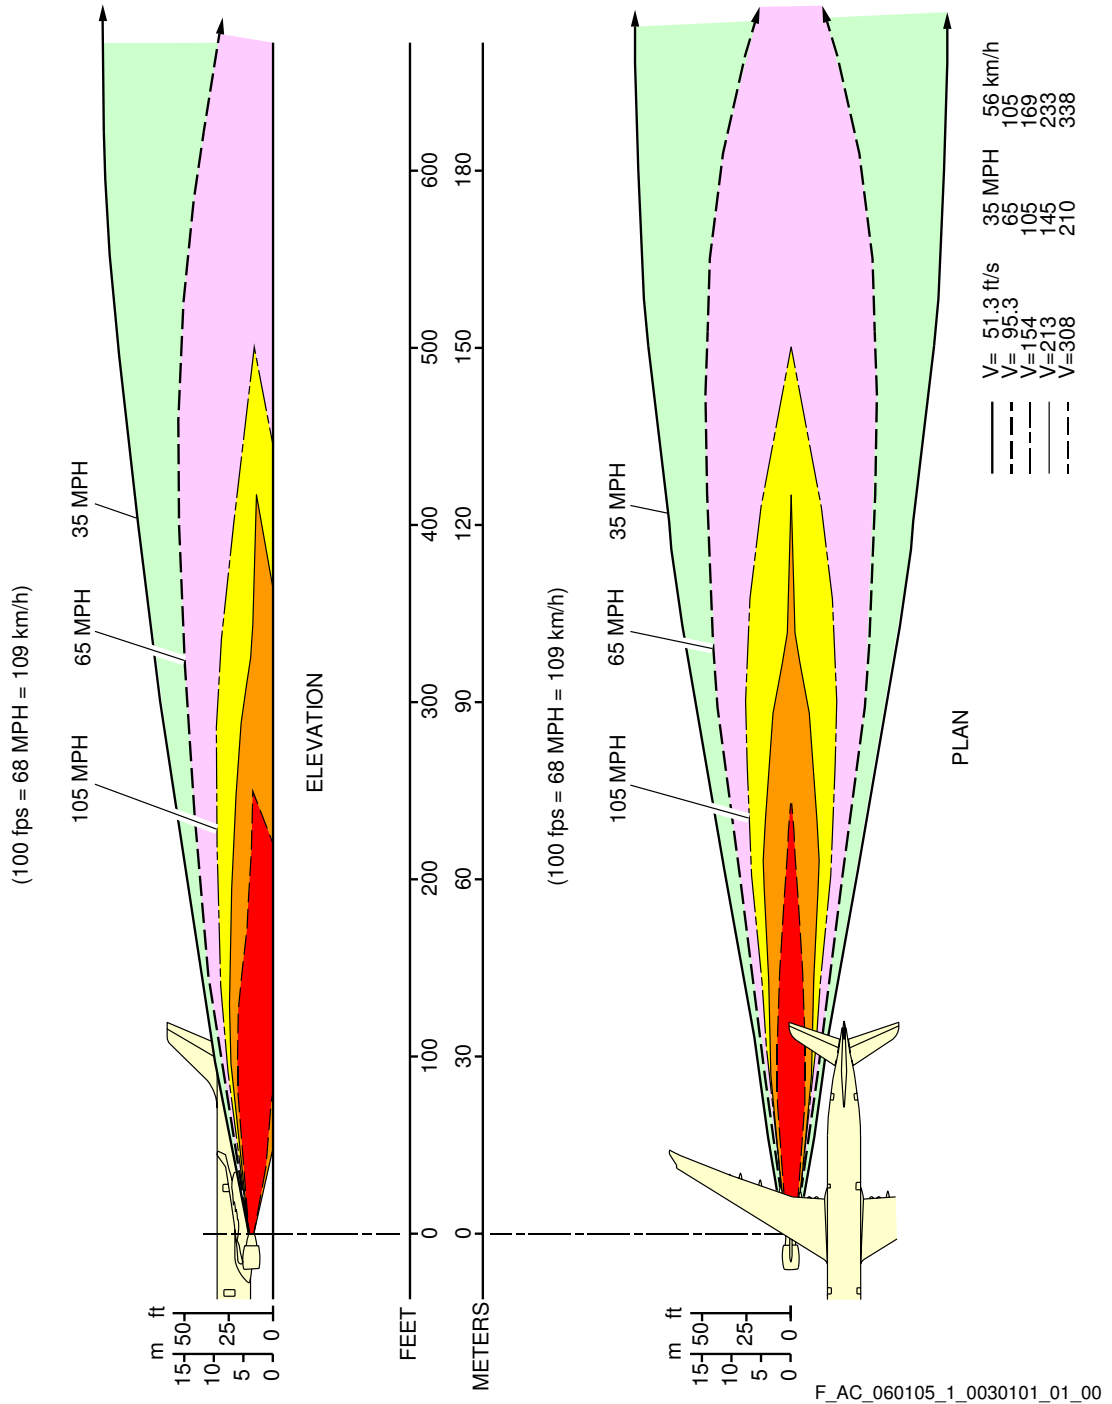

Engine Exhaust Velocities
 Takeoff Power - GE CF6-80E1 series engine
 FIGURE-6-1-5-991-003-A01



6-1-6 Engine Exhaust Temperatures Contours - Takeoff Power


**ON A/C A330-200 A330-200F A330-300

Engine Exhaust Temperatures Contours - Takeoff Power

1. This section gives engine exhaust temperatures contours at takeoff power

****ON A/C A330-200 A330-200F A330-300**

NOTE : TEMPERATURES ARE IN DEGREES FAHRENHEIT (DEGREES C).
TAKEOFF POWER - SEA LEVEL STATIC, ZERO WIND,
STANDARD DAY, ZERO RAMP GRADIENT ENGINE TYPE.

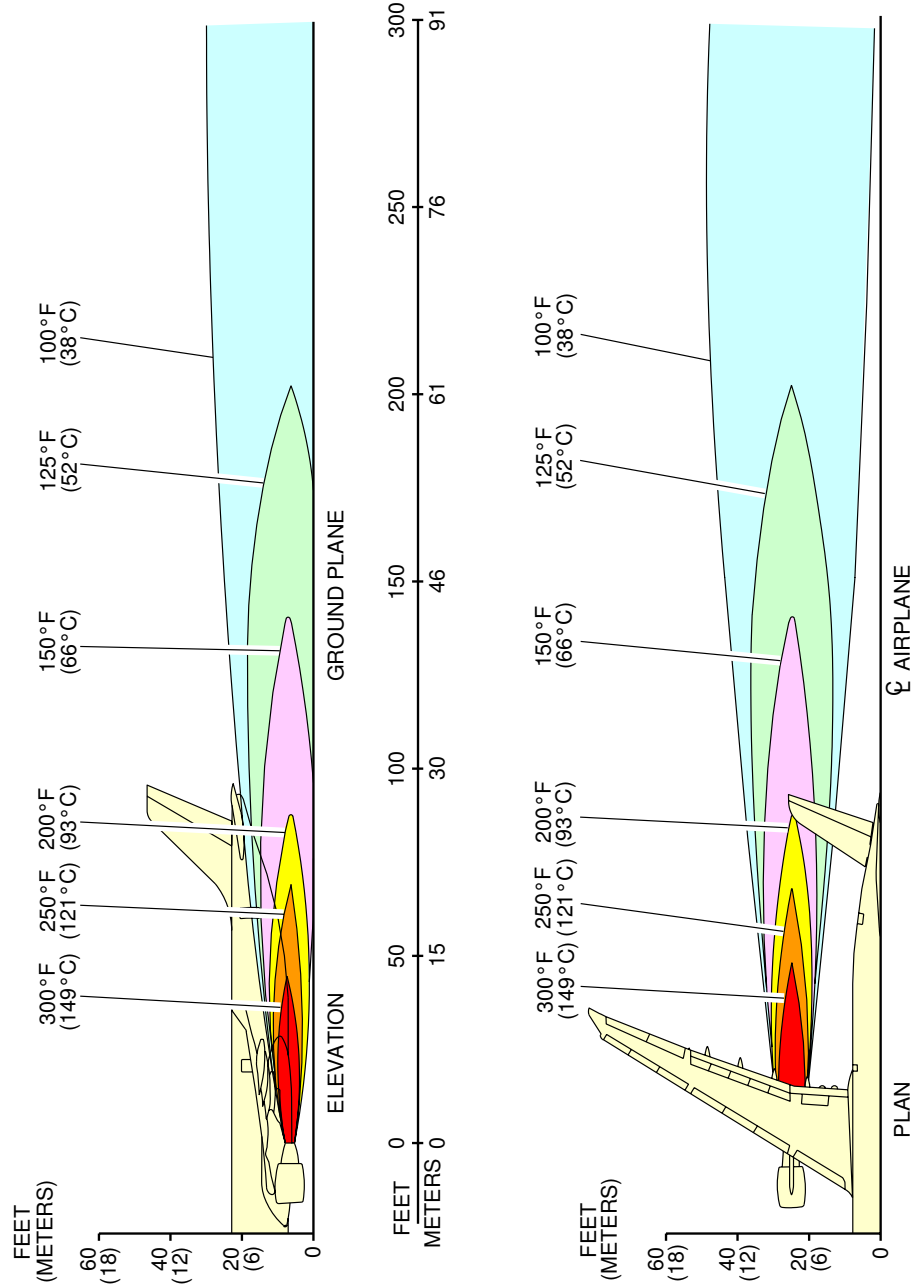


F_AC_060106_1_0010101_01_00

Engine Exhaust Temperatures
Takeoff Power - PW 4000 series engine
FIGURE-6-1-6-991-001-A01

G-00231 (0000)


**ON A/C A330-200 A330-200F A330-300

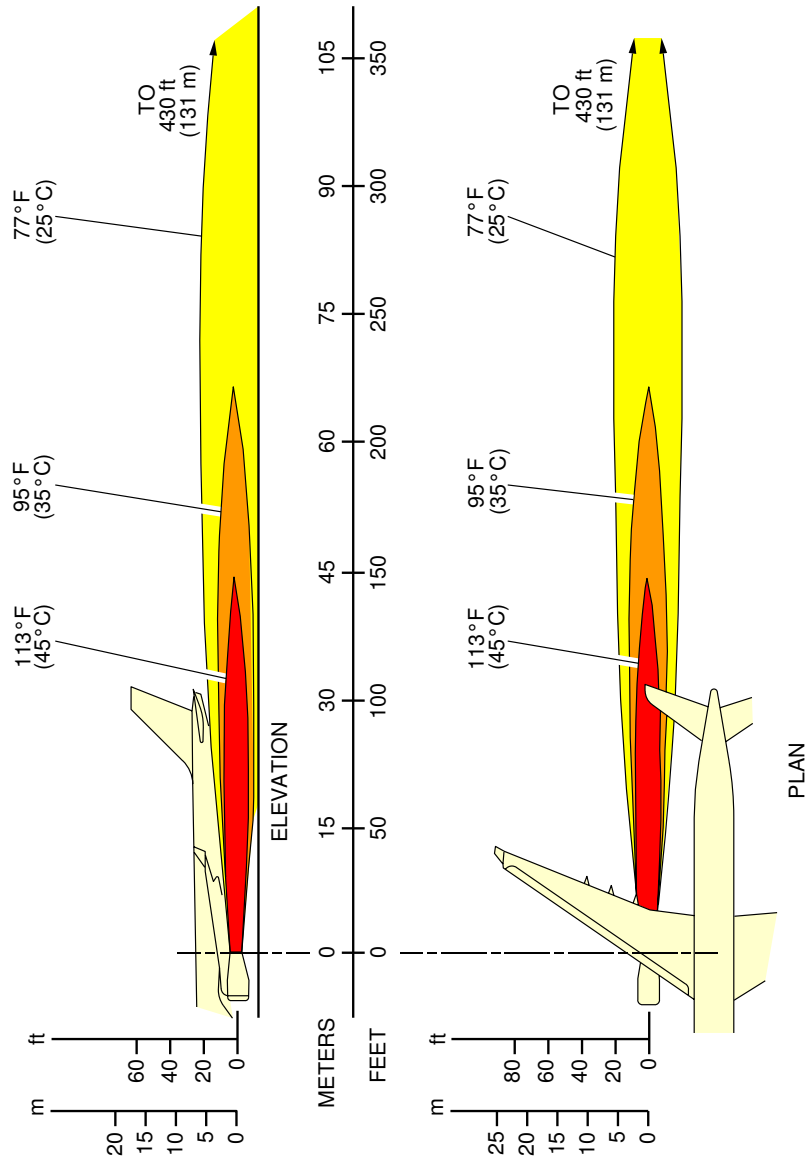

F_AC_060106_1_0020101_01_00

Engine Exhaust Temperatures
 Takeoff Power - RR Trent 700 series engine
 FIGURE-6-1-6-991-002-A01

**ON A/C A330-200 A330-300

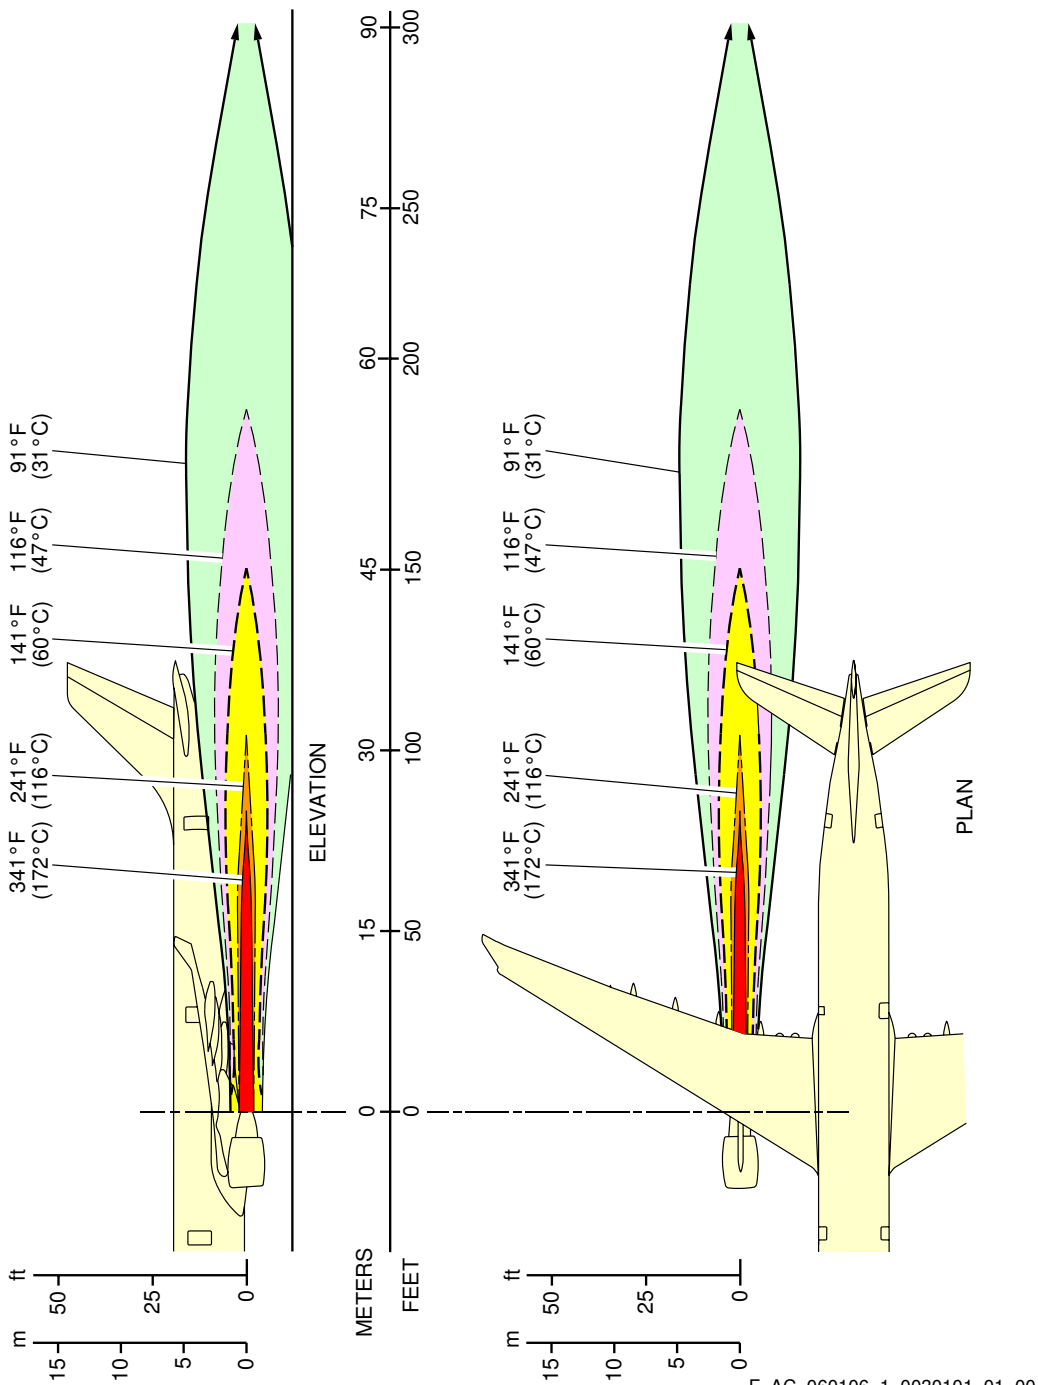

F_AC_060106_1_0030101_01_00

Engine Exhaust Temperatures
 Takeoff Power - GE CF6-80E1 series engine
 FIGURE-6-1-6-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-2-0 Airport and Community Noise

****ON A/C A330-200 A330-200F A330-300**

Airport and Community Noise Data

1. Airport and Community Noise Data

This section gives data concerning engine maintenance run-up noise to permit evaluation of possible attenuation requirements.

6-2-1 Noise Data****ON A/C A330-200 A330-200F A330-300**Noise Data

1. Noise Data for PW 4000 series engine

A. Description of test conditions :

The arc of circle (radius = 60 m (196.85 ft)), with microphones 1.2 m (3.94 ft) high, is centered on the position of the noise reference point.

A.P.U. : off ; E.C.S. : Packs off.

B. Engine parameters : 2 engines running

C. Meteorological data

The meteorological parameters measured 1.6 m (5.25 ft) from the ground on the day of test were as follows :

- Temperature : 24.8 °C (76.64 °F)
- Relative humidity : 46%
- Atmospheric pressure : 1000 hPa
- Wind speed : Negligible
- No rain

2. Noise Data for RR Trent 700 series engine

A. Description of test conditions :

The arc of circle (radius = 60 m (196.85 ft)), with microphones 1.2 m (3.94 ft) high, is centered on the position of the noise reference point.

A.P.U. : off ; E.C.S. : Packs off.

B. Engine parameters : 2 engines running

C. Meteorological data

The meteorological parameters measured 1.6 m (5.25 ft) from the ground on the day of test were as follows :

- Temperature : 16.8 °C (62.24 °F)
- Relative humidity : 70%
- Atmospheric pressure : 1009 hPa
- Wind speed : Negligible
- No rain

****ON A/C A330-200 A330-300**

3. Noise Data for GE CF6-80E1 series engine

A. Description of test conditions :

The arc of circle (radius = 60 m (196.85 ft)), with microphones 1.2 m (3.94 ft) high, is centered on the position of the noise reference point.

A.P.U. : off ; E.C.S. : Packs off.



B. Engine parameters : 2 engines running


C. Meteorological data

The meteorological parameters measured 1.6 m (5.25 ft) from the ground on the day of test were as follows :

- Temperature : 24.5 °C (76.10 °F)
- Relative humidity : 47%
- Atmospheric pressure : 1003.1 hPa
- Wind speed : Negligible
- No rain

**ON A/C A330-200 A330-200F A330-300

| | GROUND IDLE | MAX THRUST POSSIBLE ON BRAKES |
|--------|---|---|
| E.P.R. | 1.016 | 1.337 |
| N1 | 25% | 82.4% |
| CURVE |  |  |

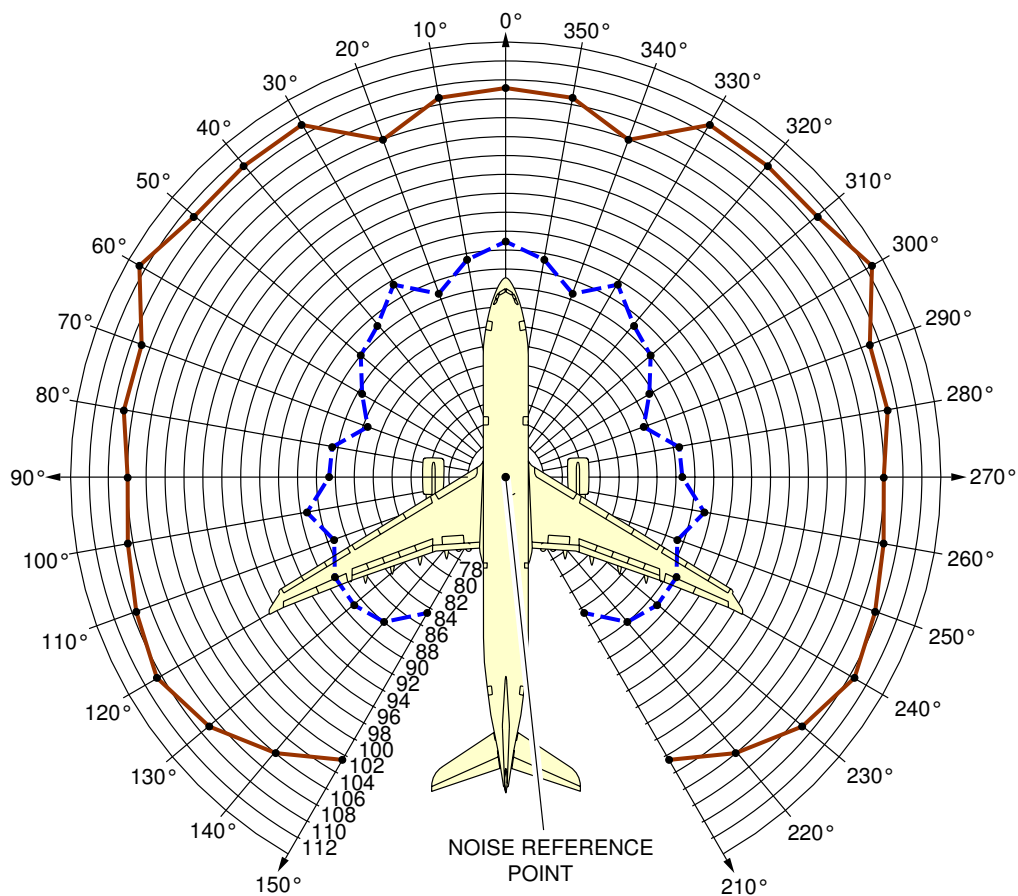


F_AC_060201_1_0010101_01_00

Airport and Community Noise
 PW 4000 series engine
 FIGURE-6-2-1-991-001-A01

**ON A/C A330-200 A330-200F A330-300

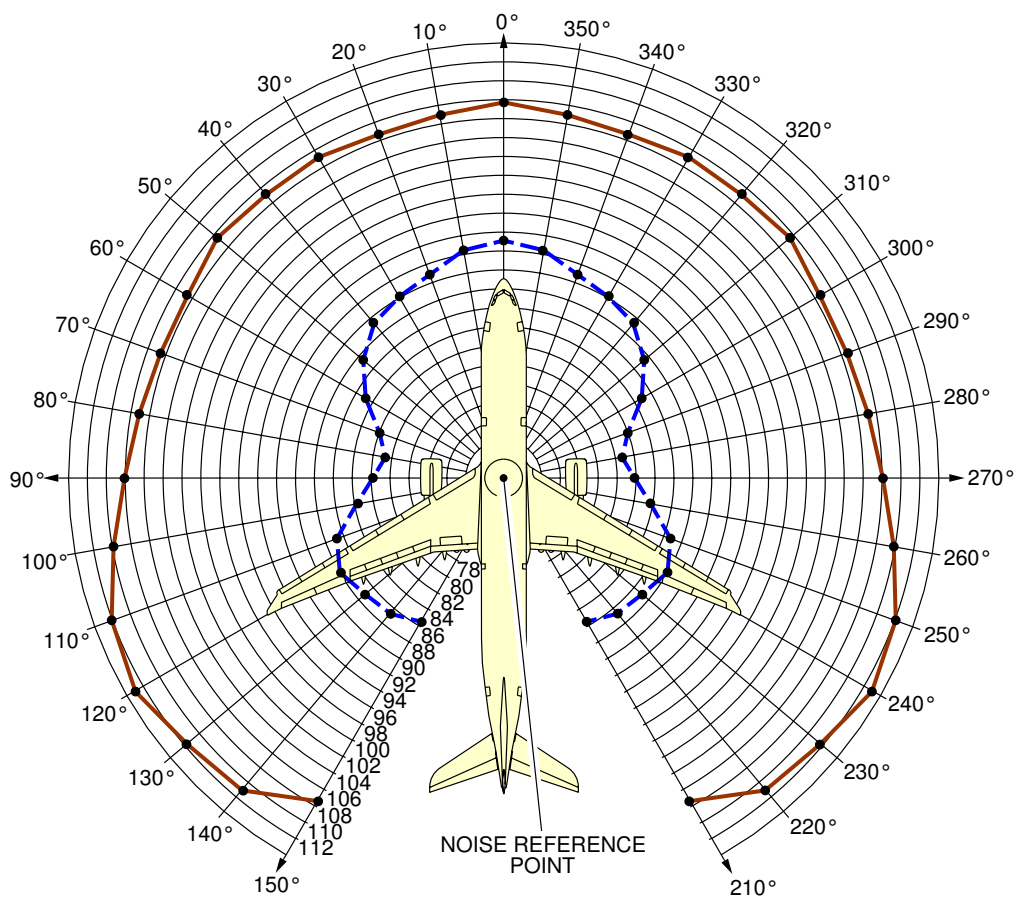

| | GROUND IDLE | MAX THRUST POSSIBLE ON BRAKES |
|--------|-------------|-------------------------------|
| E.P.R. | 1.017 | 1.43 |
| N1 | 23% | 79.5% |
| CURVE | | |




F_AC_060201_1_0020101_01_00

Airport and Community Noise
 RR Trent 700 series engine
 FIGURE-6-2-1-991-002-A01

**ON A/C A330-200 A330-300

| | GROUND IDLE | MAX THRUST POSSIBLE ON BRAKES |
|-------|---|---|
| N1 | 26% | 99.5% |
| CURVE |  |  |

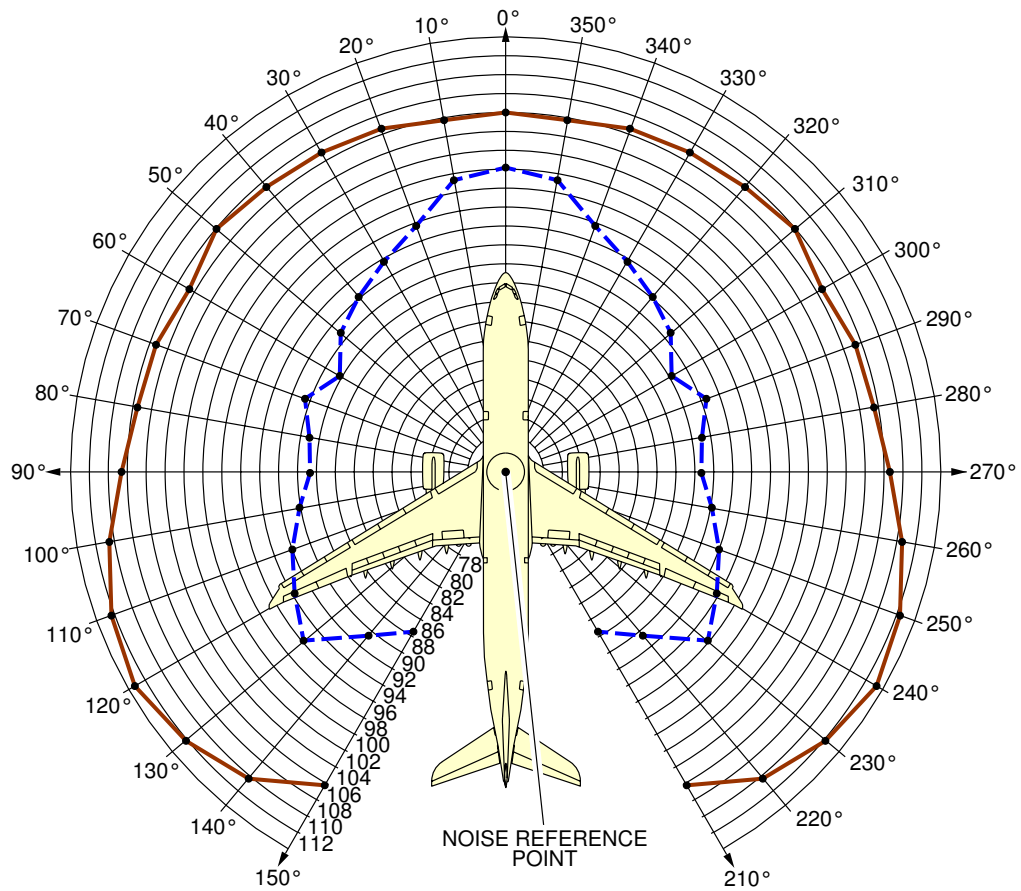

F_AC_060201_1_0030101_01_00

Airport and Community Noise
 GE CF6-80E1 series engine
 FIGURE-6-2-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-3-0 Danger Areas of Engines

**ON A/C A330-200 A330-200F A330-300

Danger Areas of Engines

1. Danger Areas of the Engines.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-3-1 Ground Idle Power

**ON A/C A330-200 A330-200F A330-300

Ground Idle Power

1. This section gives danger areas of the engines at ground idle power conditions

**ON A/C A330-200 A330-200F A330-300

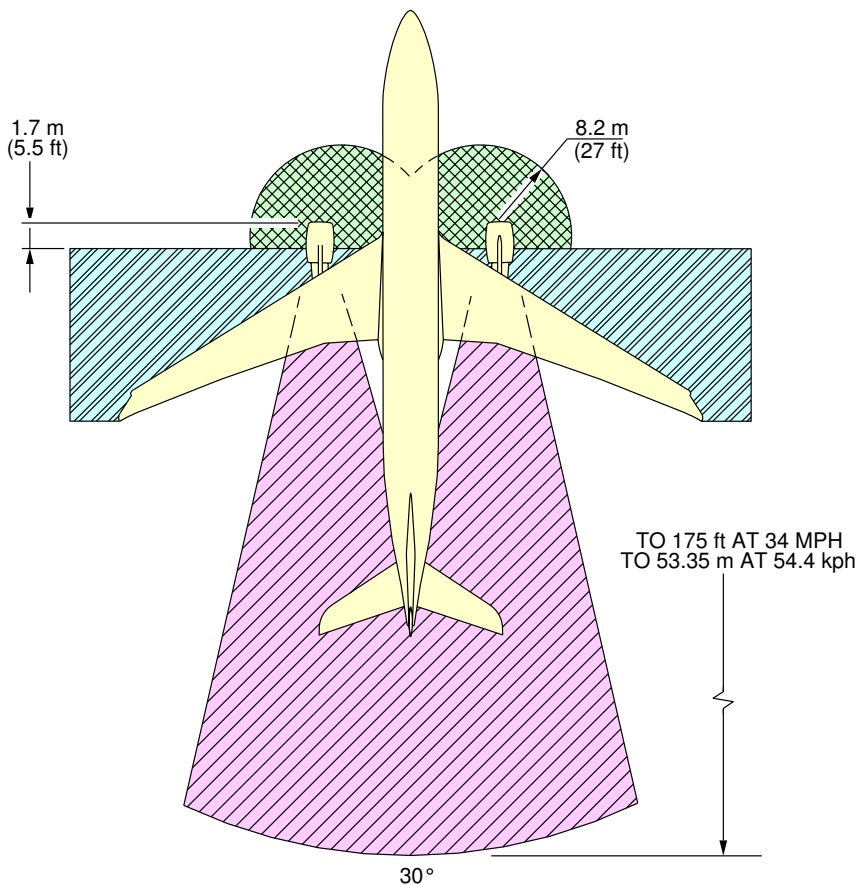


-  INTAKE SUCTION DANGER AREA
-  EXHAUST DANGER AREA
-  SAFE ENTRY AREA




G-00224(0992)

F_AC_060301_1_0010101_01_00

Danger Areas of Engines
PW 4000 series engine
FIGURE-6-3-1-991-001-A01

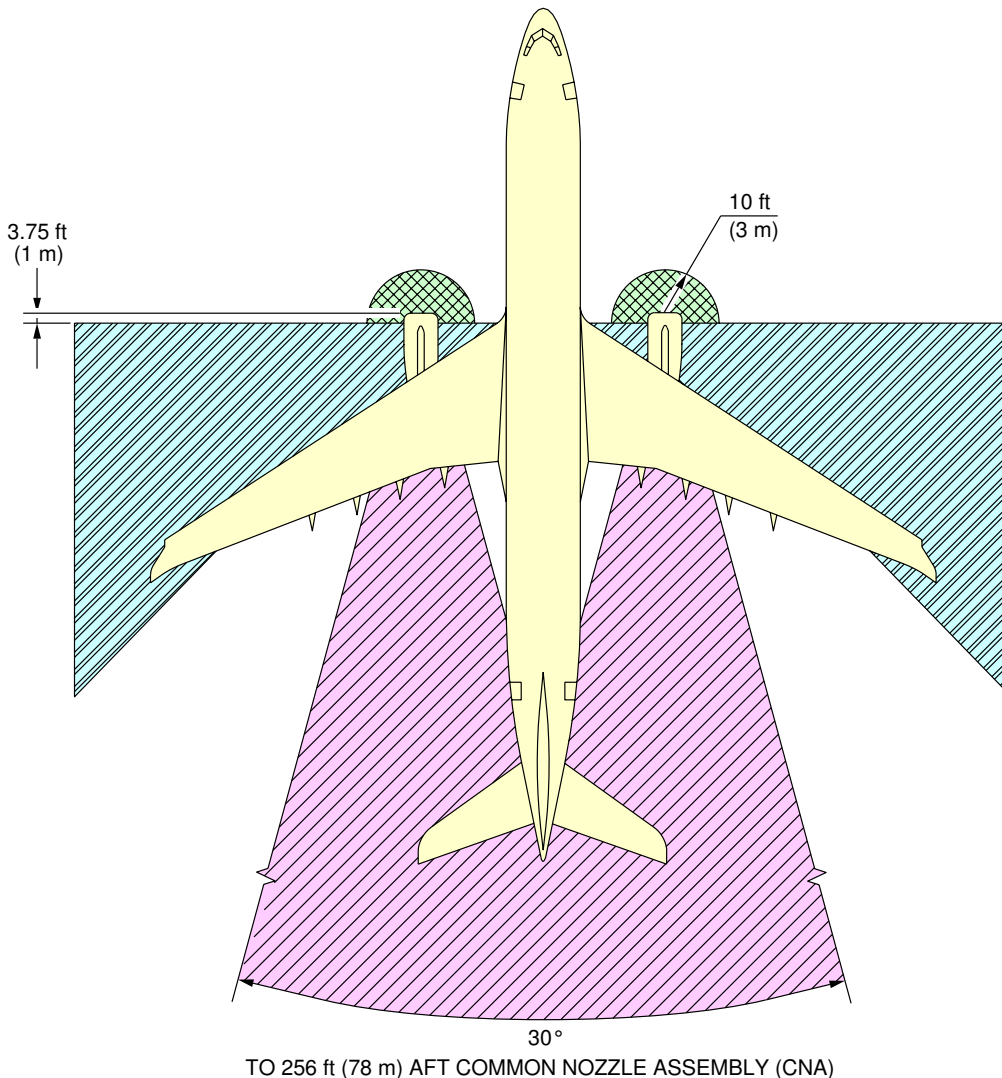**ON A/C A330-200 A330-200F A330-300




-  INTAKE SUCTION DANGER AREA MINIMUM POWER
-  ENTRY CORRIDOR
-  EXHAUST DANGER AREA

D4816

F_AC_060301_1_0020101_01_00

Danger Areas of Engines
RR Trent 700 series engine
FIGURE-6-3-1-991-002-A01

**ON A/C A330-200 A330-300

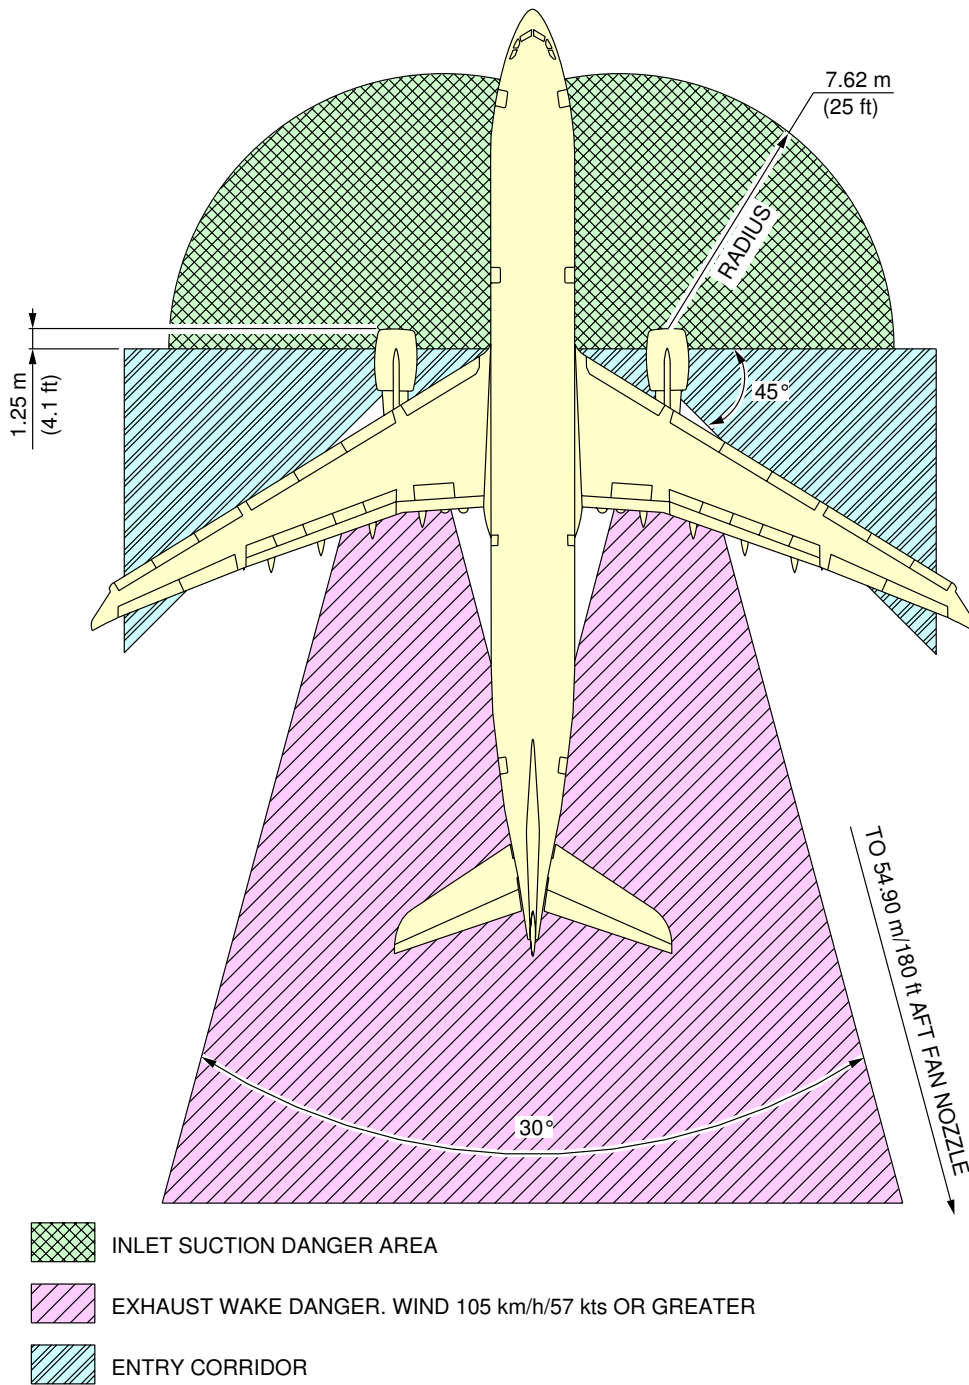

F_AC_060301_1_0030101_01_00

Danger Areas of Engines
GE CF6-80E1 series engine
FIGURE-6-3-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-3-2 Breakaway Power

****ON A/C A330-200 A330-200F A330-300**

Breakaway Power

1. This section gives danger areas of the engines at breakaway conditions.

**ON A/C A330-200 A330-200F A330-300

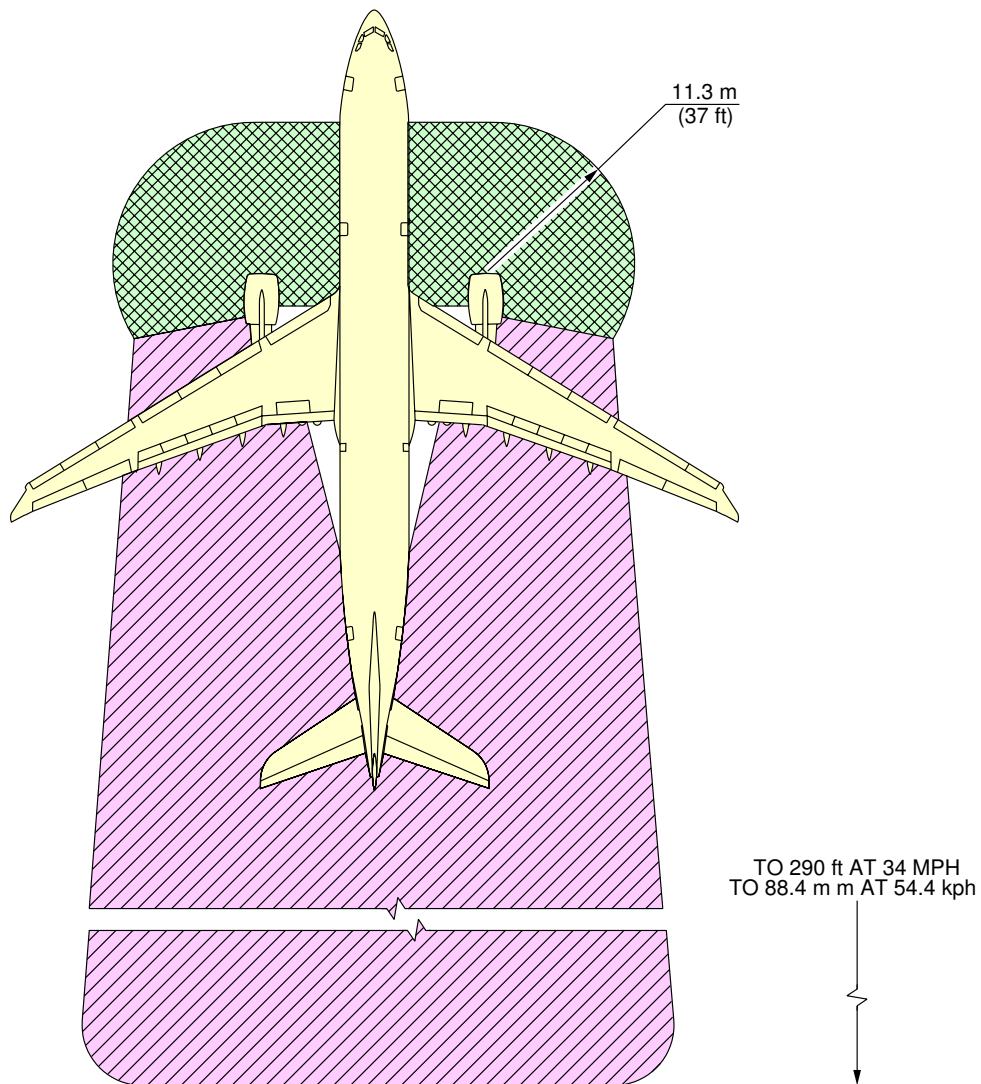

 INTAKE SUCTION
DANGER AREA


 EXHAUST DANGER
AREA




G-03248 (0000)

F_AC_060302_1_0010101_01_00

Danger Areas of Engines
PW 4000 series engine
FIGURE-6-3-2-991-001-A01

**ON A/C A330-200 A330-200F A330-300

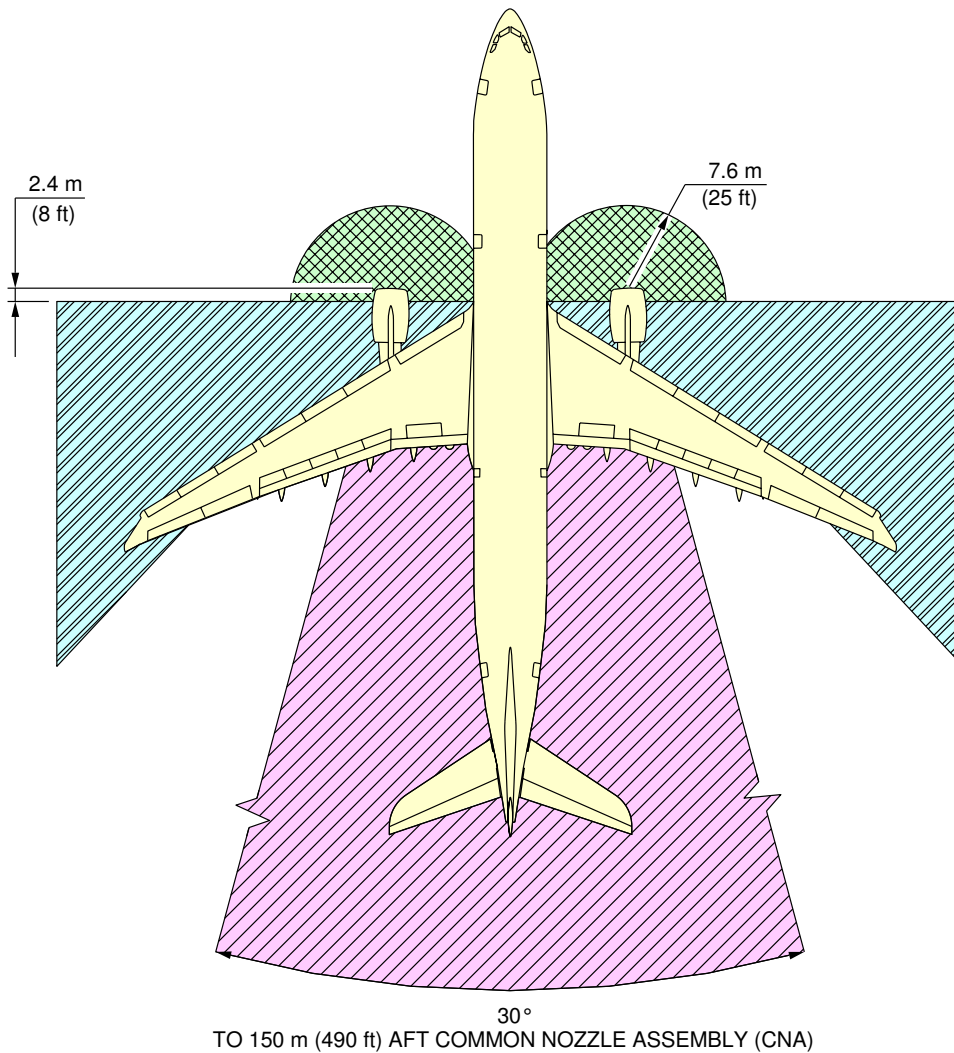


-  INTAKE SUCTION DANGER AREA BREAKAWAY POWER
-  ENTRY CORRIDOR
-  EXHAUST DANGER AREA

F_AC_060302_1_0020101_01_00

Danger Areas of Engines
RR Trent 700 series engine
FIGURE-6-3-2-991-002-A01

**ON A/C A330-200 A330-300

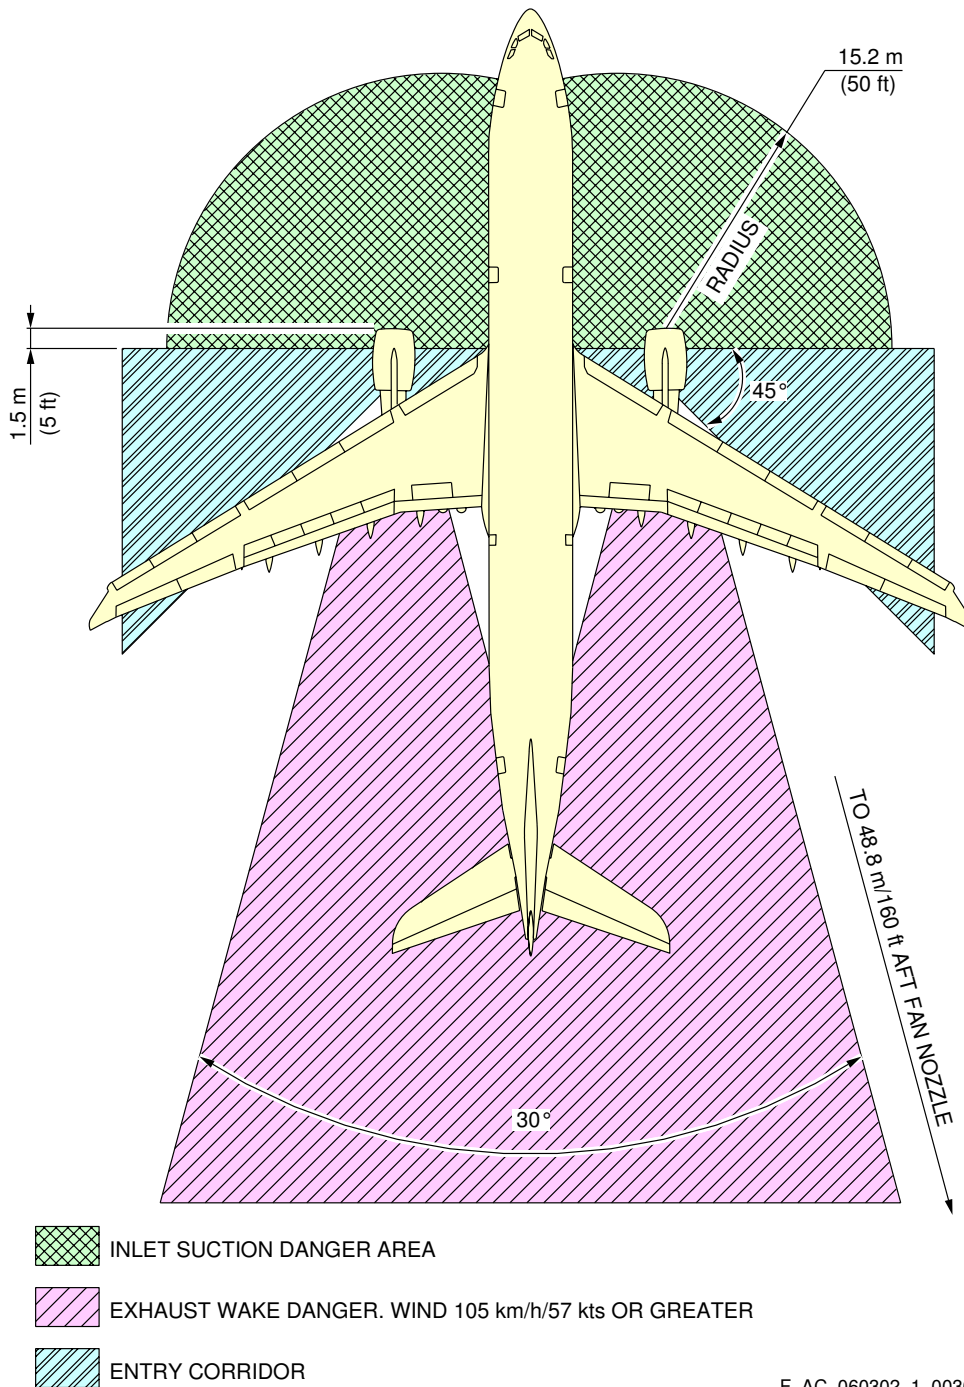

F_AC_060302_1_0030101_01_00

Danger Areas of Engines
GE CF6-80E1 series engine
FIGURE-6-3-2-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-3-3 Takeoff Power

****ON A/C A330-200 A330-200F A330-300**

Takeoff Power

1. This section gives danger areas of the engines at max takeoff conditions

**ON A/C A330-200 A330-200F A330-300

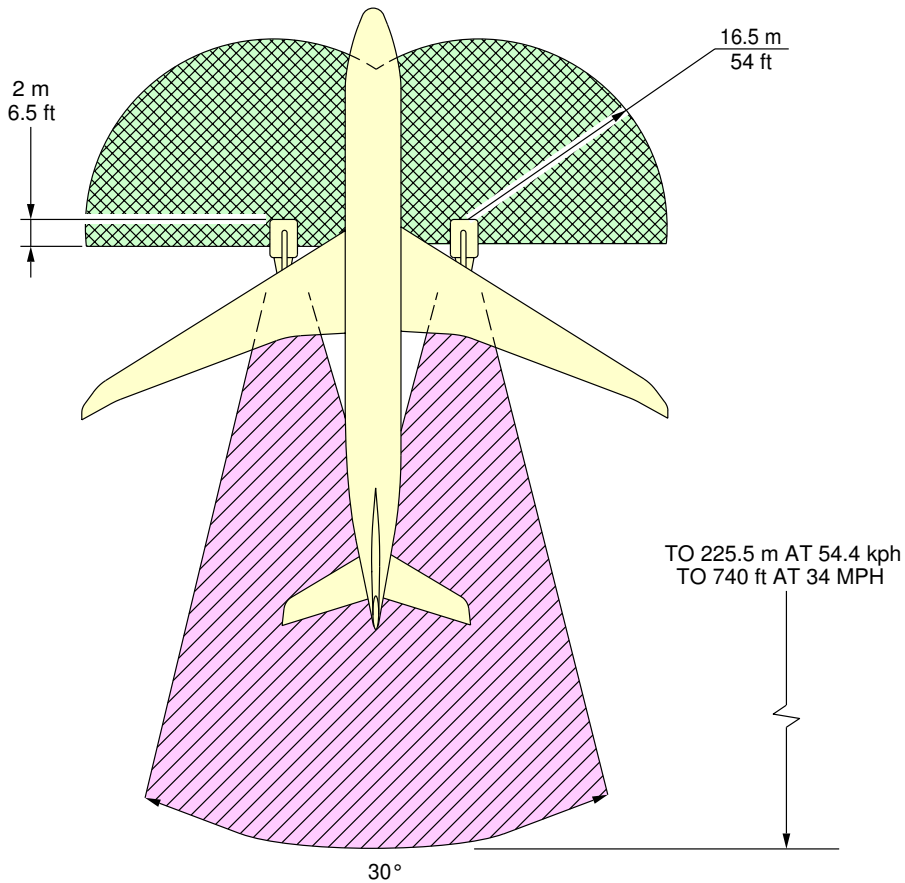

 INTAKE SUCTION
DANGER AREA

 EXHAUST DANGER
AREA


PW 4164 / PW 4168 -TAKEOFF

G - 00225 (0493)




F_AC_060303_1_0010101_01_00

Danger Areas of Engines
PW 4000 series engine
FIGURE-6-3-3-991-001-A01

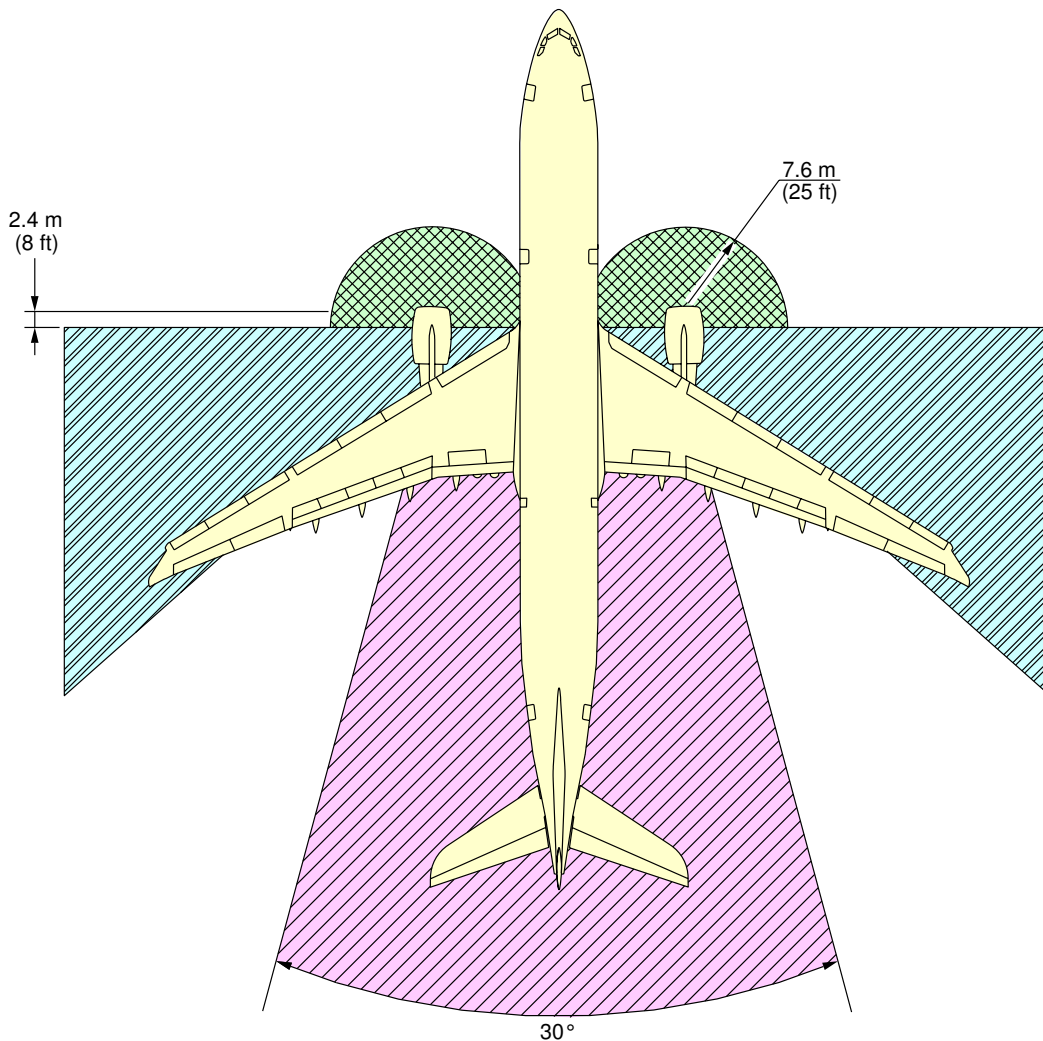**ON A/C A330-200 A330-200F A330-300




TO 2100 ft (640 m) AFT COMMON NOZZLE ASSEMBLY (CNA)

-  INTAKE SUCTION DANGER AREA TAKE-OFF POWER
-  ENTRY CORRIDOR
-  EXHAUST DANGER AREA

F_AC_060303_1_0020101_01_00

Danger Areas of Engines
RR Trent 700 series engine
FIGURE-6-3-3-991-002-A01

**ON A/C A330-200 A330-300

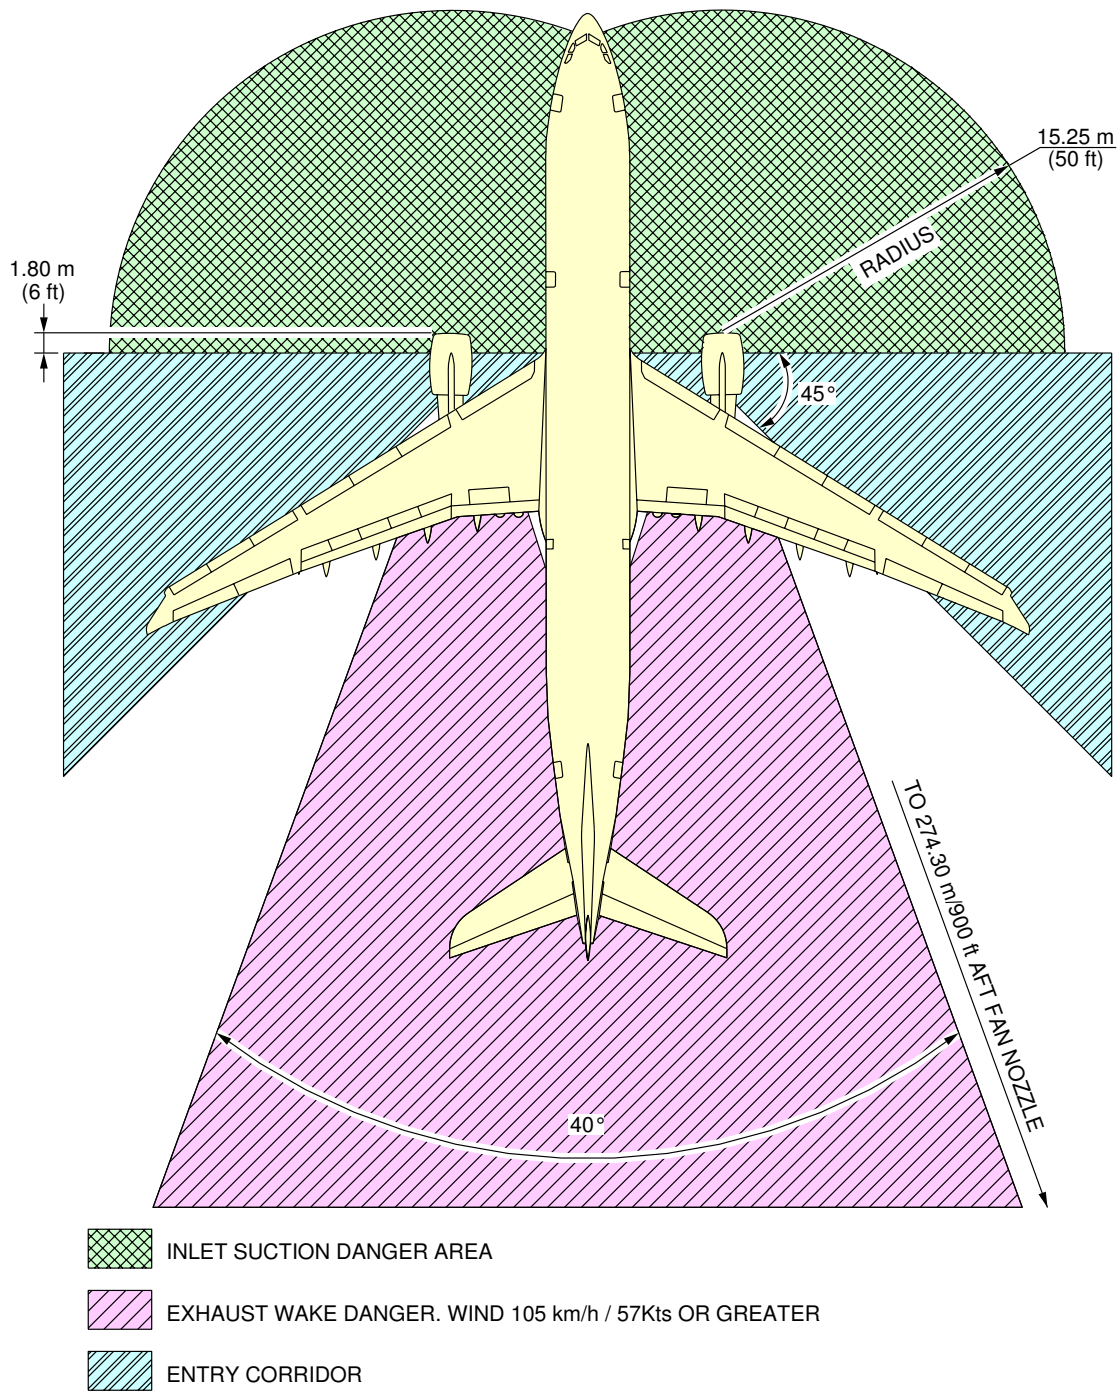

GF_AC_060303_1_0030101_01_00

Danger Areas of Engines
 GE CF6-80E1 series engine
 FIGURE-6-3-3-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-4-0 APU Exhaust Velocities and Temperatures

**ON A/C A330-200 A330-200F A330-300

APU Exhaust Velocities and Temperatures

1. APU Exhaust Velocities and Temperatures.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING



6-4-1 APU

****ON A/C A330-200 A330-200F A330-300**

APU - GARRETT

1. This section gives APU exhaust velocities and temperatures

**ON A/C A330-200 A330-200F A330-300

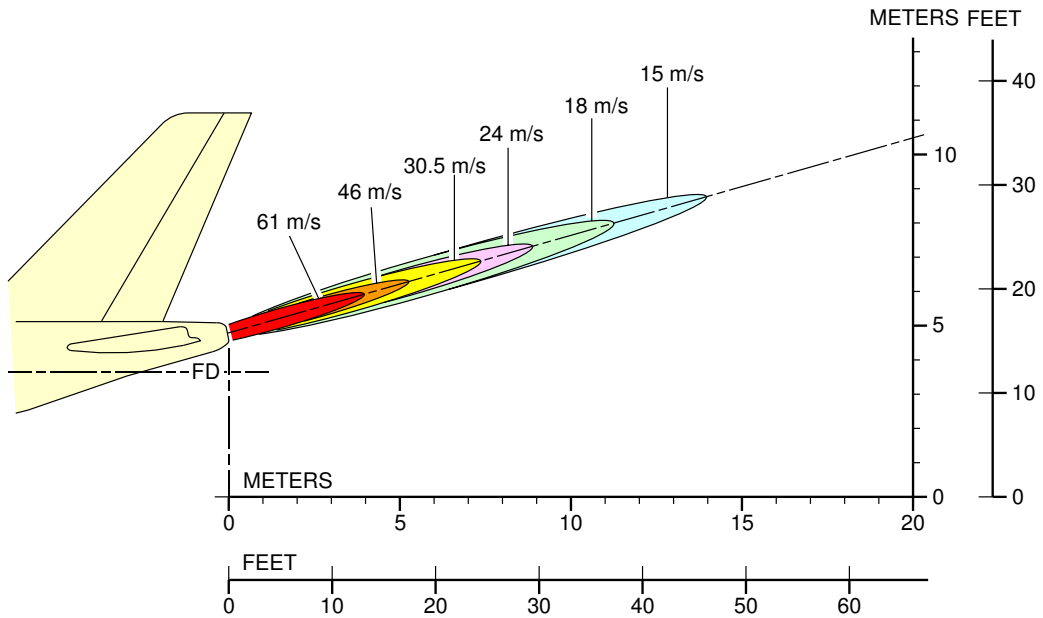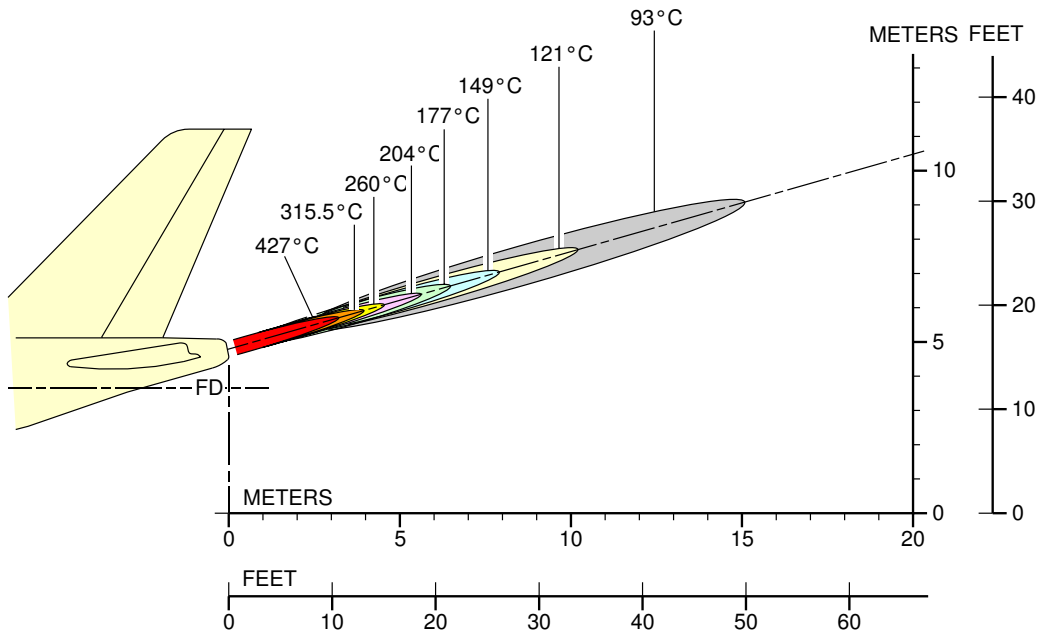

F_AC_060401_1_0010101_01_00

Exhaust Velocities and Temperatures
 APU - GARRETT GTCP 331-350
 FIGURE-6-4-1-991-001-A01

PAVEMENT DATA

7-1-0 General Information

****ON A/C A330-200 A330-200F A330-300**

General Information

1. General Information

A brief description of the pavement charts that follow will help in airport planning.

To aid in the interpolation between the discrete values shown, each airplane configuration is shown with a minimum range of five loads on the main landing gear.

All curves on the charts represent data at a constant specified tire pressure with :

- the airplane loaded to the maximum ramp weight
- the CG at its maximum permissible aft position.

Pavement requirements for commercial airplanes are derived from the static analysis of loads imposed on the main landing gear struts.

Section 7-2-0 presents basic data on the landing gear footprint configuration, maximum ramp weights and tire sizes and pressures.

Section 7-3-0 shows the maximum vertical and horizontal pavement loads for certain critical conditions at the tire-ground interfaces.

Section 7-4-1 contains charts to find these loads throughout the stability limits of the airplane at rest on the pavement.

These main landing gear loads are used as the point of entry to the pavement design charts, which follow, interpolating load values where necessary.

All Load Classification Number (LCN) curves shown in Section 7-6-1 and Section 7-8-2 have been developed from a computer program based on data provided in International Civil Aviation Organisation (ICAO) document 7920-AN/865/2, Aerodrome Manual, Part 2, "Aerodrome Physical Characteristics", Second Edition, 1965.

The flexible pavement charts in Section 7-6-1 show LCN against equivalent single wheel load, and equivalent single wheel load against pavement thickness.

The rigid pavement charts in Section 7-8-2 shown LCN against equivalent single wheel load, and equivalent single wheel load against radius of relative stiffness.

Section 7-9-0 provides ACN data prepared according to the ACN/PCN system as referenced in ICAO Annex 14, "Aerodromes", Volume 1 "Aerodrome Design and Operations." Fourth Edition July 2004, incorporating Amendments 1 to 6.

The ACN/PCN system provides a standardized international airplane/pavement rating system replacing the various S, T, TT, LCN, AUW, ISWL, etc... rating systems used throughout the world.

ACN is the Aircraft Classification Number and PCN is the corresponding Pavement Classification Number.

An aircraft having an ACN equal to or less than the PCN can operate without restriction on the pavement.

Numerically the ACN is two times the derived single wheel load expressed in thousands of kilograms.

The derived single wheel load is defined as the load on a single tire inflated to 1.25 Mpa (181 psi) that would have the same pavement requirements as the aircraft.

Computationally the ACN/PCN the system uses PCA program PDILB for rigid pavements and S-77-1 for flexible pavements to calculate ACN values. The Airport Authority must decide on the method of pavement analysis and the results of their evaluation shown as follows :

| PCN | | | |
|---------------|-------------------|--------------------------|--------------------|
| PAVEMENT TYPE | SUBGRADE CATEGORY | TIRE PRESSURE CATEGORY | EVALUATION METHOD |
| R – Rigid | A – High | W – No Limit | T – Technical |
| F – Flexible | B – Medium | X – To 1.5 Mpa (217 psi) | U – Using Aircraft |
| | C – Low | Y – To 1.0 Mpa (145 psi) | |
| | D – Ultra Low | Z – To 0.5 Mpa (73 psi) | |

Section 7-9-1 shows the aircraft ACN values for flexible pavements.

The four subgrade categories are :

- A. High Strength CBR 15
- B. Medium Strength CBR 10
- C. Low Strength CBR 6
- D. Ultra Low Strength CBR 3

Section 7-9-2 shows the aircraft ACN for rigid pavements.

The four subgrade categories are :

- A. High Strength Subgrade $k = 150 \text{ MN/m}^3$ (550 pci)
- B. Medium Strength Subgrade $k = 80 \text{ MN/m}^3$ (300 pci)
- C. Low Strength Subgrade $k = 40 \text{ MN/m}^3$ (150 pci)
- D. Ultra Low Strength Subgrade $k = 20 \text{ MN/m}^3$ (75 pci)

A. Flexible Pavement

Section 7-5-1 uses procedures in Instruction Report No S-77-1 "Procedures for Development of CBR Design Curves", dated June 1977 and as modified according to the methods described in ICAO Aerodrome Design Manual, Part 3.

Pavements, 2nd Edition, 1983, Section 1.1 (The ACN-PCN Method), and utilizing the alpha factors approved by ICAO in October 2007.

The report was prepared by the U.S. Army Corps Engineers Waterways Experiment Station, Soils and Pavement Laboratory, Vicksburg, Mississippi.

The line showing 10 000 coverages is used to calculate Aircraft Classification Number (ACN).

The procedure that follows is used to develop flexible pavement design curves such as those shown in Section 7-5-1.

- With the scale for pavement thickness at the bottom and the scale for CBR at the top, an arbitrary line is drawn representing 10 000 coverages.
- Incremental values of the weight on the main landing gear are then plotted.
- Annual departure lines are drawn based on the load lines of the weight on the main landing gear that is shown on the graph.

B. Rigid pavement

Section 7-7-1 gives the rigid pavement design curves that have been prepared with the use of the Westergaard Equation. This is in general accordance with the procedures outlined in the Portland Cement Association publications, "Design of Concrete Airport Pavement", 1973 and "Computer Program for Airport Pavement Design", (Program PDILB), 1967 both by Robert G. Packard.

The procedure that follows is used to develop rigid pavement design curves such as those shown in Section 7-7-1.

- With the scale for pavement thickness on the left and the scale for allowable working stress on the right, an arbitrary line load line is drawn. This represents the main landing gear maximum weight to be shown.

- All values of the subgrade modulus (k values) are then plotted.
- Additional load lines for the incremental values of weight on the main landing gear are drawn on the basis of the curve for $k = 80 \text{ MN/m}^3$ already shown on the graph.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

7-2-0 Landing Gear Footprint


****ON A/C A330-200 A330-200F A330-300**

Landing Gear Footprint

1. This section gives the Landing Gear Footprint.

****ON A/C A330-200**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 192 900 kg (425 275 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 192 000 kg – A330-200 and MTOW 233 000 kg – A330-200 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

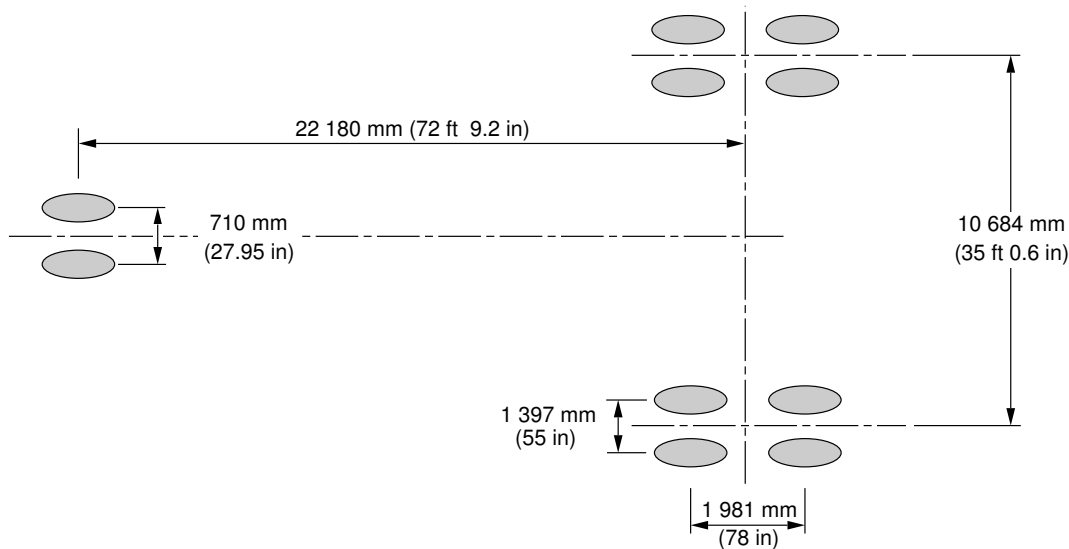


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0030101_01_02

Landing Gear Footprint
MTOW 192 000 kg
FIGURE-7-2-0-991-003-A01

****ON A/C A330-200**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 202 900 kg (447 325 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 233 000 kg – A330-200 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

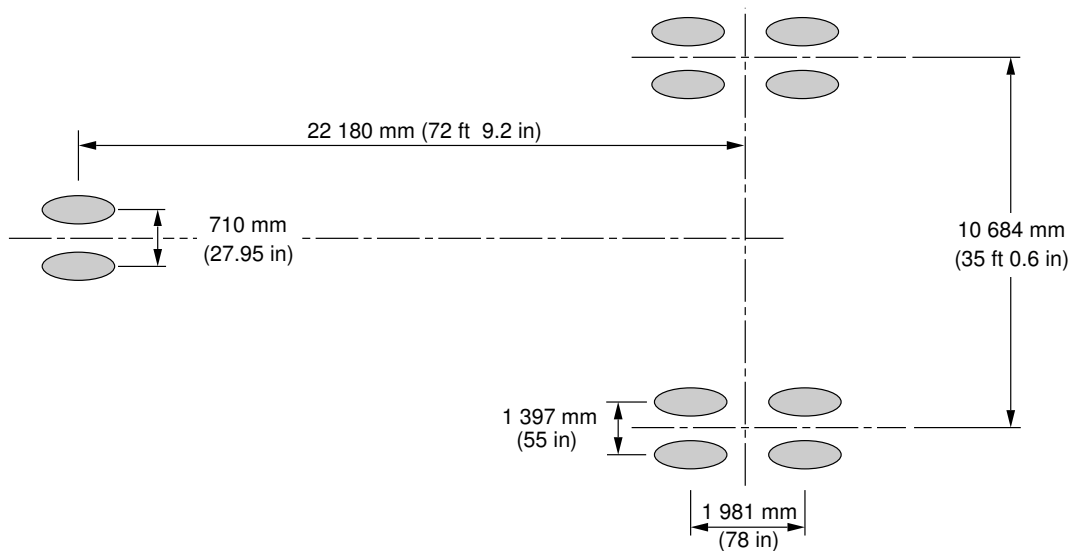


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0130101_01_01

Landing Gear Footprint
MTOW 202 000 kg
FIGURE-7-2-0-991-013-A01

****ON A/C A330-200**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 210 900 kg (464 950 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 210 000 kg – A330-200 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

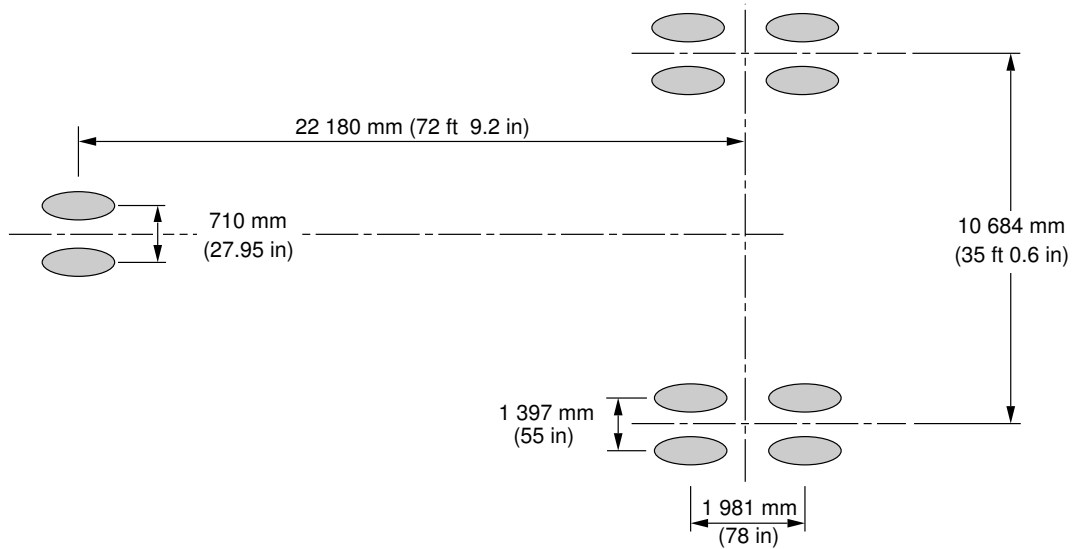


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0140101_01_01

Landing Gear Footprint
MTOW 210 000 kg
FIGURE-7-2-0-991-014-A01

****ON A/C A330-200**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 220 900 kg (487 000 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 233 000 kg – A330-200 and MTOW 233 000 kg – A330-200 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

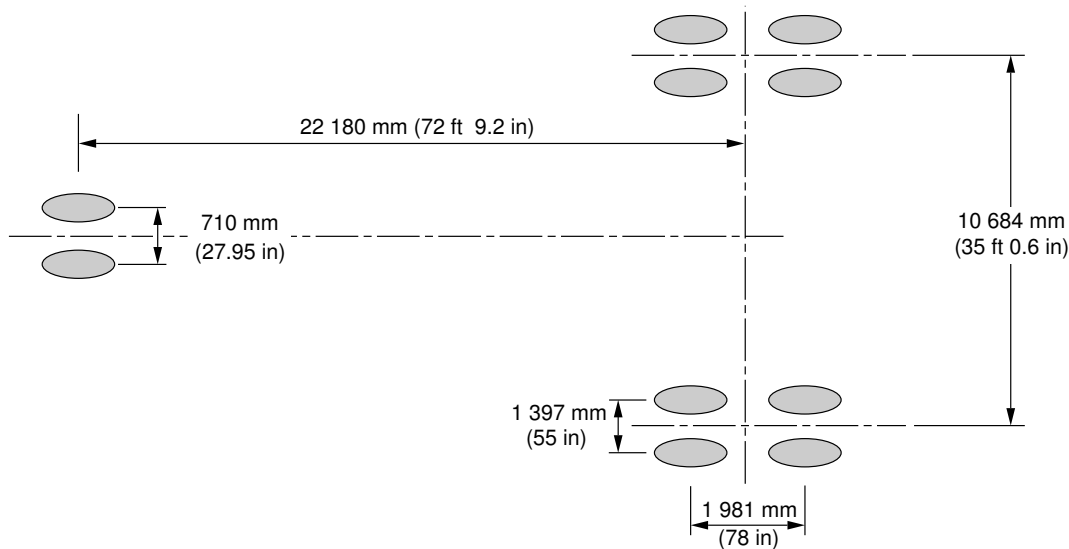


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0050101_01_02

Landing Gear Footprint
MTOW 220 000 kg
FIGURE-7-2-0-991-005-A01

****ON A/C A330-200**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 230 900 kg (509 050 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 233 000 kg – A330-200 and MTOW 233 000 kg – A330-200 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

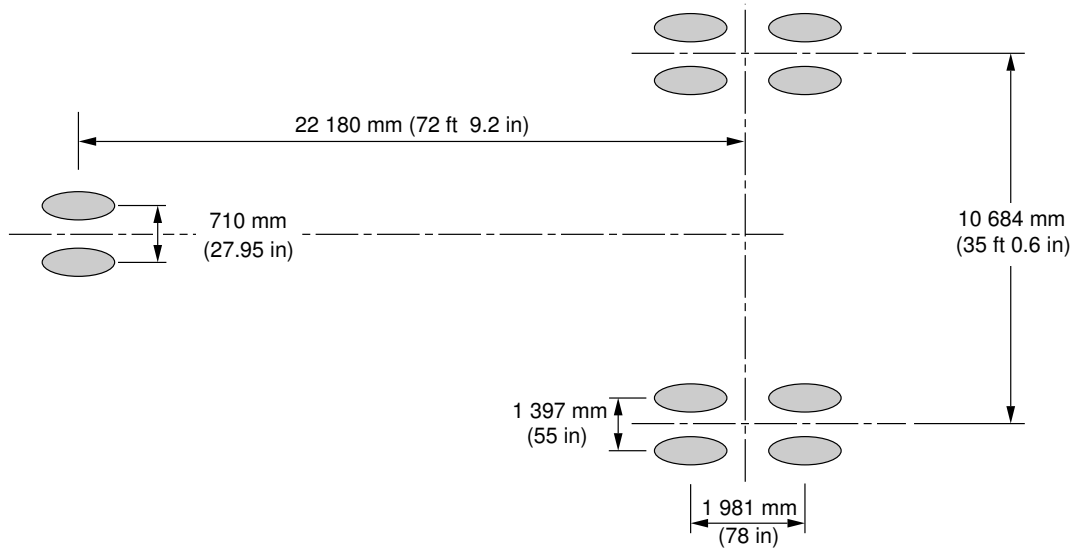


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0150101_01_01

Landing Gear Footprint
MTOW 230 000 kg
FIGURE-7-2-0-991-015-A01

****ON A/C A330-200**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 233 900 kg (515 650 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 233 000 kg – A330-200 and MTOW 233 000 kg – A330-200 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

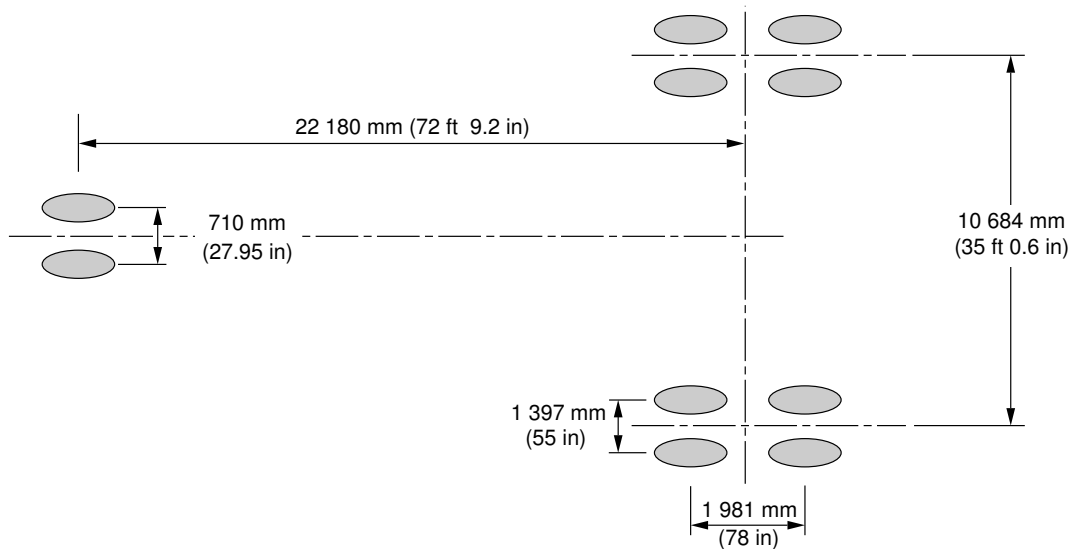


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0160101_01_01

Landing Gear Footprint
MTOW 233 000 kg
FIGURE-7-2-0-991-016-A01

****ON A/C A330-200F**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 227 900 kg (502 425 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 227 000 kg – A330-200F |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

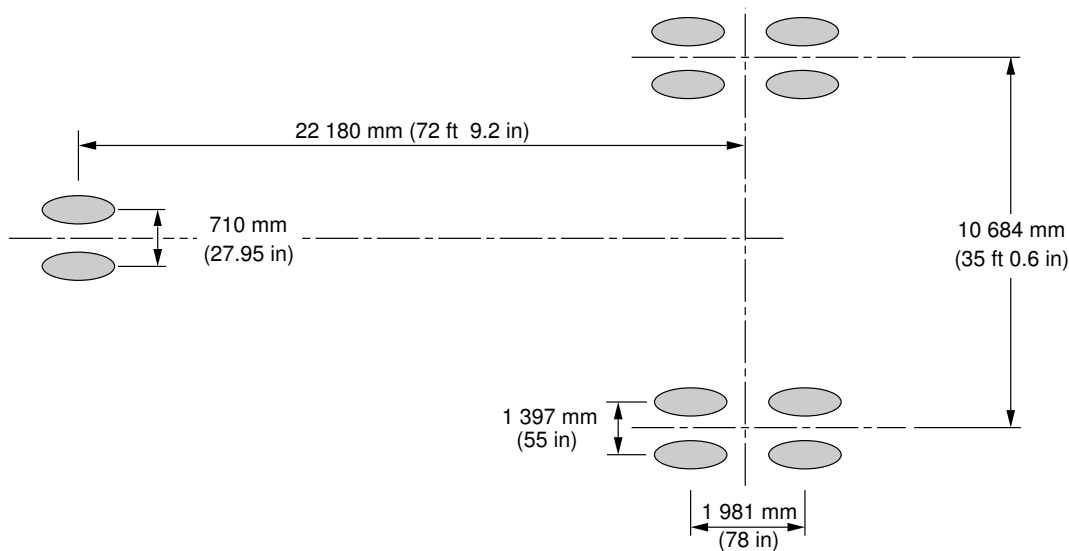


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0170101_01_01

Landing Gear Footprint
MTOW 227 000 kg
FIGURE-7-2-0-991-017-A01

****ON A/C A330-200F**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 233 900 kg (515 650 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 233 000 kg – A330-200F |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 12.7 bar (184 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

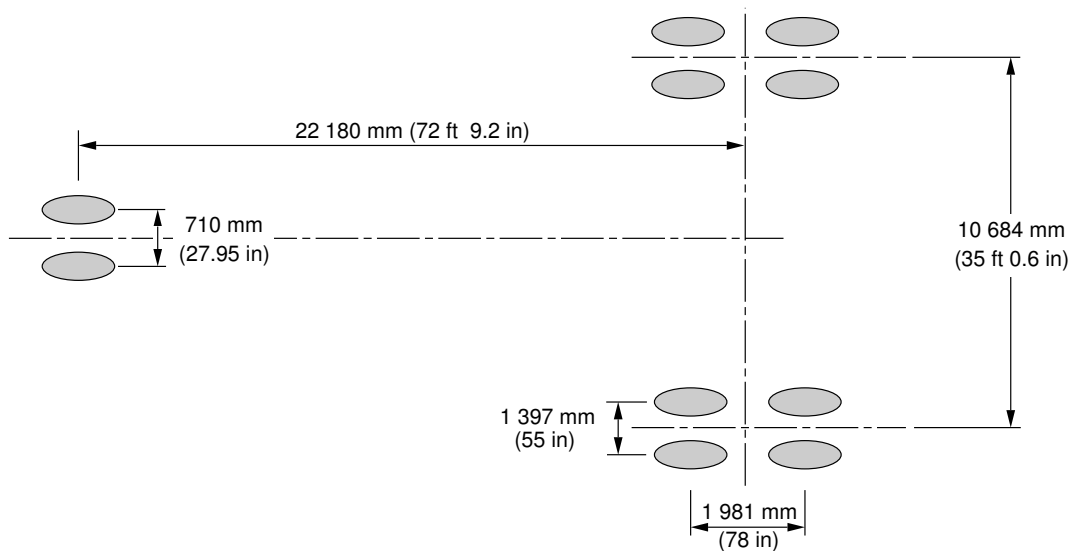


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0180101_01_01

Landing Gear Footprint
MTOW 233 000 kg
FIGURE-7-2-0-991-018-A01

****ON A/C A330-300**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 184 900 kg (407 625 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1- Figure: Landing Gear Loading on Pavement – MTOW 184 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.7 bar (155 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.1 bar (190 psi) |

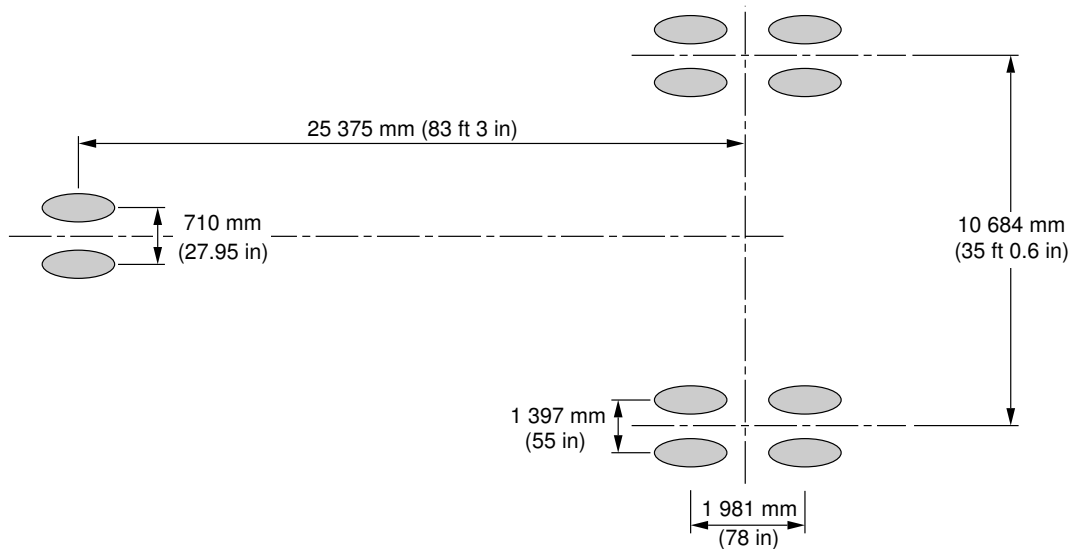


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0060101_01_02

Landing Gear Footprint
MTOW 184 000 kg
FIGURE-7-2-0-991-006-A01

****ON A/C A330-300**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 205 900 kg (453 925 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1- Figure: Landing Gear Loading on Pavement – MTOW 218 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.9 bar (158 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.3 bar (193 psi) |

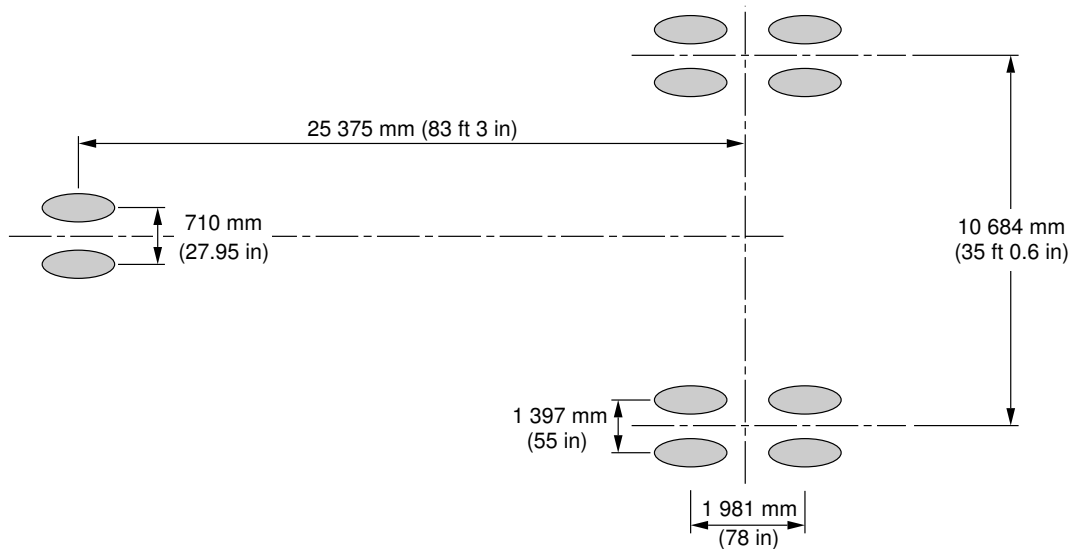


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0190101_01_01

Landing Gear Footprint
MTOW 205 000 kg
FIGURE-7-2-0-991-019-A01

****ON A/C A330-300**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 205 900 kg (453 925 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1- Figure: Landing Gear Loading on Pavement – MTOW 230 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.4 bar (165 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

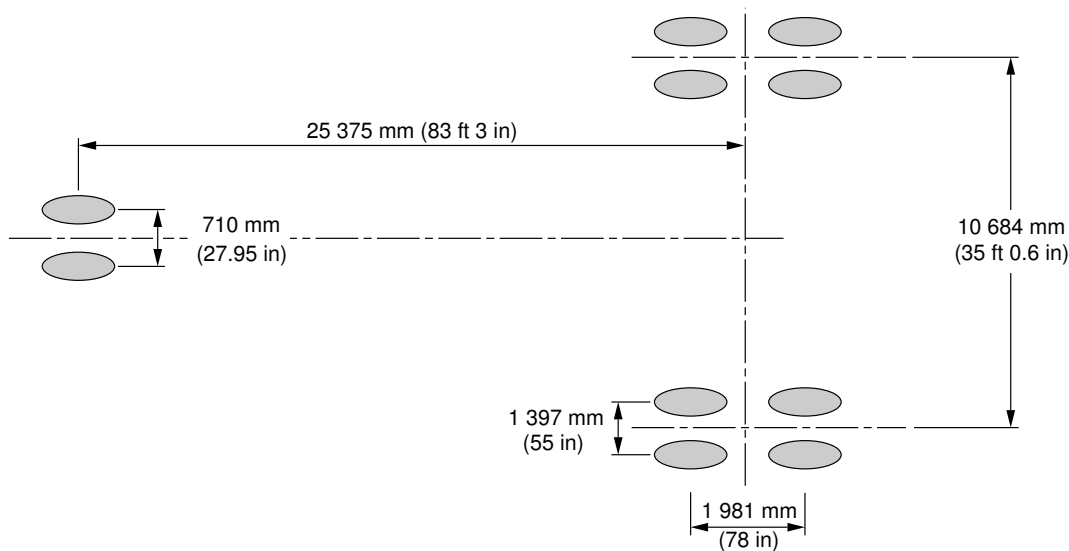


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0200101_01_01

Landing Gear Footprint
MTOW 205 000 kg
FIGURE-7-2-0-991-020-A01

****ON A/C A330-300**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 205 900 kg (453 925 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1- Figure: Landing Gear Loading on Pavement – MTOW 230 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.6 bar (168 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.5 bar (210 psi) |

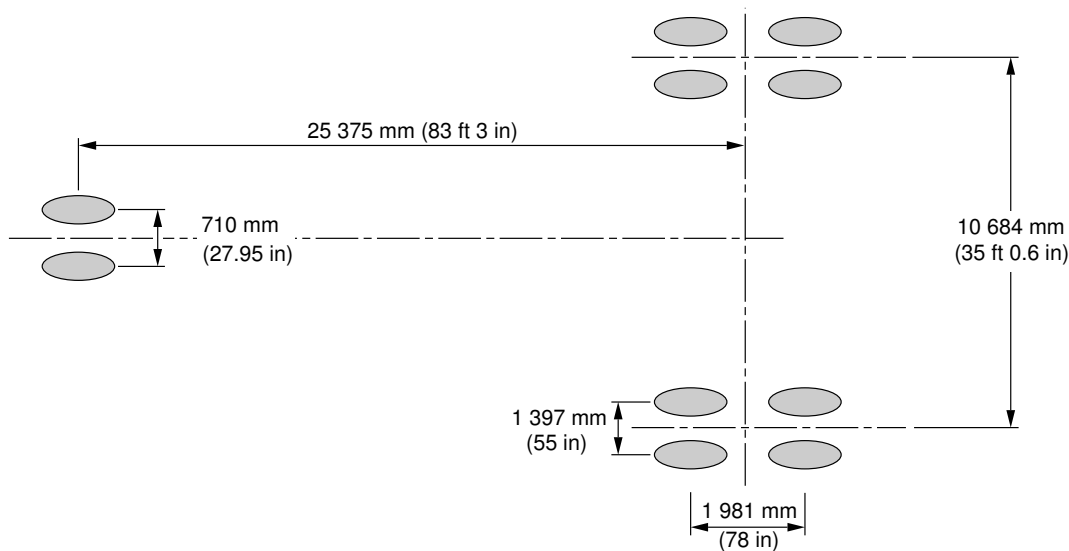


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0210101_01_01

Landing Gear Footprint
MTOW 205 000 kg
FIGURE-7-2-0-991-021-A01

****ON A/C A330-300**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 212 900 kg (469 375 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 212 000 kg – A330-300 and MTOW 215 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.7 bar (155 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.1 bar (190 psi) |

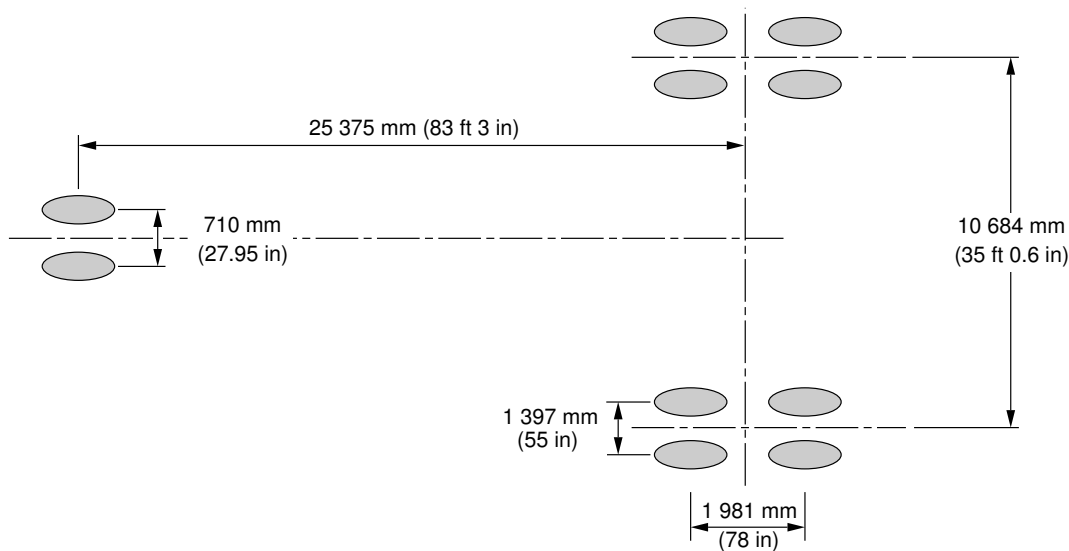


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0070101_01_02

Landing Gear Footprint
MTOW 212 000 kg
FIGURE-7-2-0-991-007-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 212 900 kg (469 375 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 215 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.9 bar (158 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.3 bar (193 psi) |

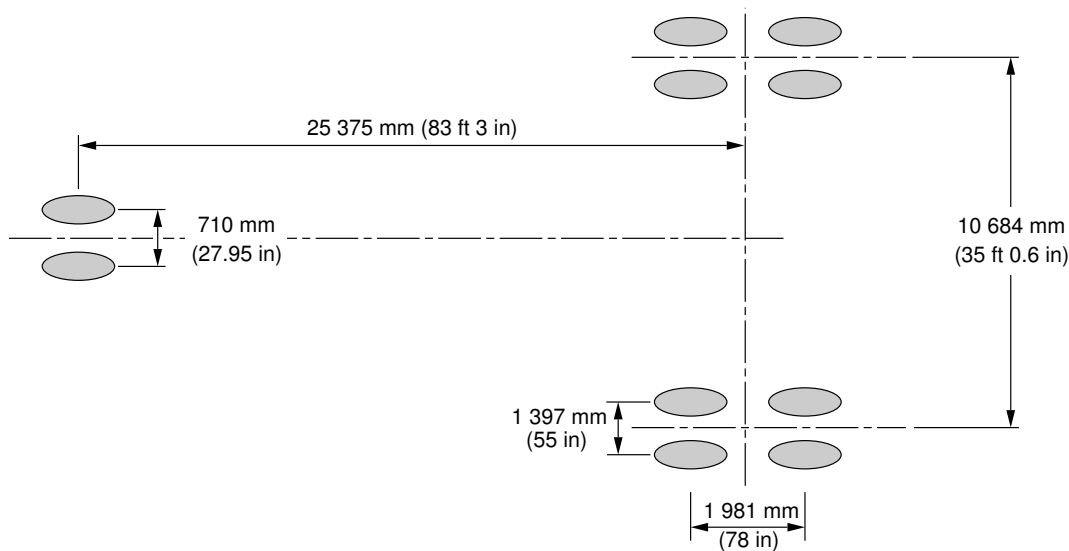


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0220101_01_01

Landing Gear Footprint
MTOW 212 000 kg
FIGURE-7-2-0-991-022-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 212 900 kg (469 375 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 215 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.6 bar (168 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.5 bar (210 psi) |

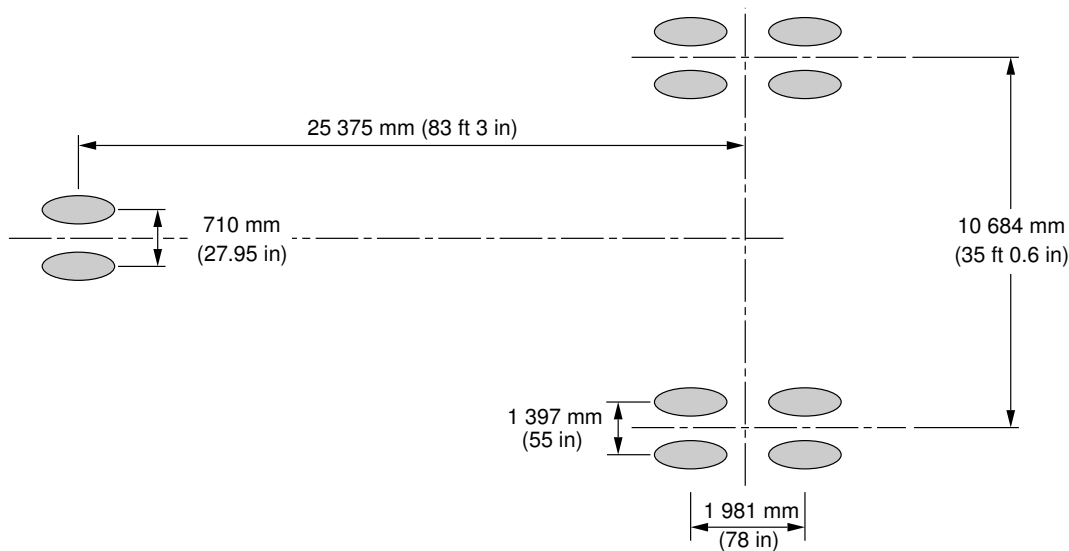


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0230101_01_01

Landing Gear Footprint
MTOW 212 000 kg
FIGURE-7-2-0-991-023-A01

****ON A/C A330-300**

| | |
|---|--|
| MAXIMUM RAMP WEIGHT | 215 900 kg (475 975 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 215 000 kg – A330-300 and MTOW 215 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.9 bar (158 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.3 bar (193 psi) |

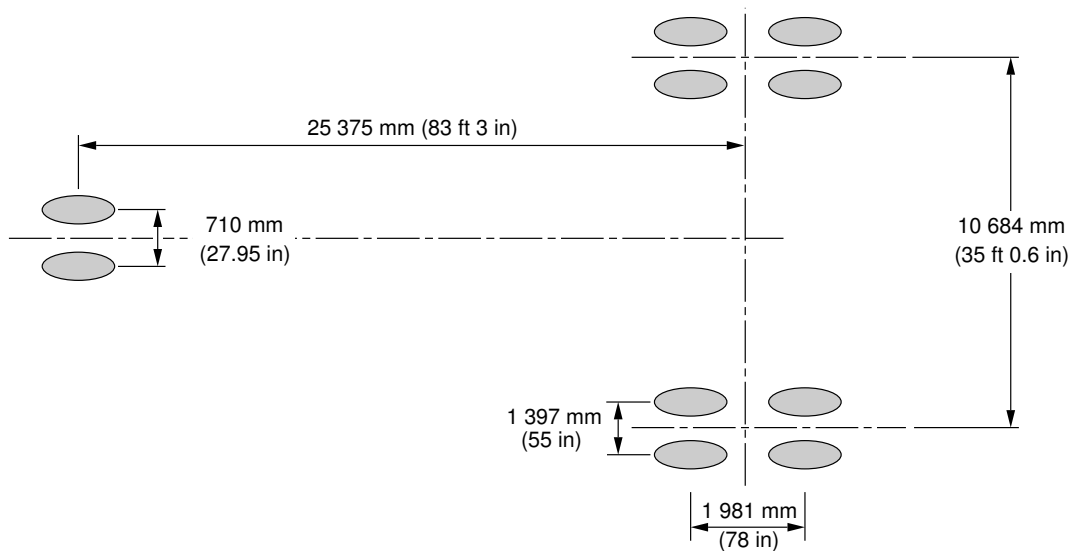


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0240101_01_01

Landing Gear Footprint
MTOW 215 000 kg
FIGURE-7-2-0-991-024-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 217 900 kg (480 375 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 217 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.9 bar (158 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.3 bar (193 psi) |

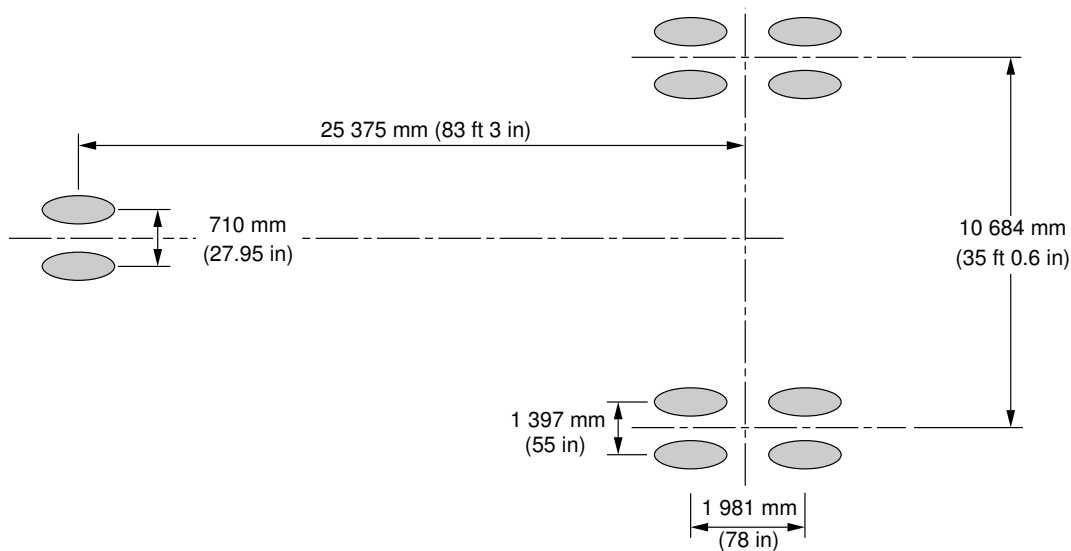


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0080101_01_02

Landing Gear Footprint
MTOW 217 000 kg
FIGURE-7-2-0-991-008-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 217 900 kg (480 375 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 217 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.4 bar (165 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

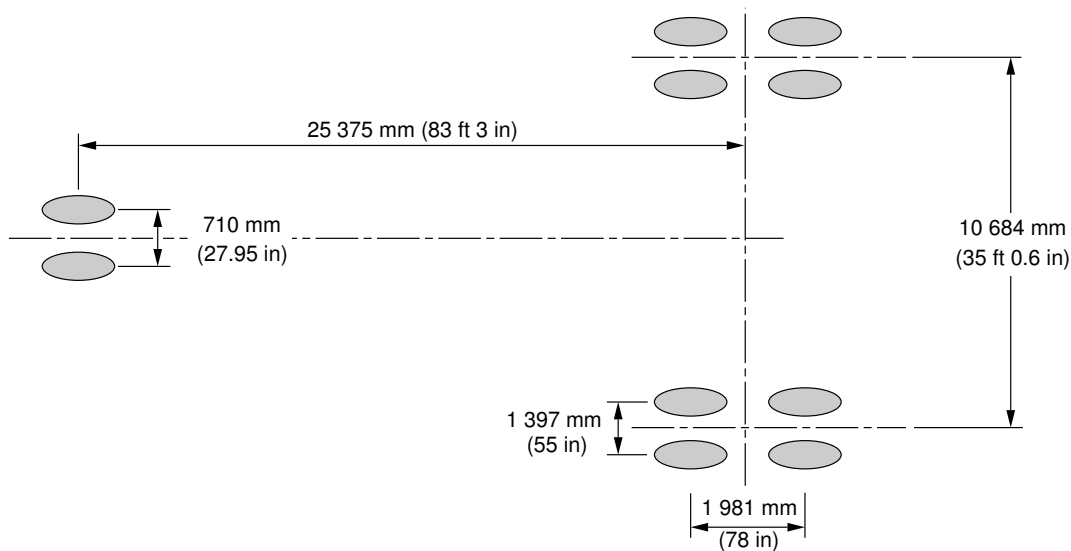


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0250101_01_01

Landing Gear Footprint
MTOW 217 000 kg
FIGURE-7-2-0-991-025-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 218 900 kg (486 600 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 218 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 10.9 bar (158 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 13.3 bar (193 psi) |

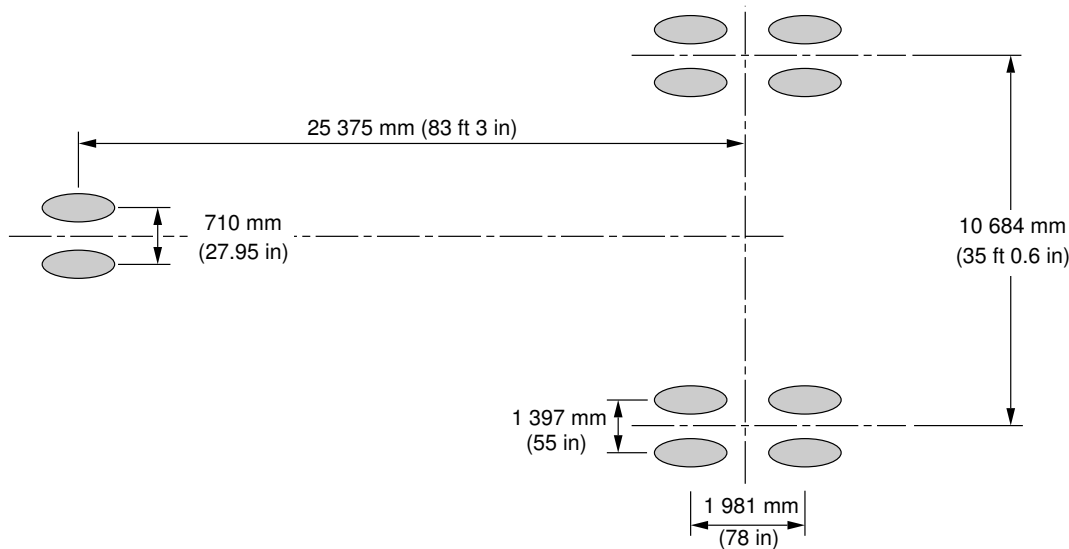


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0260101_01_01

Landing Gear Footprint
MTOW 218 000 kg
FIGURE-7-2-0-991-026-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 230 900 kg (509 050 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 230 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.4 bar (165 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.2 bar (206 psi) |

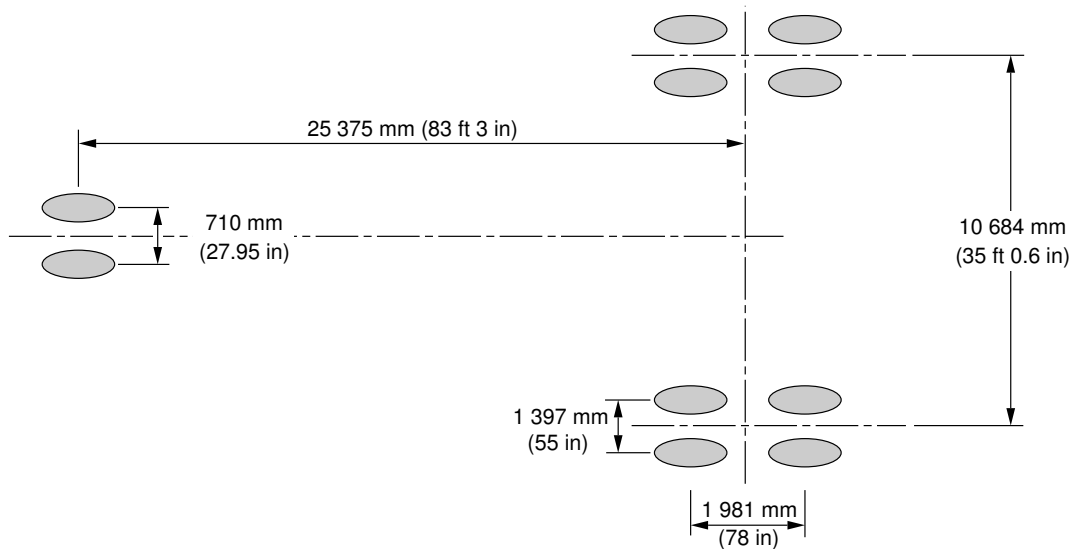


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0090101_01_02

Landing Gear Footprint
MTOW 230 000 kg
FIGURE-7-2-0-991-009-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 230 900 kg (509 050 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 230 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.6 bar (168 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.5 bar (210 psi) |

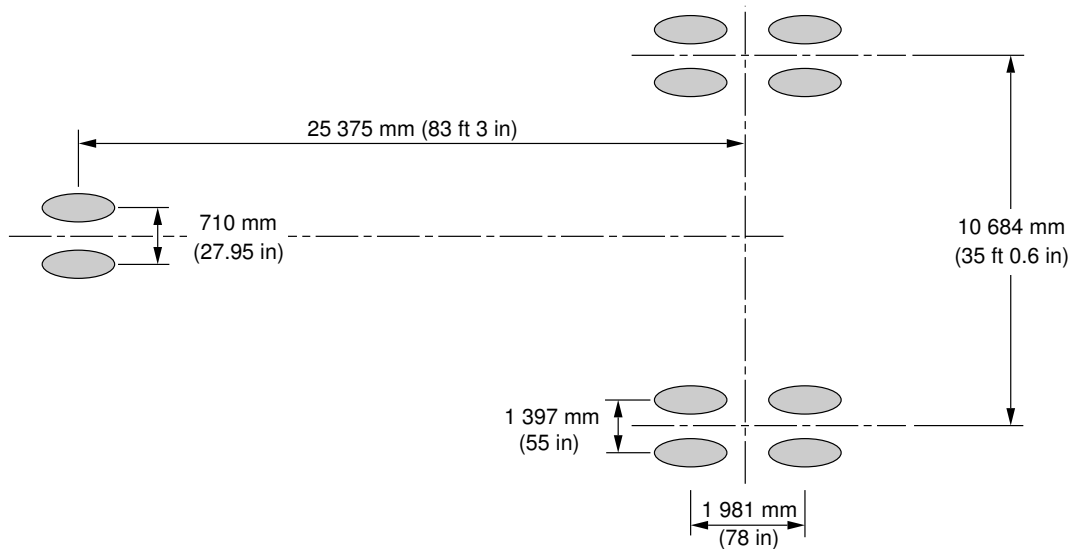


NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0270101_01_01

Landing Gear Footprint
MTOW 230 000 kg
FIGURE-7-2-0-991-027-A01

****ON A/C A330-300**

| | |
|---|---|
| MAXIMUM RAMP WEIGHT | 233 900 kg (515 650 lb) |
| PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP | See Section 7-4-1 Figure: Landing Gear Loading on Pavement – MTOW 233 000 kg – A330-300 |
| NOSE GEAR TIRE SIZE | 1 050 x 395R16 |
| NOSE GEAR TIRE PRESSURE | 11.6 bar (168 psi) |
| WING GEAR TIRE SIZE | 1 400 x 530R23 or 54 x 21-23 (bias) |
| WING GEAR TIRE PRESSURE | 14.5 bar (210 psi) |

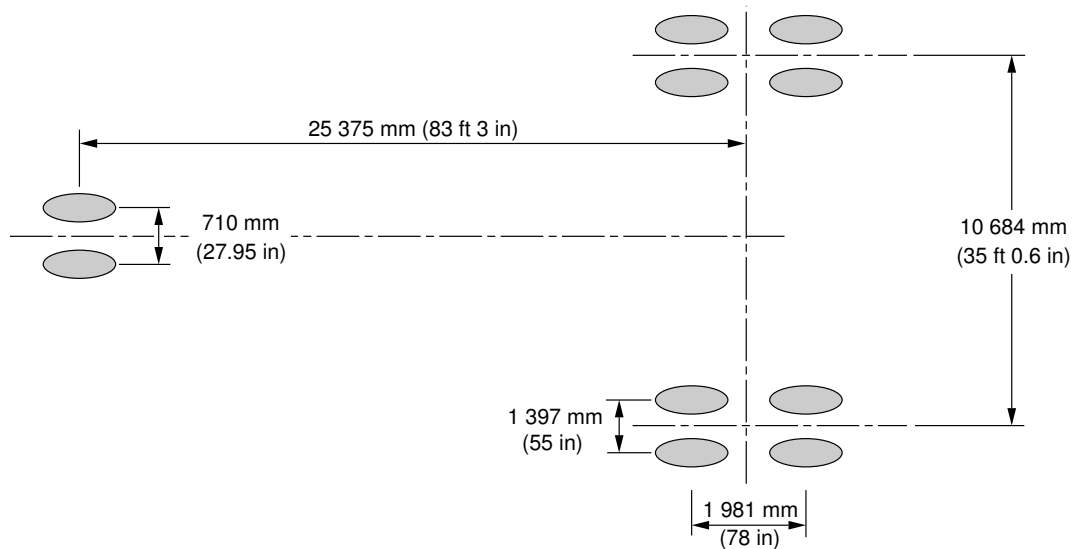

NOTE: DIMENSIONS IN MILLIMETERS
(FEET AND INCHES IN BRACKETS).

F_AC_070200_1_0280101_01_01

Landing Gear Footprint
MTOW 233 000 kg
FIGURE-7-2-0-991-028-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


7-3-0 Maximum Pavement Loads

****ON A/C A330-200 A330-200F A330-300**

Maximum Pavement Loads

1. This section gives Maximum Pavement Loads

**ON A/C A330-200

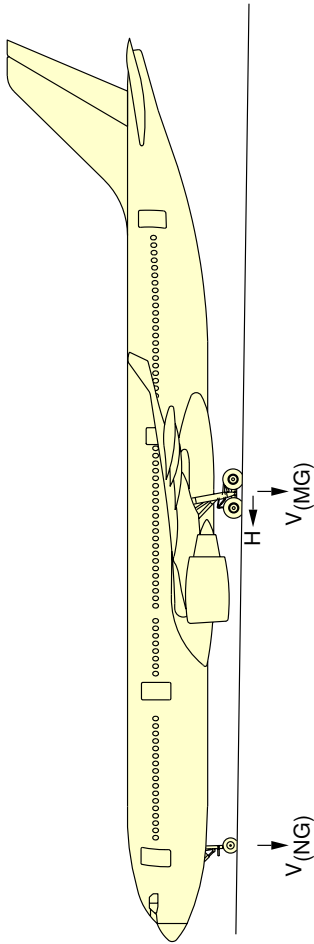

| 1 MODEL | 2 MAXIMUM RAMP WEIGHT | | 3 STATIC LOAD AT MOST FWD C.G (1) | | 4 VNG STATIC BRAKING @ 10 ft/s ² DECELERATION | | 5 VMG (PER STRUT) STATIC LOAD AT MAX AFT C.G (2) | | 6 H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION INSTANTANEOUS BRAKING COEFFICIENT = 0.8 | | | |
|------------|--------------------------|---------|--------------------------------------|--------|--|--------|--|--------|---|--------|---------|--------|
| | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | | |
| -200 | 464 950 | 210 900 | 56 250 | 25 510 | 85 400 | 38 740 | 220 050 | 99 820 | 72 250 | 32 770 | 176 050 | 79 850 |
| -200 | 447 325 | 202 900 | 54 150 | 24 560 | 82 275 | 37 320 | 211 900 | 96 120 | 69 525 | 31 530 | 169 525 | 76 900 |
| -200 | 425 275 | 192 900 | 51 550 | 23 380 | 78 375 | 35 550 | 201 700 | 91 490 | 66 100 | 29 980 | 161 375 | 73 200 |

V (NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
V (MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING


- (1) FWD CG = 18 % MAC
- (2) MRW = 210 900 kg AFT CG = 38.1 % MAC
MRW = 202 900 kg AFT CG = 38.4 % MAC
MRW = 192 900 kg AFT CG = 38.8 % MAC

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

F_AC_070300_1_0010101_01_00

Maximum Pavement Loads
FIGURE-7-3-0-991-001-A01

****ON A/C A330-200**

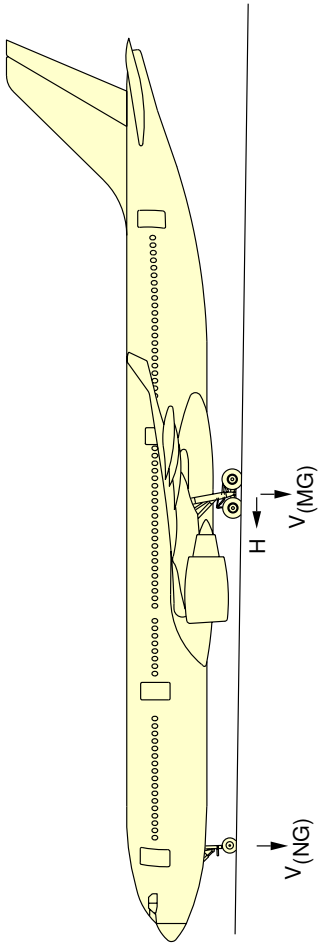

| 1 | 2 | | 3 | | 4 | | 5 | | 6 | | |
|-------|---------------------|---------|----------------------------------|--------|--------|--------|---|---------|--|--------|--------|
| | MAXIMUM RAMP WEIGHT | | STATIC LOAD AT MOST FWD C.G. (1) | | VNG | | VMG (PER STRUT) STATIC LOAD AT MAX AFT C.G. (2) | | H (PER STRUT) AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8 | | |
| MODEL | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | |
| -200 | 515 650 | 233 900 | 56 400 | 25 580 | 88 525 | 40 150 | 243 525 | 110 470 | 80 125 | 36 350 | 88 370 |
| -200 | 509 050 | 230 900 | 56 375 | 25 570 | 88 100 | 39 960 | 240 475 | 109 080 | 79 100 | 35 880 | 87 270 |
| -200 | 487 000 | 220 900 | 56 300 | 25 540 | 86 750 | 39 350 | 230 275 | 104 450 | 75 675 | 34 330 | 83 560 |


V(NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 V(MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING
 (1) MRW = 233 900 kg FWD CG = 21.4 % MAC
 MRW = 230 900 kg FWD CG = 21 % MAC
 MRW = 220 900 kg FWD CG = 19.57 % MAC
 (2) MRW = 233 900 kg AFT CG = 37.4 % MAC
 MRW = 230 900 kg AFT CG = 37.5 % MAC
 MRW = 220 900 kg AFT CG = 37.79 % MAC

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

F_AC_070300_1_0020101_01_00

Maximum Pavement Loads
FIGURE-7-3-0-991-002-A01

****ON A/C A330-200F**

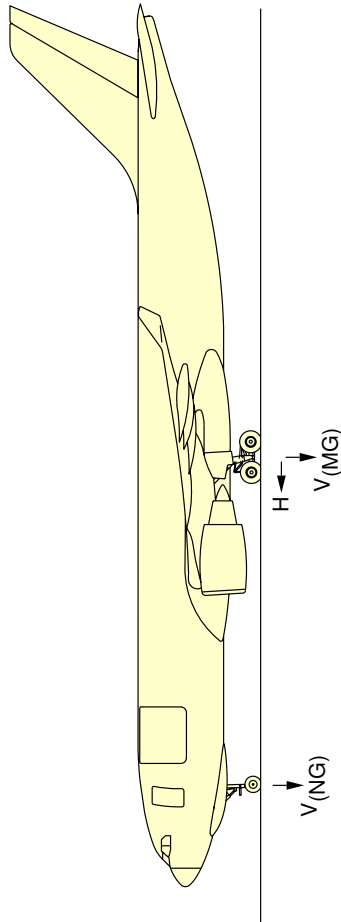

| 1 | 2 | | 3 | | 4 | | 5 | | 6 | | | |
|-------|---------------------|---------|----------------------------------|--------|--------|--------|--|---------|-----------------|--------|---------|--------|
| | MAXIMUM RAMP WEIGHT | | STATIC LOAD AT MOST FWD C.G. (1) | | VNG | | STATIC BRAKING @ 10 ft/s ² DECELERATION | | VMG (PER STRUT) | | | |
| MODEL | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | | |
| -200F | 515 650 | 233 900 | 56 400 | 25 580 | 88 525 | 40 150 | 243 525 | 110 470 | 80 125 | 36 350 | 194 825 | 88 370 |
| -200F | 502 425 | 227 900 | 56 350 | 25 570 | 87 700 | 39 790 | 237 400 | 107 690 | 78 075 | 35 420 | 189 925 | 86 150 |

V(NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 V(MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

(1) MRW = 233 900 kg FWD CG = 21.4 % MAC
 MRW = 227 900 kg FWD CG = 20.58 % MAC


(2) MRW = 233 900 kg AFT CG = 37.4 % MAC
 MRW = 227 900 kg AFT CG = 37.57 % MAC

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

F_AC_070300_1_0060101_01_00

Maximum Pavement Loads
 FIGURE-7-3-0-991-006-A01

**ON A/C A330-300

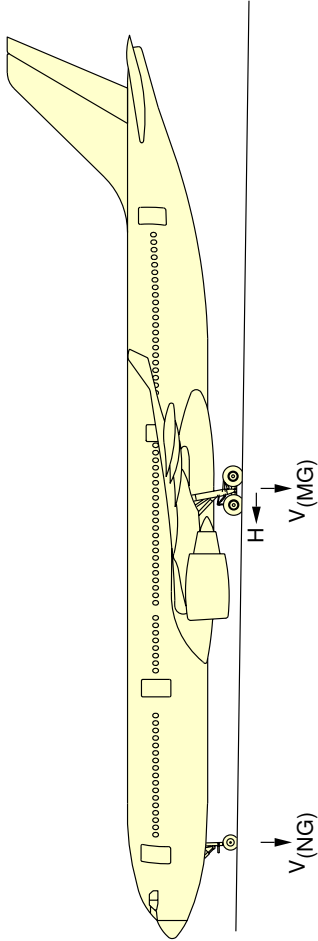

| 1 | 2 | | 3 | | 4 | | 5 | | 6 | | | |
|-------|---------------------|---------|----------------------------------|--------|--|--------|---|--------|--|--------|---------|--------|
| | MAXIMUM RAMP WEIGHT | | STATIC LOAD AT MOST FWD C.G. (1) | | STATIC BRAKING @ 10 ft/s ² DECELERATION | | VMG (PER STRUT) STATIC LOAD AT MAX AFT C.G. (2) | | H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION | | | |
| MODEL | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | | |
| -300 | 453 925 | 205 900 | 51 575 | 23 390 | 76 325 | 34 620 | 217 500 | 98 660 | 70 550 | 32 000 | 174 000 | 78 930 |
| -300 | 407 625 | 184 900 | 46 400 | 21 050 | 68 825 | 31 210 | 195 550 | 88 700 | 63 350 | 28 730 | 156 450 | 70 960 |

V(NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 V(MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

(1) FWD CG = 15 % MAC


(2) MRW = 205 900 kg AFT CG = 39.6 % MAC
 MRW = 184 900 kg AFT CG = 40.1 % MAC

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

F_AC_070300_1_0030101_01_00

Maximum Pavement Loads
 FIGURE-7-3-0-991-003-A01

****ON A/C A330-300**

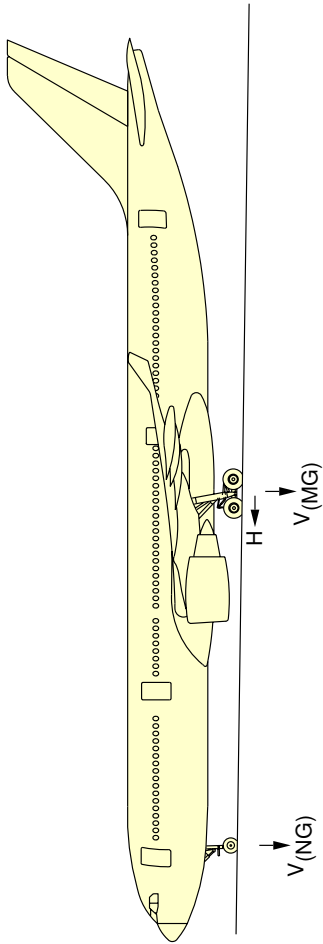

| 1 | 2 | | 3 | | 4 | | 5 | | 6 | | | |
|-------|---------------------|---------|----------------------------------|--------|---|--------|--|---------|---|--------|---------|--------|
| | MAXIMUM RAMP WEIGHT | | STATIC LOAD AT MOST FWD C.G. (1) | | VNG STATIC BRAKING @ 10 ft/s ² DECELERATION | | VMG (PER STRUT) STATIC LOAD AT MAX AFT C.G. (2) | | H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION | | | |
| MODEL | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | | |
| -300 | 480 375 | 217 900 | 52 950 | 24 020 | 79 075 | 35 860 | 229 875 | 104 270 | 74 650 | 33 860 | 183 900 | 83 420 |
| -300 | 475 975 | 215 900 | 54 025 | 24 500 | 79 900 | 36 240 | 227 825 | 103 340 | 73 975 | 33 550 | 182 250 | 82 670 |
| -300 | 469 375 | 212 900 | 53 275 | 24 170 | 78 825 | 35 760 | 222 800 | 101 060 | 72 950 | 33 090 | 178 250 | 80 850 |

V(NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG

V(MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG

H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

(1) MRW = 217 900 kg FWD CG = 16.11 % MAC
MRW = 215 900 kg/212 900 kg FWD CG = 15 % MAC


(2) MRW = 217 900 kg AFT CG = 39.12 % MAC
MRW = 215 900 kg AFT CG = 39.2 % MAC
MRW = 212 900 kg AFT CG = 36.5 % MAC

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

F_AC_070300_1_0040101_01_00

Maximum Pavement Loads
FIGURE-7-3-0-991-004-A01

**ON A/C A330-300

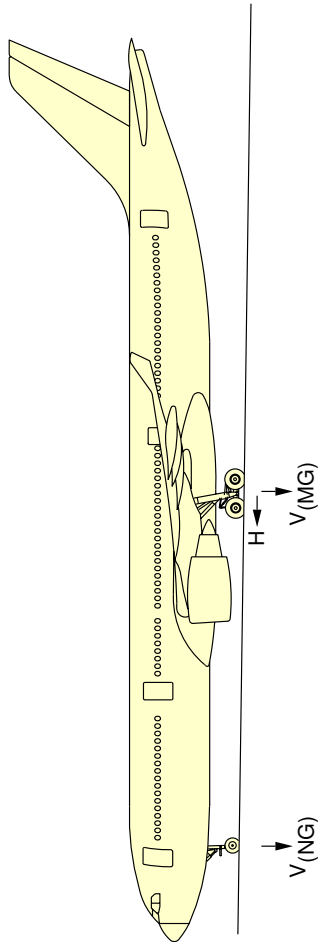

| 1 | 2 | | 3 | | 4 | | 5 | | 6 | | | |
|-------|---------------------|---------|----------------------------------|--------|--------|--------|---|---------|---|--------|---------|--------|
| | MAXIMUM RAMP WEIGHT | | STATIC LOAD AT MOST FWD C.G. (1) | | VNG | | VMG (PER STRUT) STATIC LOAD AT MAX AFT C.G. (2) | | H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8 | | | |
| MODEL | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | | |
| -300 | 515 650 | 233 900 | 53 525 | 24 270 | 81 625 | 37 020 | 246 325 | 111 730 | 80 125 | 36 350 | 197 050 | 89 380 |
| -300 | 509 050 | 230 900 | 53 425 | 24 240 | 81 200 | 36 830 | 243 225 | 110 330 | 79 100 | 35 880 | 194 575 | 88 260 |
| -300 | 482 600 | 218 900 | 54 750 | 24 840 | 80 975 | 36 730 | 230 925 | 104 750 | 75 000 | 34 020 | 184 750 | 83 800 |

V(NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 V(MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

(1) MRW = 233 900 kg FWD CG = 18.4 % MAC
 MRW = 230 900 kg FWD CG = 18 % MAC
 MRW = 218 900 kg FWD CG = 15 % MAC

(2) MRW = 233 900 kg AFT CG = 38.6 % MAC
 MRW = 230 900 kg AFT CG = 38.7 % MAC
 MRW = 218 900 kg AFT CG = 39.1 % MAC

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

F_AC_070300_1_0050101_01_00

Maximum Pavement Loads
 FIGURE-7-3-0-991-005-A01

7-4-0 Landing Gear Loading on Pavement

****ON A/C A330-200 A330-200F A330-300**

Landing Gear Loading on Pavement

****ON A/C A330-200**

1. General

In the example shown in Section 7-4-1, Figure: Landing Gear Loading on Pavement - MTOW 192 000 kg - A330-200

The Gross Aircraft Weight is 145 000 kg (319 670 lb) and the percentage of weight on the Main Landing Gear is 94.9 %.

For these conditions the total weight on the Main Landing Gear Group is 137 600 kg (303 245 lb).

****ON A/C A330-200F**

2. General

In the example shown in Section 7-4-1, Figure: Landing Gear Loading on Pavement - MTOW 227 000 kg - A330-200F

The Gross Aircraft Weight is 190 000 kg (418 880 lb) and the percentage of weight on the Main Landing Gear is 94.5 %.

For these conditions the total weight on the Main Landing Gear Group is 179 560 kg (395 860 lb).

****ON A/C A330-300**

3. General

In the example shown in Section 7-4-1, Figure: Landing Gear Loading on Pavement - MTOW 184 000 kg - A330-300

The Gross Aircraft Weight is 145 000 kg (319 670 lb) and the percentage of weight on the Main Landing Gear is 95.95 %.

For these conditions the total weight on the Main Landing Gear Group is 139 120 kg (306 705 lb).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


7-4-1 Landing Gear Loading on Pavement

**ON A/C A330-200 A330-200F A330-300

Landing Gear Loading on Pavement

1. This section gives Landing Gear Loading on Pavement


**ON A/C A330-200

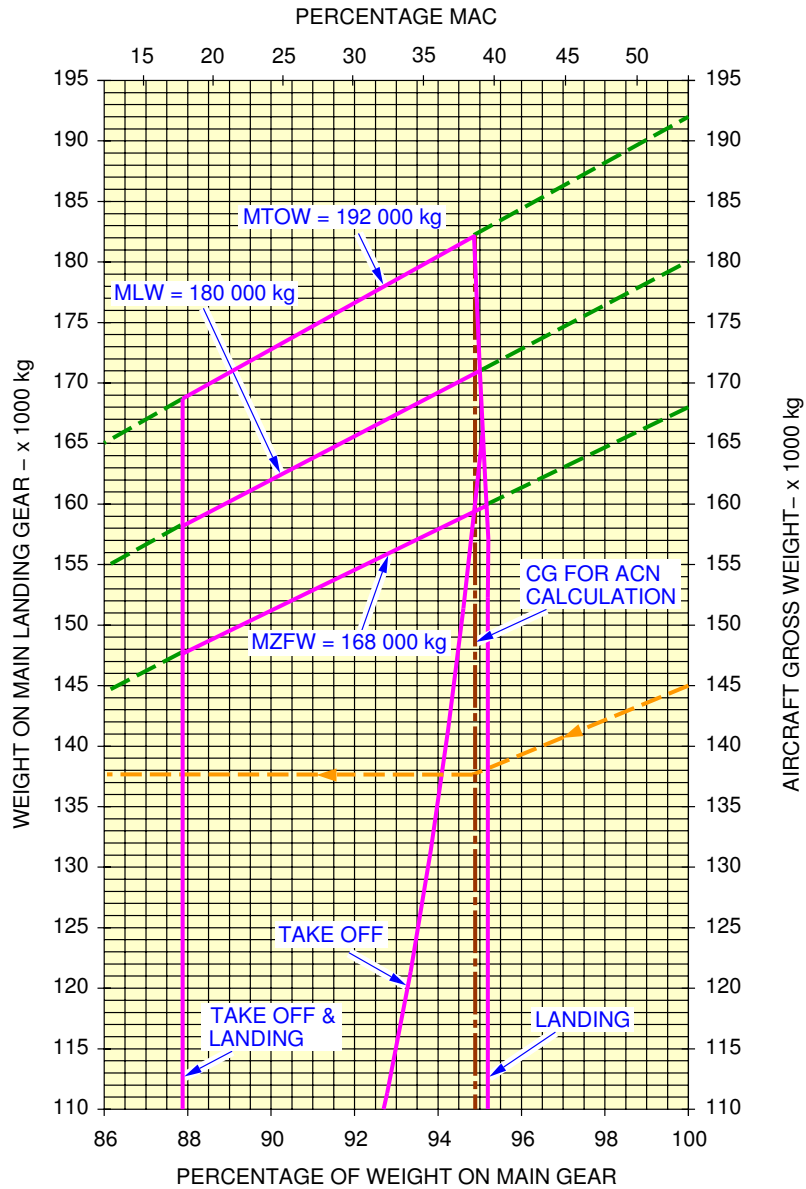

F_AC_070401_1_0010101_01_02

Landing Gear Loading on Pavement
MTOW 192 000 kg
FIGURE-7-4-1-991-001-A01


**ON A/C A330-200

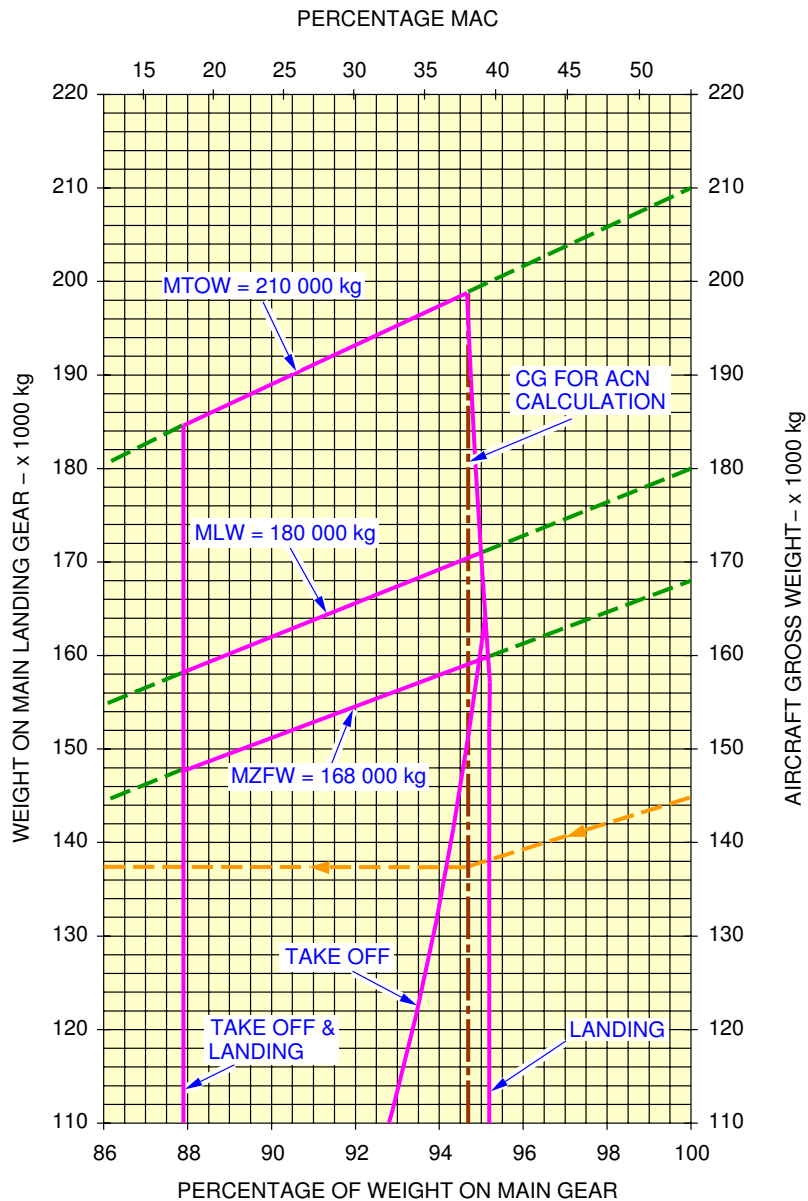

F_AC_070401_1_0020101_01_02

Landing Gear Loading on Pavement
 MTOW 210 000 kg
 FIGURE-7-4-1-991-002-A01

**ON A/C A330-200

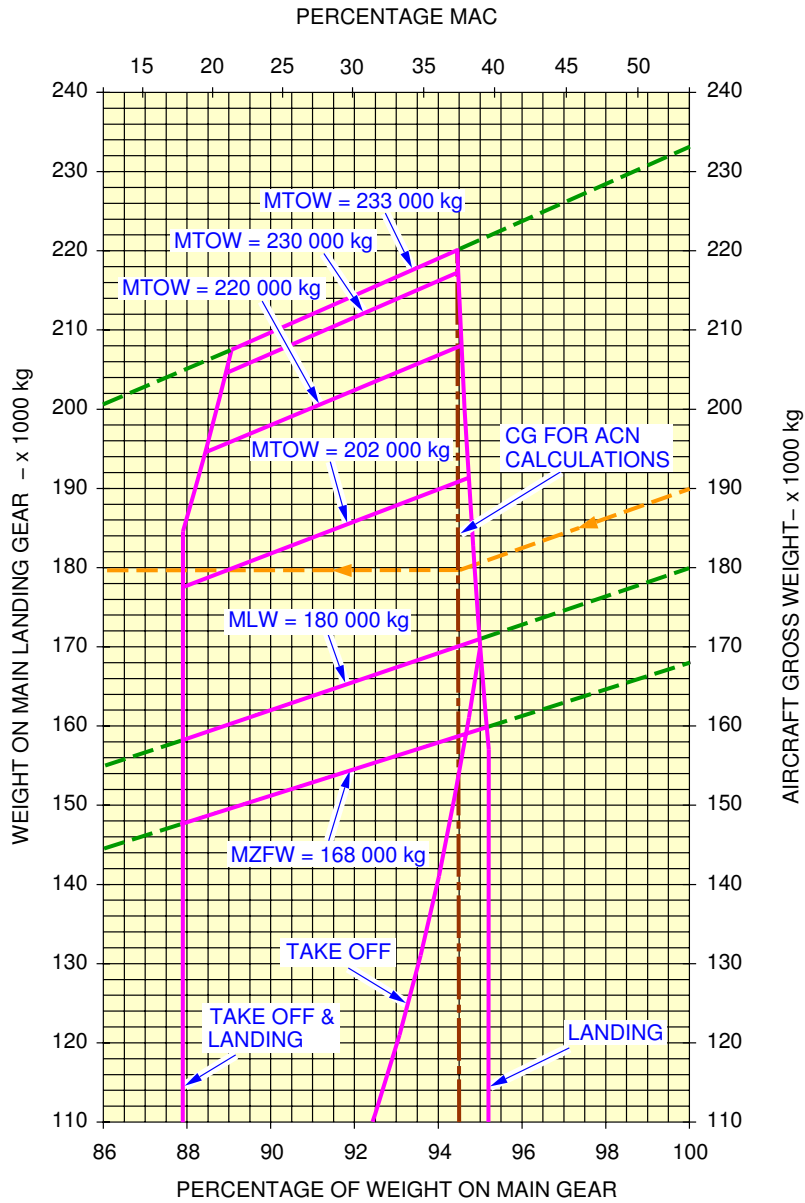


F_AC_070401_1_0030101_01_02

Landing Gear Loading on Pavement
 MTOW 233 000 kg
 FIGURE-7-4-1-991-003-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


**ON A/C A330-200

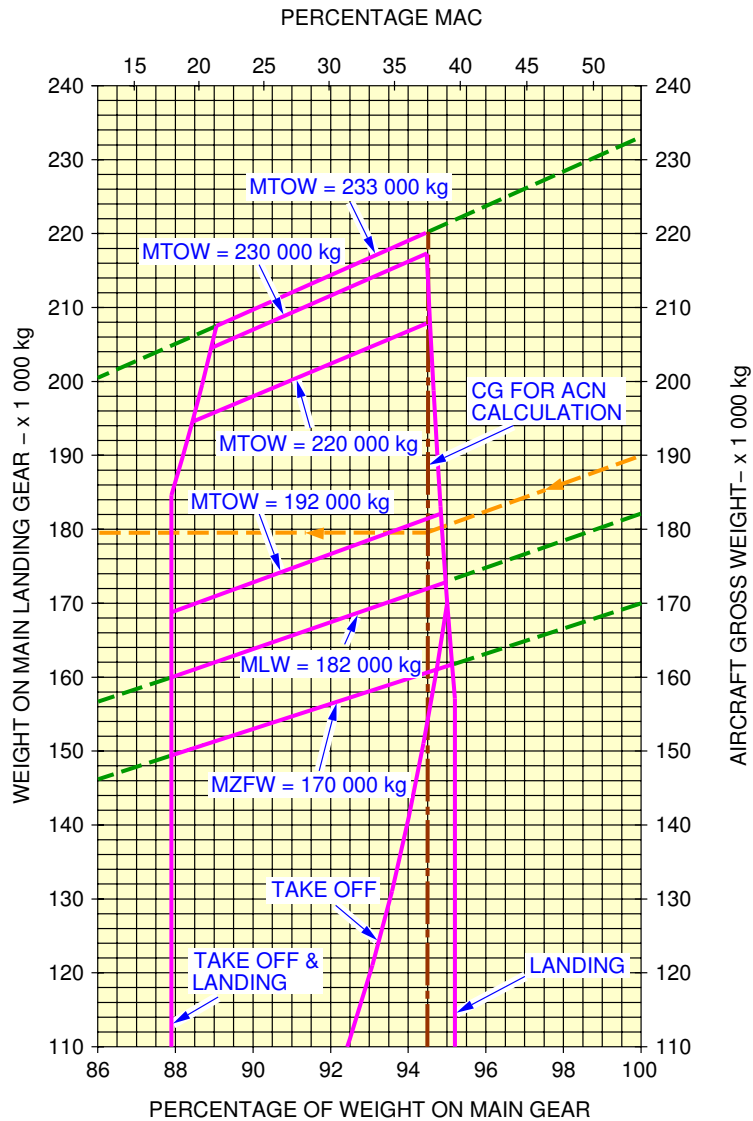

F_AC_070401_1_0040101_01_03

Landing Gear Loading on Pavement
MTOW 233 000 kg
FIGURE-7-4-1-991-004-A01


**ON A/C A330-200F

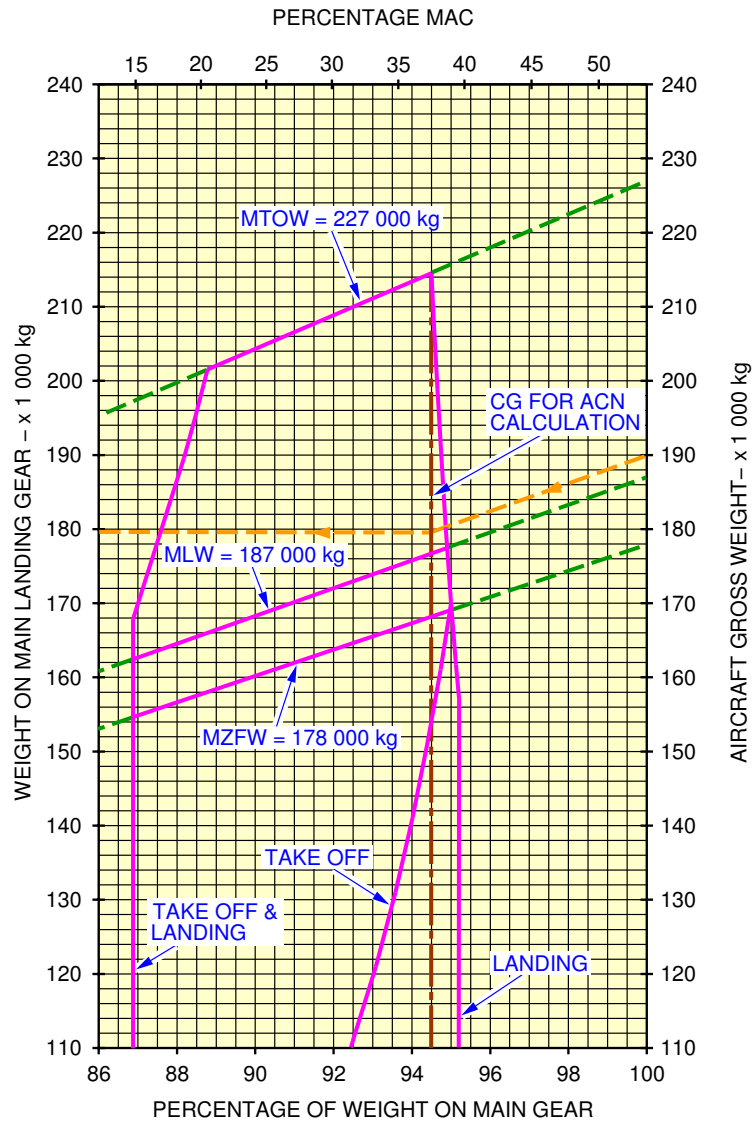

F_AC_070401_1_0140101_01_02

Landing Gear Loading on Pavement
 MTOW 227 000 kg
 FIGURE-7-4-1-991-014-A01


**ON A/C A330-200F

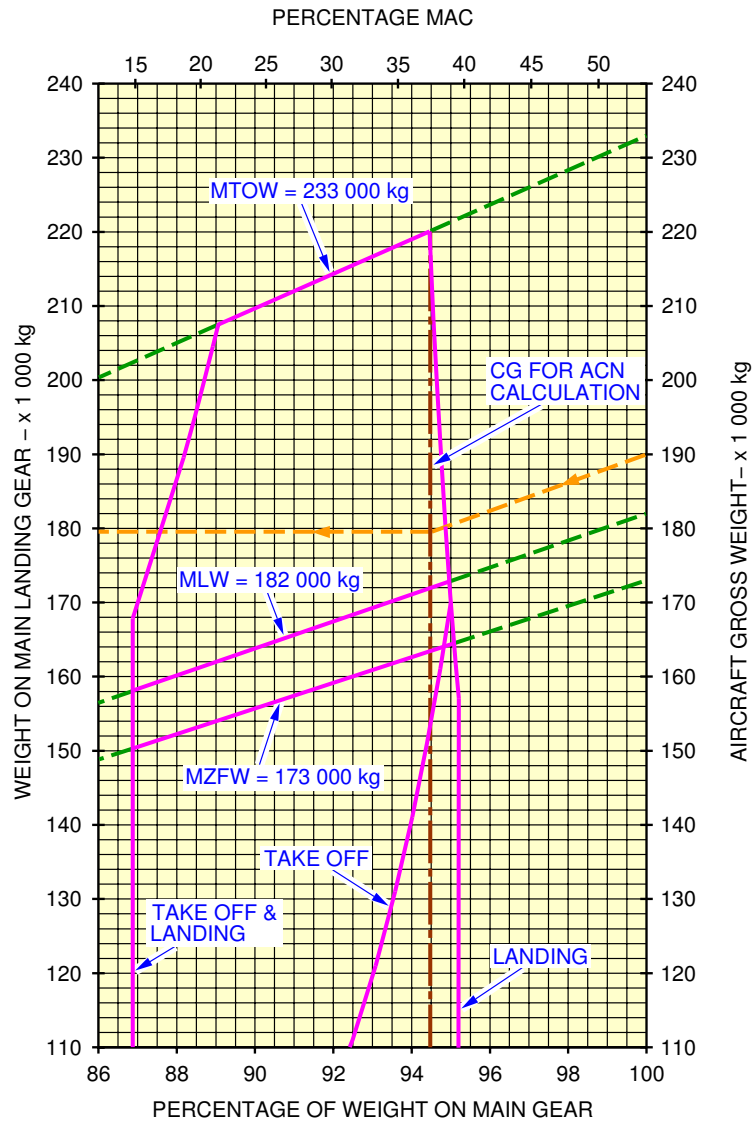

F_AC_070401_1_0150101_01_02

Landing Gear Loading on Pavement
 MTOW 233 000 kg
 FIGURE-7-4-1-991-015-A01


**ON A/C A330-300

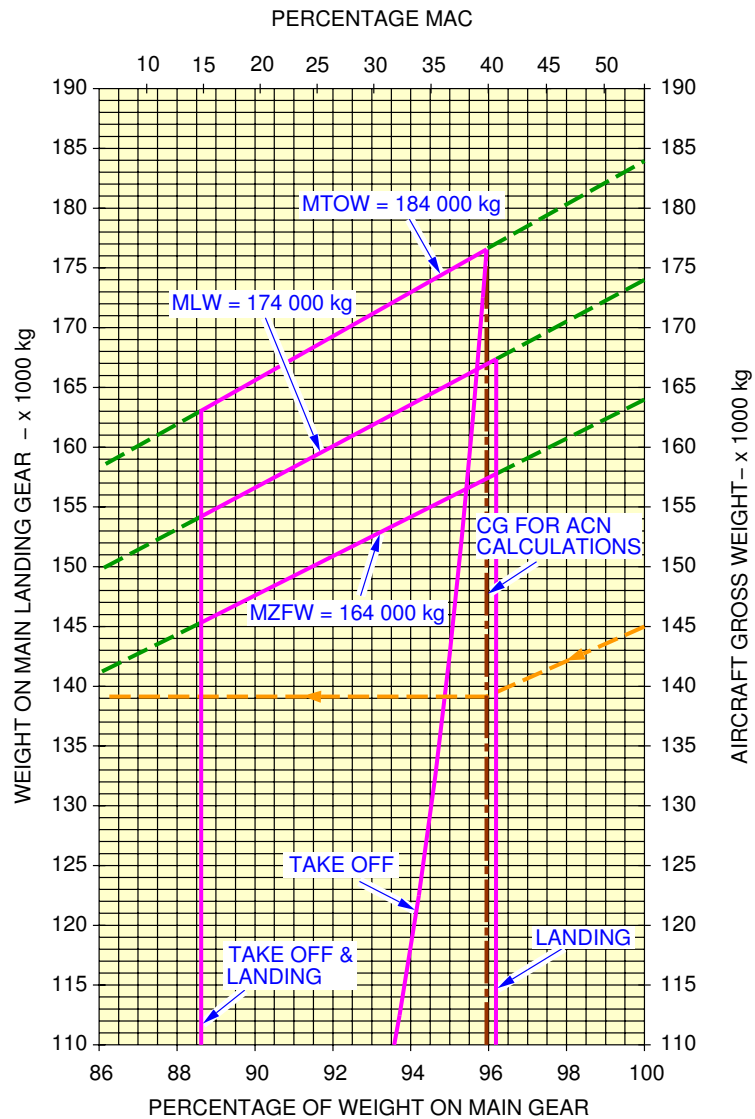

F_AC_070401_1_0050101_01_01

Landing Gear Loading on Pavement
 MTOW 184 000 kg
 FIGURE-7-4-1-991-005-A01


**ON A/C A330-300

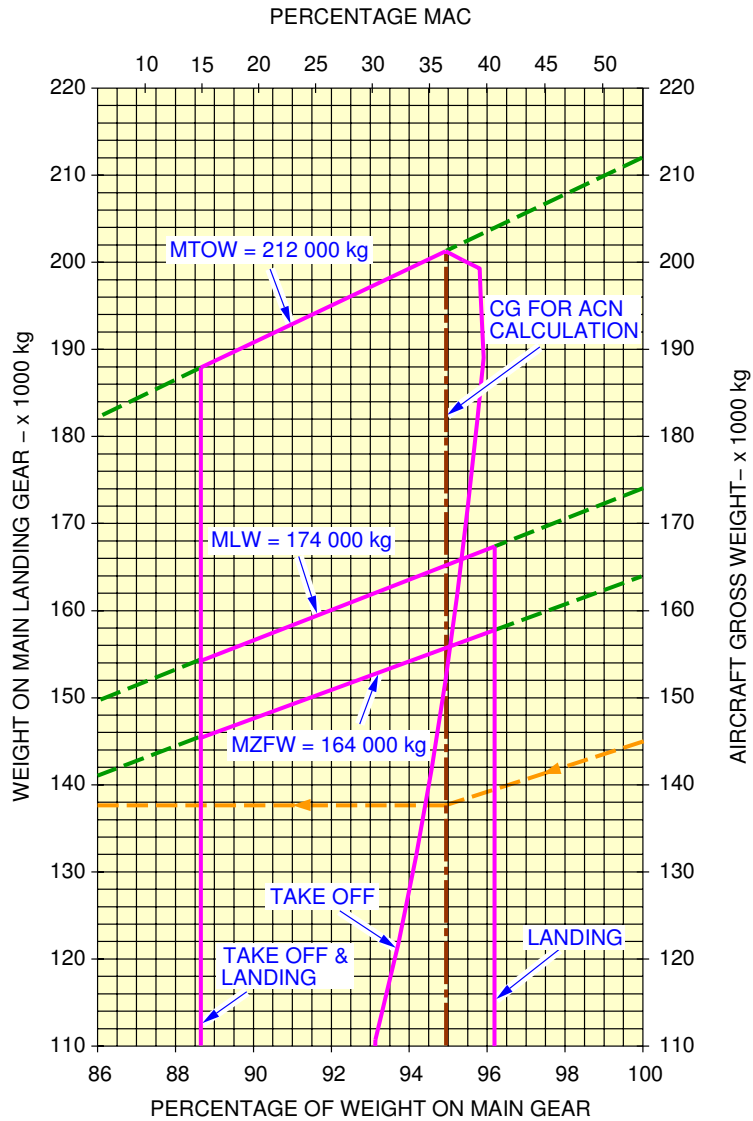

F_AC_070401_1_0060101_01_01

Landing Gear Loading on Pavement
MTOW 212 000 kg
FIGURE-7-4-1-991-006-A01


**ON A/C A330-300

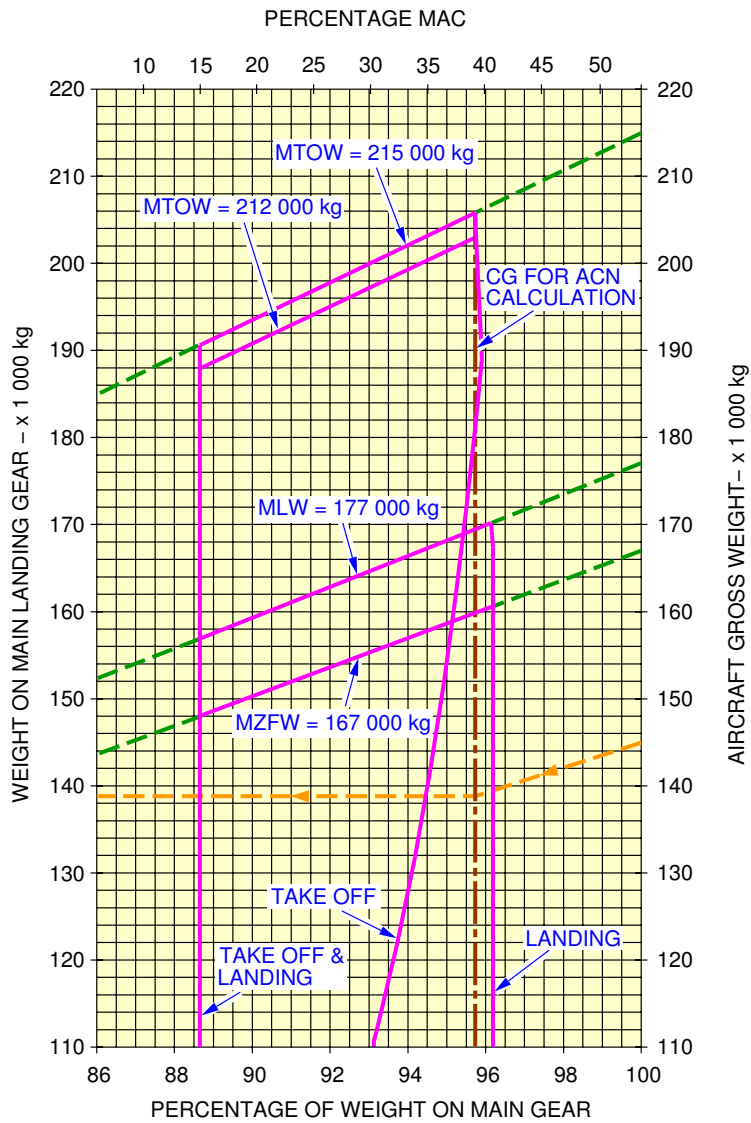

F_AC_070401_1_0070101_01_01

Landing Gear Loading on Pavement
 MTOW 215 000 kg
 FIGURE-7-4-1-991-007-A01


**ON A/C A330-300

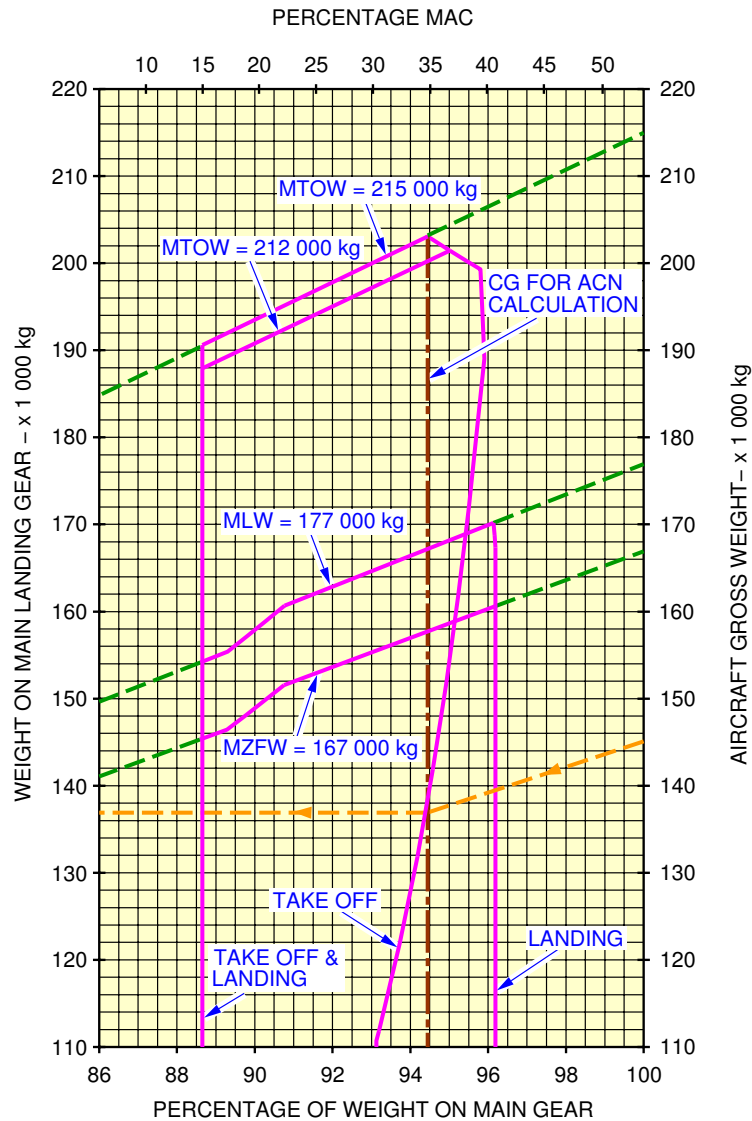

F_AC_070401_1_0080101_01_02

Landing Gear Loading on Pavement
 MTOW 215 000 kg
 FIGURE-7-4-1-991-008-A01


**ON A/C A330-300

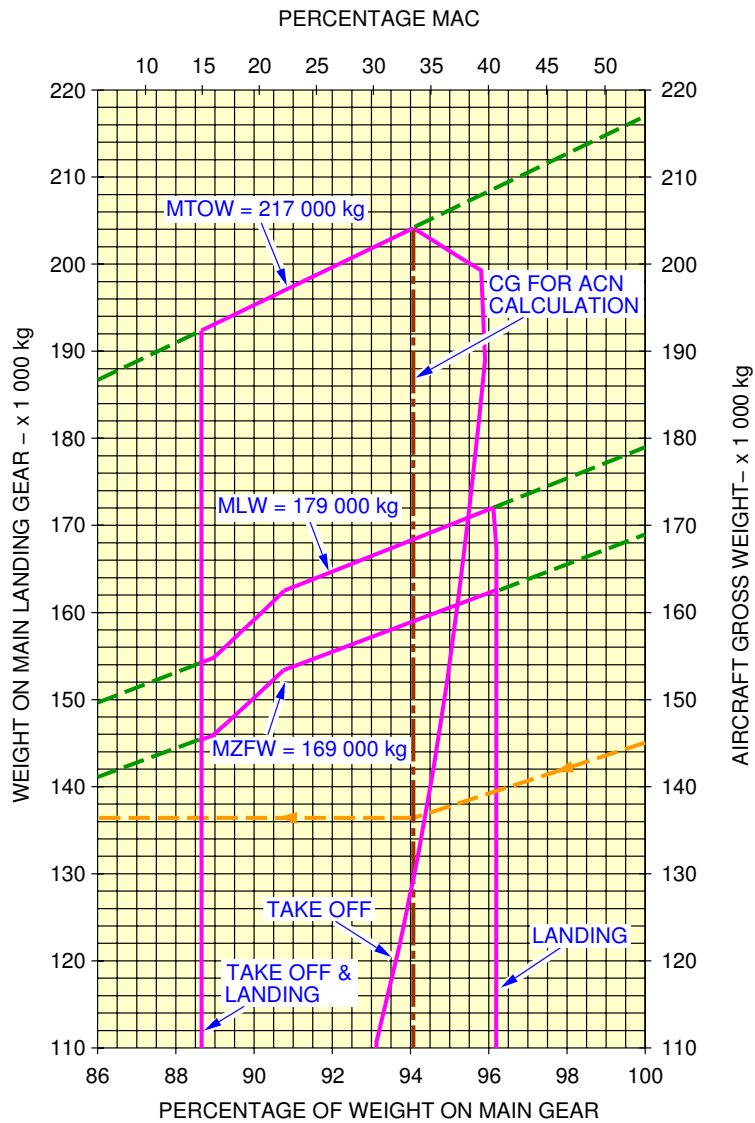

F_AC_070401_1_0090101_01_01

Landing Gear Loading on Pavement
 MTOW 217 000 kg
 FIGURE-7-4-1-991-009-A01


**ON A/C A330-300

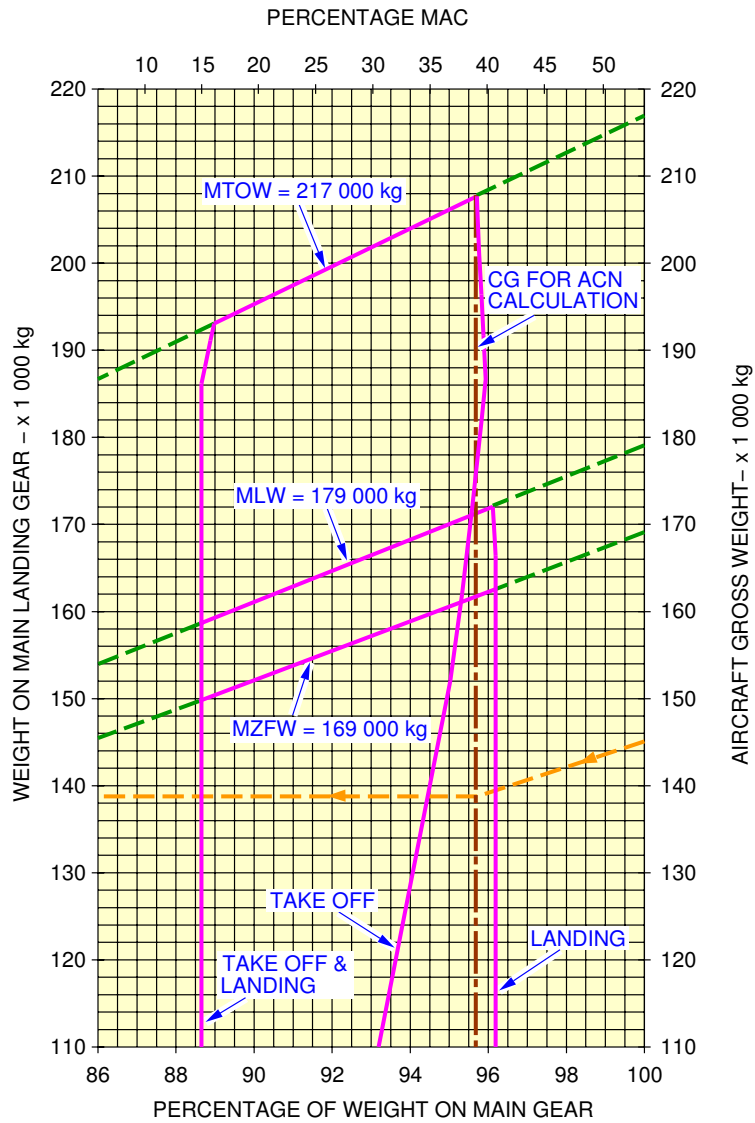

F_AC_070401_1_0100101_01_01

Landing Gear Loading on Pavement
 MTOW 217 000 kg
 FIGURE-7-4-1-991-010-A01


**ON A/C A330-300

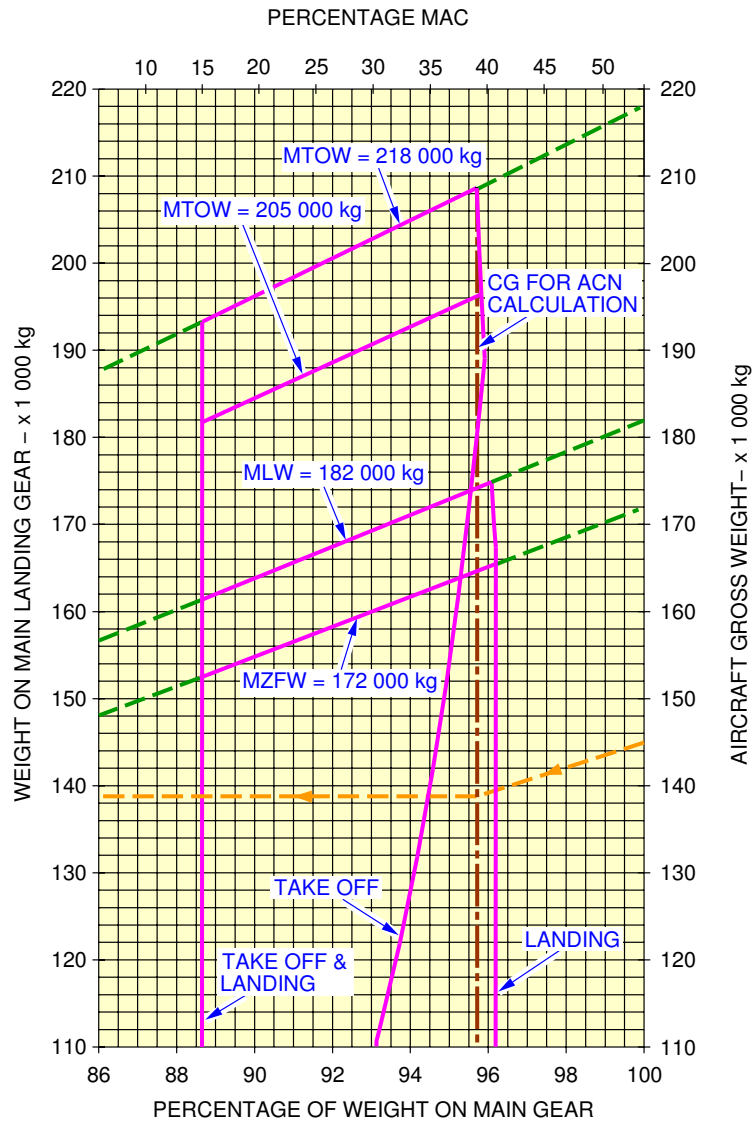

F_AC_070401_1_0110101_01_01

Landing Gear Loading on Pavement
 MTOW 218 000 kg
 FIGURE-7-4-1-991-011-A01


**ON A/C A330-300

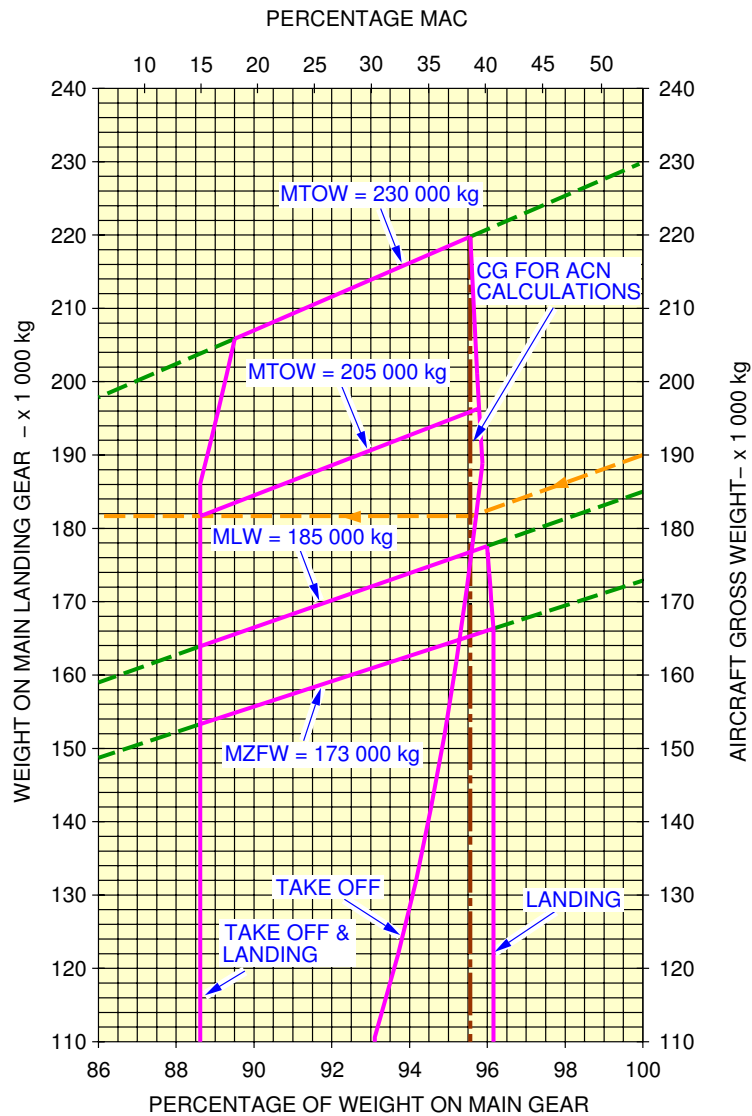

F_AC_070401_1_0120101_01_01

Landing Gear Loading on Pavement
 MTOW 230 000 kg
 FIGURE-7-4-1-991-012-A01

**ON A/C A330-300

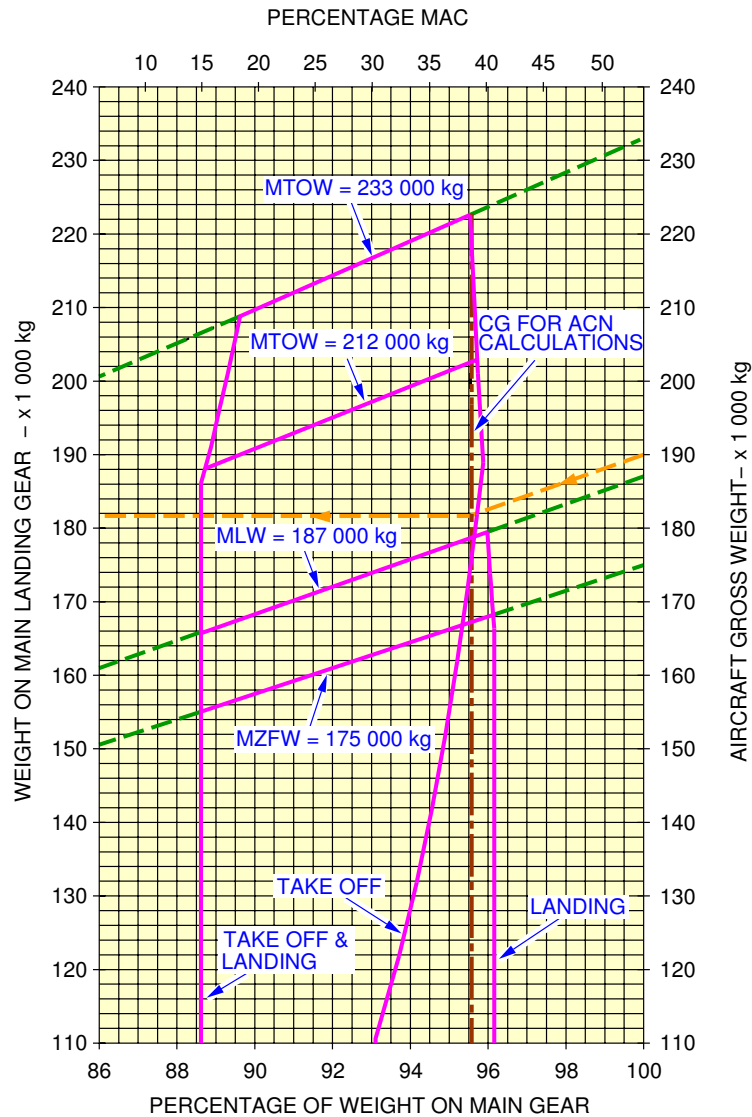

F_AC_070401_1_0130101_01_01

Landing Gear Loading on Pavement
 MTOW 233 000 kg
 FIGURE-7-4-1-991-013-A01

7-5-0 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method****ON A/C A330-200 A330-200F A330-300**Flexible Pavement Requirements - US Army Corps of Engineers Design Method****ON A/C A330-200**

1. General

To find a Flexible Pavement Thickness, the Subgrade Strength (CBR), the Annual Departure Level and the weight on one Main Landing must be known.

In the example shown in Section 7-5-1 Figure : Flexible Pavement Requirements - MTOW 233 000 kg - A330-200

- A "CBR" value of 10
- An Annual Departure level of 3 000
- And the load on one Main Landing Gear of 80 000 kg (176 370 lb)
- The required Flexible Pavement Thickness is 49 cm (19.25 inches).

The line showing 10 000 Coverages is used to calculate Aircraft Classification Number (ACN).

****ON A/C A330-200F**

2. General

To find a Flexible Pavement Thickness, the Subgrade Strength (CBR), the Annual Departure Level and the weight on one Main Landing must be known.

In the example shown in Section 7-5-1 Figure : Flexible Pavement Requirements - MTOW 233 000 kg - A330-200F

- A "CBR" value of 10
- An Annual Departure level of 3 000
- And the load on one Main Landing Gear of 80 000 kg (176 370 lb)
- The required Flexible Pavement Thickness is 49 cm (19.25 inches).

The line showing 10 000 Coverages is used to calculate Aircraft Classification Number (ACN).

****ON A/C A330-300**

3. General

To find a Flexible Pavement Thickness, the Subgrade Strength (CBR), the Annual Departure Level and the weight on one Main Landing must be known.

In the example shown in Section 7-5-1 Figure : Flexible Pavement Requirements - MTOW 212 000 kg - A330-300

- A "CBR" value of 10
- An Annual Departure level of 3 000
- And the load on one Main Landing Gear of 80 000 kg (176 370 lb)
- The required Flexible Pavement Thickness is 49 cm (19.25 inches).

The line showing 10 000 Coverages is used to calculate Aircraft Classification Number (ACN).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


7-5-1 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method S-77-1

****ON A/C A330-200 A330-200F A330-300**

Flexible Pavement Requirements - US Army Corps of Engineers Design Method

1. This section gives Flexible Pavement Requirements.

**ON A/C A330-200

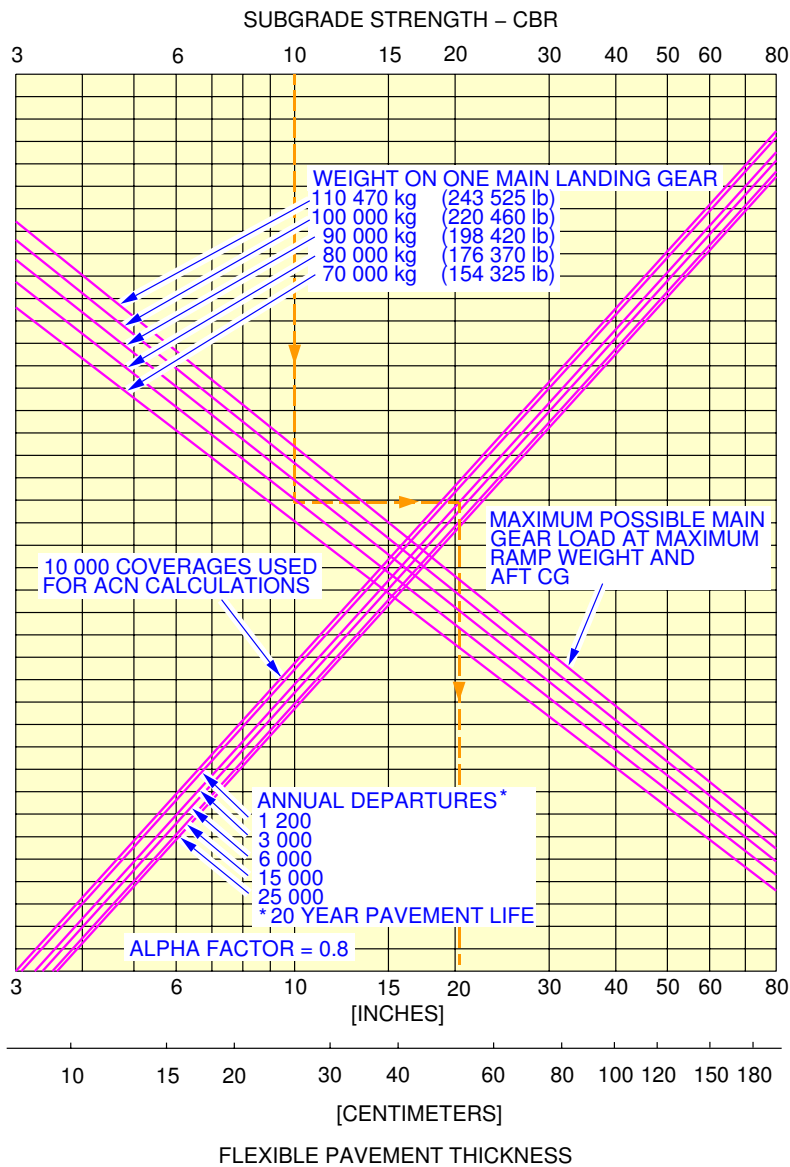


1400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 14.2 BAR (206 PSI)

F_AC_070501_1_0010101_01_01

Flexible Pavement Requirements
MTOW 233 000 kg
FIGURE-7-5-1-991-001-A01

**ON A/C A330-200F

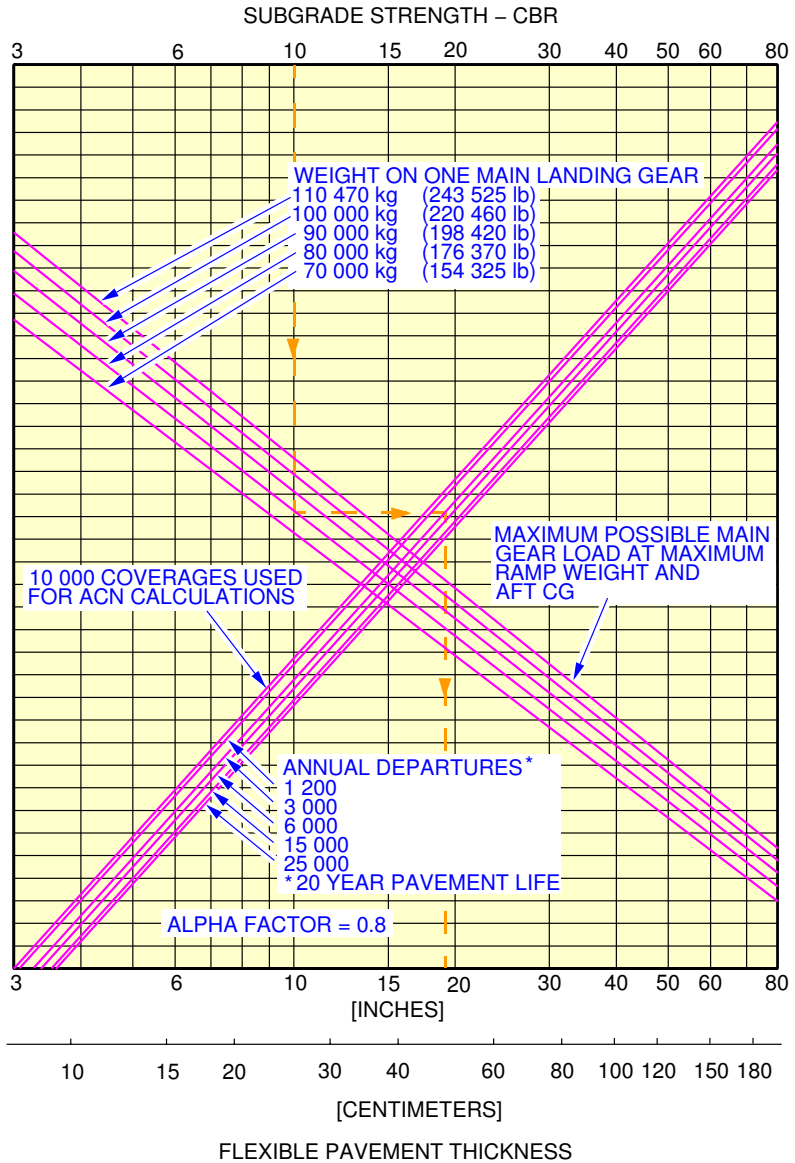


1400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 14.2 BAR (206 PSI)

F_AC_070501_1_0060101_01_00

Flexible Pavement Requirements
MTOW 233 000 kg
FIGURE-7-5-1-991-006-A01

**ON A/C A330-300

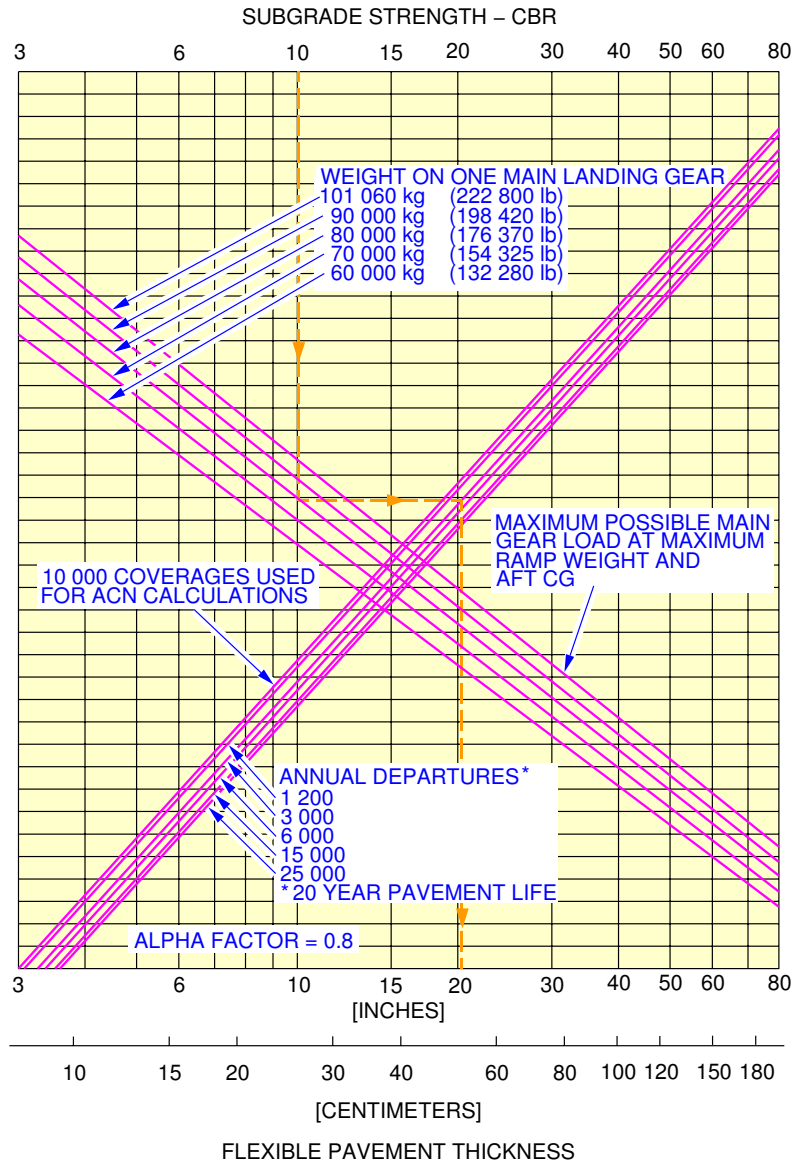


1400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 13.1 BAR (189 PSI)

F_AC_070501_1_0020101_01_01

Flexible Pavement Requirements
MTOW 212 000 kg
FIGURE-7-5-1-991-002-A01

**ON A/C A330-300

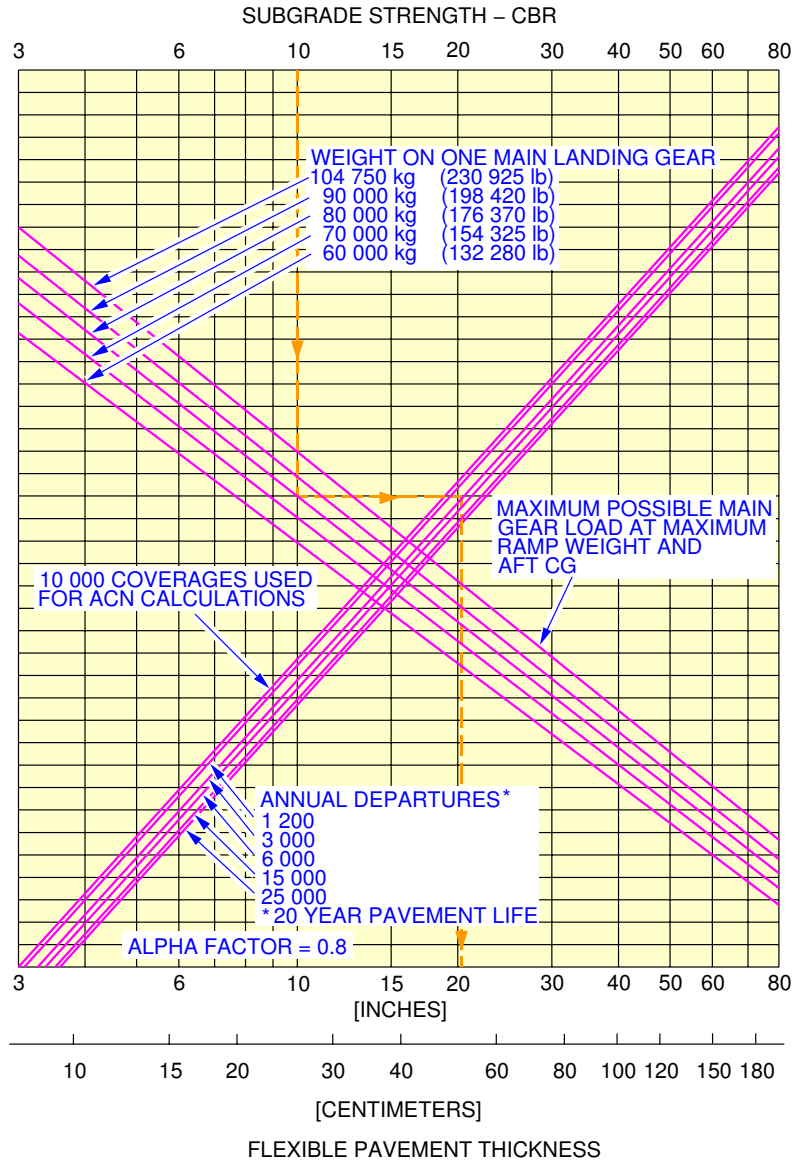


1400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 13.3 BAR (194 PSI)

F_AC_070501_1_0030101_01_01

Flexible Pavement Requirements
MTOW 218 000 kg
FIGURE-7-5-1-991-003-A01

**ON A/C A330-300

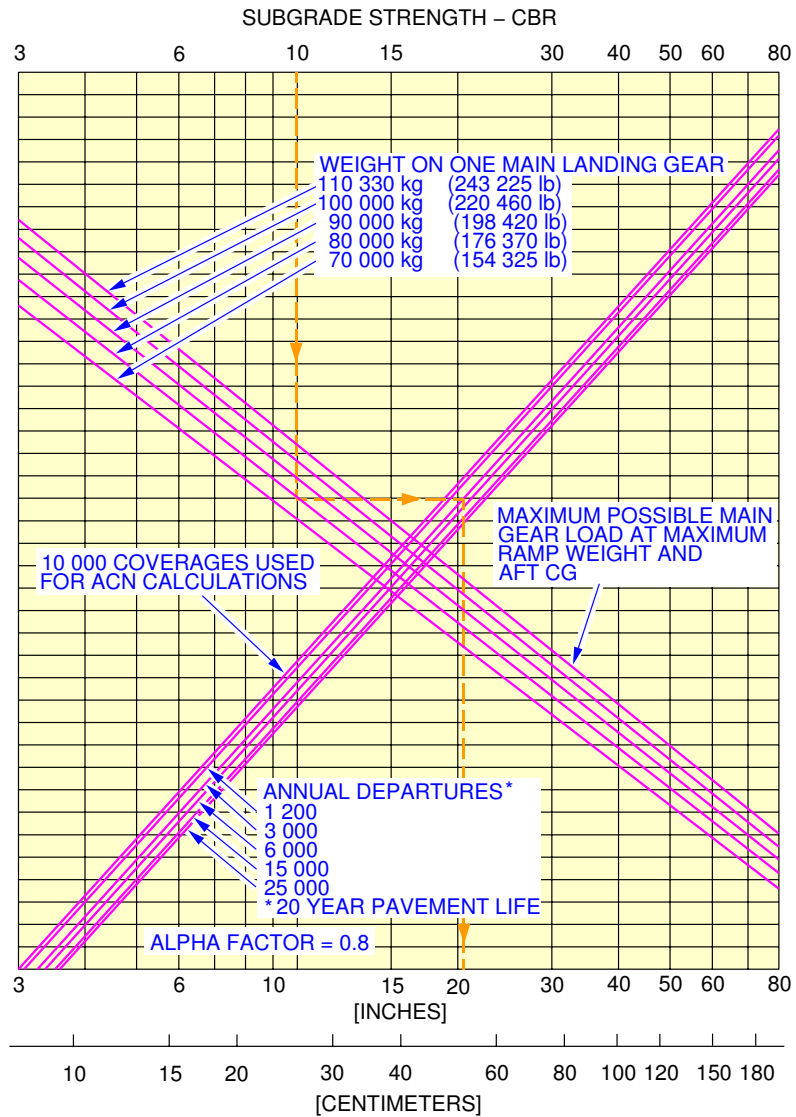


FLEXIBLE PAVEMENT THICKNESS

1400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 14.2 BAR (206 PSI)

F_AC_070501_1_0040101_01_01

Flexible Pavement Requirements
MTOW 230 000 kg
FIGURE-7-5-1-991-004-A01

****ON A/C A330-300**

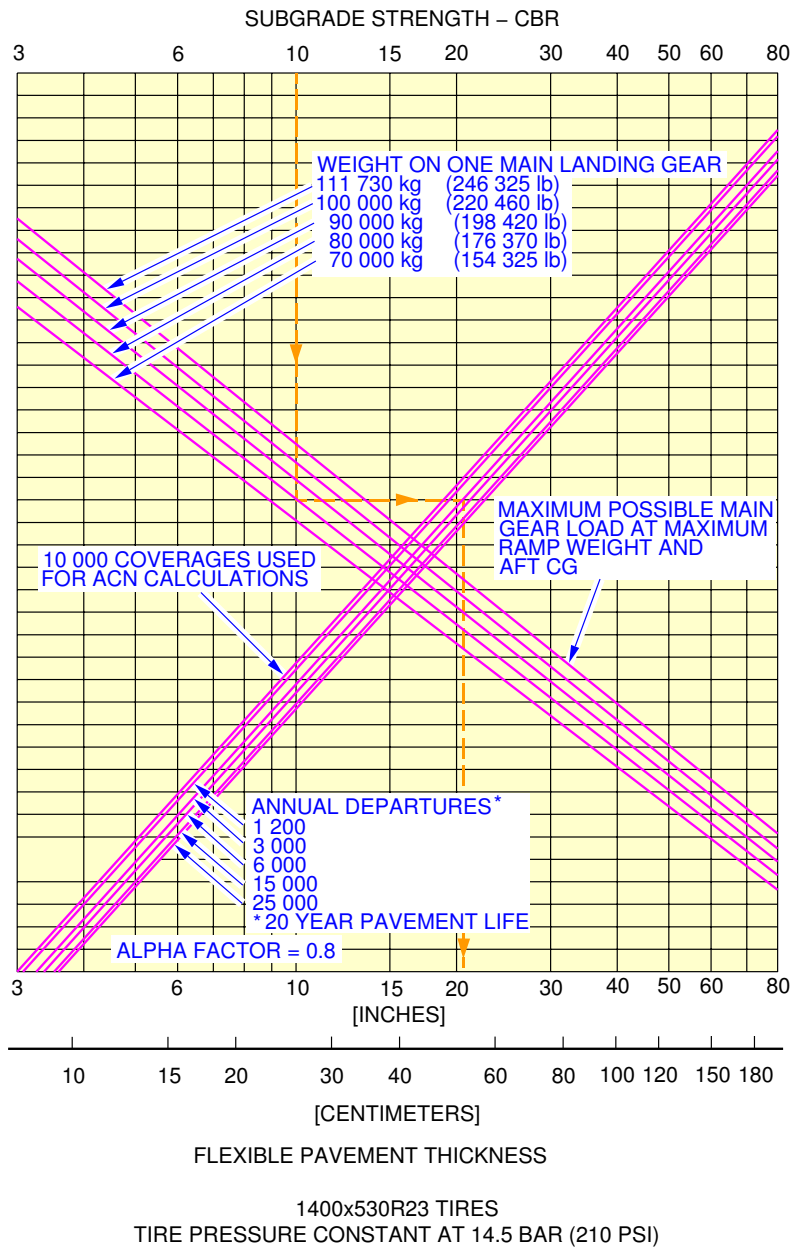

F_AC_070501_1_0050101_01_01

Flexible Pavement Requirements
 MTOW 233 000 kg
 FIGURE-7-5-1-991-005-A01

7-6-0 Flexible Pavement Requirements - LCN Conversion****ON A/C A330-200 A330-200F A330-300**Flexible Pavement Requirements - LCN Conversion****ON A/C A330-200**

1. General

To find the airplane weight that a Flexible Pavement can support, the LCN of the pavement and the thickness (h) must be known.

In the example shown in Section 7-6-1, Figure: Flexible Pavement Requirements LCN - MTOW 233 000 kg - A330-200

The thickness "h" is shown at 762 mm (30 in.) with an LCN of 108.

For these conditions the weight on one Main Landing Gear is 100 000 kg (220 460 lb).

****ON A/C A330-200F**

2. General

To find the airplane weight that a Flexible Pavement can support, the LCN of the pavement and the thickness (h) must be known.

In the example shown in Section 7-6-1, Figure: Flexible Pavement Requirements LCN - MTOW 233 000 kg - A330-200F

The thickness "h" is shown at 762 mm (30 in.) with an LCN of 108.

For these conditions the weight on one Main Landing Gear is 100 000 kg (220 460 lb).

****ON A/C A330-300**

3. General

To find the airplane weight that a Flexible Pavement can support, the LCN of the pavement and the thickness (h) must be known.

In the example shown in Section 7-6-1, Figure: Flexible Pavement Requirements LCN - MTOW 212 000 kg - A330-300



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

The thickness "h" is shown at 762 mm (30 in.) with an LCN of 94.

For these conditions the weight on one Main Landing Gear is 90 000 kg (198 416 lb).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


7-6-1 Flexible Pavement Requirements - LCN Conversion

****ON A/C A330-200 A330-200F A330-300**

Flexible Pavement Requirements - LCN Conversion

1. This section gives Flexible Pavement Requirements - LCN Conversion.


**ON A/C A330-200

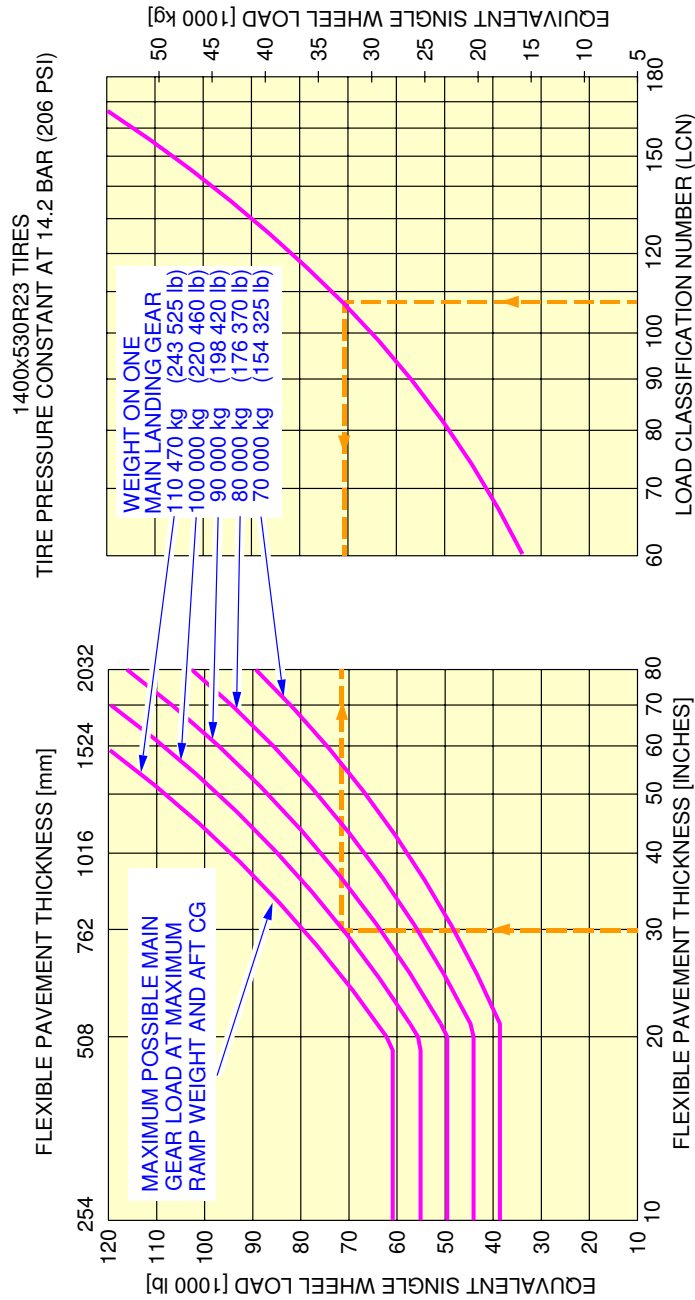

F_AC_070601_1_0010101_01_01

Flexible Pavement Requirements
 MTOW 233 000 kg
 FIGURE-7-6-1-991-001-A01


**ON A/C A330-200F

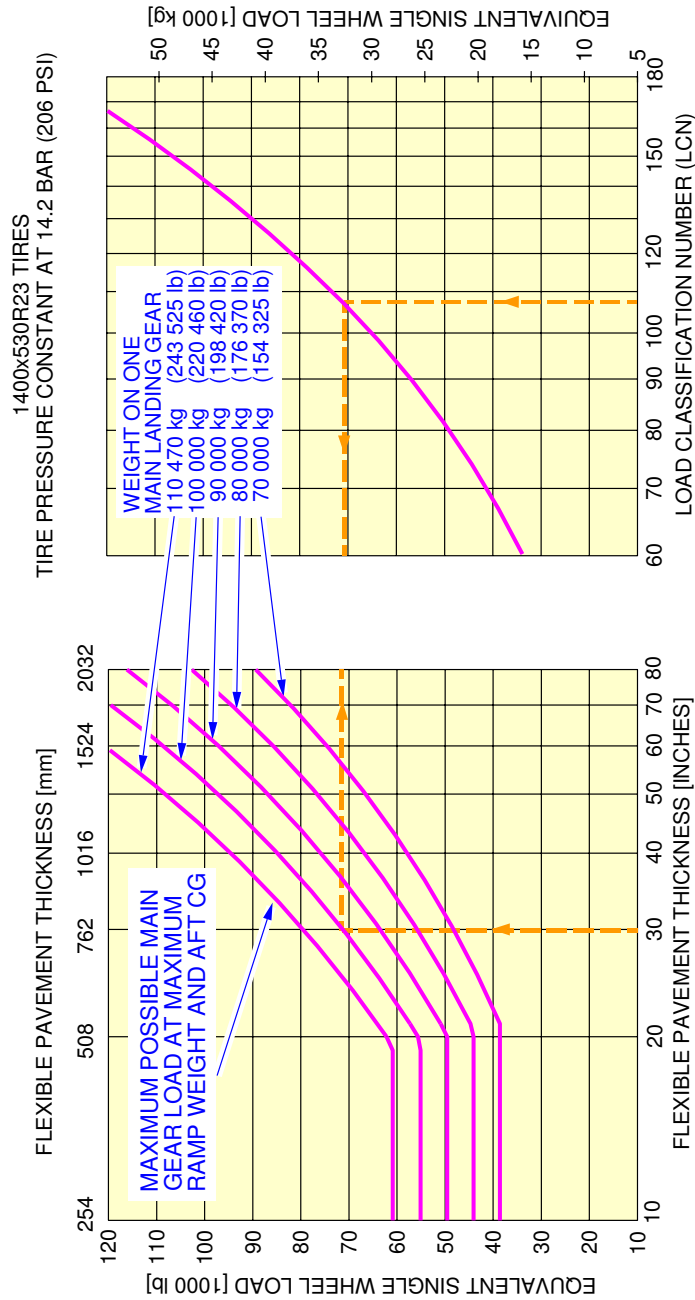

F_AC_070601_1_0060101_01_00

Flexible Pavement Requirements
 MTOW 233 000 kg
 FIGURE-7-6-1-991-006-A01


**ON A/C A330-300

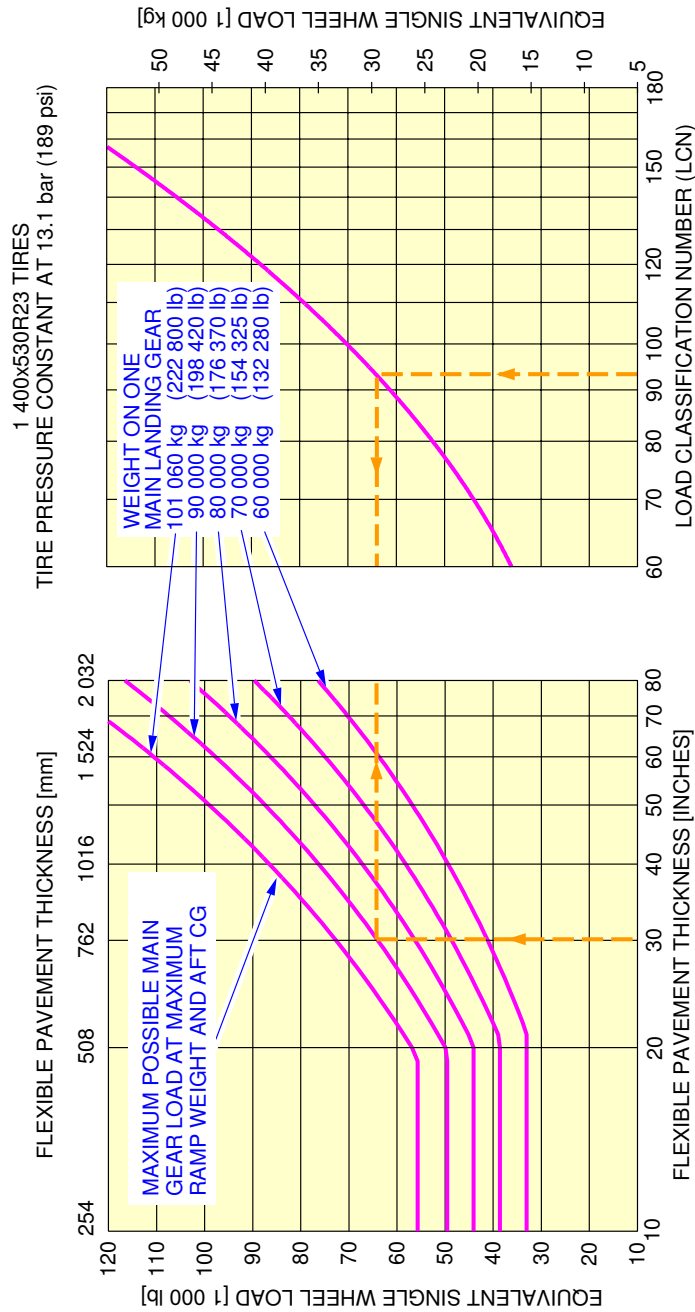

F_AC_070601_1_0020101_01_02

Flexible Pavement Requirements
 MTOW 212 000 kg
 FIGURE-7-6-1-991-002-A01


**ON A/C A330-300

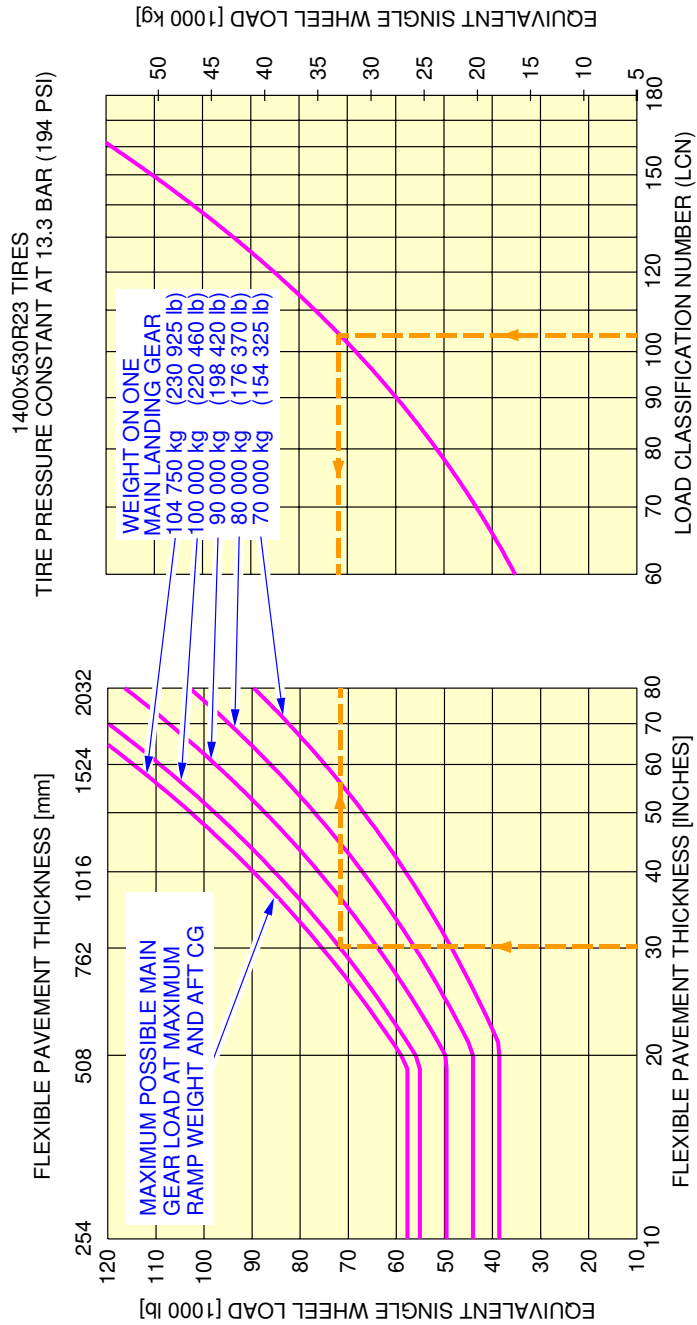

F_AC_070601_1_0030101_01_01

Flexible Pavement Requirements
 MTOW 218 000 kg
 FIGURE-7-6-1-991-003-A01


**ON A/C A330-300

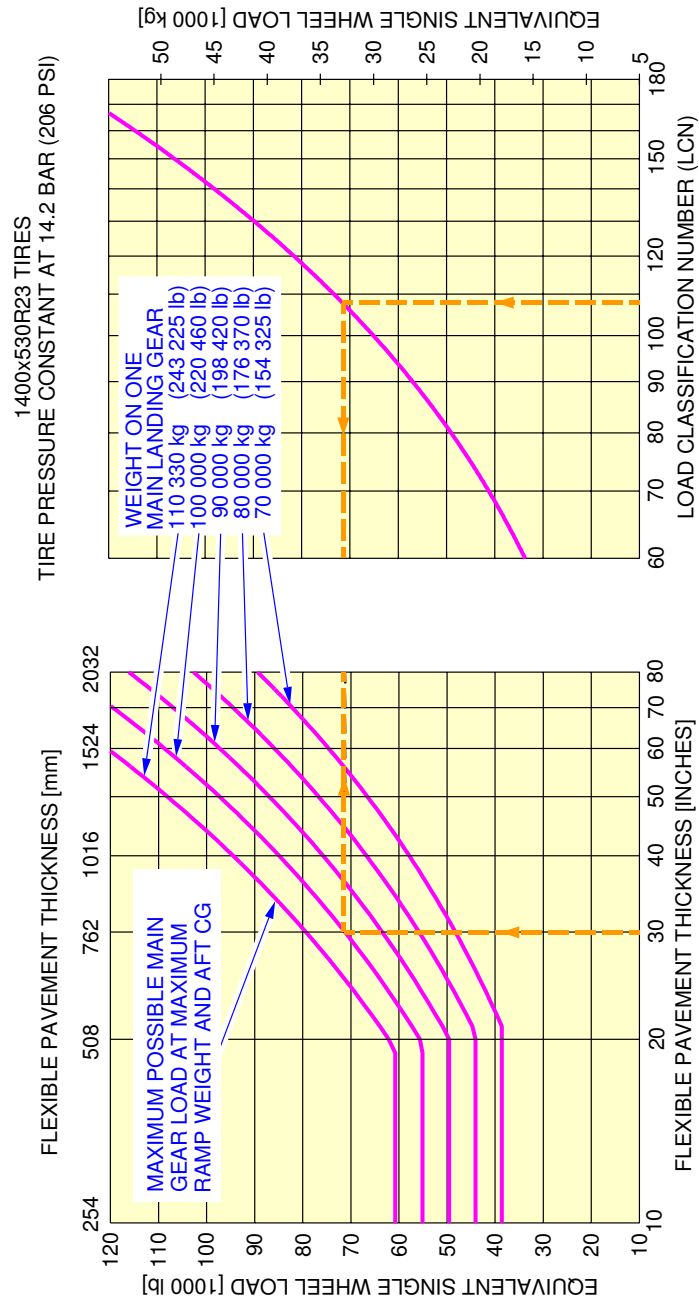

F_AC_070601_1_0040101_01_01

Flexible Pavement Requirements
 MTOW 230 000 kg
 FIGURE-7-6-1-991-004-A01

**ON A/C A330-300

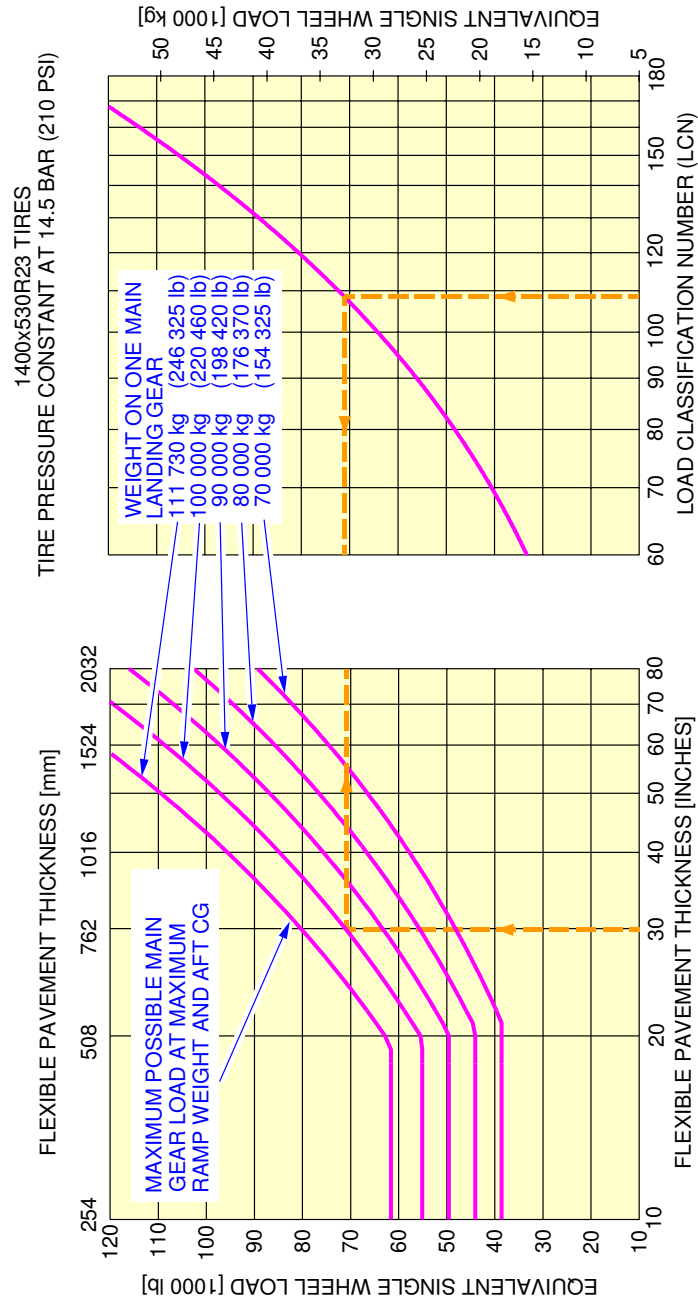

F_AC_070601_1_0050101_01_01

Flexible Pavement Requirements
 MTOW 233 000 kg
 FIGURE-7-6-1-991-005-A01

7-7-0 Rigid Pavement Requirements - Portland Cement Association Design Method****ON A/C A330-200 A330-200F A330-300**Rigid Pavement Requirements - Portland Cement Association Design Method****ON A/C A330-200**

1. General

To determine a Rigid Pavement Thickness, the Subgrade Modulus (k), the allowable working stress and the weight on one Main Landing Gear must be known.

In the example shown in Section 7-7-1 Figure: Rigid Pavement Requirements - MTOW 233 000 kg - A330-200

- a "k" value of 150 MN/m³ (550 lb/in³)
- an allowable working stress of 39 kg/cm² (550 lb/in²)
- the load on one Main Landing Gear of 80 000 kg (176 370 lb) the required Rigid Pavement Thickness is 22 cm (8.6 inches).

****ON A/C A330-200F**

2. General

To determine a Rigid Pavement Thickness, the Subgrade Modulus (k), the allowable working stress and the weight on one Main Landing Gear must be known.

In the example shown in Section 7-7-1 Figure: Rigid Pavement Requirements - MTOW 233 000 kg - A330-200F

- a "k" value of 150 MN/m³ (550 lb/in³)
- an allowable working stress of 39 kg/cm² (550 lb/in²)
- the load on one Main Landing Gear of 80 000 kg (176 370 lb) the required Rigid Pavement Thickness is 22 cm (8.6 inches).

****ON A/C A330-300**

3. General

To determine a Rigid Pavement Thickness, the Subgrade Modulus (k), the allowable working stress and the weight on one Main Landing Gear must be known.

In the example shown in Section 7-7-1 Figure: Rigid Pavement Requirements - MTOW 212 000 kg - A330-300

- a "k" value of 150 MN/m³ (550 lb/in³)



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

- an allowable working stress of 39 kg/cm^2 (550 lb/in^2)
- the load on one Main Landing Gear of $80\,000 \text{ kg}$ ($176\,370 \text{ lb}$) the required Rigid Pavement Thickness is 22 cm (8.6 inches).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

7-7-1 Rigid Pavement Requirements - Portland Cement Association Design Method


**ON A/C A330-200 A330-200F A330-300

Rigid Pavement Requirements - Portland Cement Association Design Method

1. This section gives Rigid Pavement Requirements.

**ON A/C A330-200

1400 x 530R23 TIRES
TIRE PRESSURE CONSTANT = 14.2 BAR (206 PSI)

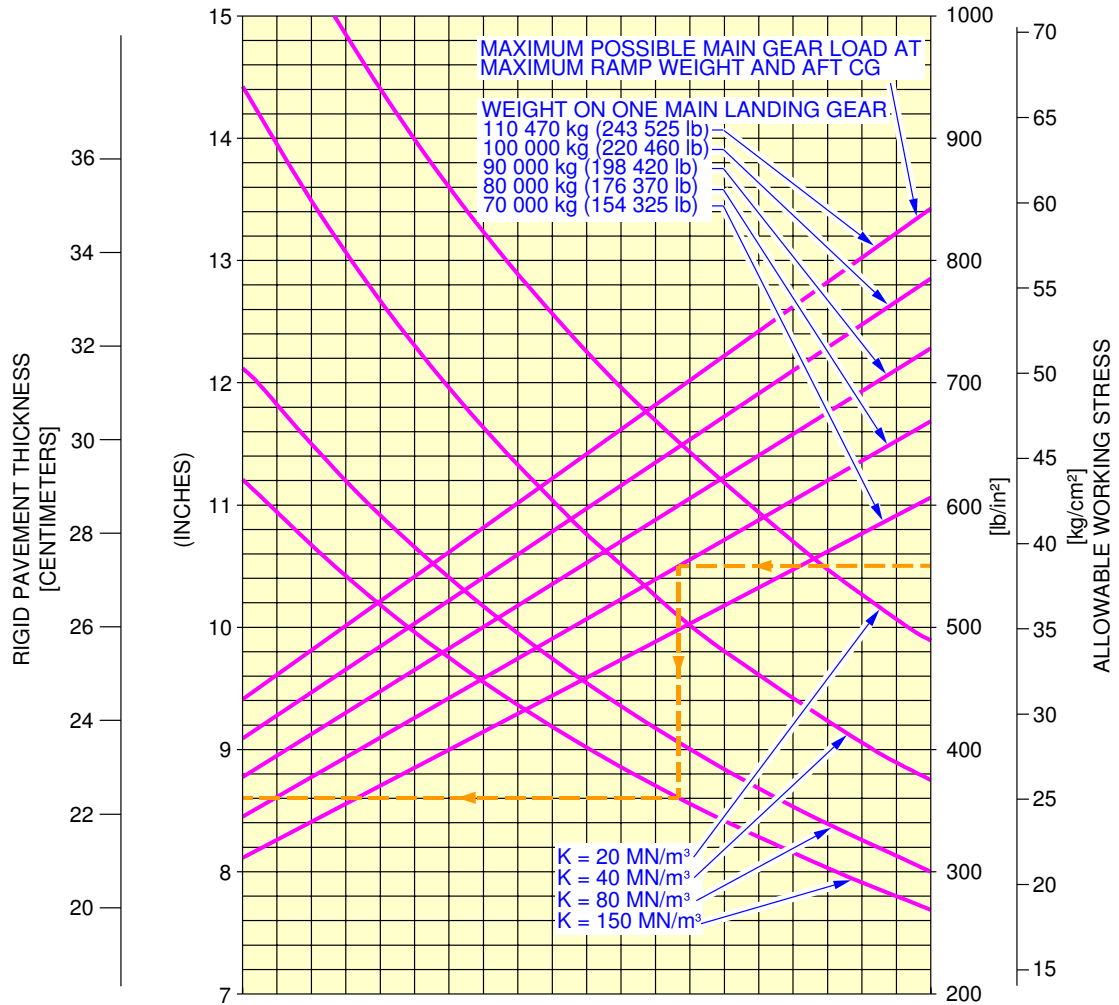

NOTES:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT.
FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=80 MN/m³ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K


REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN-PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

F_AC_070701_1_0010101_01_00

Rigid Pavement Requirements
MTOW 233 000 kg
FIGURE-7-7-1-991-001-A01

**ON A/C A330-200F

1400 x 530R23 TIRES
TIRE PRESSURE CONSTANT = 14.2 BAR (206 PSI)

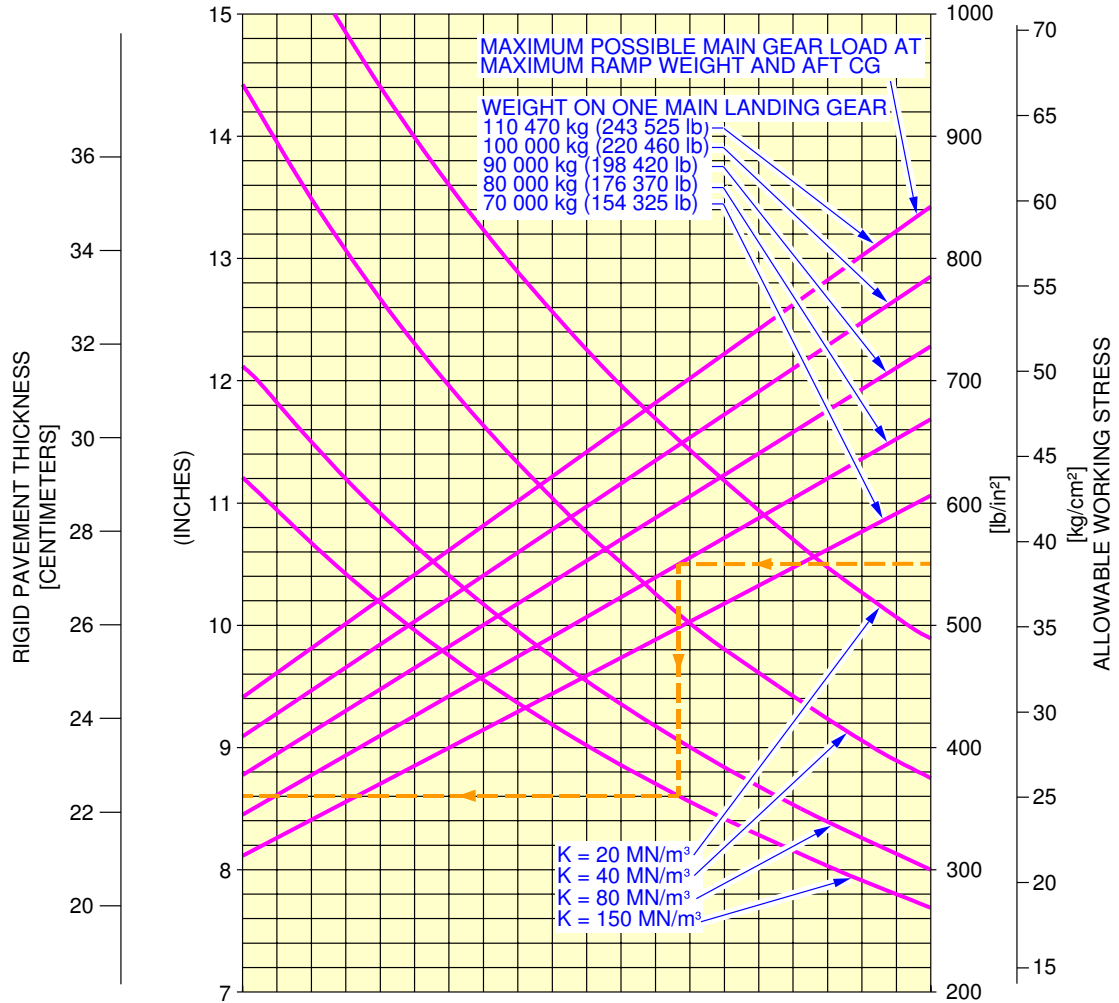


NOTES:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT.
FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=80 MN/m³ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN-PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

F_AC_070701_1_0060101_01_00

Rigid Pavement Requirements
MTOW 233 000 kg
FIGURE-7-7-1-991-006-A01

****ON A/C A330-300**

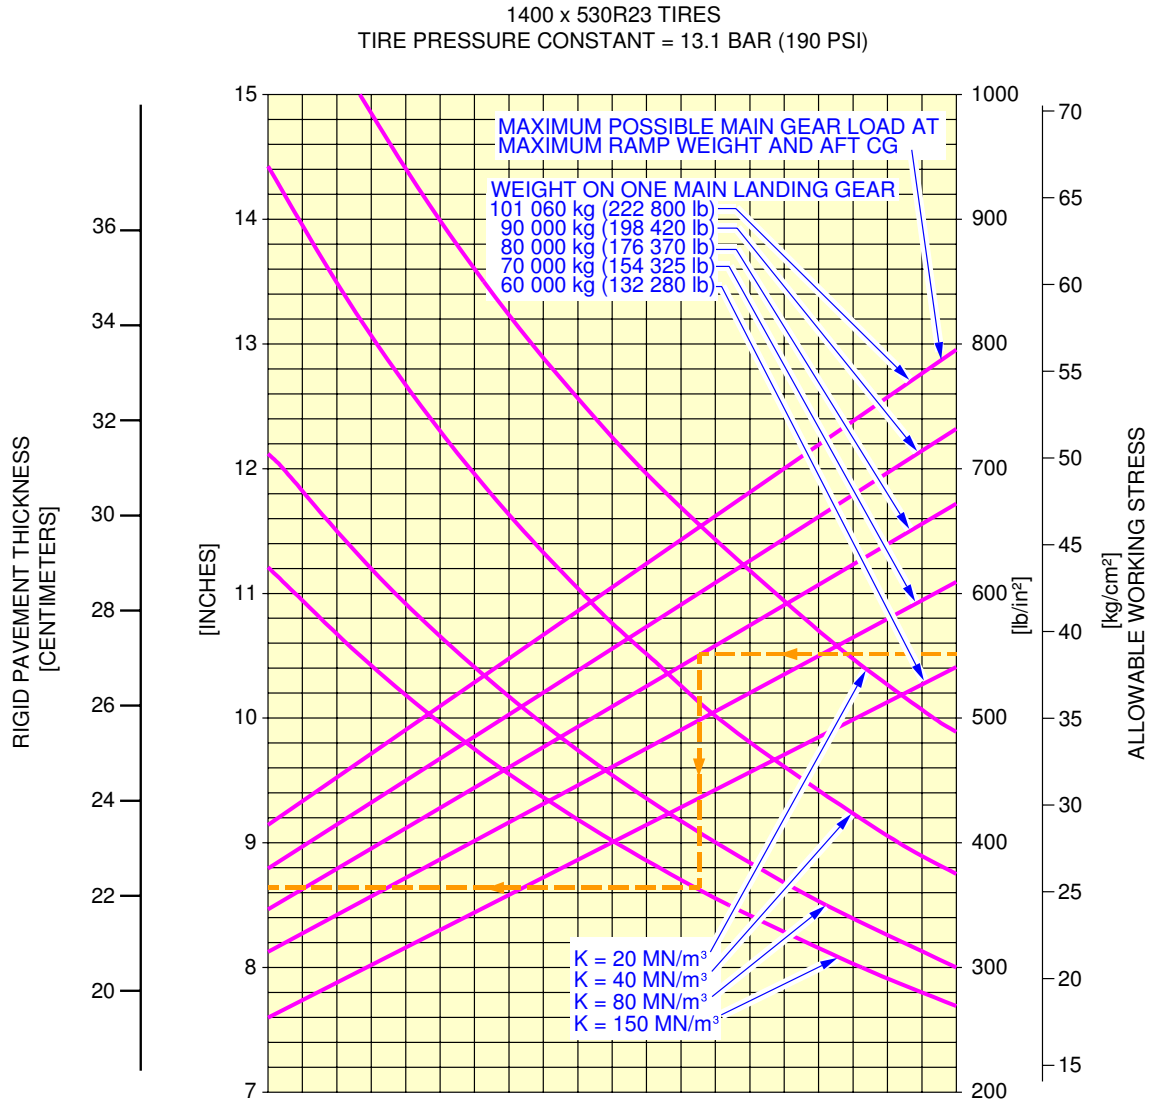

NOTES:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT.
FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=80 MN/m³ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K


REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN - PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

F_AC_070701_1_0020101_01_00

Rigid Pavement Requirements
MTOW 212 000 kg
FIGURE-7-7-1-991-002-A01

****ON A/C A330-300**

1400 x 530R23 TIRES
TIRE PRESSURE CONSTANT = 13.3 BAR (194 PSI)

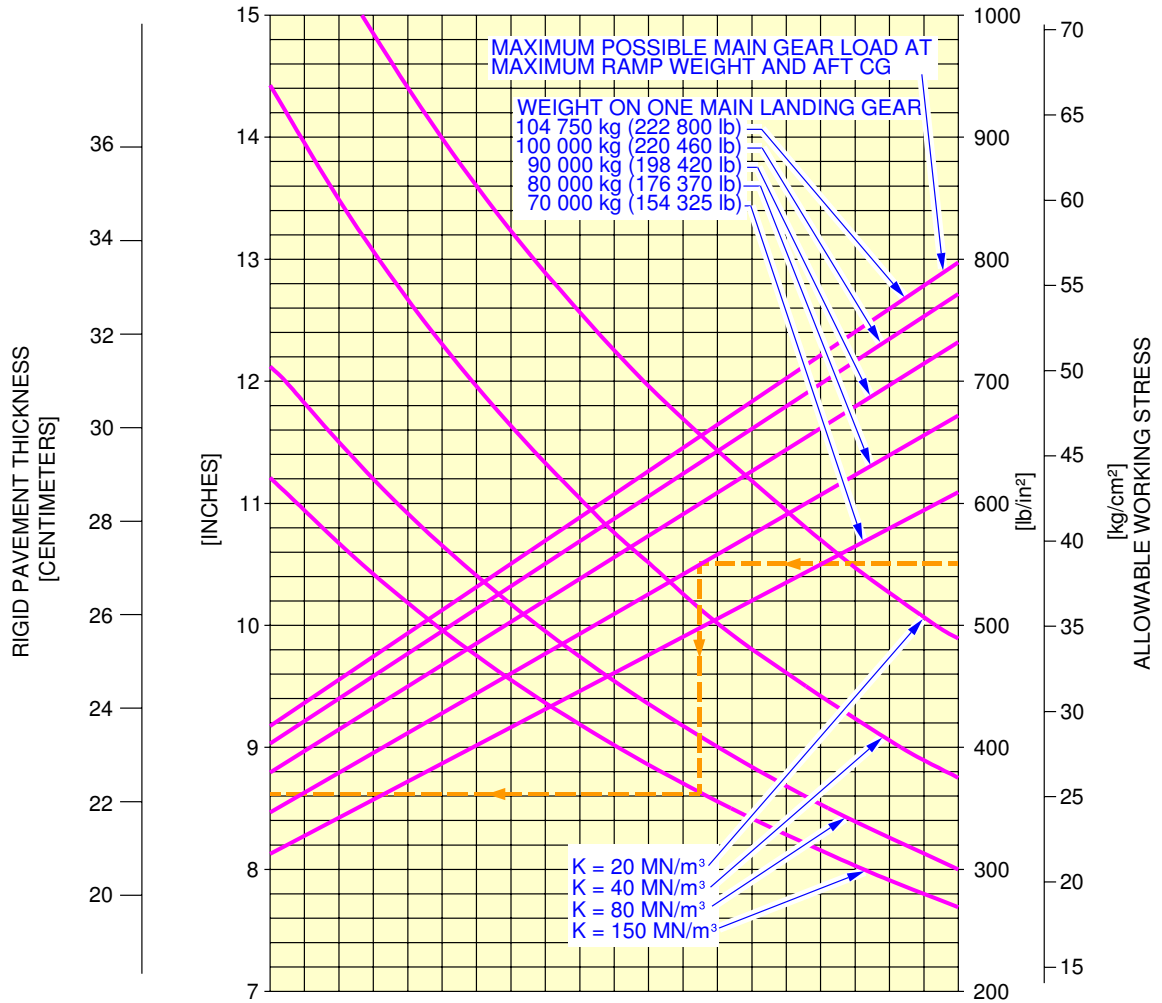


NOTES:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT.
FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=80 MN/m³ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN – PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

F_AC_070701_1_0030101_01_00

Rigid Pavement Requirements
MTOW 218 000 kg
FIGURE-7-7-1-991-003-A01

****ON A/C A330-300**

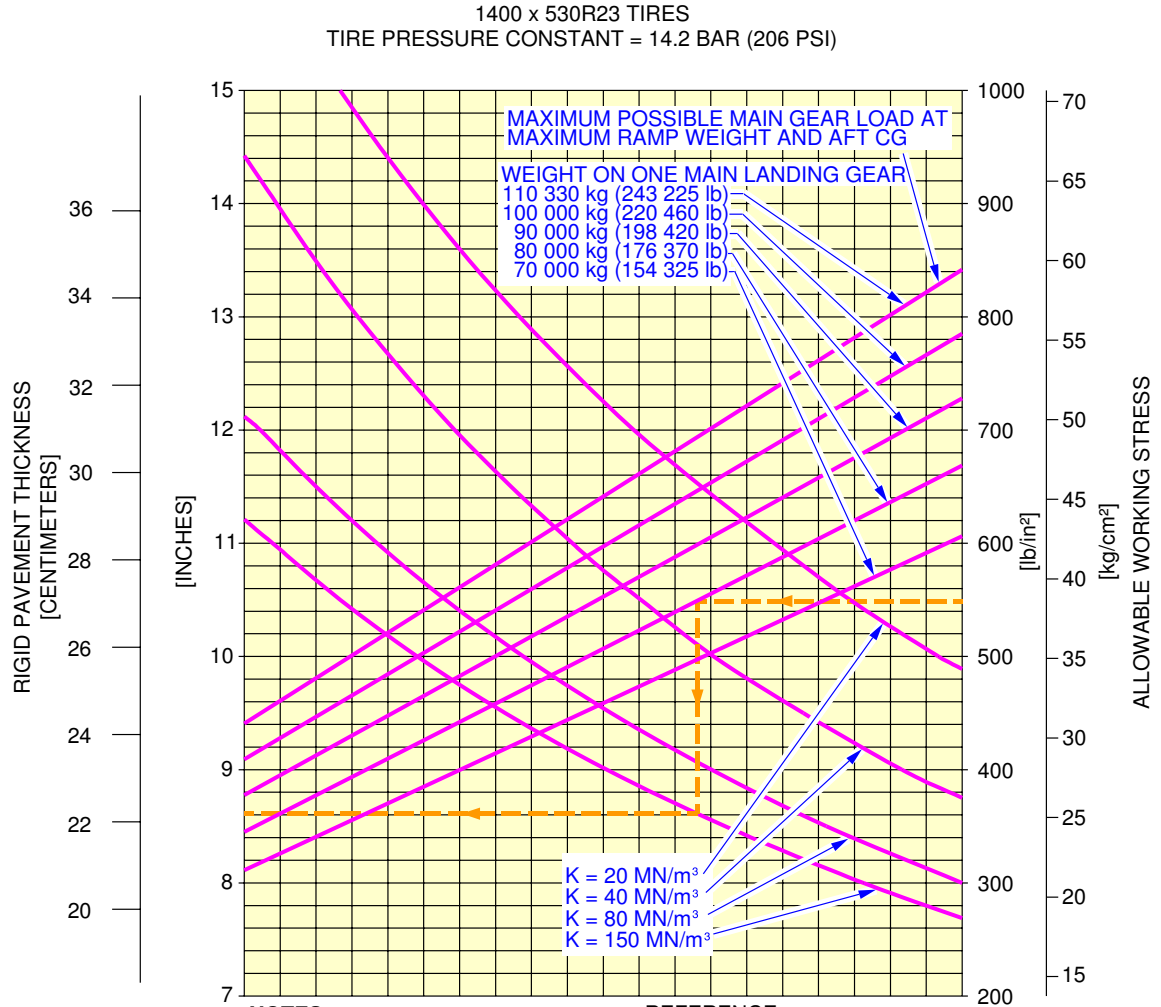


NOTES:
 THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT.
 FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=80 MN/m³ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
 "DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN - PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

F_AC_070701_1_0040101_01_00

Rigid Pavement Requirements
 MTOW 230 000 kg
 FIGURE-7-7-1-991-004-A01

****ON A/C A330-300**

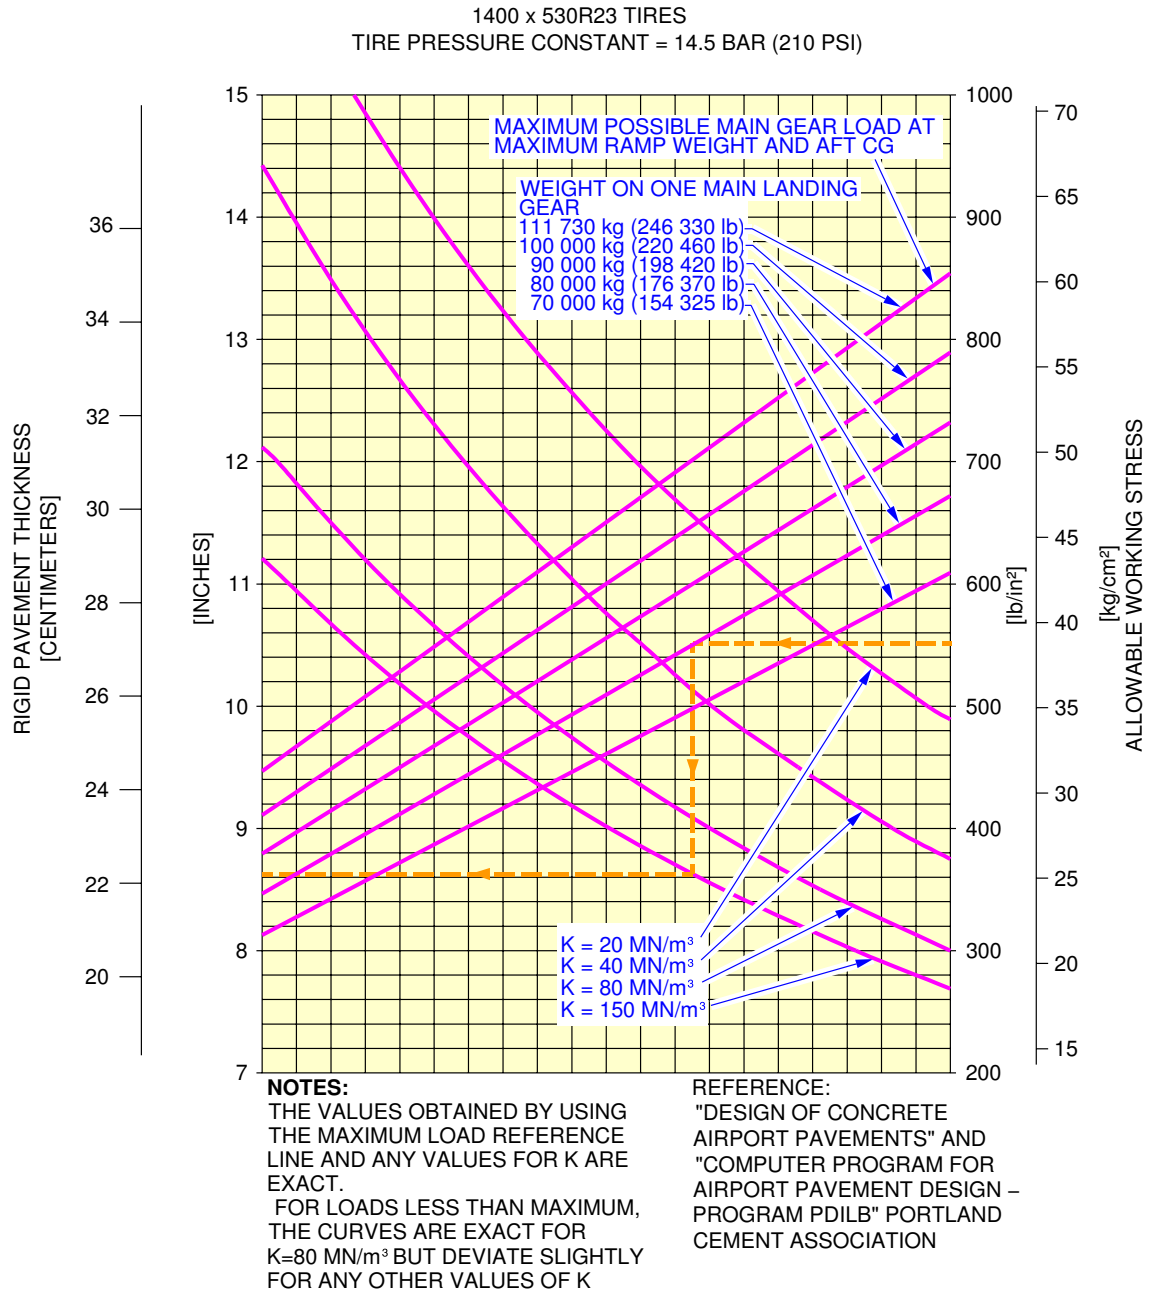

F_AC_070701_1_0050101_01_00

Rigid Pavement Requirements
MTOW 233 000 kg
FIGURE-7-7-1-991-005-A01

7-8-0 Rigid Pavement Requirements - LCN Conversion

****ON A/C A330-200 A330-200F A330-300**

Rigid Pavement Requirements - LCN Conversion

****ON A/C A330-200**

1. General

To determine the airplane weight that a Rigid Pavement can support, the LCN of the pavement and the Radius of Relative Stiffness (L) must be known.

In the example shown in Section 7-8-2, Figure: Rigid Pavement Requirements LCN - MTOW 233 000 kg - A330-200

The Radius of Relative Stiffness is shown at 1016 mm (40 in.) with an LCN of 96

For these conditions the weight on one Main Landing Gear is 100 000 kg (220 462 lb)

****ON A/C A330-200F**

2. General

To determine the airplane weight that a Rigid Pavement can support, the LCN of the pavement and the Radius of Relative Stiffness (L) must be known.

In the example shown in Section 7-8-2, Figure: Rigid Pavement Requirements LCN - MTOW 233 000 kg - A330-200F

The Radius of Relative Stiffness is shown at 1016 mm (40 in.) with an LCN of 96

For these conditions the weight on one Main Landing Gear is 100 000 kg (220 462 lb)

****ON A/C A330-300**

3. General

To determine the airplane weight that a Rigid Pavement can support, the LCN of the pavement and the Radius of Relative Stiffness (L) must be known.

In the example shown in Section 7-8-2, Figure: Rigid Pavement Requirements LCN - MTOW 212 000 kg - A330-300



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

The Radius of Relative Stiffness is shown at 1016 mm (40 in.) with an LCN of 83

For these conditions the weight on one Main Landing Gear is 90 000 kg (198 420 lb).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

7-8-1 Radius of Relative Stiffness

****ON A/C A330-200 A330-200F A330-300**

Radius of Relative Stiffness

1. This section gives Radius of Relative Stiffness.

****ON A/C A330-200 A330-200F A330-300**

RADIUS OF RELATIVE STIFFNESS (L)
VALUES IN INCHES

$$L = \sqrt[4]{\frac{Ed^3}{12(1-\mu^2)k}} = 24.1652 \sqrt[4]{\frac{d^3}{k}}$$

WHERE E = Young's Modulus = 4×10^6 psi
 k = Subgrade Modulus, Lbf/in³
 d = Rigid Pavement Thickness, inches
 μ = Poisson's Ratio = 0.15

| d | K=75 | K=100 | K=150 | K=200 | K=250 | K=300 | K=350 | K=400 | K=550 |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 6.0 | 31.48 | 29.30 | 26.47 | 24.63 | 23.30 | 22.26 | 21.42 | 20.72 | 19.13 |
| 6.5 | 33.43 | 31.11 | 28.11 | 26.16 | 24.74 | 23.64 | 22.74 | 22.00 | 20.31 |
| 7.0 | 35.34 | 32.89 | 29.72 | 27.65 | 26.15 | 24.99 | 24.04 | 23.25 | 21.47 |
| 7.5 | 37.22 | 34.63 | 31.29 | 29.12 | 27.54 | 26.32 | 25.32 | 24.49 | 22.61 |
| 8.0 | 39.06 | 36.35 | 32.85 | 30.57 | 28.91 | 27.62 | 26.58 | 25.70 | 23.74 |
| 8.5 | 40.88 | 38.04 | 34.37 | 31.99 | 30.25 | 28.91 | 27.81 | 26.90 | 24.84 |
| 9.0 | 42.67 | 39.71 | 35.88 | 33.39 | 31.58 | 30.17 | 29.03 | 28.08 | 25.93 |
| 9.5 | 44.43 | 41.35 | 37.36 | 34.77 | 32.89 | 31.42 | 30.23 | 29.24 | 27.00 |
| 10.0 | 46.18 | 42.97 | 38.83 | 36.14 | 34.17 | 32.65 | 31.42 | 30.39 | 28.06 |
| 10.5 | 47.90 | 44.57 | 40.28 | 37.48 | 35.45 | 33.87 | 32.59 | 31.52 | 29.11 |
| 11.0 | 49.60 | 46.16 | 41.71 | 38.81 | 36.71 | 35.07 | 33.75 | 32.64 | 30.14 |
| 11.5 | 51.28 | 47.72 | 43.12 | 40.13 | 37.95 | 36.26 | 34.89 | 33.74 | 31.16 |
| 12.0 | 52.94 | 49.27 | 44.52 | 41.43 | 39.18 | 37.44 | 36.02 | 34.84 | 32.17 |
| 12.5 | 54.59 | 50.80 | 45.90 | 42.72 | 40.40 | 38.60 | 37.14 | 35.92 | 33.17 |
| 13.0 | 56.22 | 52.32 | 47.27 | 43.99 | 41.61 | 39.75 | 38.25 | 36.99 | 34.16 |
| 13.5 | 57.83 | 53.82 | 48.63 | 45.26 | 42.80 | 40.89 | 39.35 | 38.06 | 35.14 |
| 14.0 | 59.43 | 55.31 | 49.98 | 46.51 | 43.98 | 42.02 | 40.44 | 39.11 | 36.12 |
| 14.5 | 61.02 | 56.78 | 51.31 | 47.75 | 45.16 | 43.15 | 41.51 | 40.15 | 37.08 |
| 15.0 | 62.59 | 58.25 | 52.63 | 48.98 | 46.32 | 44.26 | 42.58 | 41.19 | 38.03 |
| 15.5 | 64.15 | 59.70 | 53.94 | 50.20 | 47.47 | 45.36 | 43.64 | 42.21 | 38.98 |
| 16.0 | 65.69 | 61.13 | 55.24 | 51.41 | 48.62 | 46.45 | 44.70 | 43.23 | 39.92 |
| 16.5 | 67.23 | 62.56 | 56.53 | 52.61 | 49.75 | 47.54 | 45.74 | 44.24 | 40.85 |
| 17.0 | 68.75 | 63.98 | 57.81 | 53.80 | 50.88 | 48.61 | 46.77 | 45.24 | 41.78 |
| 17.5 | 70.26 | 65.38 | 59.08 | 54.98 | 52.00 | 49.68 | 47.80 | 46.23 | 42.70 |
| 18.0 | 71.76 | 66.78 | 60.34 | 56.15 | 53.11 | 50.74 | 48.82 | 47.22 | 43.61 |
| 19.0 | 74.73 | 69.54 | 62.84 | 58.48 | 55.31 | 52.84 | 50.84 | 49.17 | 45.41 |
| 20.0 | 77.66 | 72.27 | 65.30 | 60.77 | 57.47 | 54.91 | 52.84 | 51.10 | 47.19 |
| 21.0 | 80.55 | 74.96 | 67.74 | 63.04 | 59.62 | 56.96 | 54.81 | 53.01 | 48.95 |
| 22.0 | 83.41 | 77.63 | 70.14 | 65.28 | 61.73 | 58.98 | 56.75 | 54.89 | 50.69 |
| 23.0 | 86.24 | 80.26 | 72.52 | 67.49 | 63.83 | 60.98 | 58.68 | 56.75 | 52.41 |
| 24.0 | 89.04 | 82.86 | 74.87 | 69.68 | 65.90 | 62.96 | 60.58 | 58.59 | 54.11 |
| 25.0 | 91.81 | 85.44 | 77.20 | 71.84 | 67.95 | 64.92 | 62.46 | 60.41 | 55.79 |

F_AC_070801_1_0010101_01_00

Radius of relative stiffness
 (Reference : Portland Cement Association)
 FIGURE-7-8-1-991-001-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


7-8-2 Rigid Pavement Requirements - LCN Conversion

****ON A/C A330-200 A330-200F A330-300**

Rigid Pavement Requirements - LCN Conversion

1. This section gives Rigid Pavement Requirements - LCN Conversion.


**ON A/C A330-200

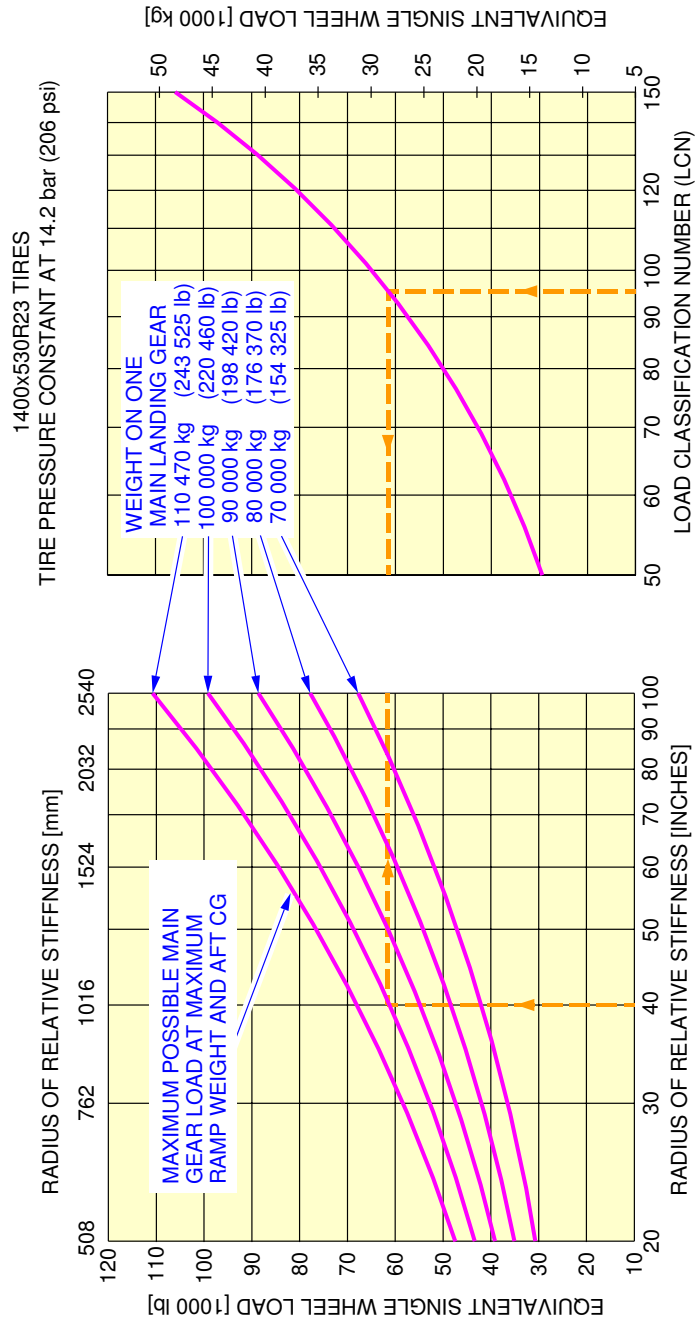

F_AC_070802_1_0010101_01_01

Rigid Pavement Requirements LCN
 MTOW 233 000 kg
 FIGURE-7-8-2-991-001-A01


**ON A/C A330-200F

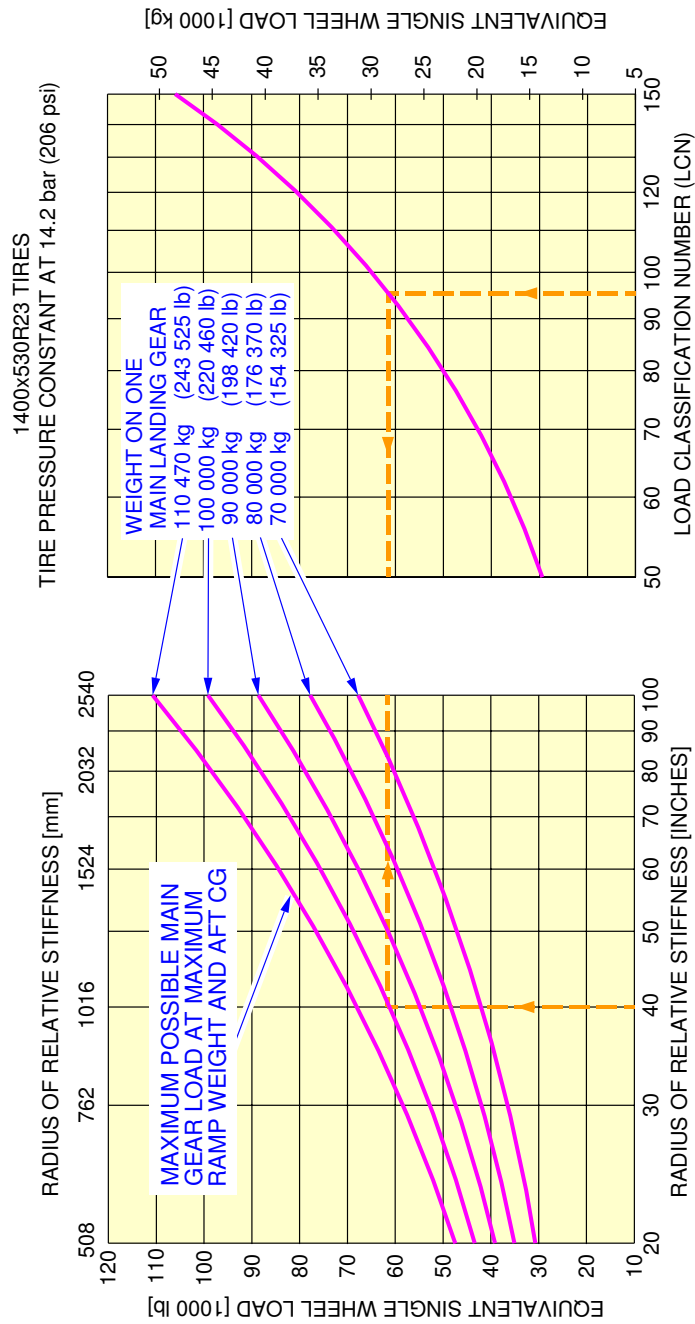

F_AC_070802_1_0060101_01_00

Rigid Pavement Requirements LCN
 MTOW 233 000 kg
 FIGURE-7-8-2-991-006-A01


****ON A/C A330-300**

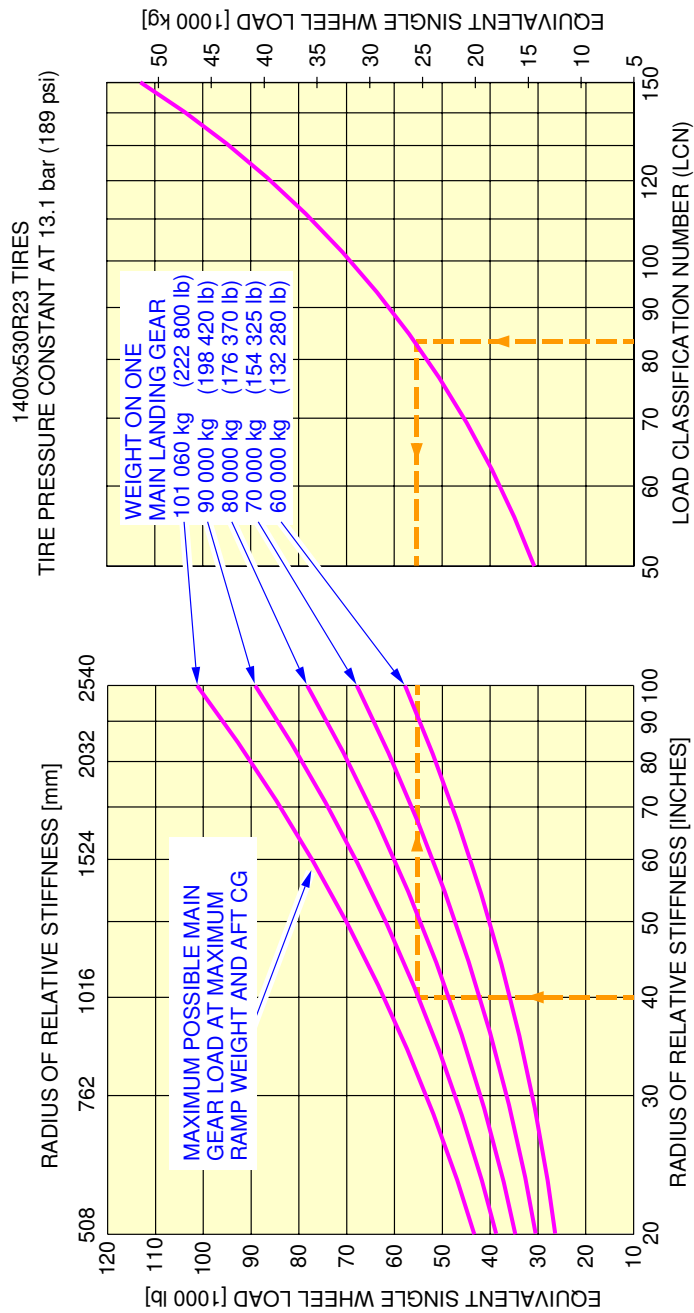

F_AC_070802_1_0020101_01_01

Rigid Pavement Requirements LCN
 MTOW 212 000 kg
 FIGURE-7-8-2-991-002-A01


**ON A/C A330-300

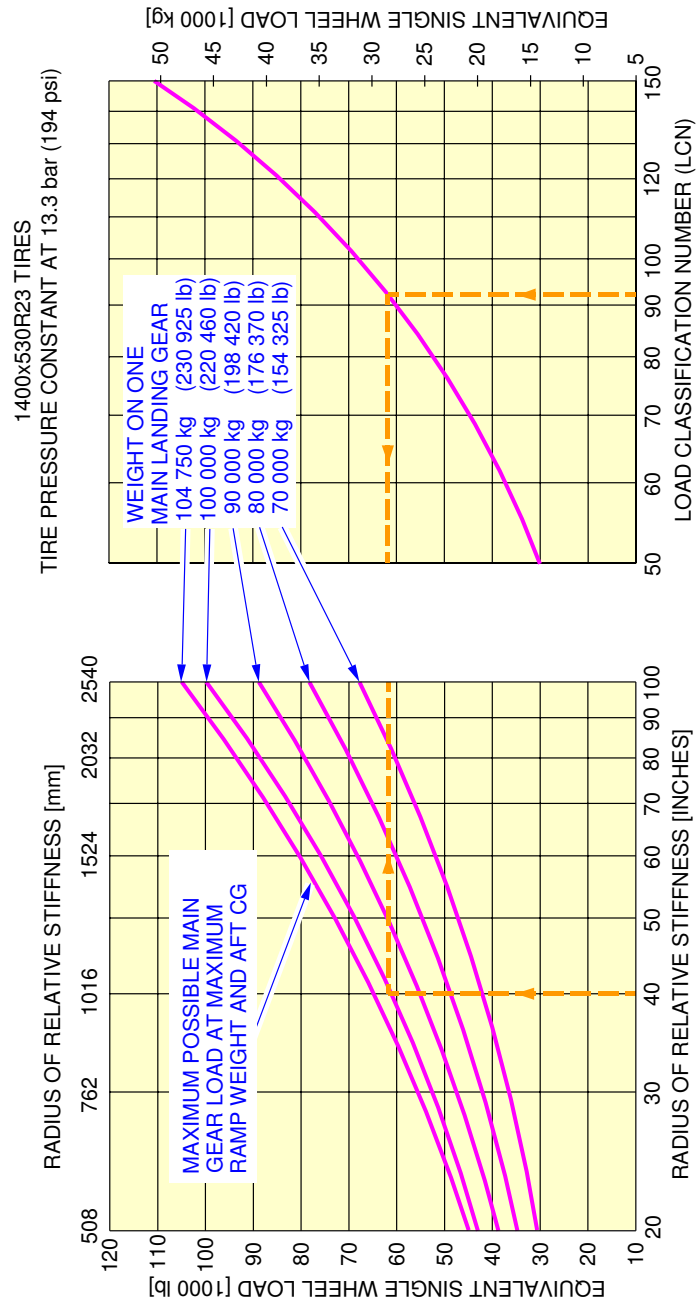

F_AC_070802_1_0030101_01_01

Rigid Pavement Requirements LCN
 MTOW 218 000 kg
 FIGURE-7-8-2-991-003-A01


**ON A/C A330-300

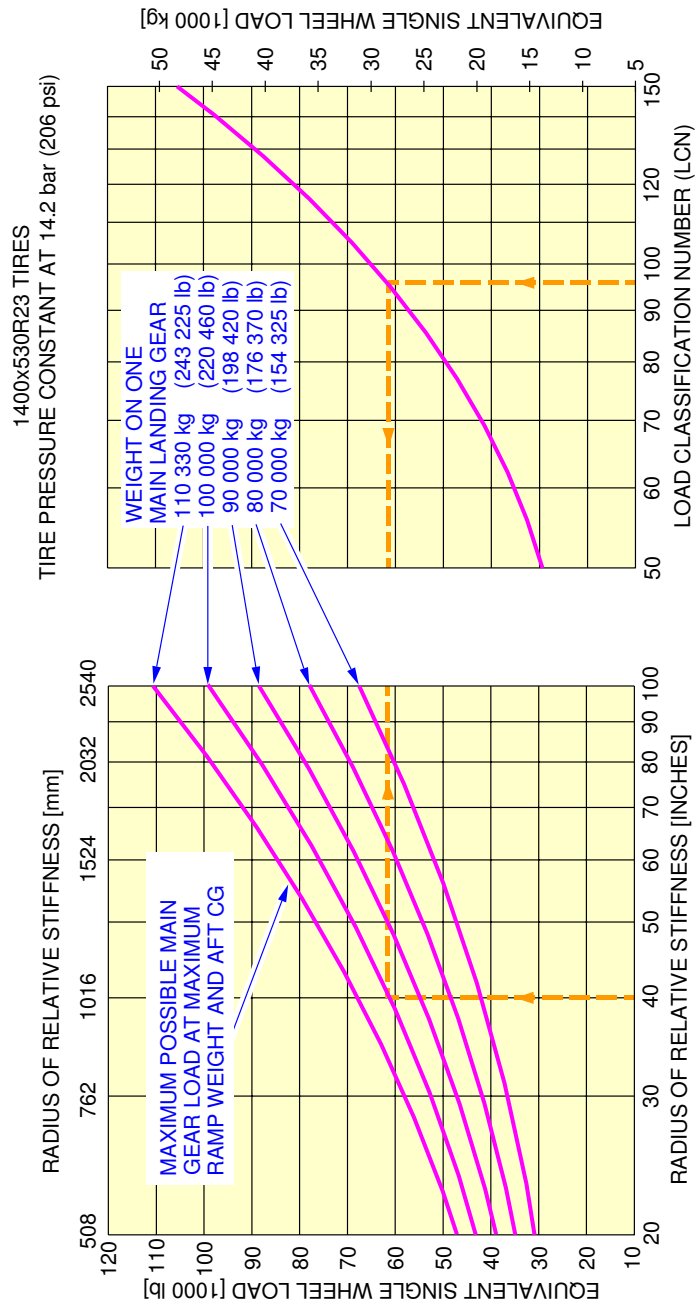

F_AC_070802_1_0040101_01_01

Rigid Pavement Requirements LCN
MTOW 230 000 kg
FIGURE-7-8-2-991-004-A01

**ON A/C A330-300

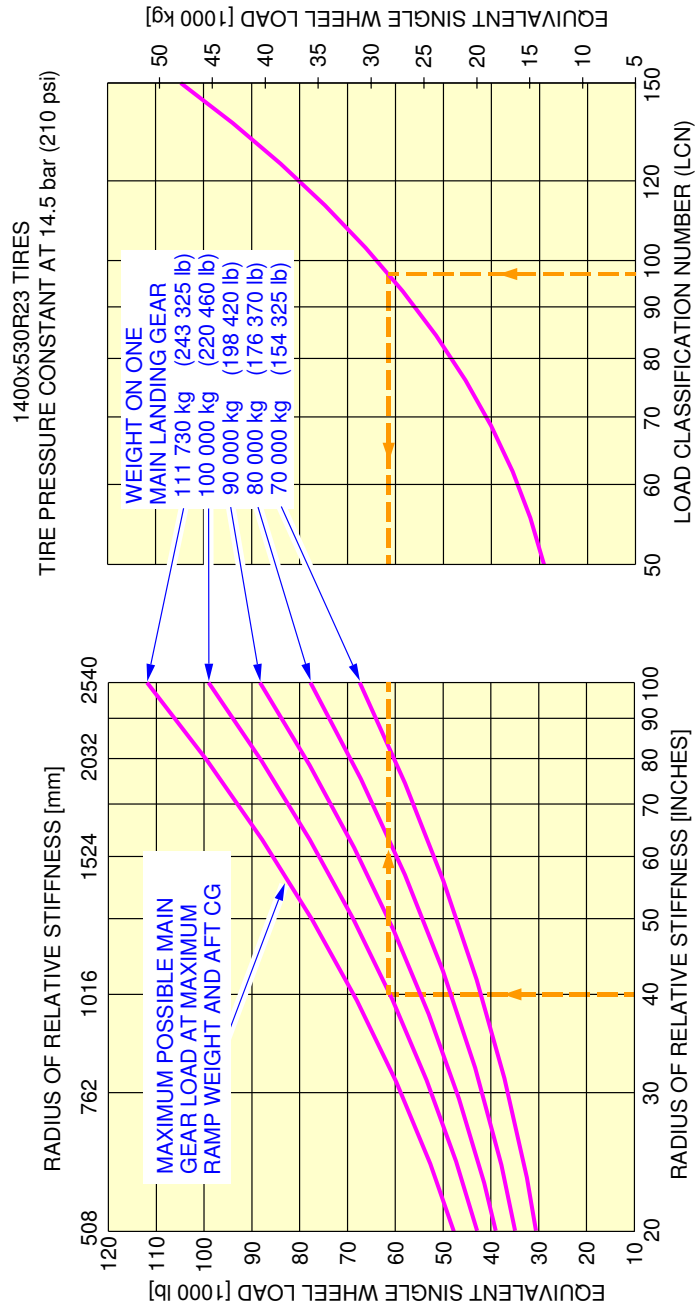

NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

F_AC_070802_1_0050101_01_01

Rigid Pavement Requirements LCN
 MTOW 233 000 kg
 FIGURE-7-8-2-991-005-A01

7-8-3 Radius of Relative Stiffness (Other values of E and L)****ON A/C A330-200 A330-200F A330-300**Radius of Relative Stiffness (Other values of "E" and " μ ")

1. General

The table of Chapter 7-8-1, Figure: Radius of Relative Stiffness, presents "L" values based on Young's Modulus (E) of 4 000 000 psi and Poisson's Ratio (μ) of 0.15.

To find "L" values based on other values of "E" and " μ ",
See Section 7-8-4, Figure: Radius of Relative Stiffness (Other values of "E" and " μ ")

For example, to find an "L" value based on an "E" of 3 000 000 psi, the "E" factor of 0.931 is multiplied by the "L" value found in table of Section 7-8-1, Figure: Radius of Relative Stiffness.

The effect of variations of " μ " on the "L" value is treated in a similar manner.



7-8-4 Radius of Relative Stiffness

****ON A/C A330-200 A330-200F A330-300**

Radius of Relative Stiffness

1. This section gives Radius of Relative Stiffness.

**ON A/C A330-200 A330-200F A330-300

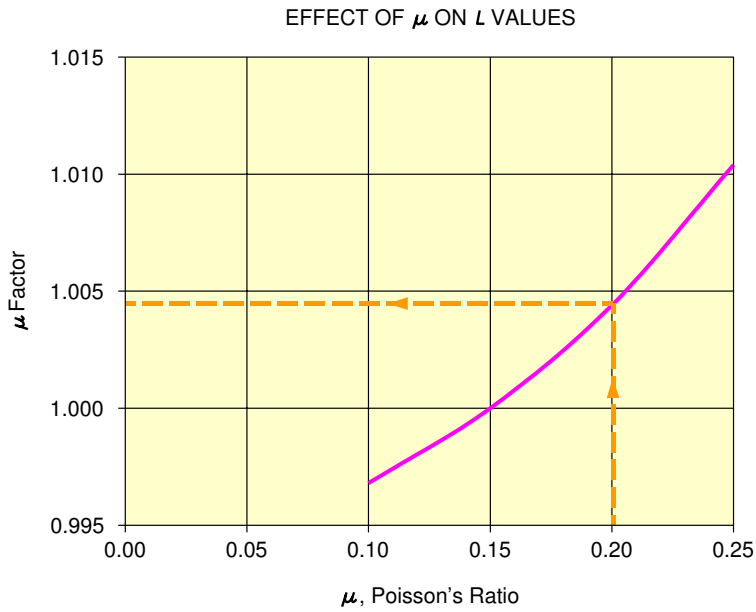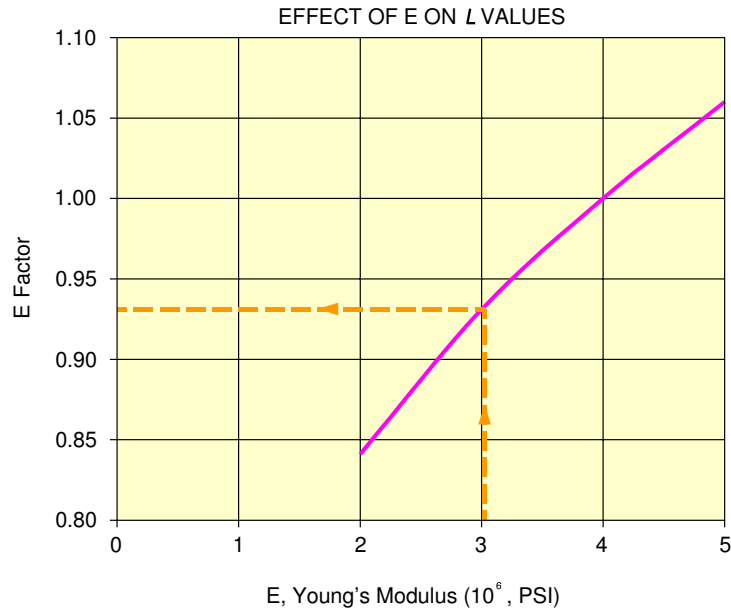

NOTE: BOTH CURVES ON THIS PAGE ARE USED TO ADJUST THE " L " VALUES OF TABLE 7-8-1

F_AC_070804_1_0010101_01_00

Radius of Relative Stiffness
 (Effect E and μ ON "L" values)
 FIGURE-7-8-4-991-001-A01

7-9-0 ACN/PCN Reporting System - Flexible and Rigid Pavements

****ON A/C A330-200 A330-200F A330-300**

ACN/PCN Reporting System - Flexible and Rigid Pavements

****ON A/C A330-200**

1. General

To find the ACN of an aircraft on flexible or rigid pavement, the aircraft gross weight and the subgrade strength must be known.

In the example shown in Section 7-9-1, Figure: Aircraft Classification Number - Flexible Pavement - MTOW 192 000 kg - A330-200

- For an Aircraft Gross Weight of 180 000 kg (396 830 lb) and low subgrade strength (code C), the ACN for the flexible pavement is 51.

In the example shown in Section 7-9-2, Figure: Aircraft Classification Number - Rigid Pavement - MTOW 192 000 kg - A330-200

- For an Aircraft Gross Weight of 180 000 kg (396 830 lb) and low subgrade strength (code C), the ACN for the rigid pavement is 52.

NOTE : An aircraft with an ACN equal to or less than the reported PCN can operate on that pavement, subject to any limitation on the tire pressure.
(Ref : ICAO Aerodrome Design Manual Part 3 Chapter 1 Second Edition 1983).

****ON A/C A330-200F**

2. General

To find the ACN of an aircraft on flexible or rigid pavement, the aircraft gross weight and the subgrade strength must be known.

In the example shown in Section 7-9-1, Figure: Aircraft Classification Number - Flexible Pavement - MTOW 227 000 kg - A330-200F

- For an Aircraft Gross Weight of 200 000 kg (440 924 lb) and low subgrade strength (code C), the ACN for the flexible pavement is 58.

In the example shown in Section 7-9-2, Figure: Aircraft Classification Number - Rigid Pavement - MTOW 227 000 kg - A330-200F

- For an Aircraft Gross Weight of 200 000 kg (440 924 lb) and low subgrade strength (code C), the ACN for the rigid pavement is 59.

NOTE : An aircraft with an ACN equal to or less than the reported PCN can operate on that pavement, subject to any limitation on the tire pressure.
(Ref : ICAO Aerodrome Design Manual Part 3 Chapter 1 Second Edition 1983).

****ON A/C A330-300**

3. General

To find the ACN of an aircraft on flexible or rigid pavement, the aircraft gross weight and the subgrade strength must be known.

In the example shown in Section 7-9-1, Figure: Aircraft Classification Number - Flexible Pavement - MTOW 184 000 kg - A330-300

- For an Aircraft Gross Weight of 170 000 kg (374 786 lb) and low subgrade strength (code C), the ACN for the flexible pavement is 47.

In the example shown in Section 7-9-2, Figure: Aircraft Classification Number - Rigid Pavement - MTOW 184 000 kg - A330-300

- For an Aircraft Gross Weight of 170 000 kg (374 786 lb) and low subgrade strength (code C), the ACN for the rigid pavement is 47.5.

NOTE : An aircraft with an ACN equal to or less than the reported PCN can operate on that pavement, subject to any limitation on the tire pressure.
(Ref : ICAO Aerodrome Design Manual Part 3 Chapter 1 Second Edition 1983).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

7-9-1 Aircraft Classification Number - Flexible Pavement


****ON A/C A330-200 A330-200F A330-300**

Aircraft Classification Number - Flexible Pavement

1. This section gives the Aircraft Classification Number - Flexible Pavement.

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.8 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 192 000 kg - A330-200

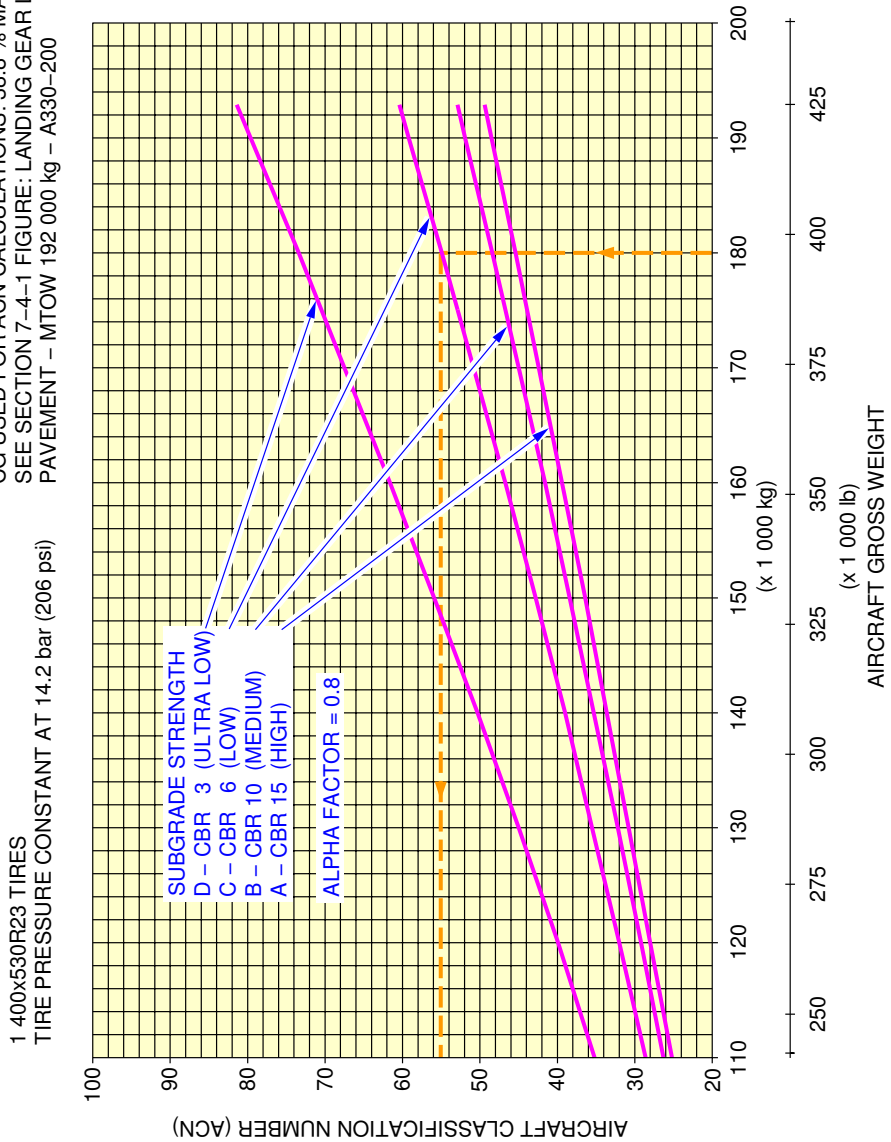


F_AC_070901_1_0010101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 192 000 kg
 FIGURE-7-9-1-991-001-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN ICAO AERODROME DESIGN MANUAL PART 3 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.4 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON PAVEMENT – MTOW 233 000 kg – A330-200

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

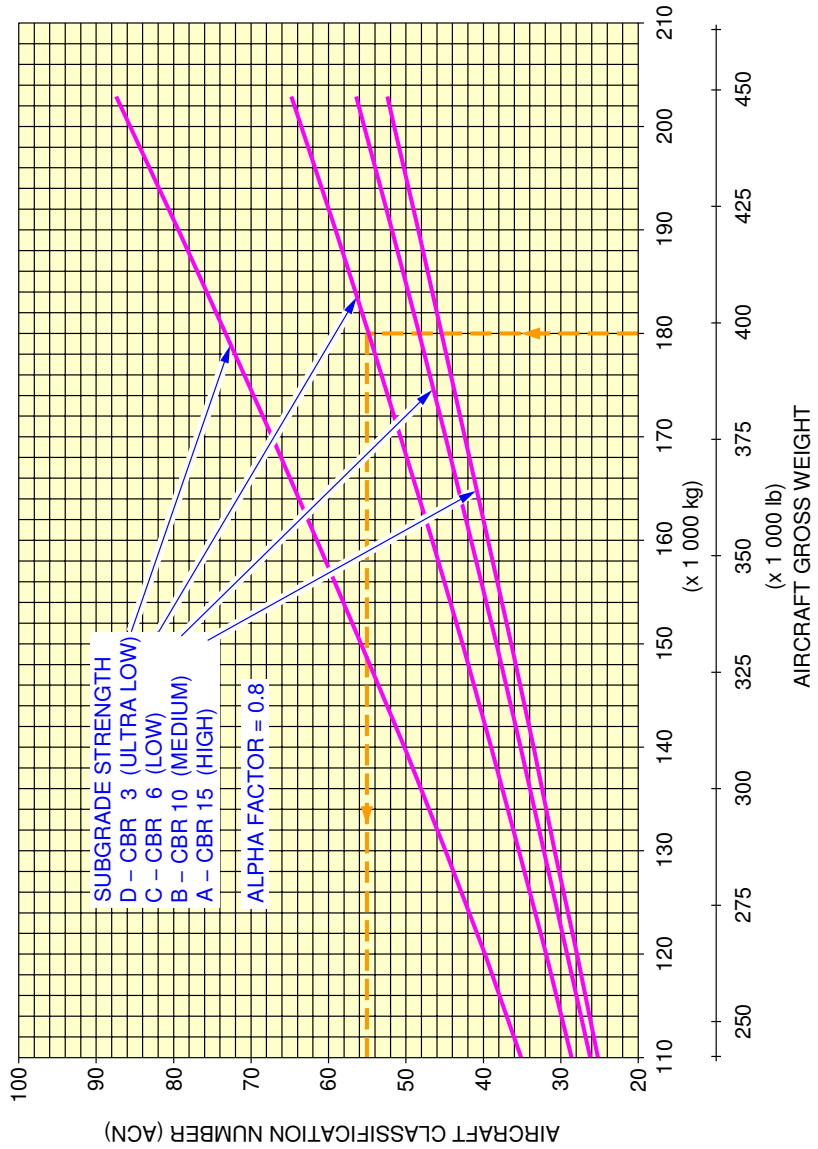


F_AC_070901_1_0020101_01_03

Aircraft Classification Number – Flexible Pavement
 MTOW 202 000 kg
 FIGURE-7-9-1-991-002-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN ICAO AERODROME DESIGN MANUAL PART 3 CHAPTER 1, SECOND EDITION 1983. CG USED FOR ACN CALCULATIONS: 38.1 % MAC. SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON PAVEMENT - MTOW 210 000 kg - A330-200

1 400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

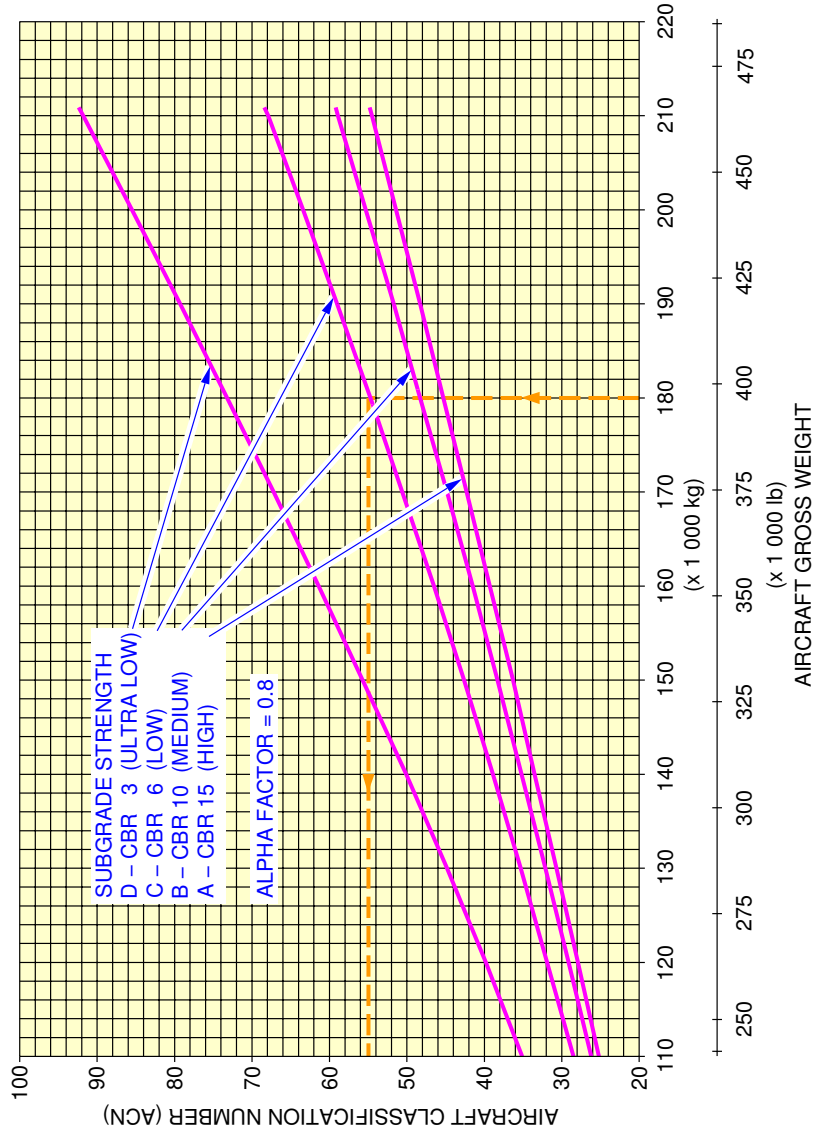


F_AC_070901_1_0030101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 210 000 kg
 FIGURE-7-9-1-991-003-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.79 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDIG GEAR LOADING ON
 PAVEMENT - MTOW 233 000 kg - A330-200

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

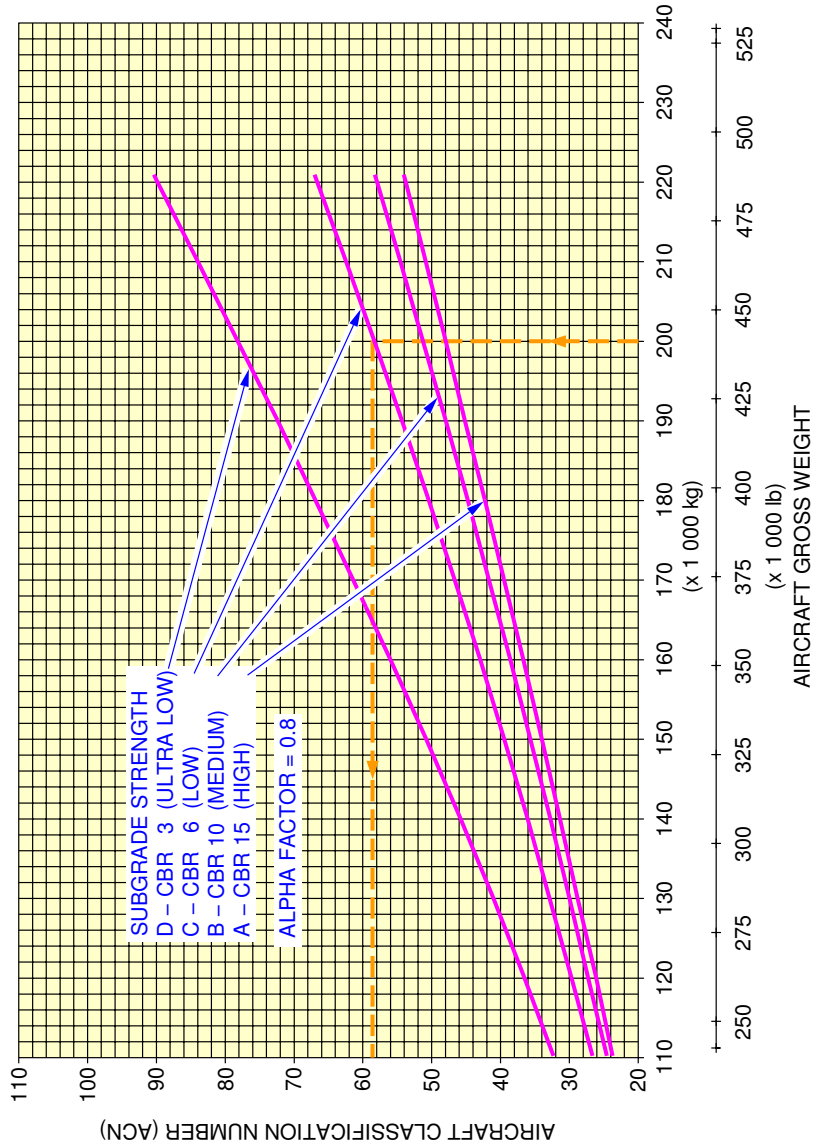


F_AC_070901_1_0040101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 220 000 kg
 FIGURE-7-9-1-991-004-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.5 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDIG GEAR LOADING ON
 PAVEMENT - MTOW 233 000 kg - A330-200

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

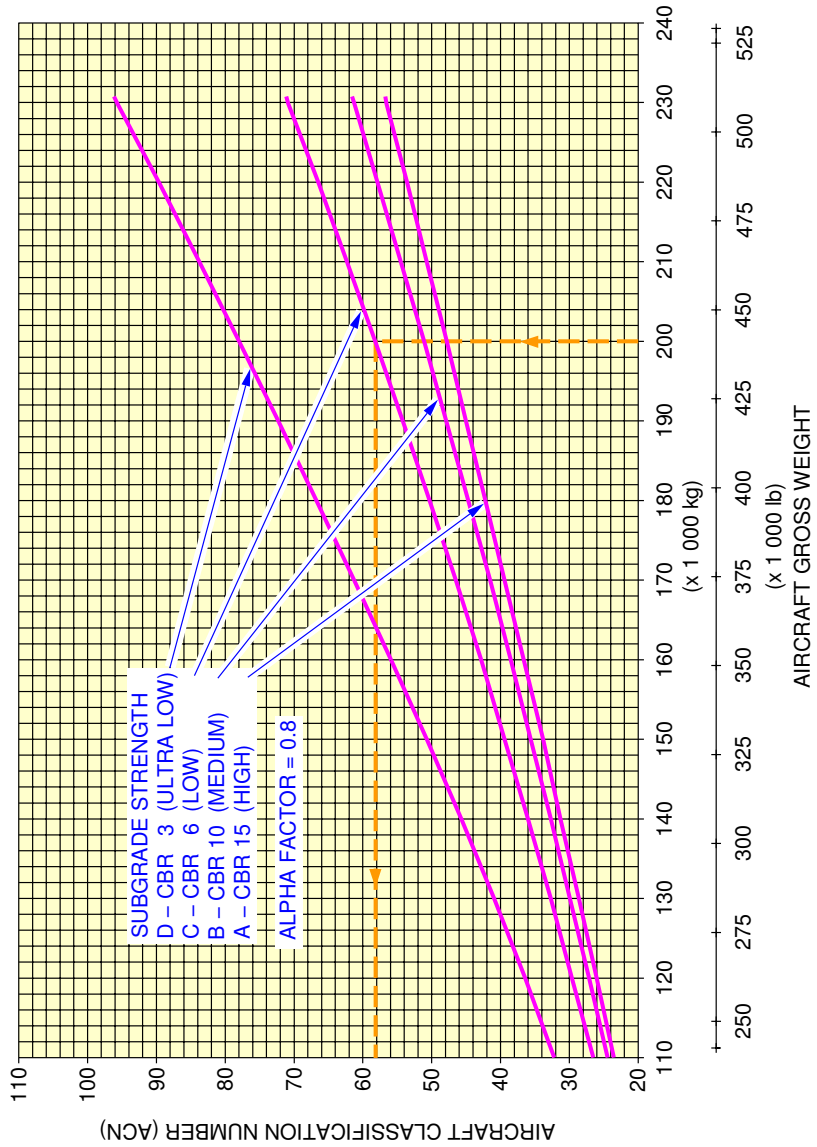


F_AC_070901_1_0050101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 230 000 kg
 FIGURE-7-9-1-991-005-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.4 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT – MTOW 233 000 kg – A330-200

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

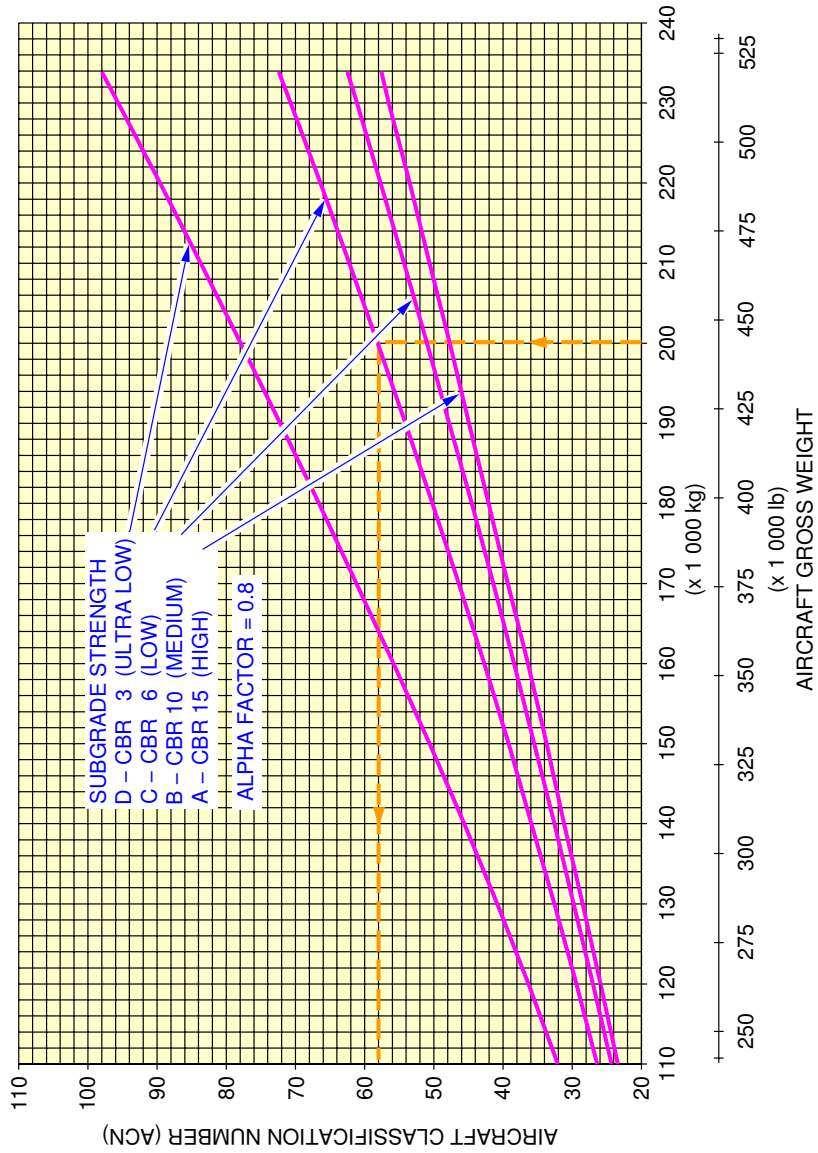


F_AC_070901_1_0060101_01_03

Aircraft Classification Number – Flexible Pavement
 MTOW 233 000 kg
 FIGURE-7-9-1-991-006-A01

****ON A/C A330-200F**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.57 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 227 000 kg - A330-200F

1 400x530F23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

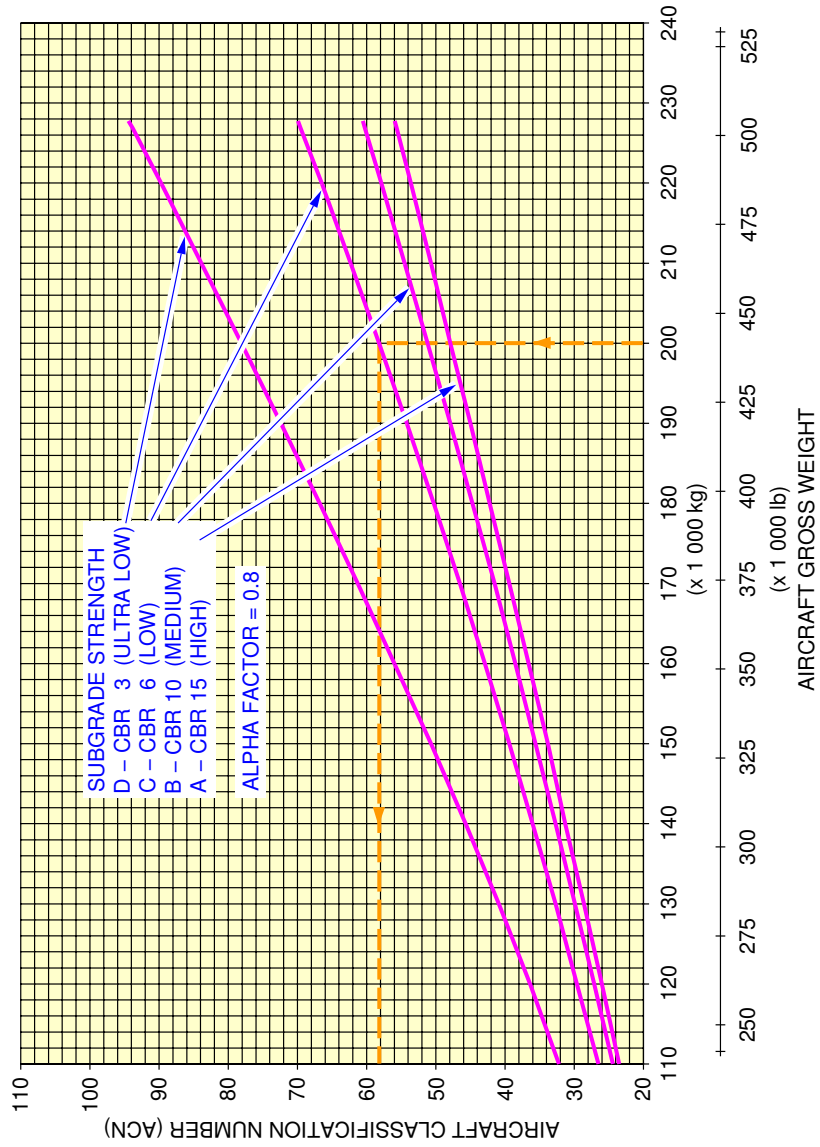


F_AC_070901_1_0150101_01_02

Aircraft Classification Number - Flexible Pavement
 MTOW 227 000 kg
 FIGURE-7-9-1-991-015-A01

****ON A/C A330-200F**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.4 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 233 000 kg - A330-200F

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

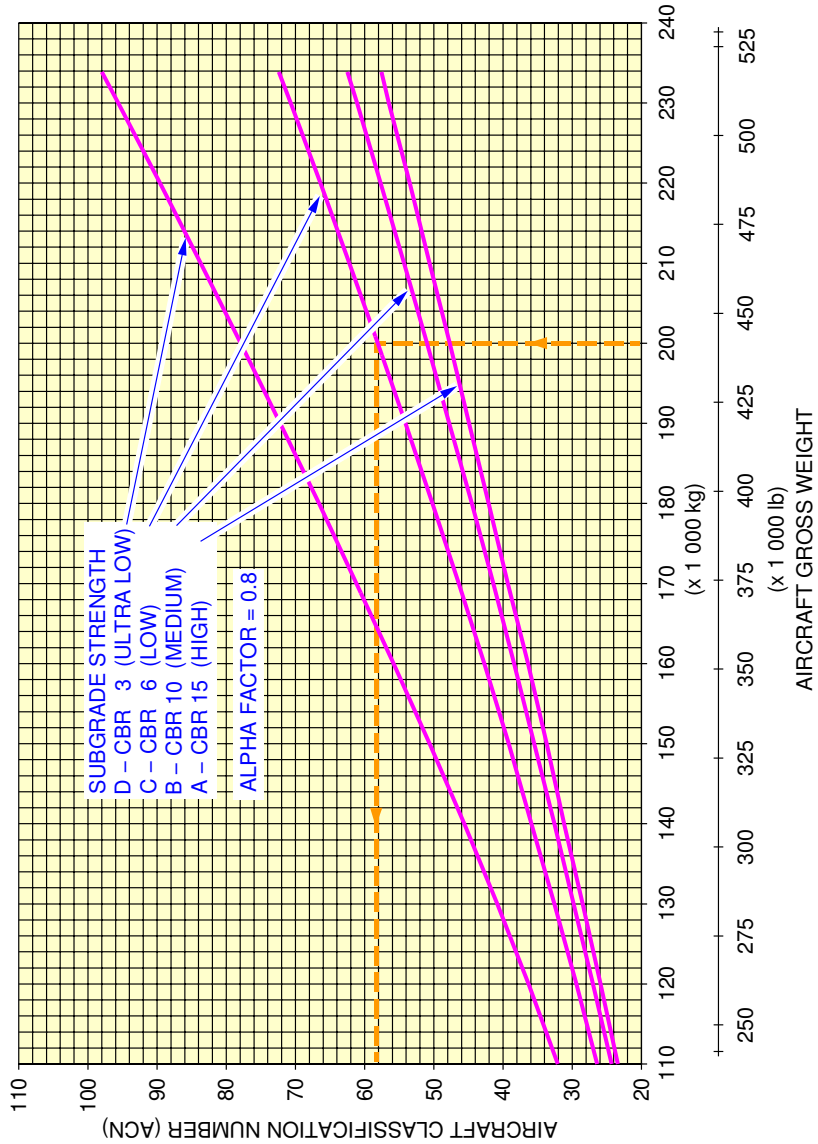


F_AC_070901_1_0160101_01_02

Aircraft Classification Number – Flexible Pavement
 MTOW 233 000 kg
 FIGURE-7-9-1-991-016-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 40.1 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 184 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 13.1 bar (189 psi)

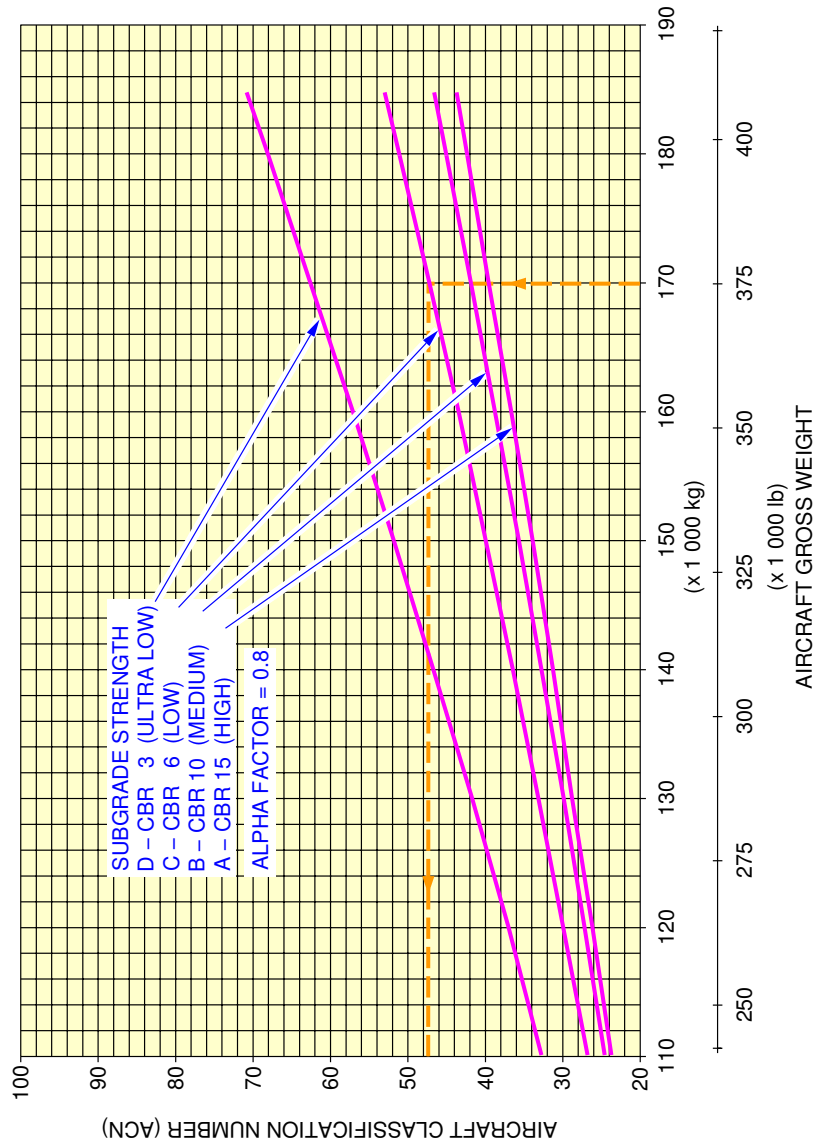


F_AC_070901_1_0070101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 184 000 kg
 FIGURE-7-9-1-991-007-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN ICAO AERODROME DESIGN MANUAL PART 3 CHAPTER 1, SECOND EDITION 1983. CG USED FOR ACN CALCULATIONS: 39.6 % MAC. SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON PAVEMENT - MTOW 230 000 kg - A330-300

1 400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 14.5 bar (210 psi)

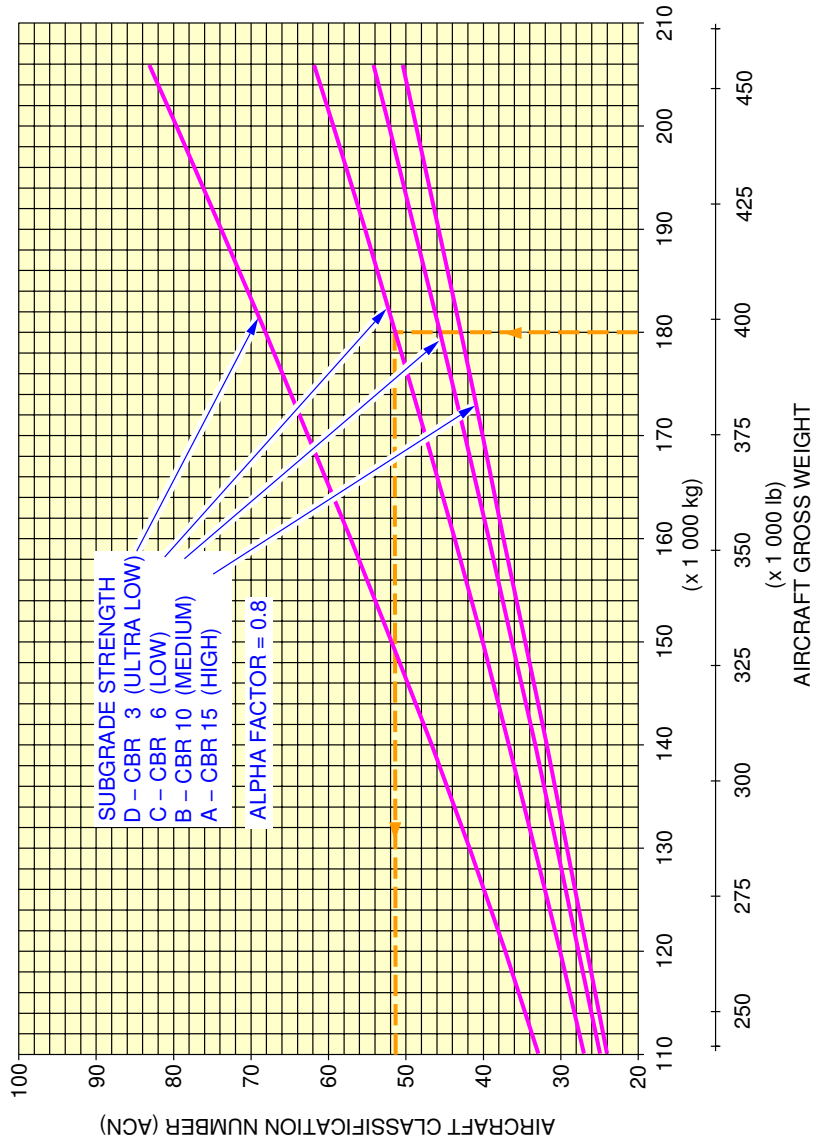


F_AC_070901_1_0080101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 205 000 kg
 FIGURE-7-9-1-991-008-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1. SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 36.5 % MAC.
SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
PAVEMENT – MTOW 212 000 kg – A330-300

1 400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 13.1 bar (189 psi)

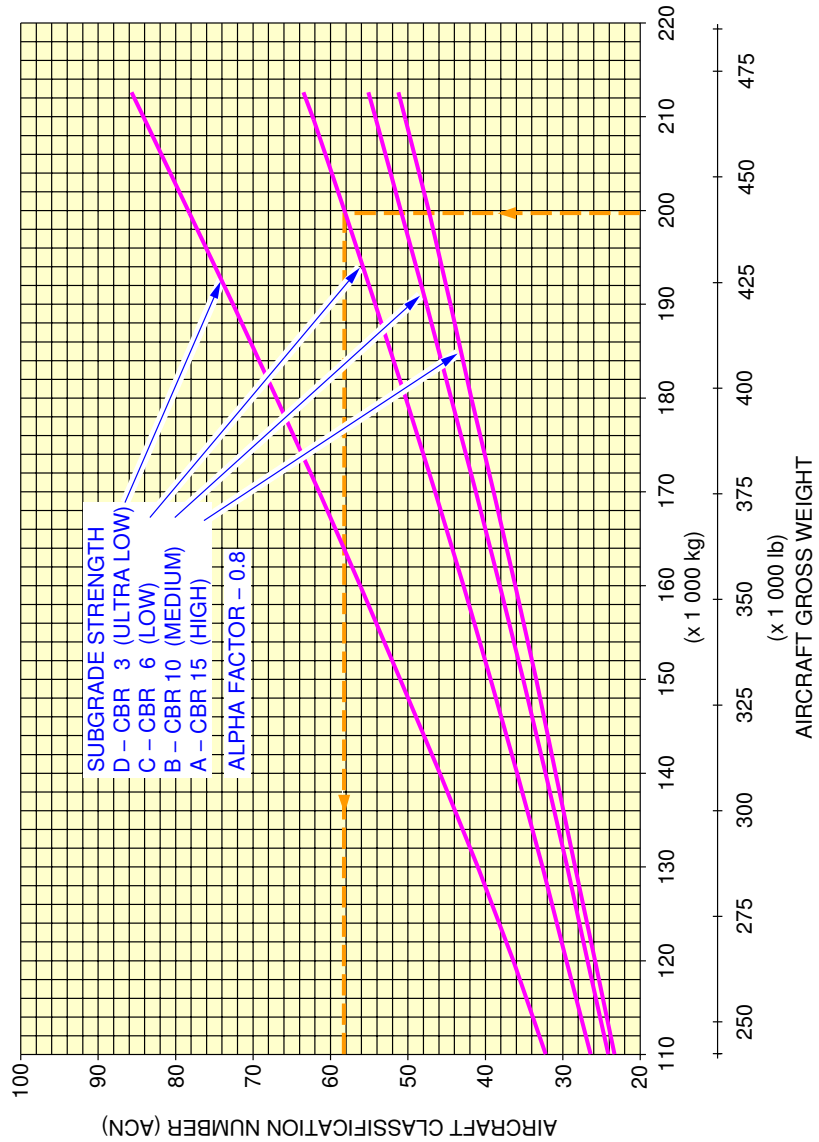


F_AC_070901_1_0090101_01_03

Aircraft Classification Number – Flexible Pavement
MTOW 212 000 kg
FIGURE-7-9-1-991-009-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 39.2 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 215 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 13.3 bar (194 psi)

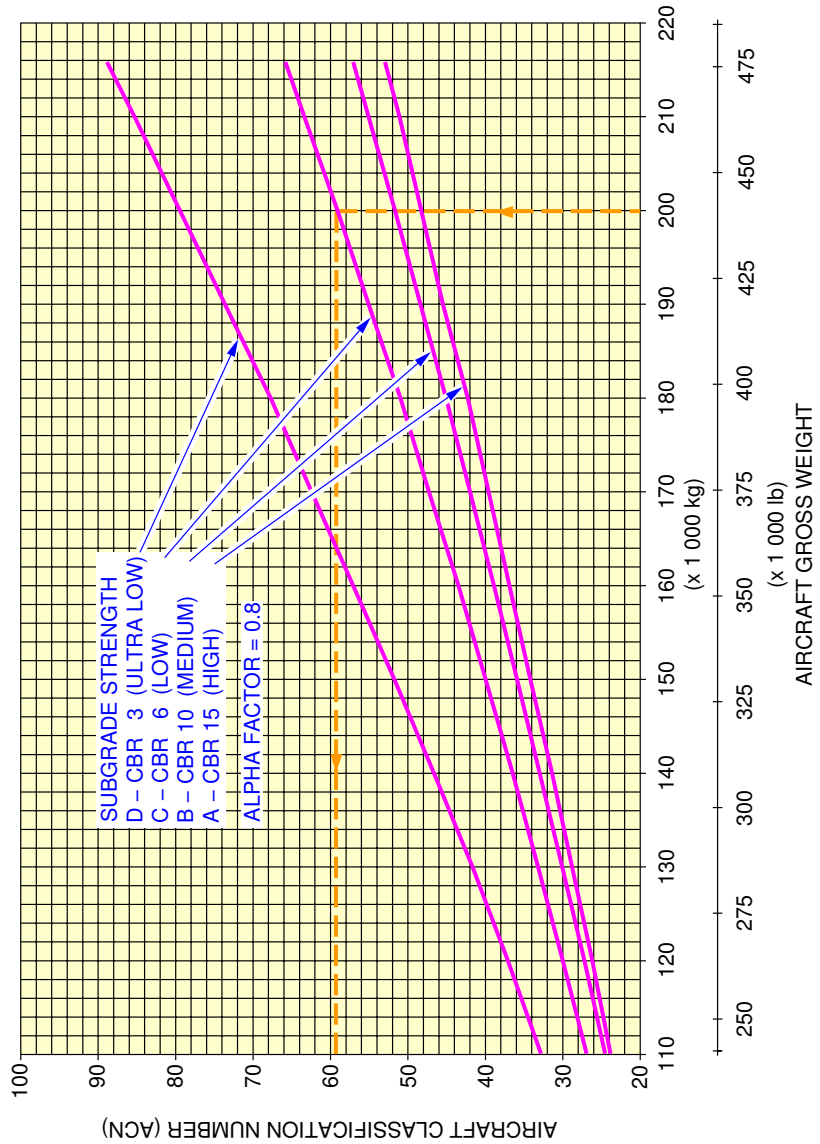


F_AC_070901_1_0100101_01_03

Aircraft Classification Number – Flexible Pavement
 MTOW 215 000 kg
 FIGURE-7-9-1-991-010-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 39.12 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 217 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

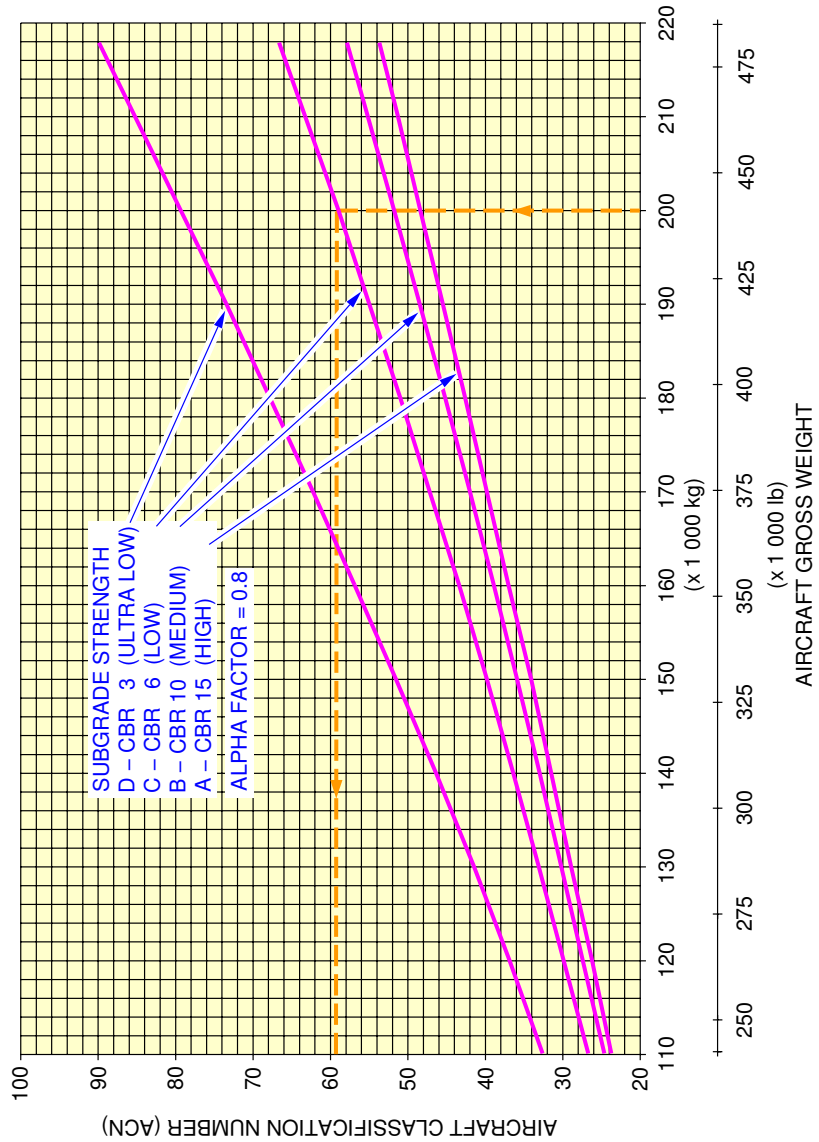


F_AC_070901_1_0110101_01_03

Aircraft Classification Number - Flexible Pavement
 MTOW 217 000 kg
 FIGURE-7-9-1-991-011-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 39.1 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 218 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 13.3 bar (194 psi)

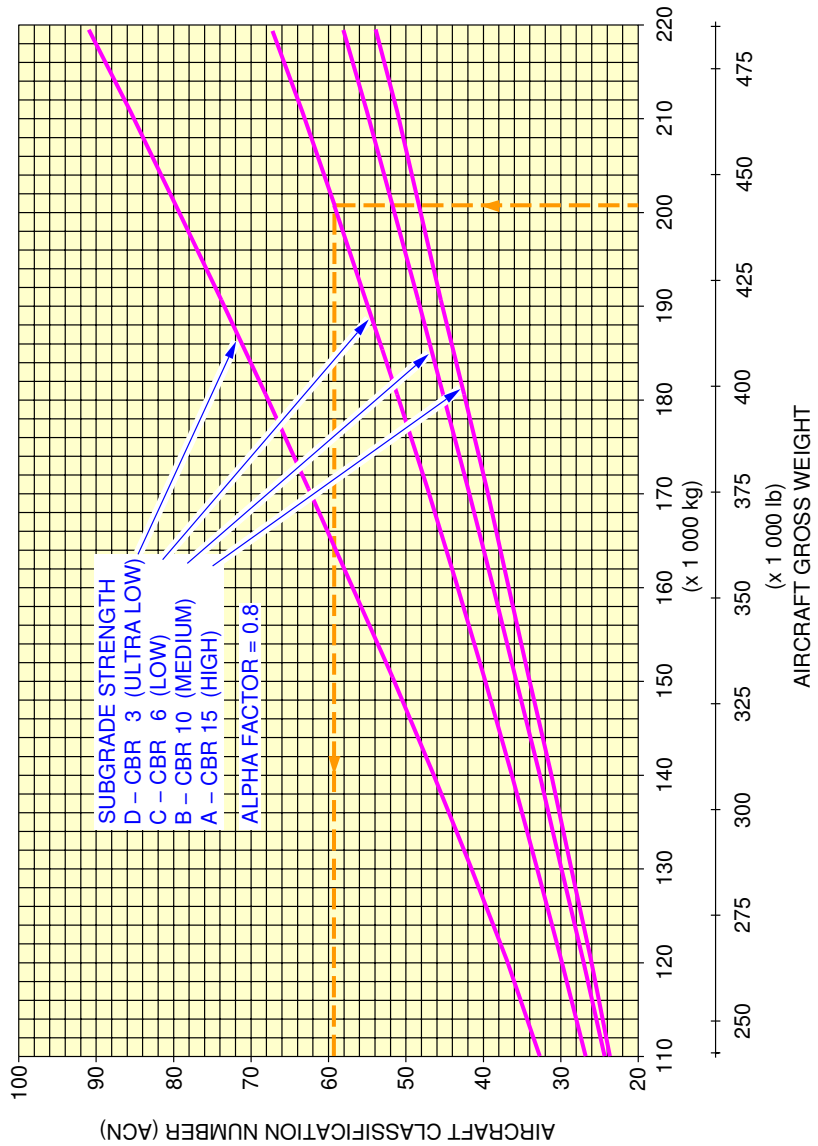


F_AC_070901_1_0120101_01_03

Aircraft Classification Number – Flexible Pavement
 MTOW 218 000 kg
 FIGURE-7-9-1-991-012-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN ICAO AERODROME DESIGN MANUAL PART 3 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.7 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON PAVEMENT - MTOW 230 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

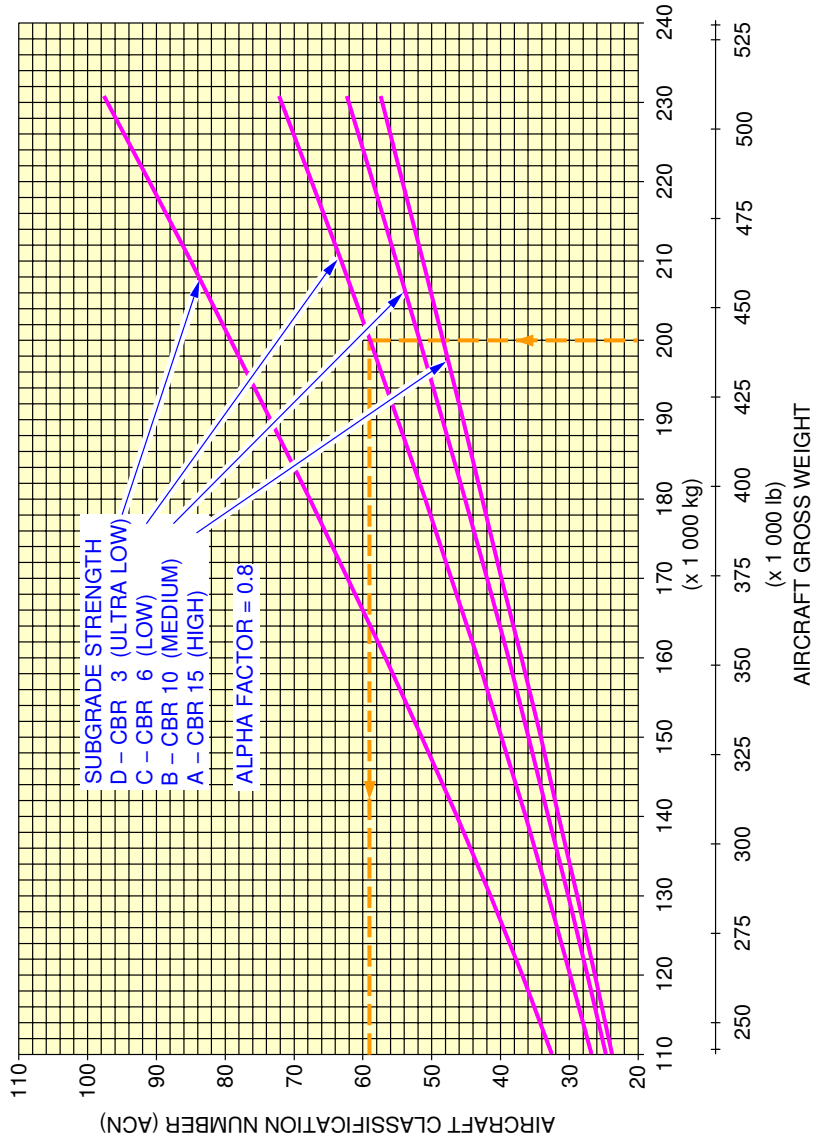


F_AC_070901_1_0130101_01_03

Aircraft Classification Number – Flexible Pavement
 MTOW 230 000 kg
 FIGURE-7-9-1-991-013-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.6 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 233 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.5 bar (210 psi)

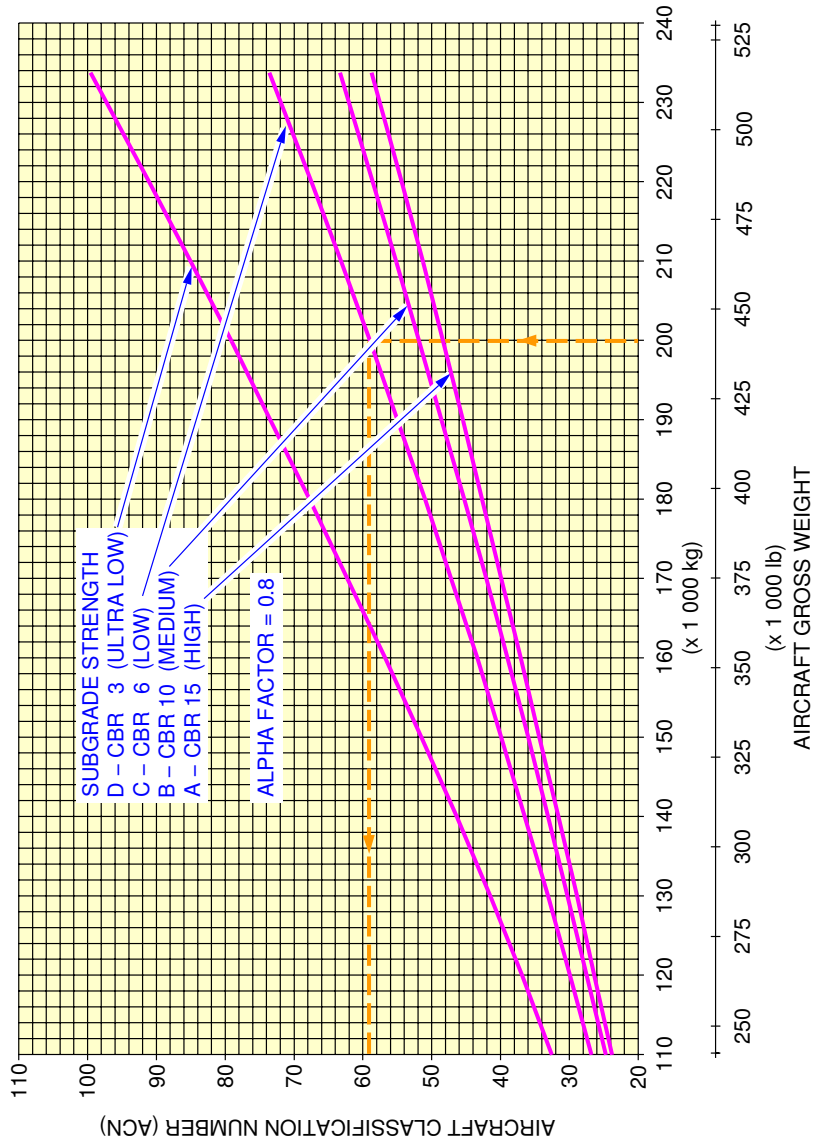

F_AC_070901_1_0140101_01_03

Aircraft Classification Number – Flexible Pavement
 MTOW 233 000 kg
 FIGURE-7-9-1-991-014-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

7-9-2 Aircraft Classification Number - Rigid Pavement

****ON A/C A330-200 A330-200F A330-300**


Aircraft Classification Number - Rigid Pavement

1. This section gives the Aircraft Classification Number - Rigid Pavement.

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1 - SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.8 % MAC.
 ON PAVEMENT - MTOW 192 000 kg - A330-200

1 400x530R23 40PR TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

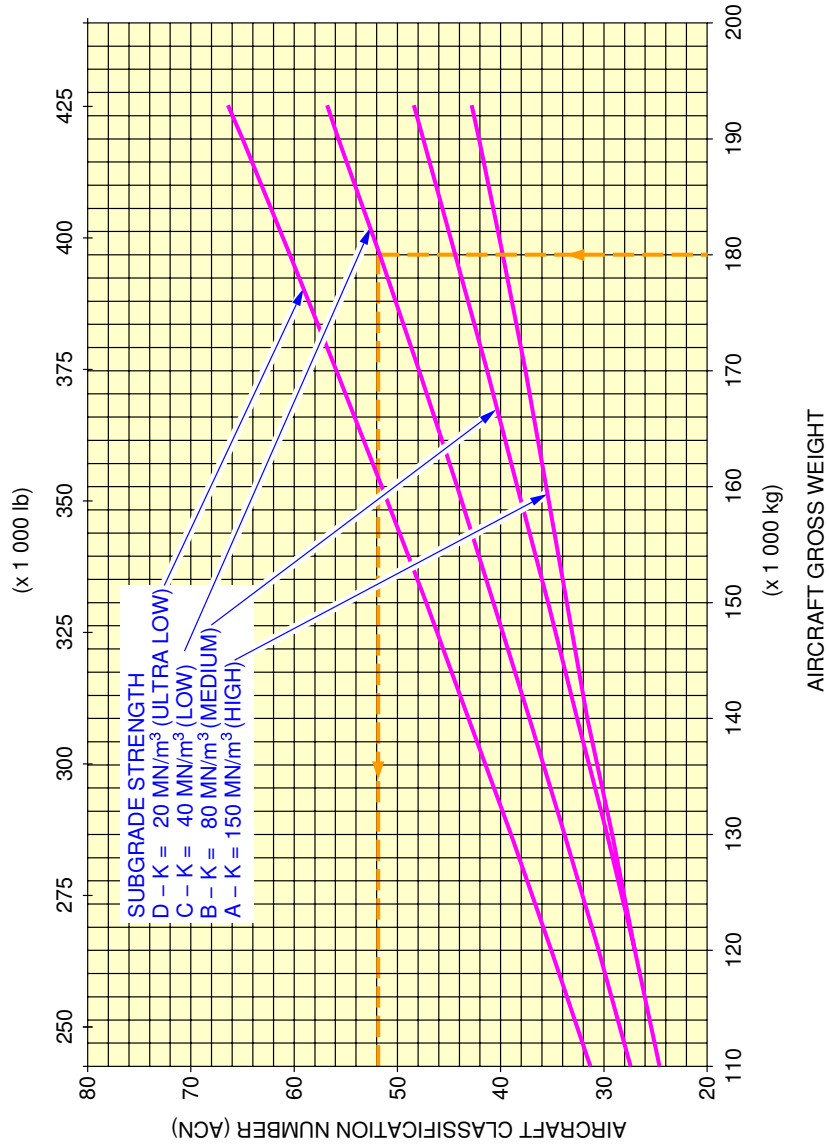


F_AC_070902_1_0010101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 192 000 kg
 FIGURE-7-9-2-991-001-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1, SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 38.4 % MAC.
SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
PAVEMENT – MTOW 233 000 kg – A330-200

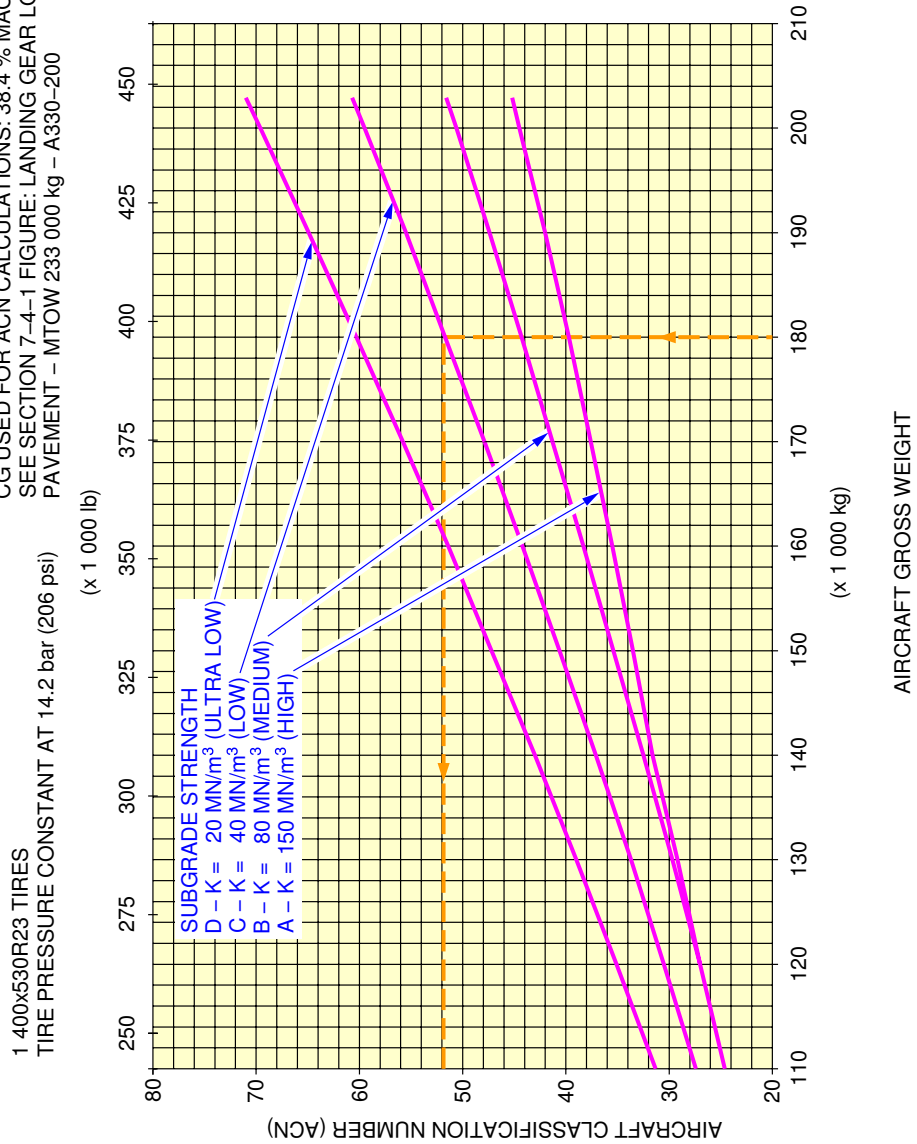


F_AC_070902_1_0020101_01_02

Aircraft Classification Number – Rigid Pavement
MTOW 202 000 kg
FIGURE-7-9-2-991-002-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.1 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING
 ON PAVEMENT – MTOW 210 000 kg – A330-200

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

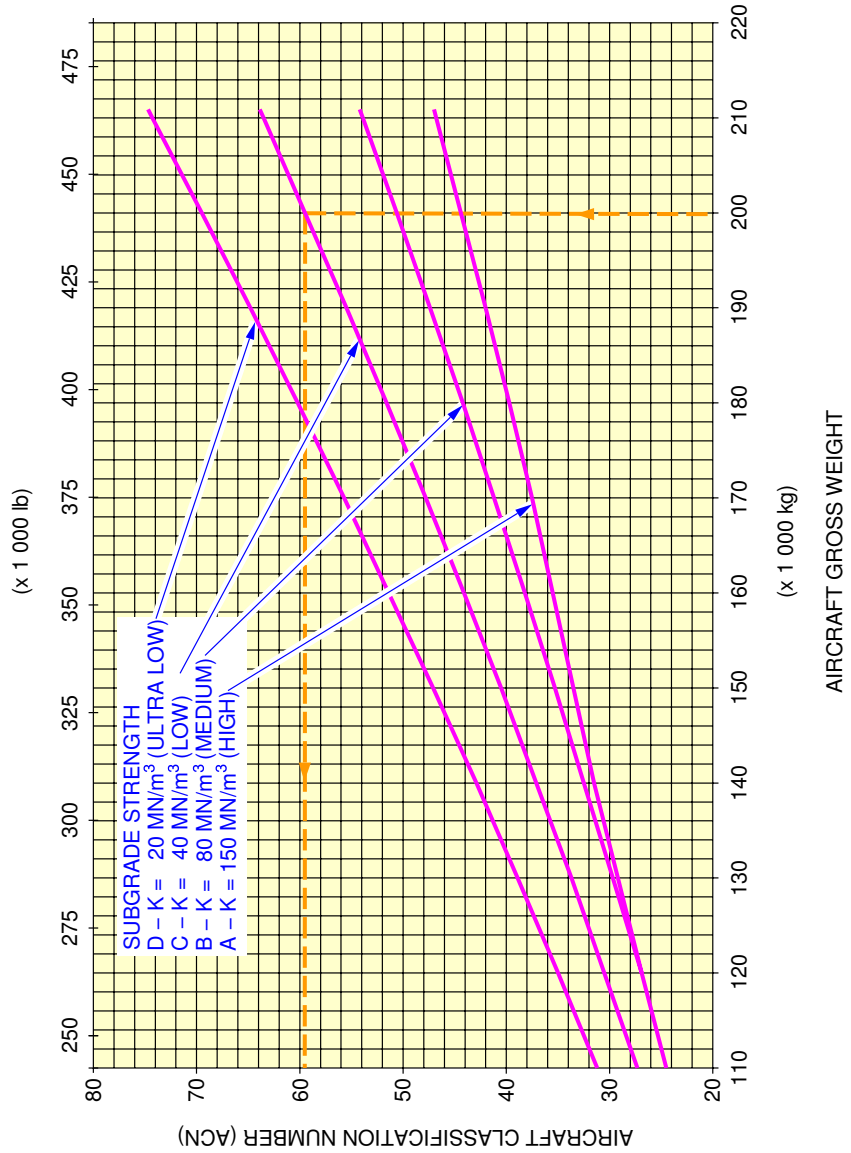


F_AC_070902_1_0030101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 210 000 kg
 FIGURE-7-9-2-991-003-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.79% MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 233 000 kg - A330-200

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

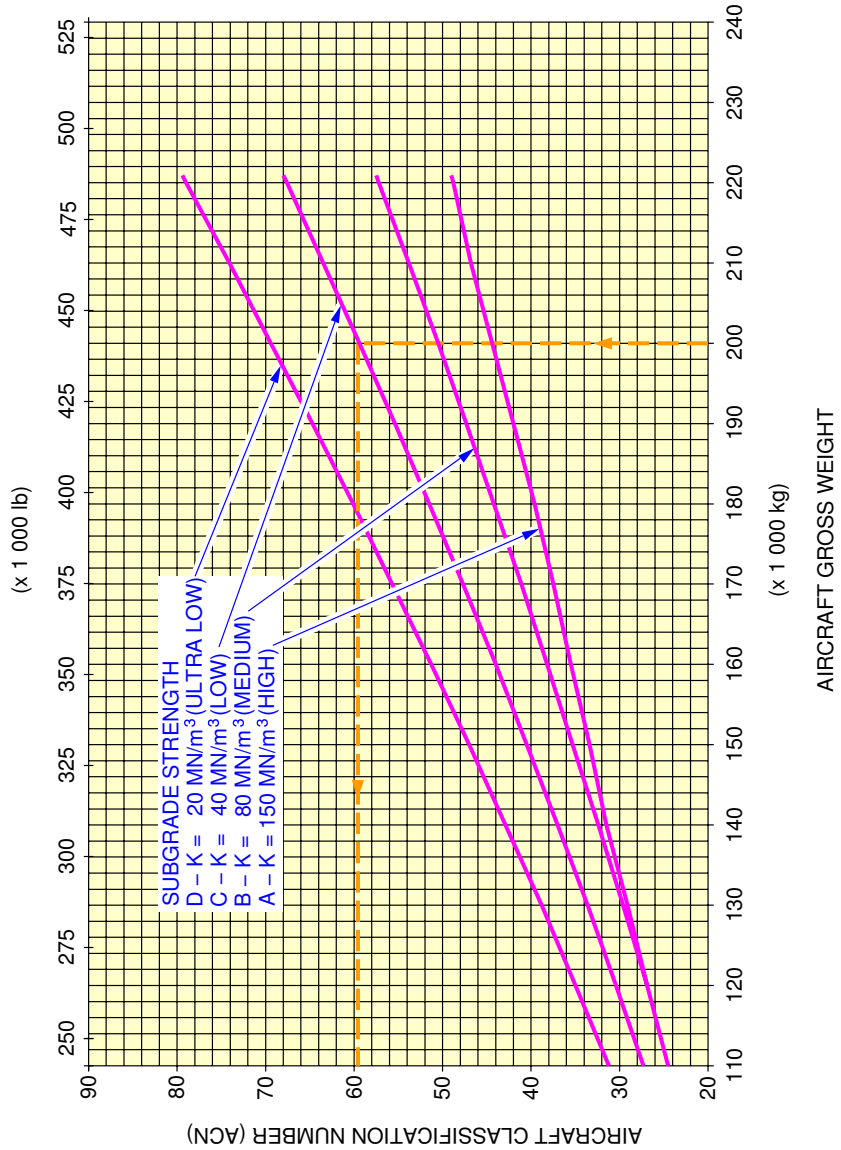


F_AC_070902_1_0040101_01_02

Aircraft Classification Number - Rigid Pavement
 MTOW 220 000 kg
 FIGURE-7-9-2-991-004-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.5% MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT – MTOW 233 000 kg – A330-200

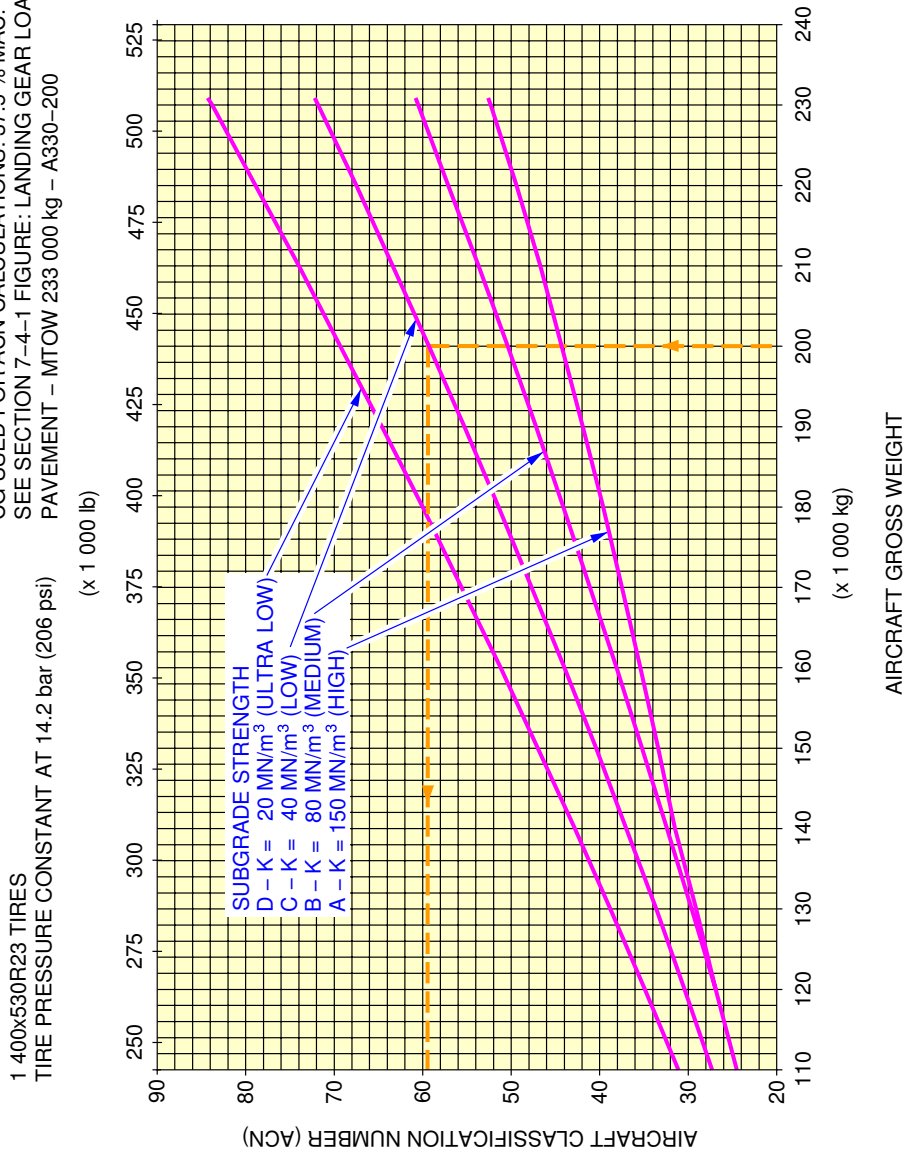


F_AC_070902_1_0050101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 230 000 kg
 FIGURE-7-9-2-991-005-A01

****ON A/C A330-200**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.4% MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT – MTOW 233 000 kg – A330-200

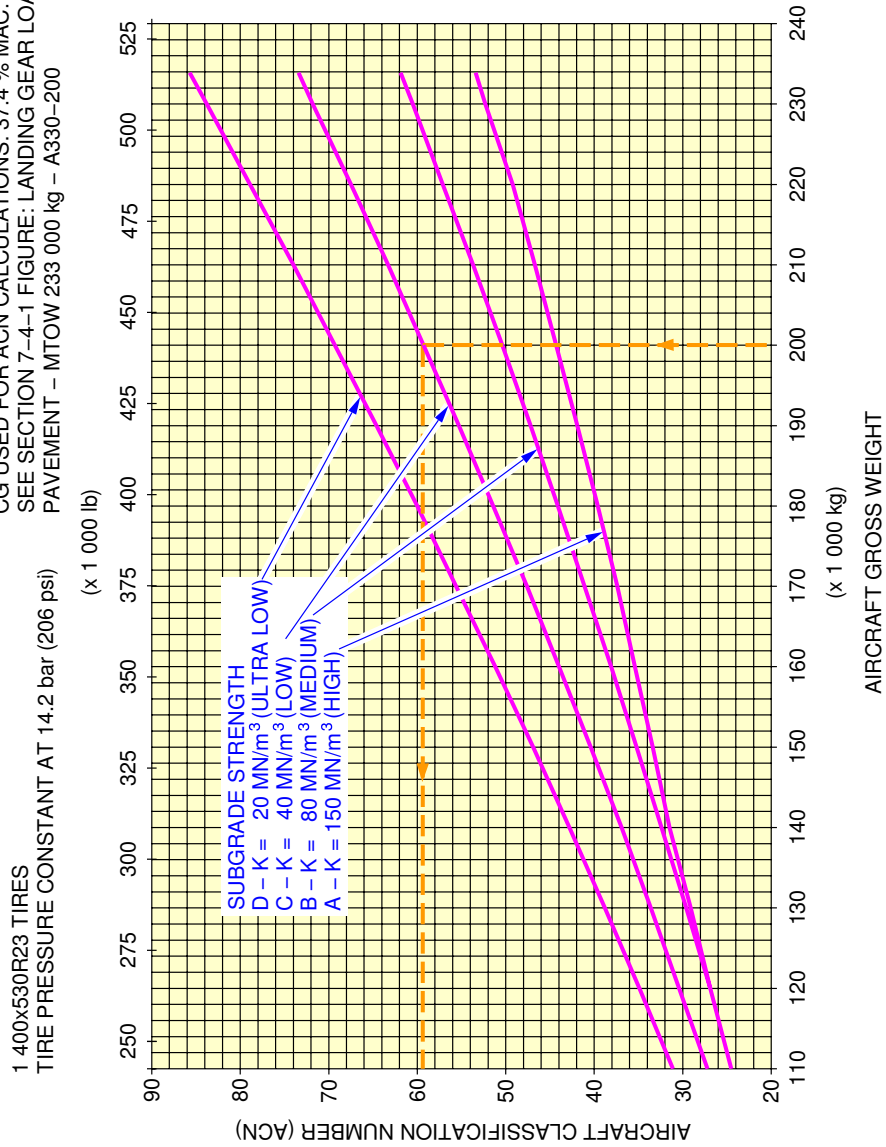


F_AC_070902_1_0060101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 233 000 kg
 FIGURE-7-9-2-991-006-A01

****ON A/C A330-200F**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.57 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 227 000 kg - A330-200F

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

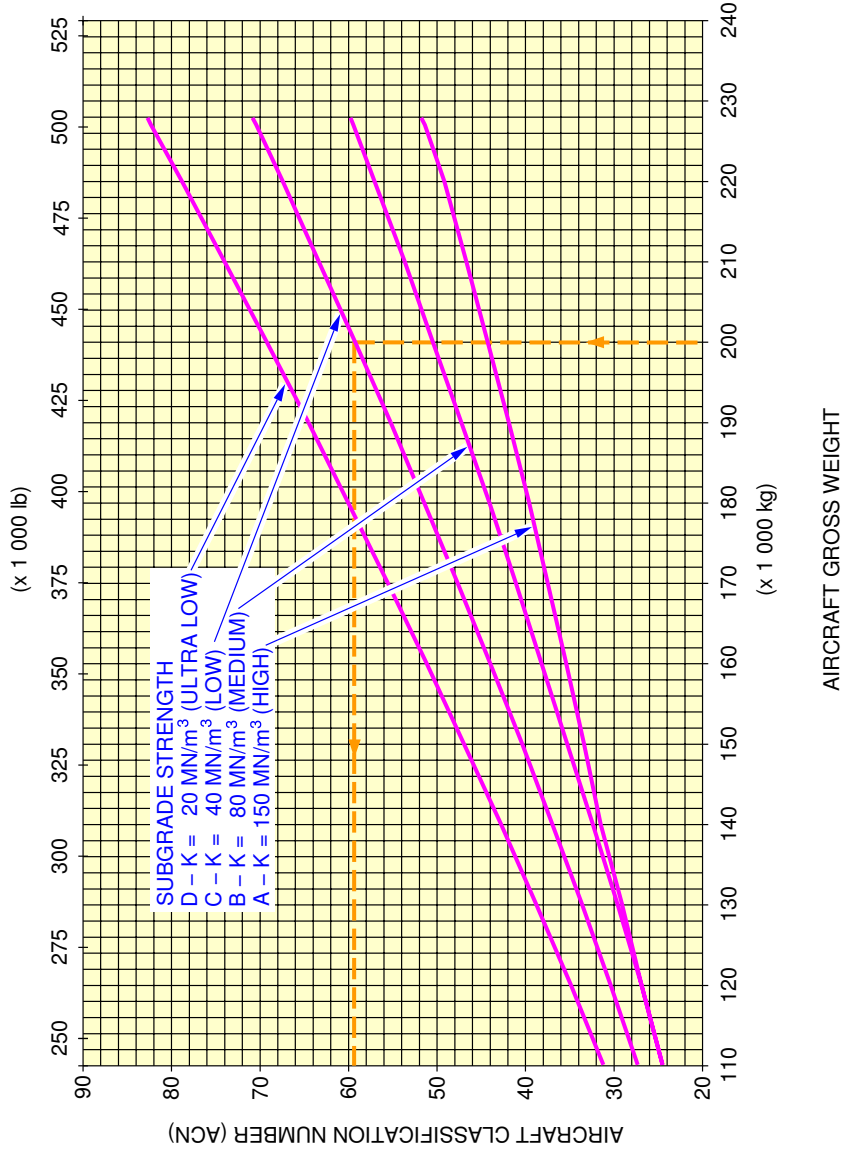


F_AC_070902_1_0150101_01_01

Aircraft Classification Number - Rigid Pavement
 MTOW 227 000 kg
 FIGURE-7-9-2-991-015-A01

****ON A/C A330-200F**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 37.4 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 233 000 kg - A330-200F

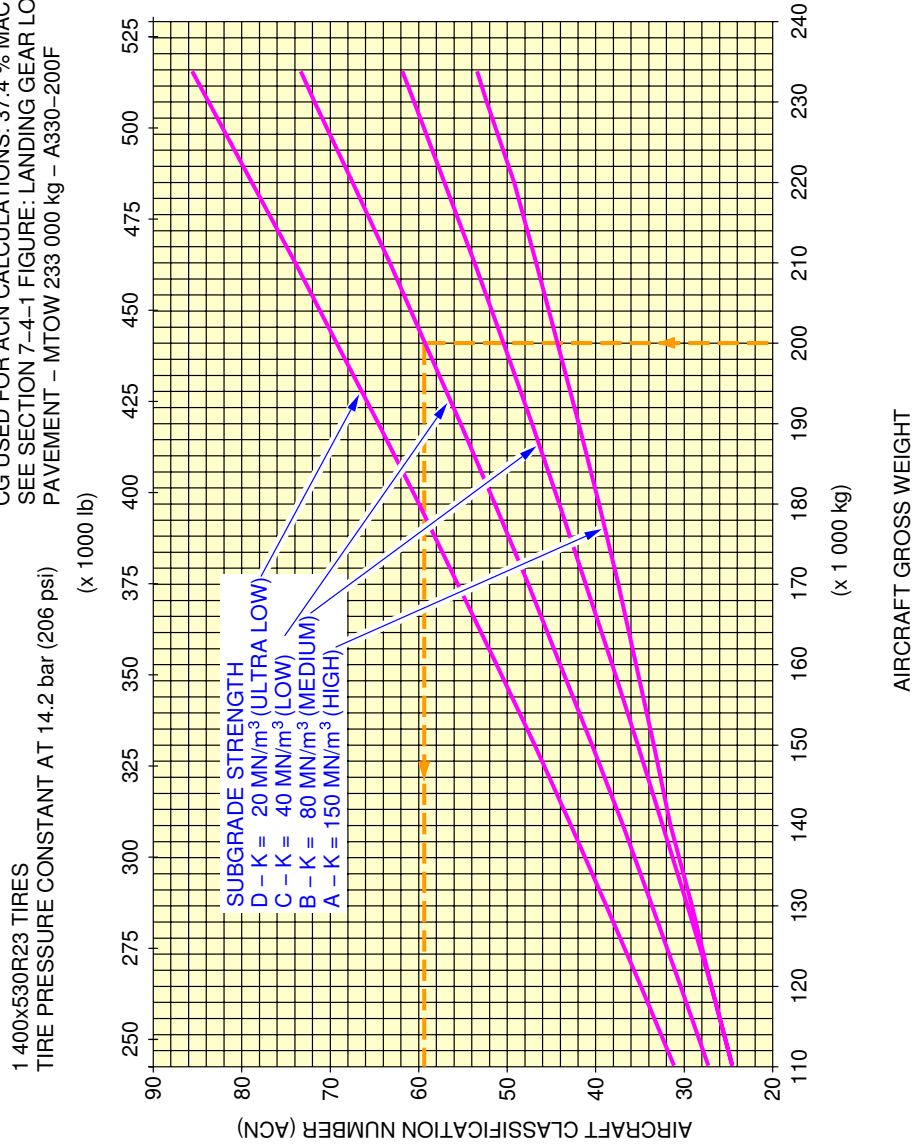


F_AC_070902_1_0160101_01_01

Aircraft Classification Number - Rigid Pavement
 MTOW 233 000 kg
 FIGURE-7-9-2-991-016-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN ICAO AERODROME DESIGN MANUAL PART 3 CHAPTER 1, SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 40.1 % MAC.
SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON PAVEMENT - MTOW 184 000 kg - A330-300

1 400x530R23 TIRES
TIRE PRESSURE CONSTANT AT 13.1 bar (189 psi)

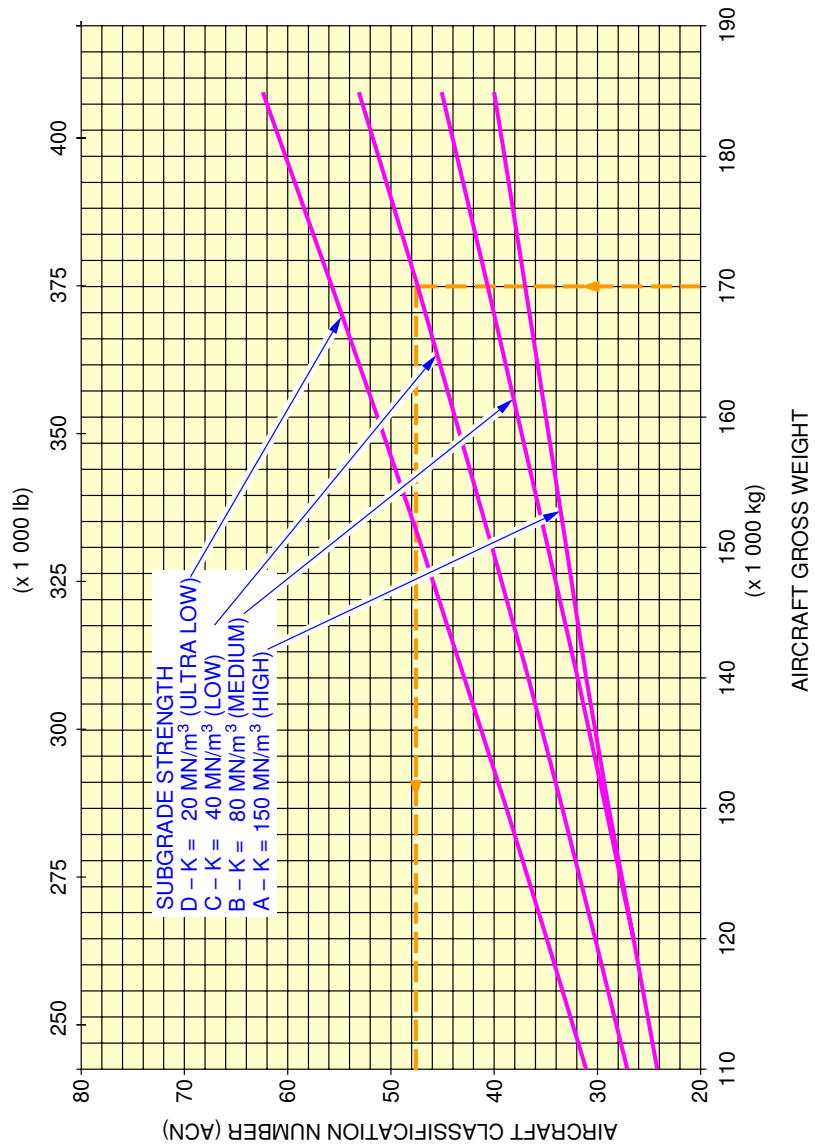


F_AC_070902_1_0070101_01_02

Aircraft Classification Number - Rigid Pavement
MTOW 184 000 kg
FIGURE-7-9-2-991-007-A01

****ON A/C A330-300**


ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 39.6 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING
 ON PAVEMENT – MTOW 230 000 kg – A330-300

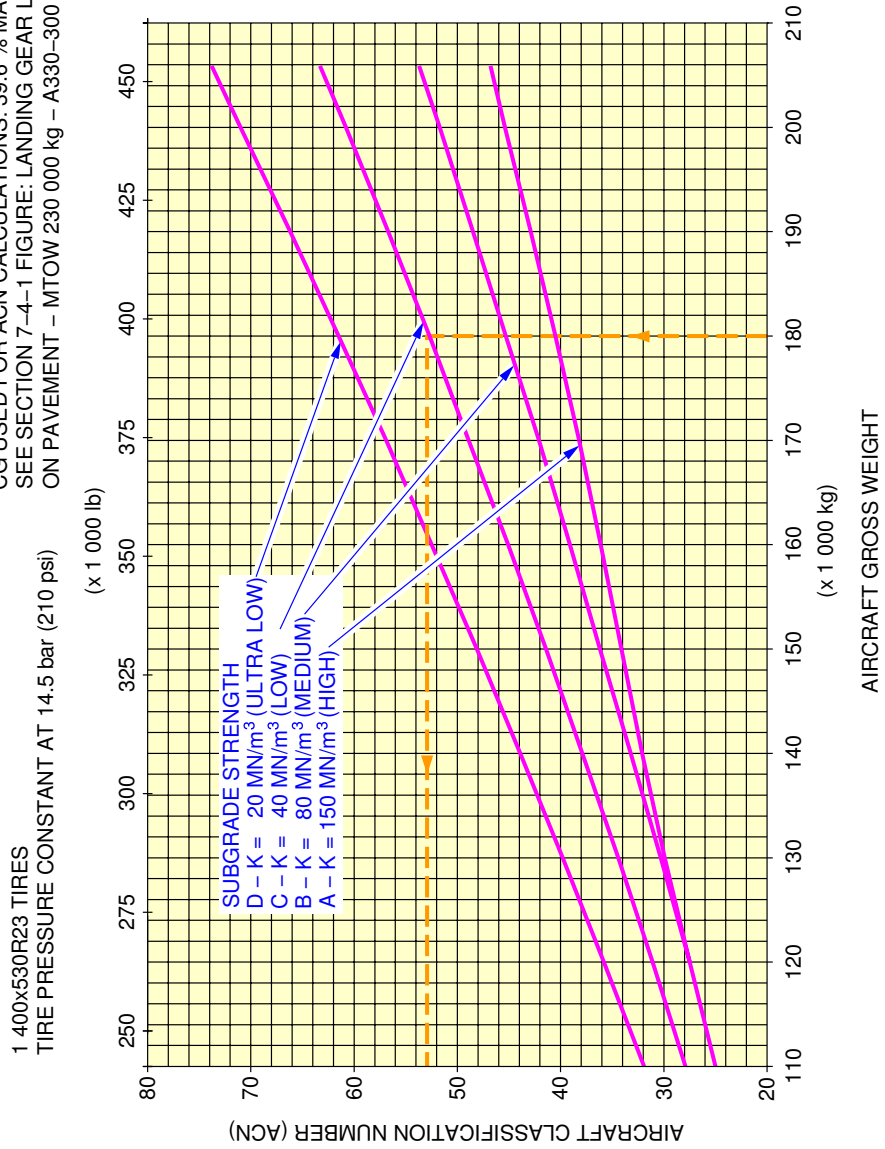

F_AC_070902_1_0080101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 205 000 kg
 FIGURE-7-9-2-991-008-A01

****ON A/C A330-300**

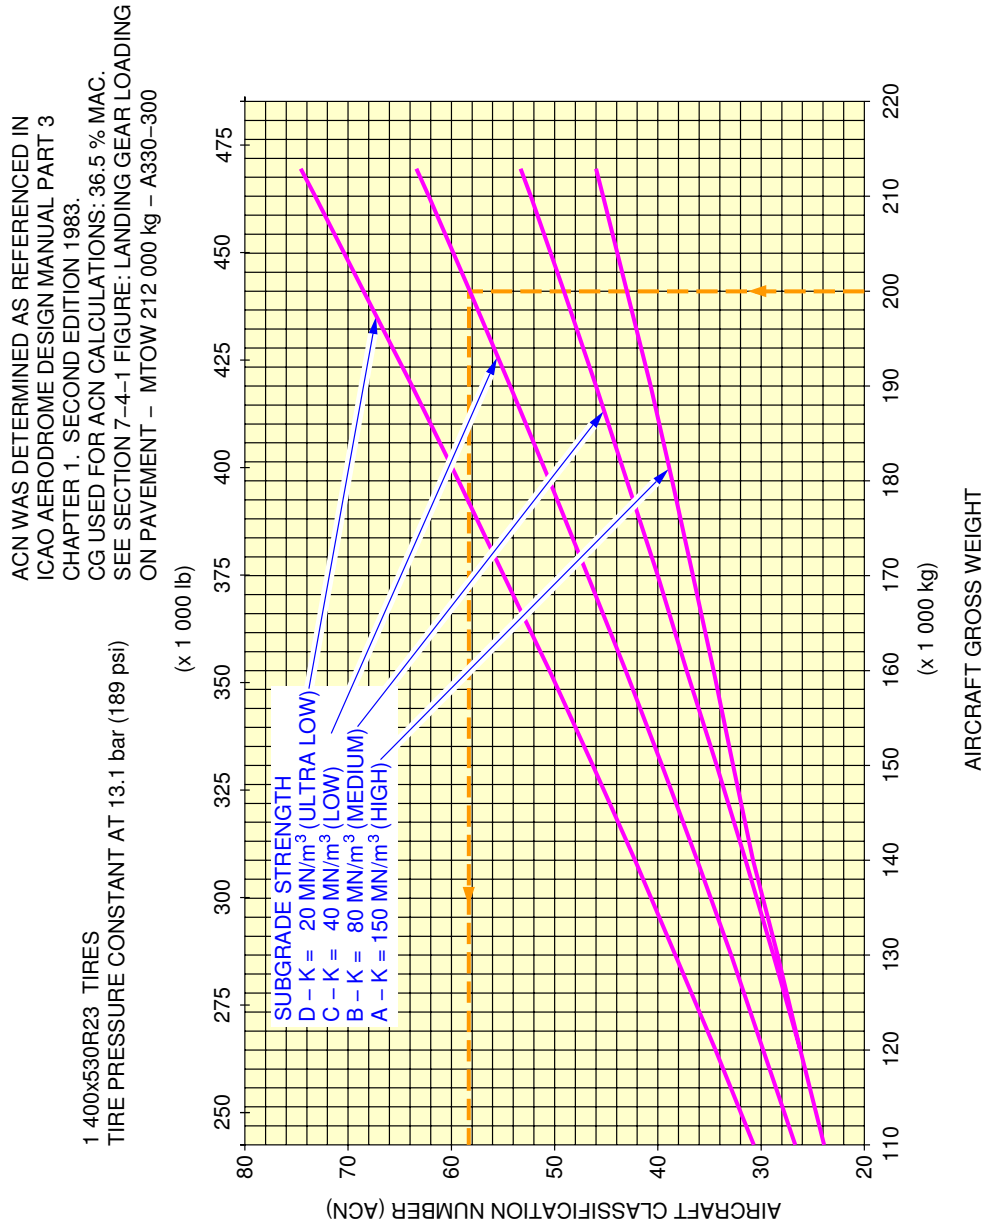


F_AC_070902_1_0090101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 212 000 kg
 FIGURE-7-9-2-991-009-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 39.2 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT - MTOW 215 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 13.3 bar (194 psi)

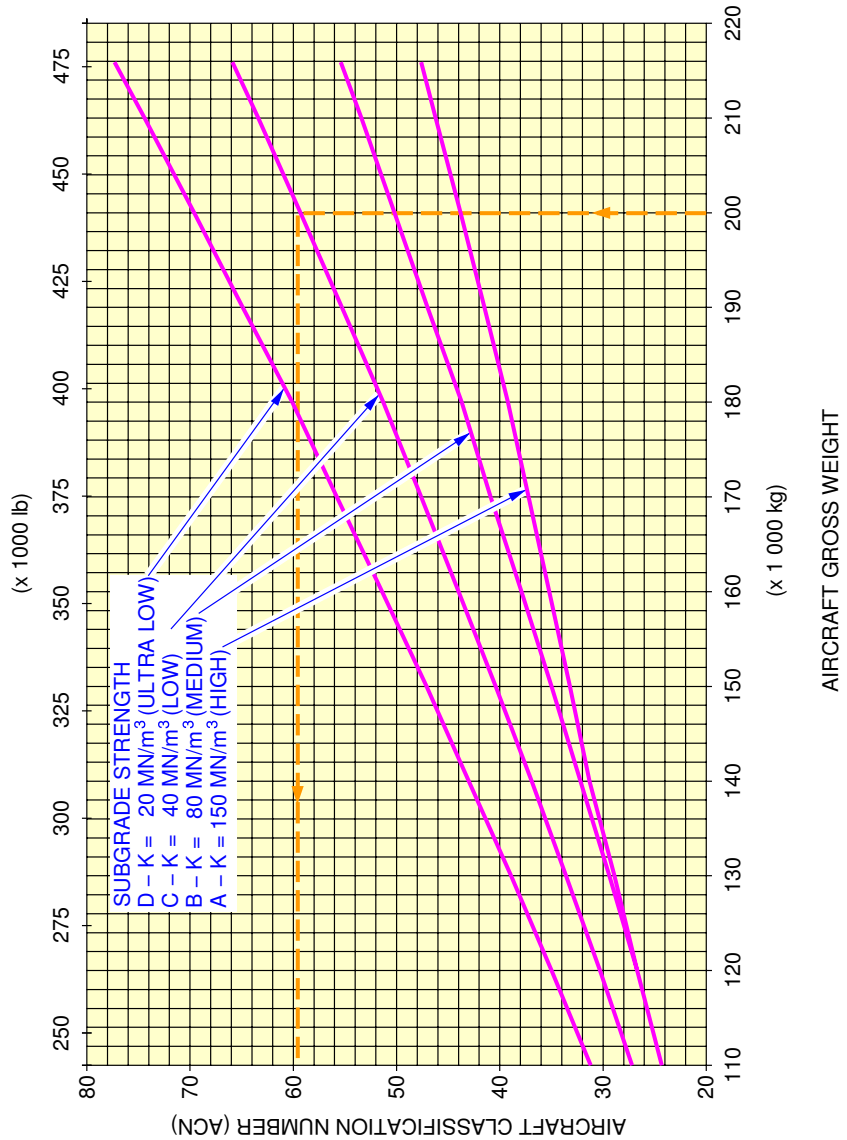


F_AC_070902_1_0100101_01_02

Aircraft Classification Number – Rigid Pavement
 MTOW 215 000 kg
 FIGURE-7-9-2-991-010-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1. SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 39.12 % MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
 PAVEMENT – MTOW 217 000 kg – A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

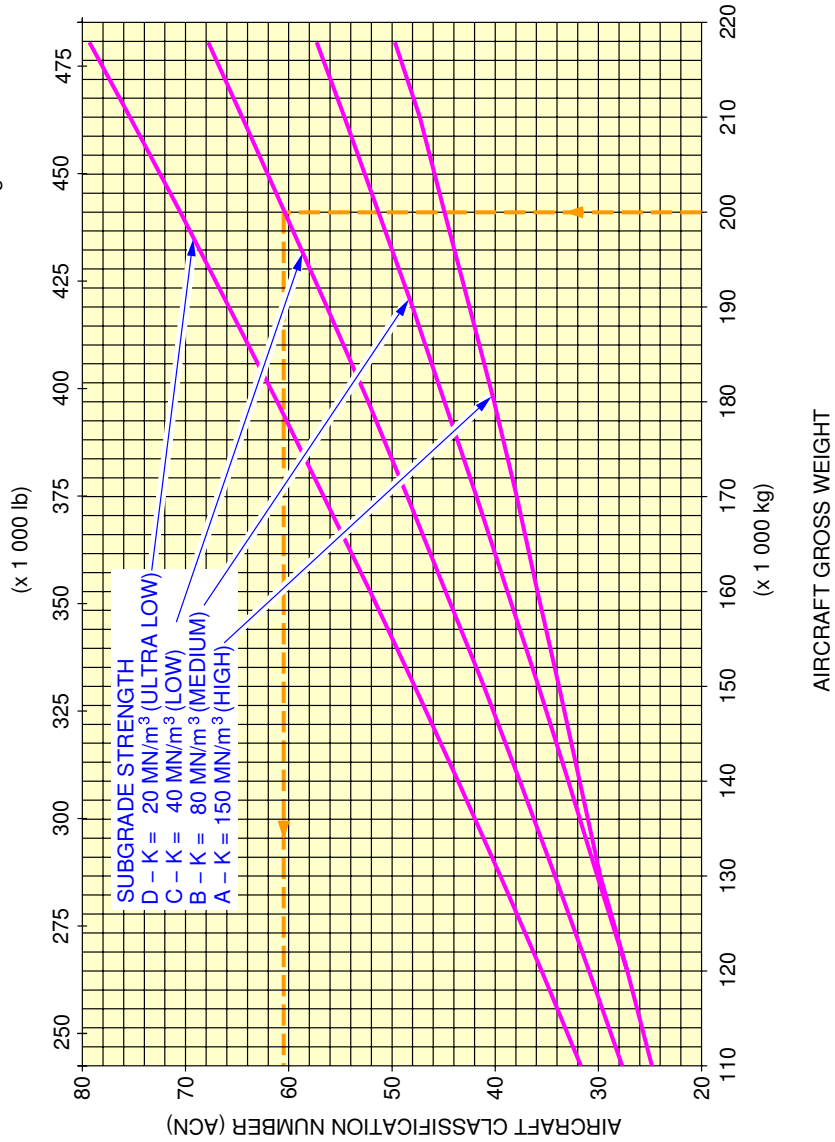

F_AC_070902_1_0110101_01_02


Aircraft Classification Number – Rigid Pavement
 MTOW 217 000 kg
 FIGURE-7-9-2-991-011-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1, SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 39.1 % MAC.
SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING
ON PAVEMENT - MTOW 218 000 kg - A330-300

1 400x530R23 TIRES

TIRE PRESSURE CONSTANT AT 13.3 bar (194 psi)

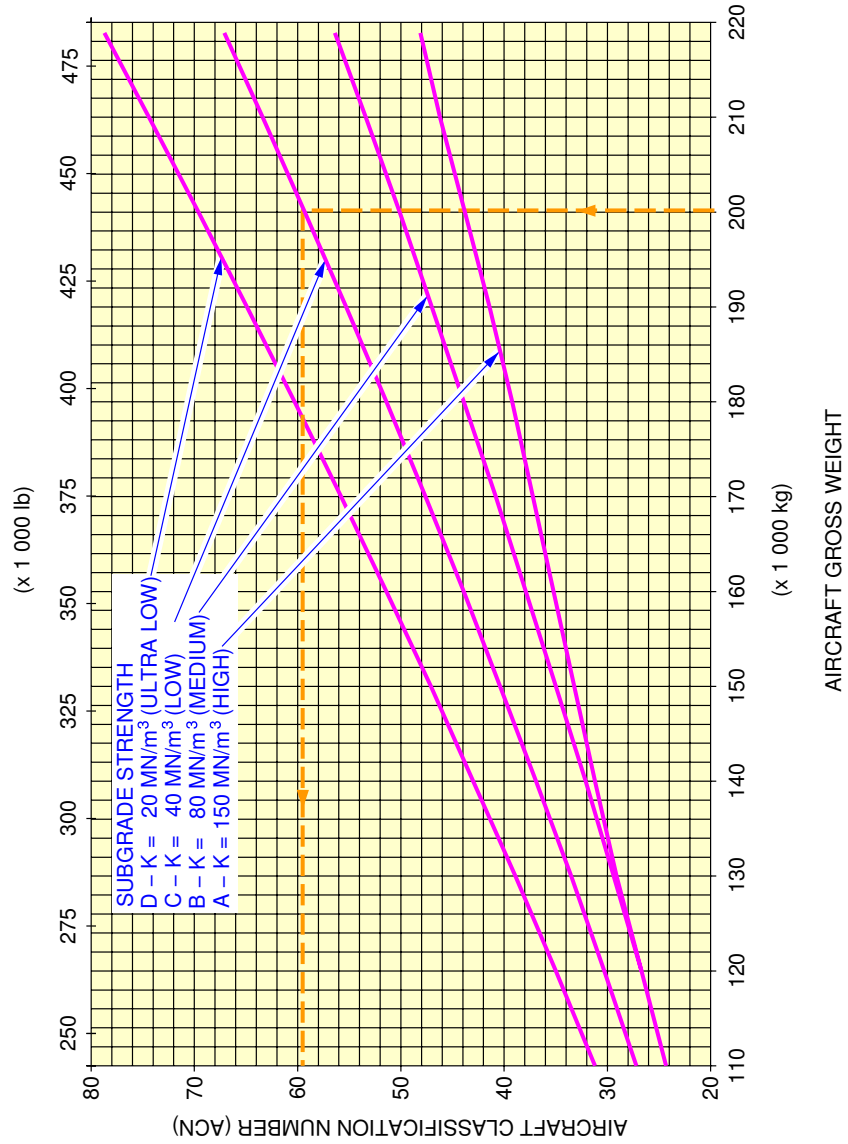


F_AC_070902_1_0120101_01_02

Aircraft Classification Number – Rigid Pavement
MTOW 218 000 kg
FIGURE-7-9-2-991-012-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
 ICAO AERODROME DESIGN MANUAL PART 3
 CHAPTER 1, SECOND EDITION 1983.
 CG USED FOR ACN CALCULATIONS: 38.7% MAC.
 SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING
 ON PAVEMENT - MTOW 230 000 kg - A330-300

1 400x530R23 TIRES
 TIRE PRESSURE CONSTANT AT 14.2 bar (206 psi)

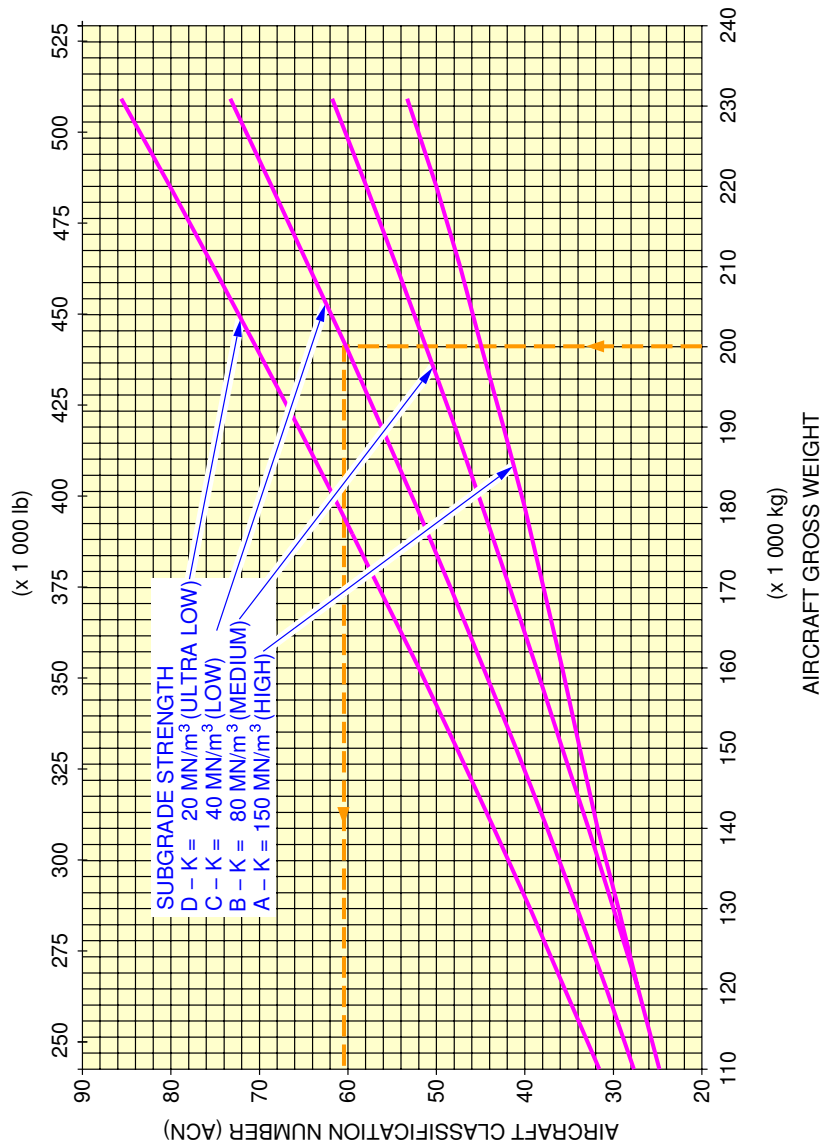


F_AC_070902_1_0130101_01_02

Aircraft Classification Number - Rigid Pavement
 MTOW 230 000 kg
 FIGURE-7-9-2-991-013-A01

****ON A/C A330-300**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1, SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 38.6 % MAC.
SEE SECTION 7-4-1 FIGURE: LANDING GEAR LOADING ON
PAVEMENT – MTOW 233 000 kg – A330-300

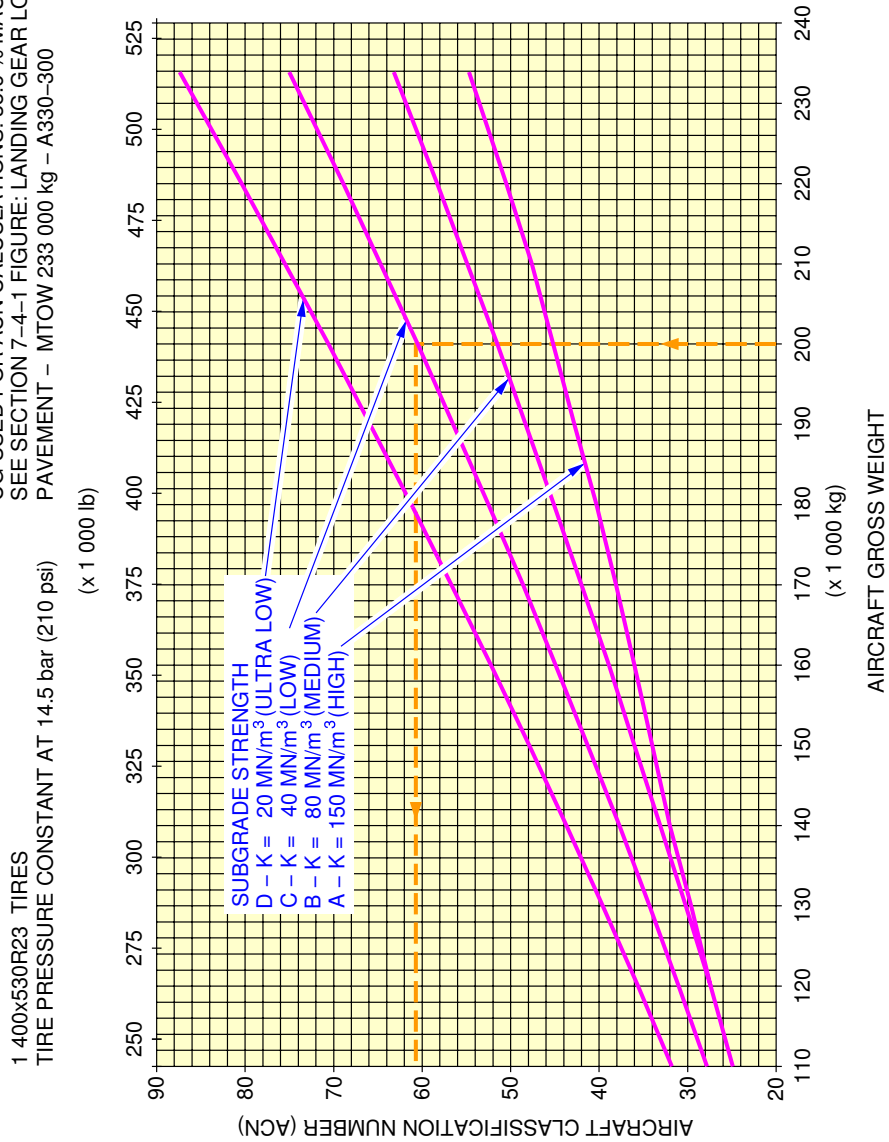

F_AC_070902_1_0140101_01_02

Aircraft Classification Number – Rigid Pavement
MTOW 233 000 kg
FIGURE-7-9-2-991-014-A01

DERIVATIVE AIRPLANES

8-1-0 Possible Future Derivative Airplane

****ON A/C A330-200 A330-200F A330-300**Possible Future Derivative Airplane

1. General

Other versions of the A330 airplane are being studied to satisfy customer requests.

In the future, this program could have new versions:

- Additional passenger capacity,
- Additional cargo modularity,
- New design version,
- Different range or payload.

If these new aircraft definitions are developed, the design and weight will be considered in accordance with airport facilities.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

SCALED DRAWINGS


9-1-0 Scaled Drawing 1 in. = 500 ft.

**ON A/C A330-200 A330-200F A330-300

Scaled Drawing 1 in. = 50 ft.

1. This section provides the Scaled Drawing - 1 in. = 50 ft.

****ON A/C A330-200**

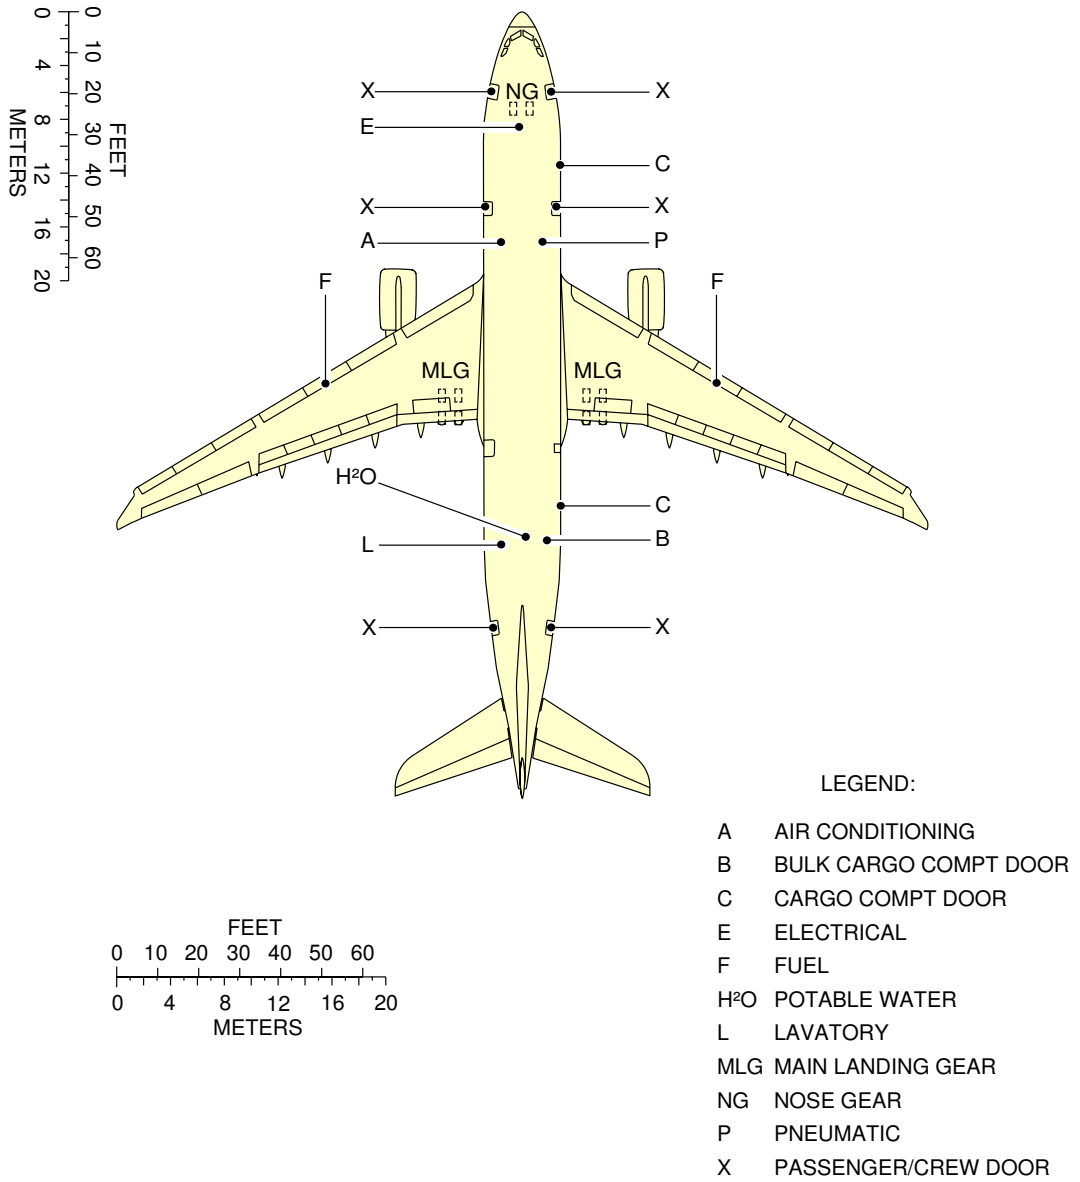


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090100_1_0010101_01_01

Scaled Drawing
 1 in. = 50 ft.
 FIGURE-9-1-0-991-001-A01

****ON A/C A330-300**

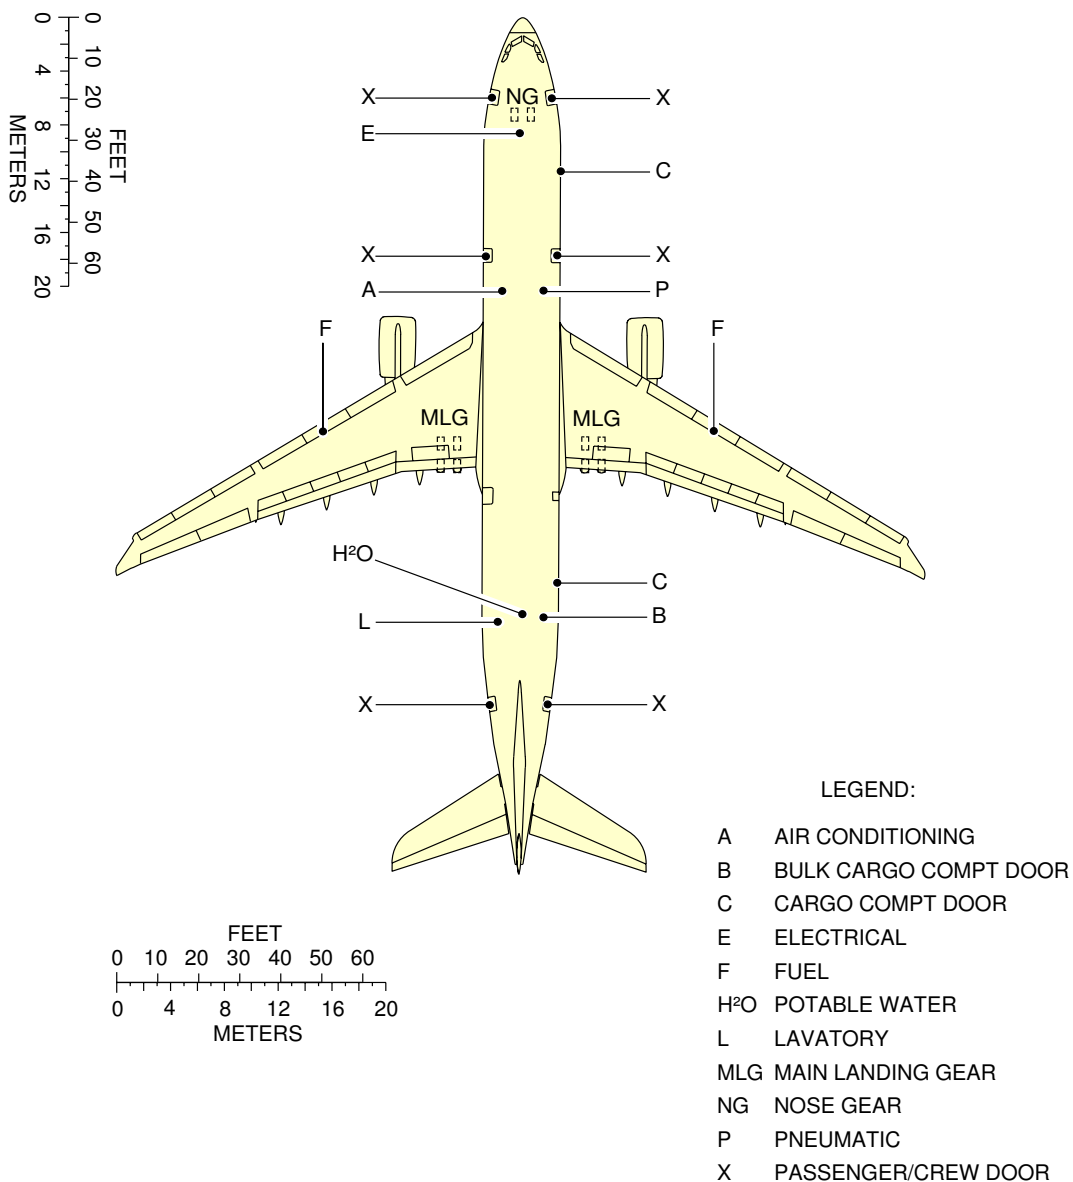


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090100_1_0050101_01_00

Scaled Drawing
1 in. = 50 ft.
FIGURE-9-1-0-991-005-A01

****ON A/C A330-200F**

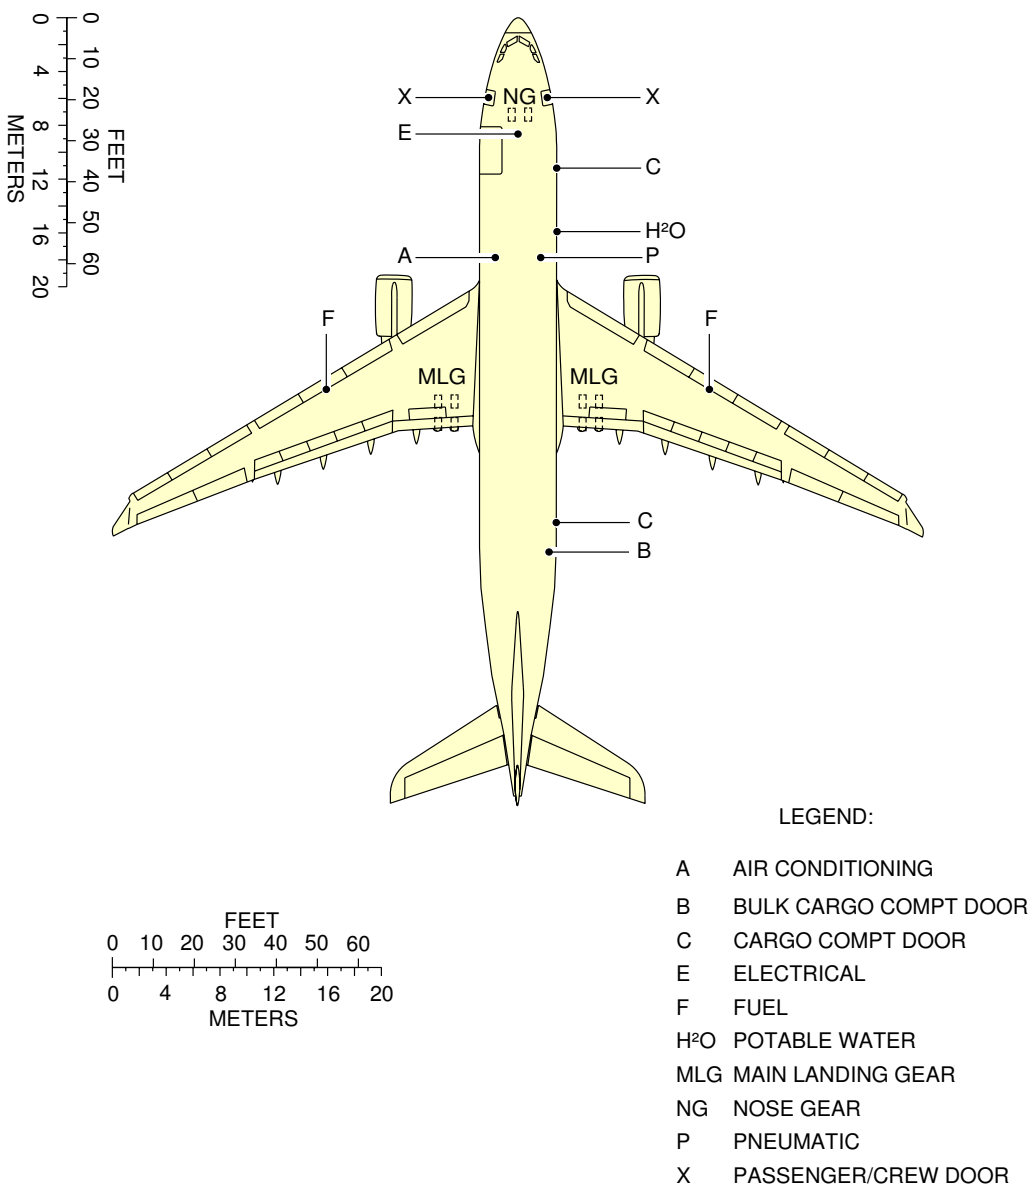


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090100_1_0030101_01_01

Scaled Drawing
 1 in. = 50 ft.
 FIGURE-9-1-0-991-003-A01

****ON A/C A330-200**

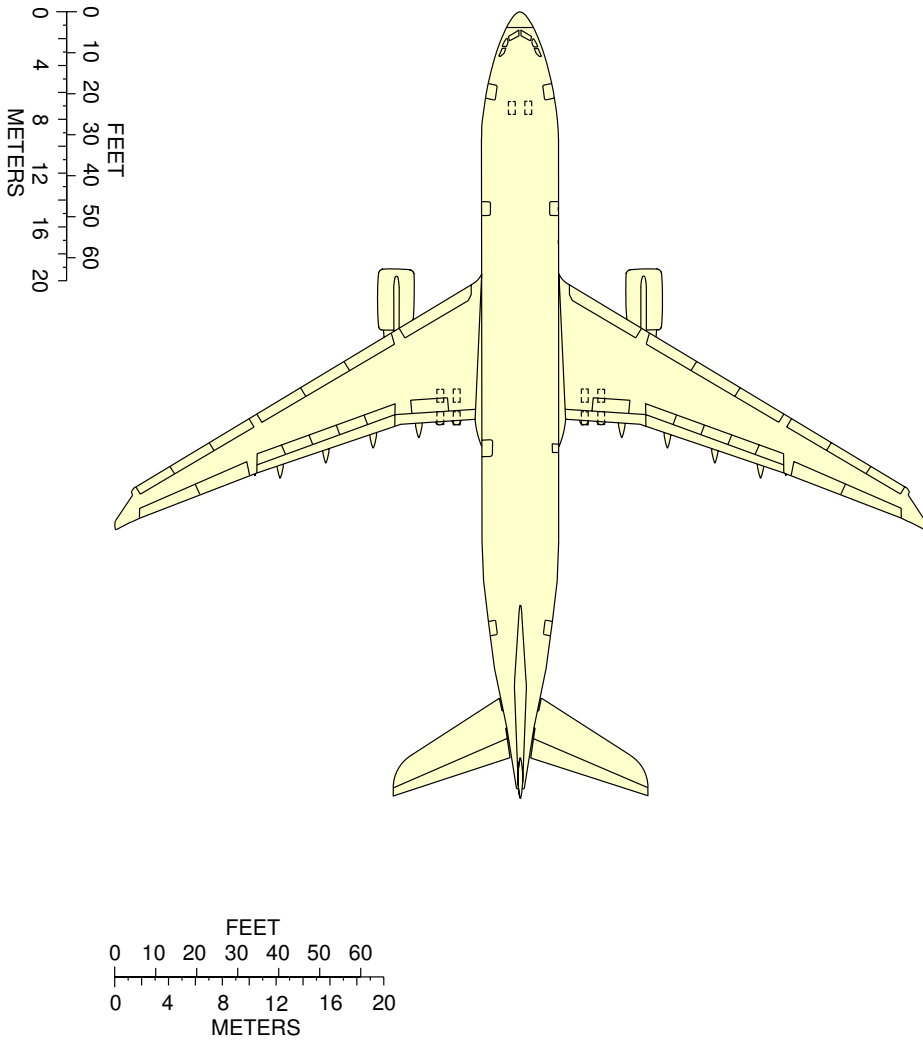


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090100_1_0020101_01_01

Scaled Drawing
1 in. = 50 ft.
FIGURE-9-1-0-991-002-A01

****ON A/C A330-300**

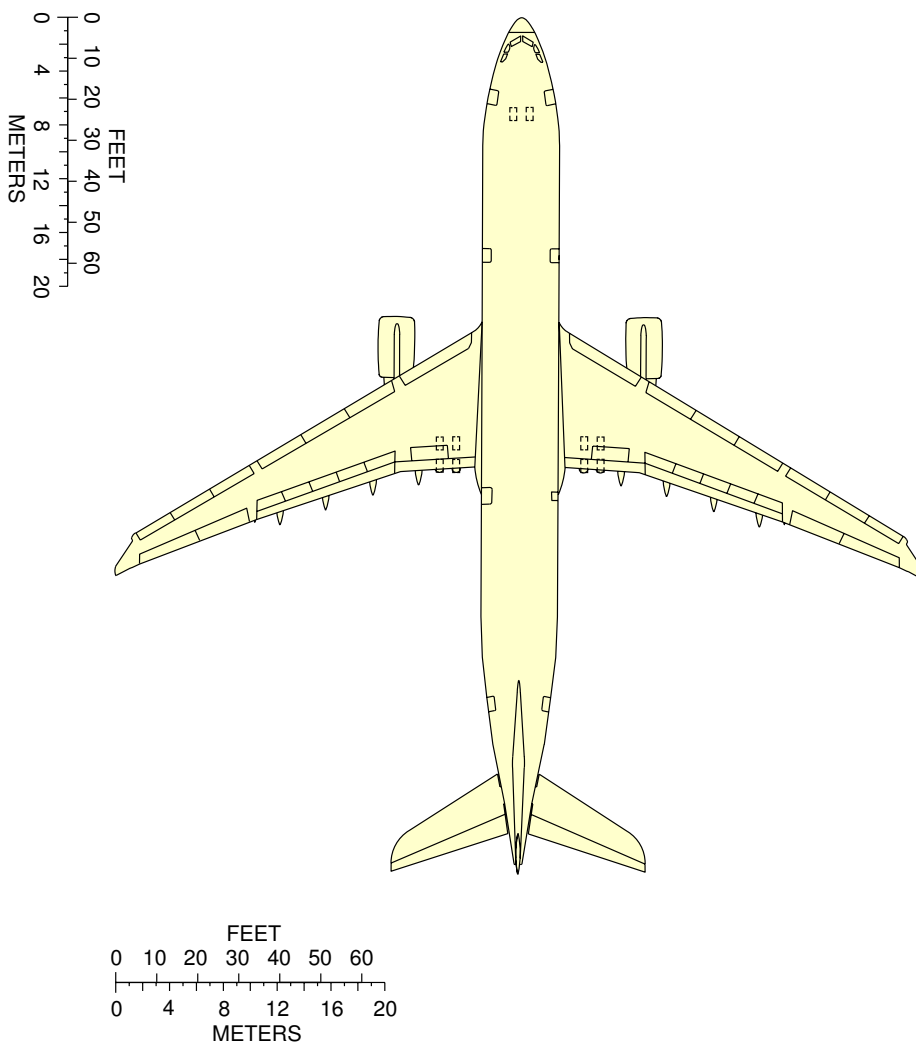


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090100_1_0060101_01_00

Scaled Drawing
1 in. = 50 ft.
FIGURE-9-1-0-991-006-A01

****ON A/C A330-200F**

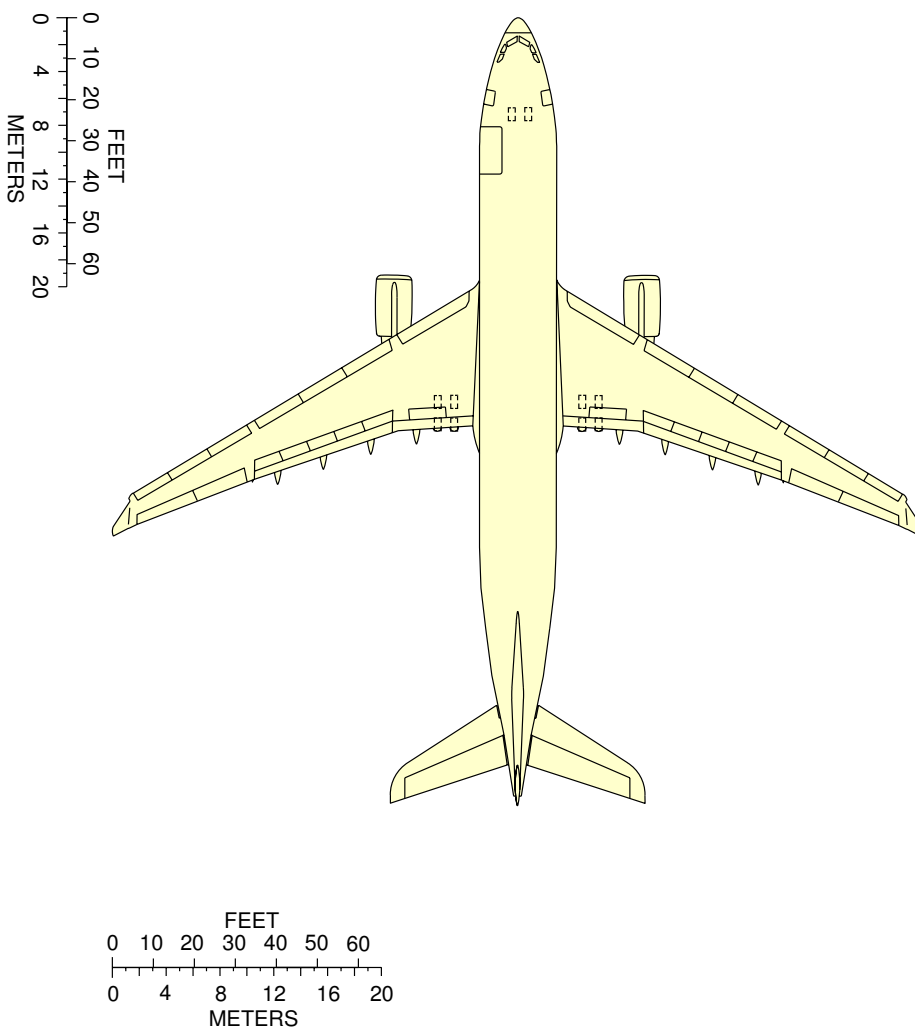

NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090100_1_0040101_01_01

Scaled Drawing
1 in. = 50 ft.
FIGURE-9-1-0-991-004-A01



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


9-2-0 Scaled Drawing 1 cm. = 500 cm.

****ON A/C A330-200 A330-200F A330-300**

Scaled Drawing 1 cm. = 500 cm.

1. This section provides the Scaled Drawing - 1 cm. = 500 cm.

****ON A/C A330-200**

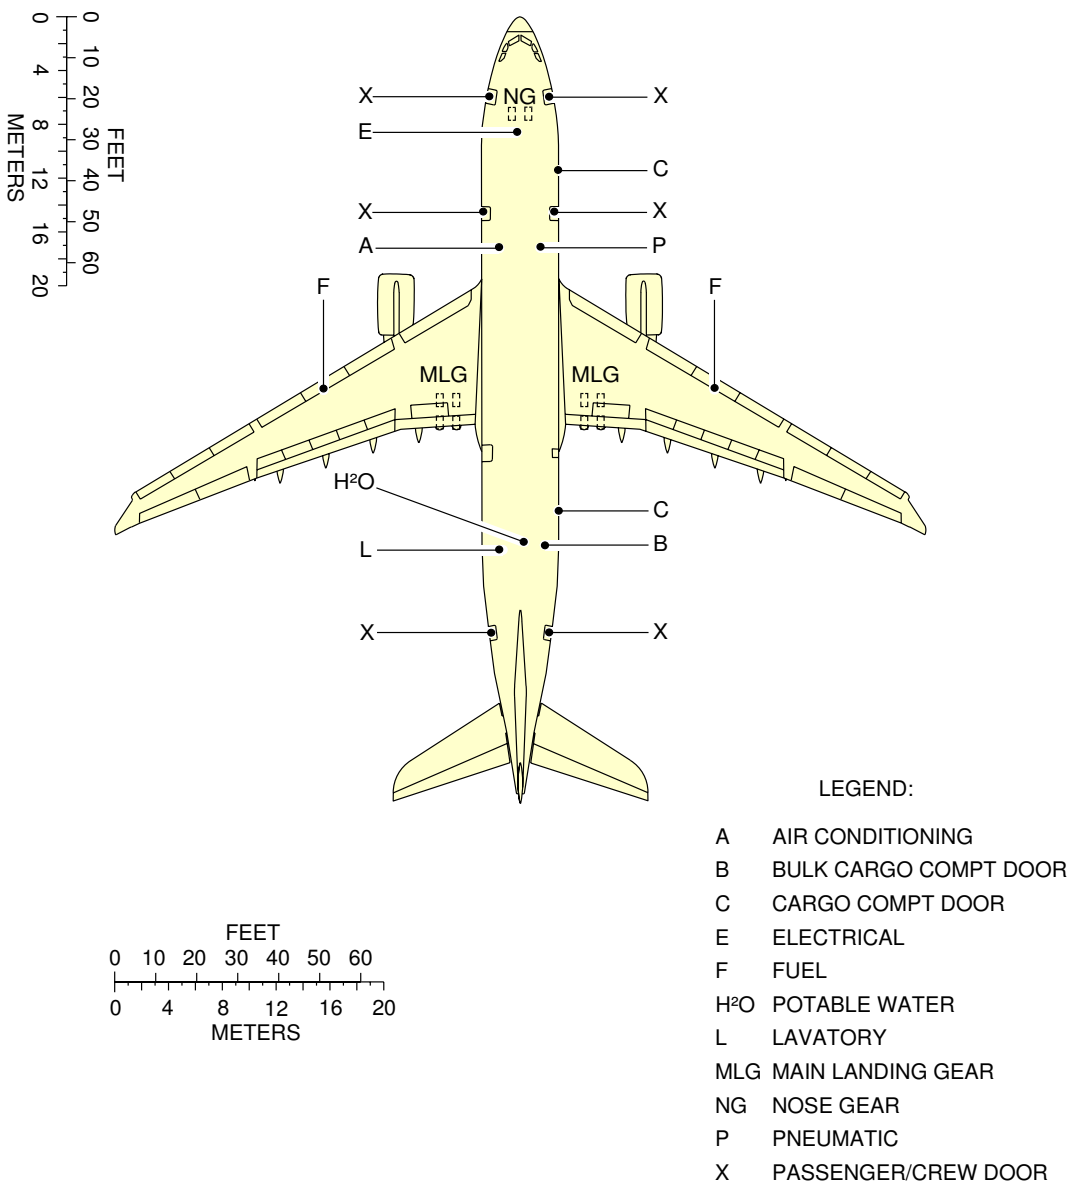


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090200_1_0010101_01_01

Scaled Drawing
 1 cm. = 500 cm.
 FIGURE-9-2-0-991-001-A01

****ON A/C A330-300**

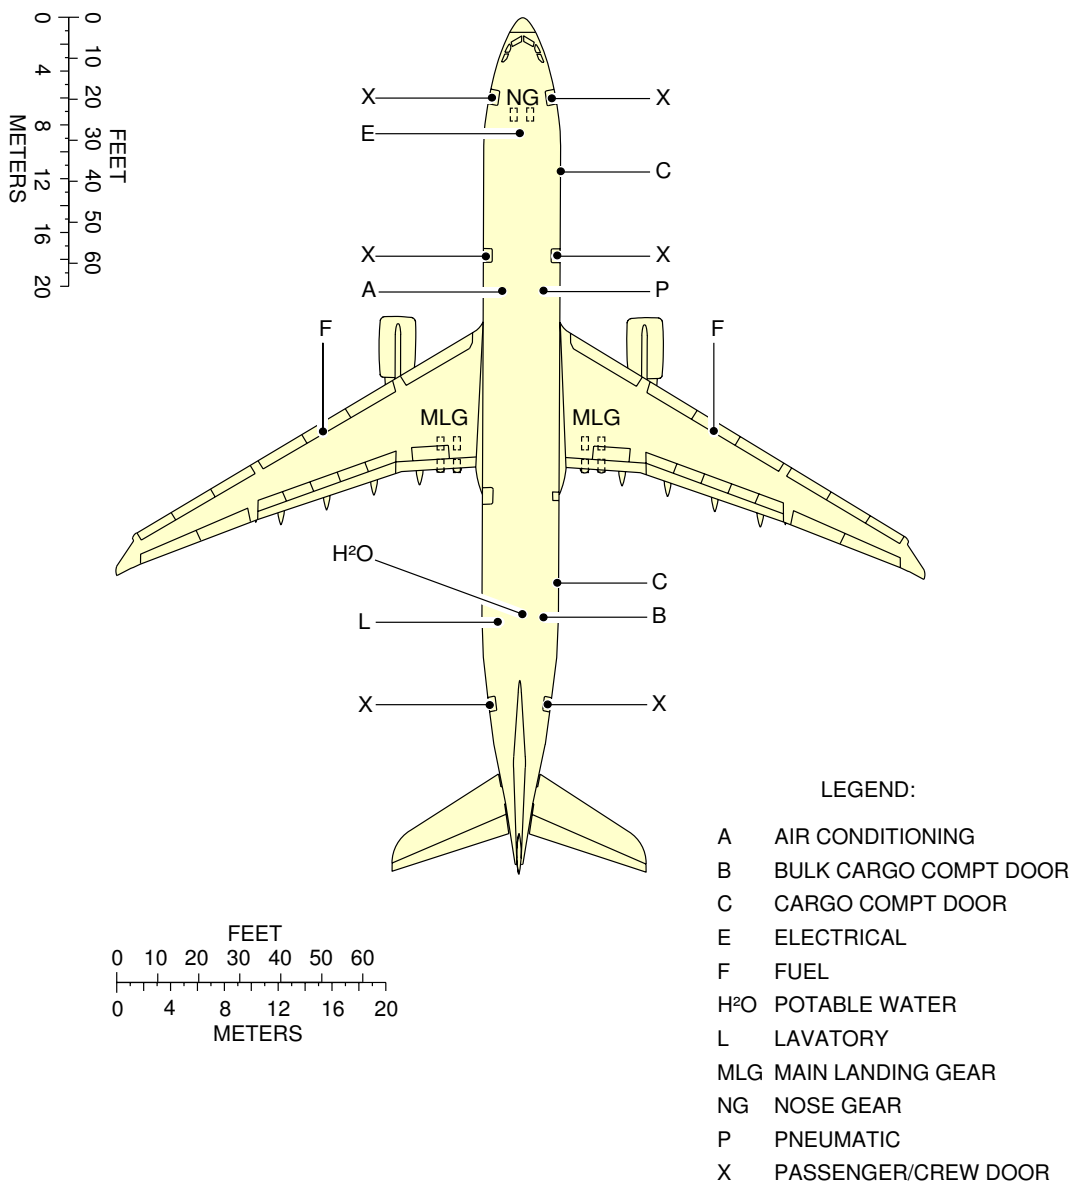


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090200_1_0050101_01_00

Scaled Drawing
1 cm. = 500 cm.
FIGURE-9-2-0-991-005-A01

****ON A/C A330-200F**

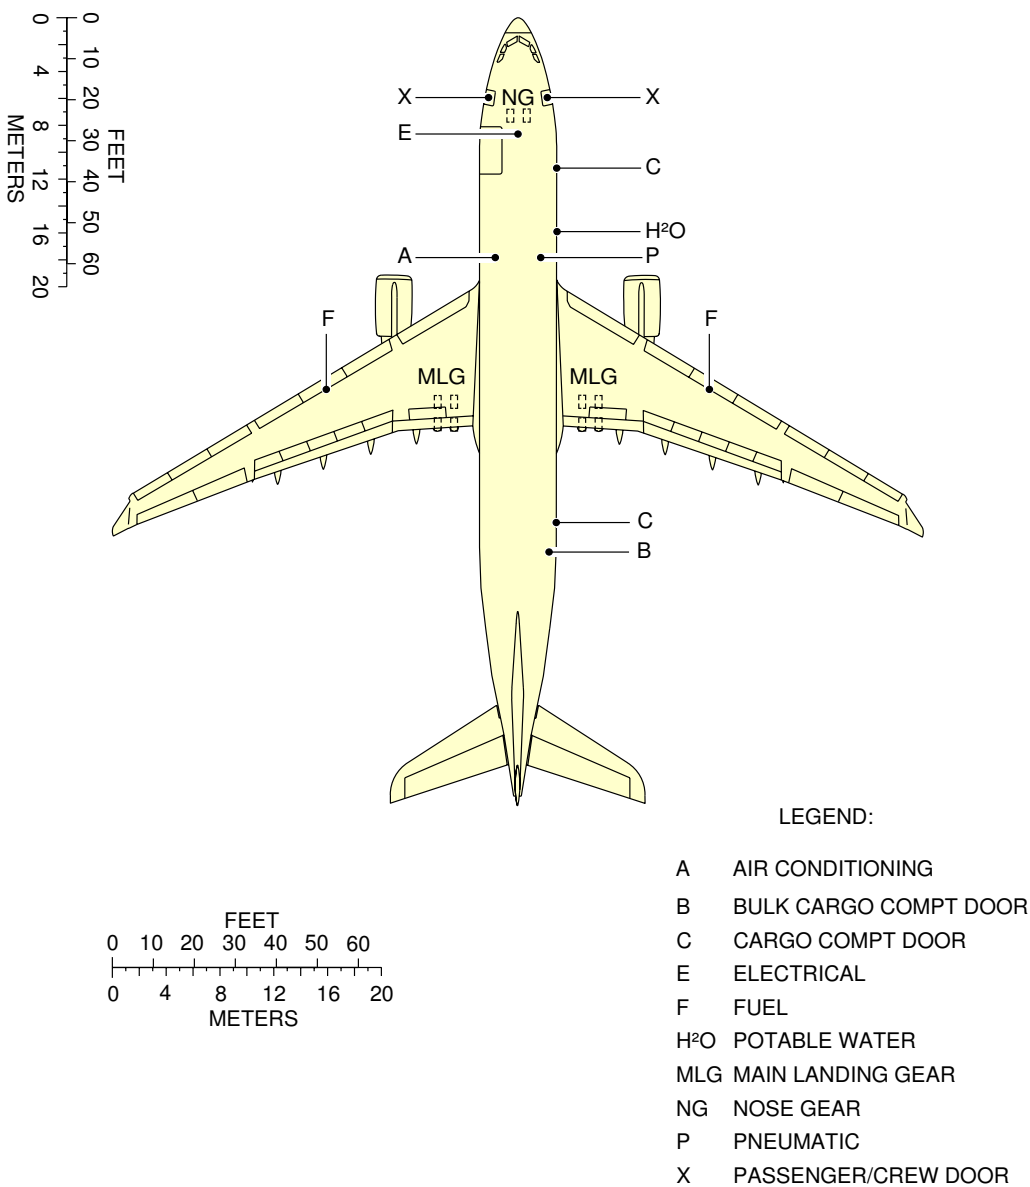


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090200_1_0030101_01_01

Scaled Drawing
 1 cm. = 500 cm.
 FIGURE-9-2-0-991-003-A01

****ON A/C A330-200**

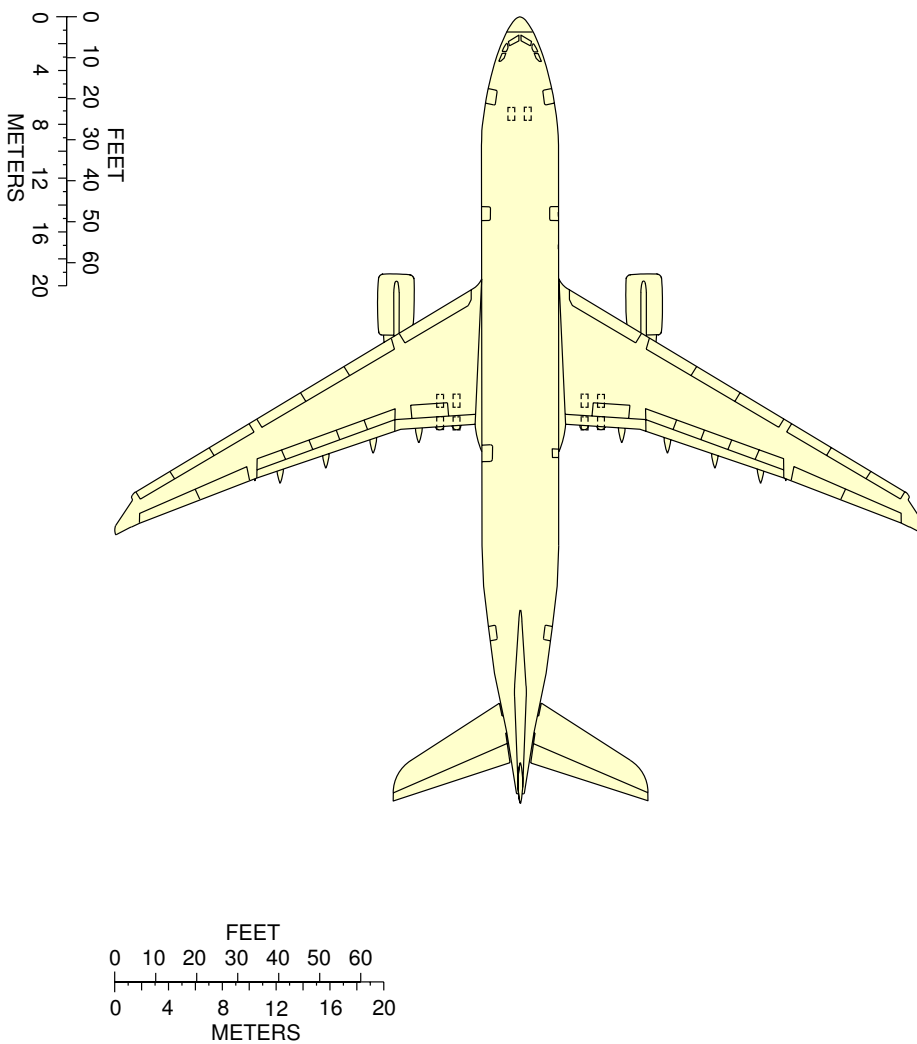


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090200_1_0020101_01_01

Scaled Drawing
1 cm. = 500 cm.
FIGURE-9-2-0-991-002-A01

****ON A/C A330-300**

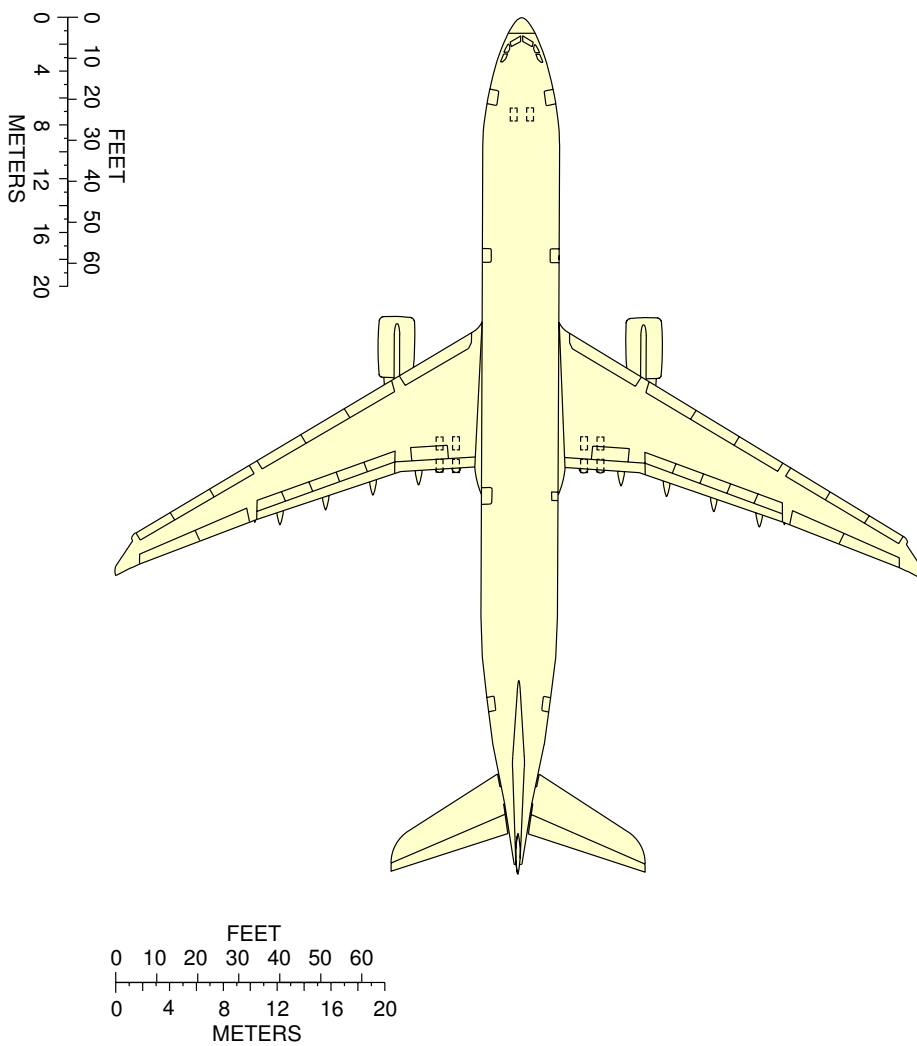


NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090200_1_0060101_01_00

Scaled Drawing
1 cm. = 500 cm.
FIGURE-9-2-0-991-006-A01

****ON A/C A330-200F**

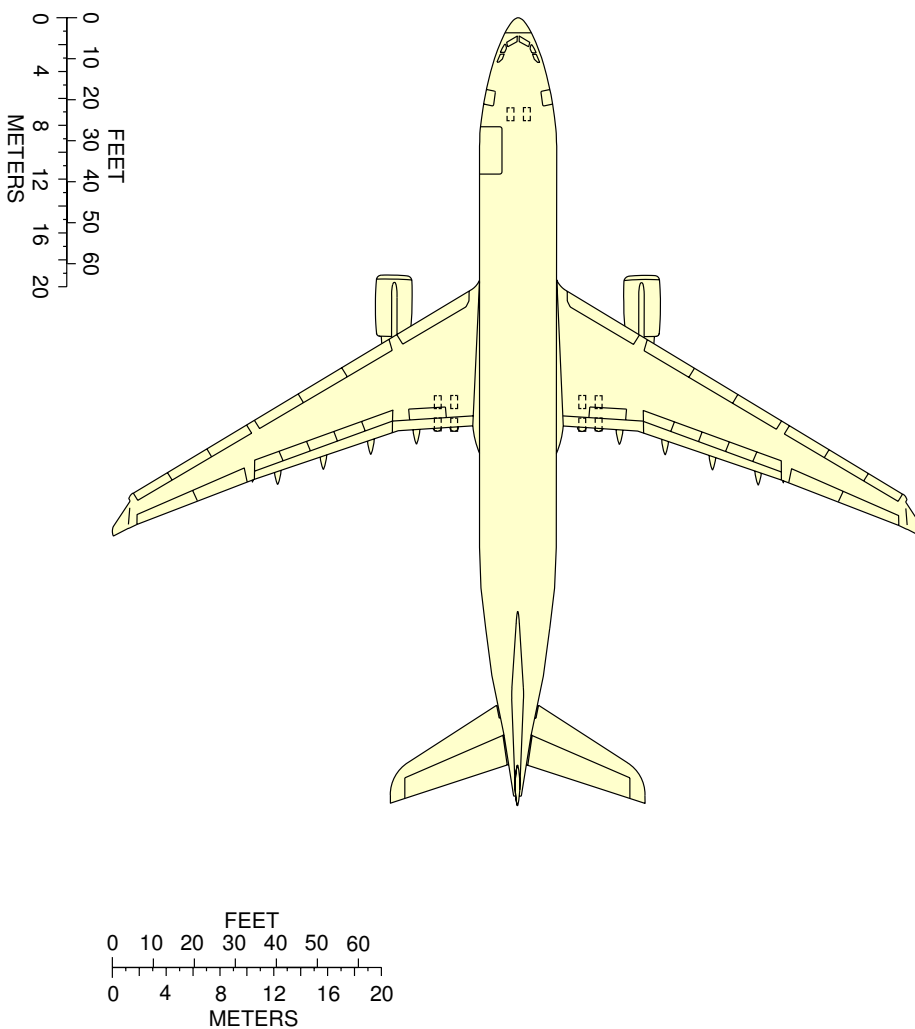

NOTE: WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR PROPER SCALING

F_AC_090200_1_0040101_01_01

Scaled Drawing
1 cm. = 500 cm.
FIGURE-9-2-0-991-004-A01