

Macon-Bibb County Government

Procurement Department

Government Center

700 Poplar Street, Suite 308 Macon, Georgia 31201 (478) 803-0550 Fax (478) 751-7252

Chauncey Wilmore Senior Procurement Officer

> May 22, 2017 ADDENDUM #3

To: ALL PROSPECTIVE FIRMS

Re: INVITATION FOR BIDS: 17-037-CW New Senior Citizen Community Center

The Invitation for Bids, referenced above, is modified as follows:

1. Attached are all the new items to be incorporated into the bid.

Please incorporate this change into the Invitation for Bid and acknowledge receipt of this addendum on your bid form.

Sincerely,

Chauncey Wilmore

Chauncey Wilmore Senior Procurement Officer

GENERAL NOTES

- ALL LINE VOLTAGE ELECTRICITY SHALL BE PROVIDED AND INSTALLED BY E.C.

 ALL VOICE SERVICES, DATA SERVICES, COMPUTER NETWORKING SERVICES AND CABLING FOR SAID SERVICES SHALL BE PROVIDED BY OTHERS.

 ALL FREE AIR CABLING SHALL BE PLENUM RATED.
- 4 ALL DEVICE PLATES MOUNTED IN INTERIOR WALL SHALL HAVE A NATURAL ALUMINUM FINISH, U.N.O.
- 5 ALL DEVICE PLATES MOUNTED INSIDE FLOOR BOXES SHALL HAVE A NATURAL ALUMINUM FINISH,
- 6 ALL DEVICE PLATES SHALL BE STANDARD SIZE U.N.O.

SYMBOL LEGEND

OTWIDOL LLOLIND			
XXXXXX	BACK BOX AND FACE PLATE IDENTIFIER		
1"C & (2) 1-1/2"C	EMPTY LOW VOLTAGE CONDUIT WITH PULL STRING. E.C. TO PROVIDE SIZE & QUANTITY INDICATED. CONDUIT TO BE (1) 1"C IF NO NOTATION GIVEN. LINE DOES NOT IMPLY HOW CONDUIT IS TO BE ROUTED. ROUTE CONDUIT AS REQUIRED IN FIELD.		
-	E.C. SUPPLIED CIRCUIT(S). ARROWS DENOTE QUANTITY OF CIRCUITS. CROSSMARKS INDICATE QUANTITY OF CONDUCTORS PER CIRCUIT. ALL CONDUCTORS TO BE 20A 120VAC CONDUCTORS UNLESS NOTED OTHERWISE. ALL RUNS TO INCLUDE GROUNDING CONDUCTOR WHICH IS NOT INCLUDED IN THE CROSSMARKS. RUNS DEVOID OF CROSSMARKS ARE TO CONTAIN (2) 20A 120VAC CONDUCTORS & (1) GROUNDING CONDUCTOR UNLESS NOTED OTHERWISE. "IG" INDICATES ISOLATED GROUNDING CONDUCTOR.		
РВ	PULL BOX SUPPLIED BY E.C. SIZE AS REQUIRED. LOCATE BOX IN ACCESSIBLE AREA.		
T	CONDUIT STUBBED INTO ACCESSIBLE SPACE ABOVE CEILING IN ROOM WHERE SYMBOL IS SHOWN, UNO		
	WALL-MOUNTED 20A/120V DUPLEX RECEPTACLE ON DEDICATED 20A CIRCUIT		
	CEILING MOUNTED 20A/120V DUPLEX RECEPTACLE ON DEDICATED 20A CIRCUIT		
	20A/120VAC DUPLEX RECEPTACLE ON DEDICATED 20A CIRCUIT MOUNTED IN FLOOR BOX		
IG	WALL-MOUNTED 20A/120V DUPLEX RECEPTACLE ON DEDICATED 20A CIRCUIT WITH ISOLATED GROUND ON DEDICATED 20A CIRCUIT		
Olg	CEILING MOUNTED 20A/120V DUPLEX RECEPTACLE ON DEDICATED 20A CIRCUIT WITH ISOLATED GROUND ON DEDICATED 20A CIRCUIT		
IG	20A/120VAC DUPLEX RECEPTACLE ON DEDICATED 20A CIRCUIT WITH ISOLATED GROUND MOUNTED IN FLOOR BOX ON DEDICATED 20A CIRCUIT		
))))	RADIO FREQUENCY TRANSMISSION SYSTEM		
⟨xx⟩	SHEET KEYNOTE IDENTIFIER. SEE SHEET KEYNOTE WITH CORRESPONDING NUMBER "XX". NOTES CAN BE FOUND IN THE SHEET KEYNOTES TABLE ON PAGE WHERE		

ABBREVIATIONS


IDENTIFIER APPEARS.

AFC	ABOVE FINISHED COUNTER
AFF	ABOVE FINISHED FLOOR
AV	AUDIO VISUAL
BLW CLG	BELOW CEILING
BOS	BOTTOM OF STEEL
CKT	CIRCUIT
EC	ELECTRICAL CONTRACTOR
IR	INFRARED
МС	METAL-CLAD
OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED
OFOI	OWNER FURNISHED, OWNER INSTALLED
PROSC	PROSCENIUM
PSC	PRESENTATION SYSTEMS CONTRACTOR
RCP	REFLECTED CEILING PLAN
SL	STAGE LEFT
SR	STAGE RIGHT
UNO	UNLESS NOTED OTHERWISE
VAC	VOLTS-ALTERNATING CURRENT

MACON-BIBB COUNTY SENIOR CENTER

MULTIPURPOSE ROOM MACON, GA SFPS JOB 3-21075

CONVENTIONS

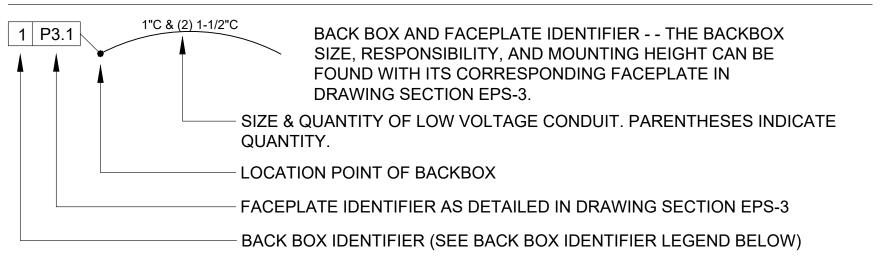

BACK BOX IDENTIFIER LEGEND

- SINGLE GANG BACK BOX MINIMUM DEPTH 3"
- TWO GANG BACK BOX MINIMUM DEPTH 3"
- THREE GANG BACK BOX MINIMUM DEPTH 3"
- 4 FOUR GANG BACK BOX MINIMUM DEPTH 3"
- 5 SURFACE MOUNTED WIRE TROUGH
- 6 HOFFMAN 8" X 8" X 4" SCREW COVER PULL BOX
- 7 FLOOR BOX
- 8 CEILING SPEAKER
- 9 WALL MOUNTED EQUIPMENT RACK
- 10 PROJECTION SCREEN
- 11 LOW VOLTAGE SCREEN CONTROLLER

PRESENTATION SYSTEM SHEET INDEX

EPS-L LEGEND

EPS-1.1 MULTIPURPOSE AV FLOOR PLAN

EPS-1.2 MULTIPURPOSE AV REFLECTED CEILING PLAN

EPS-2.1 SECTION

EPS-3.1 DETAILS
EPS-3.2 DETAILS

PS-1.1 AUDIO SIGNAL FLOW

PS-1.2 VIDEO SIGNAL FLOW

PS-1.3 CONTROL SIGNAL FLOW


Savannah, Georgia 31405
800.736.9242

This document contains copyrighted material and trade secret information belonging to Stage Front
Presentation Systems. Any unauthorized use, disclosure, or duplication of any of the information contained herein may result in liability under applicable laws.

6 Southern Oaks Drive

STAGE FRONT

MACON-BIBB COUNTY SENIOR CENTER MULTIPURPOSE ROOM



RAFT: CHECK: APRV


PROJECT NO: 3-21075


SCALE: NONE

04/17/17

ID EPS-L

LEGEND

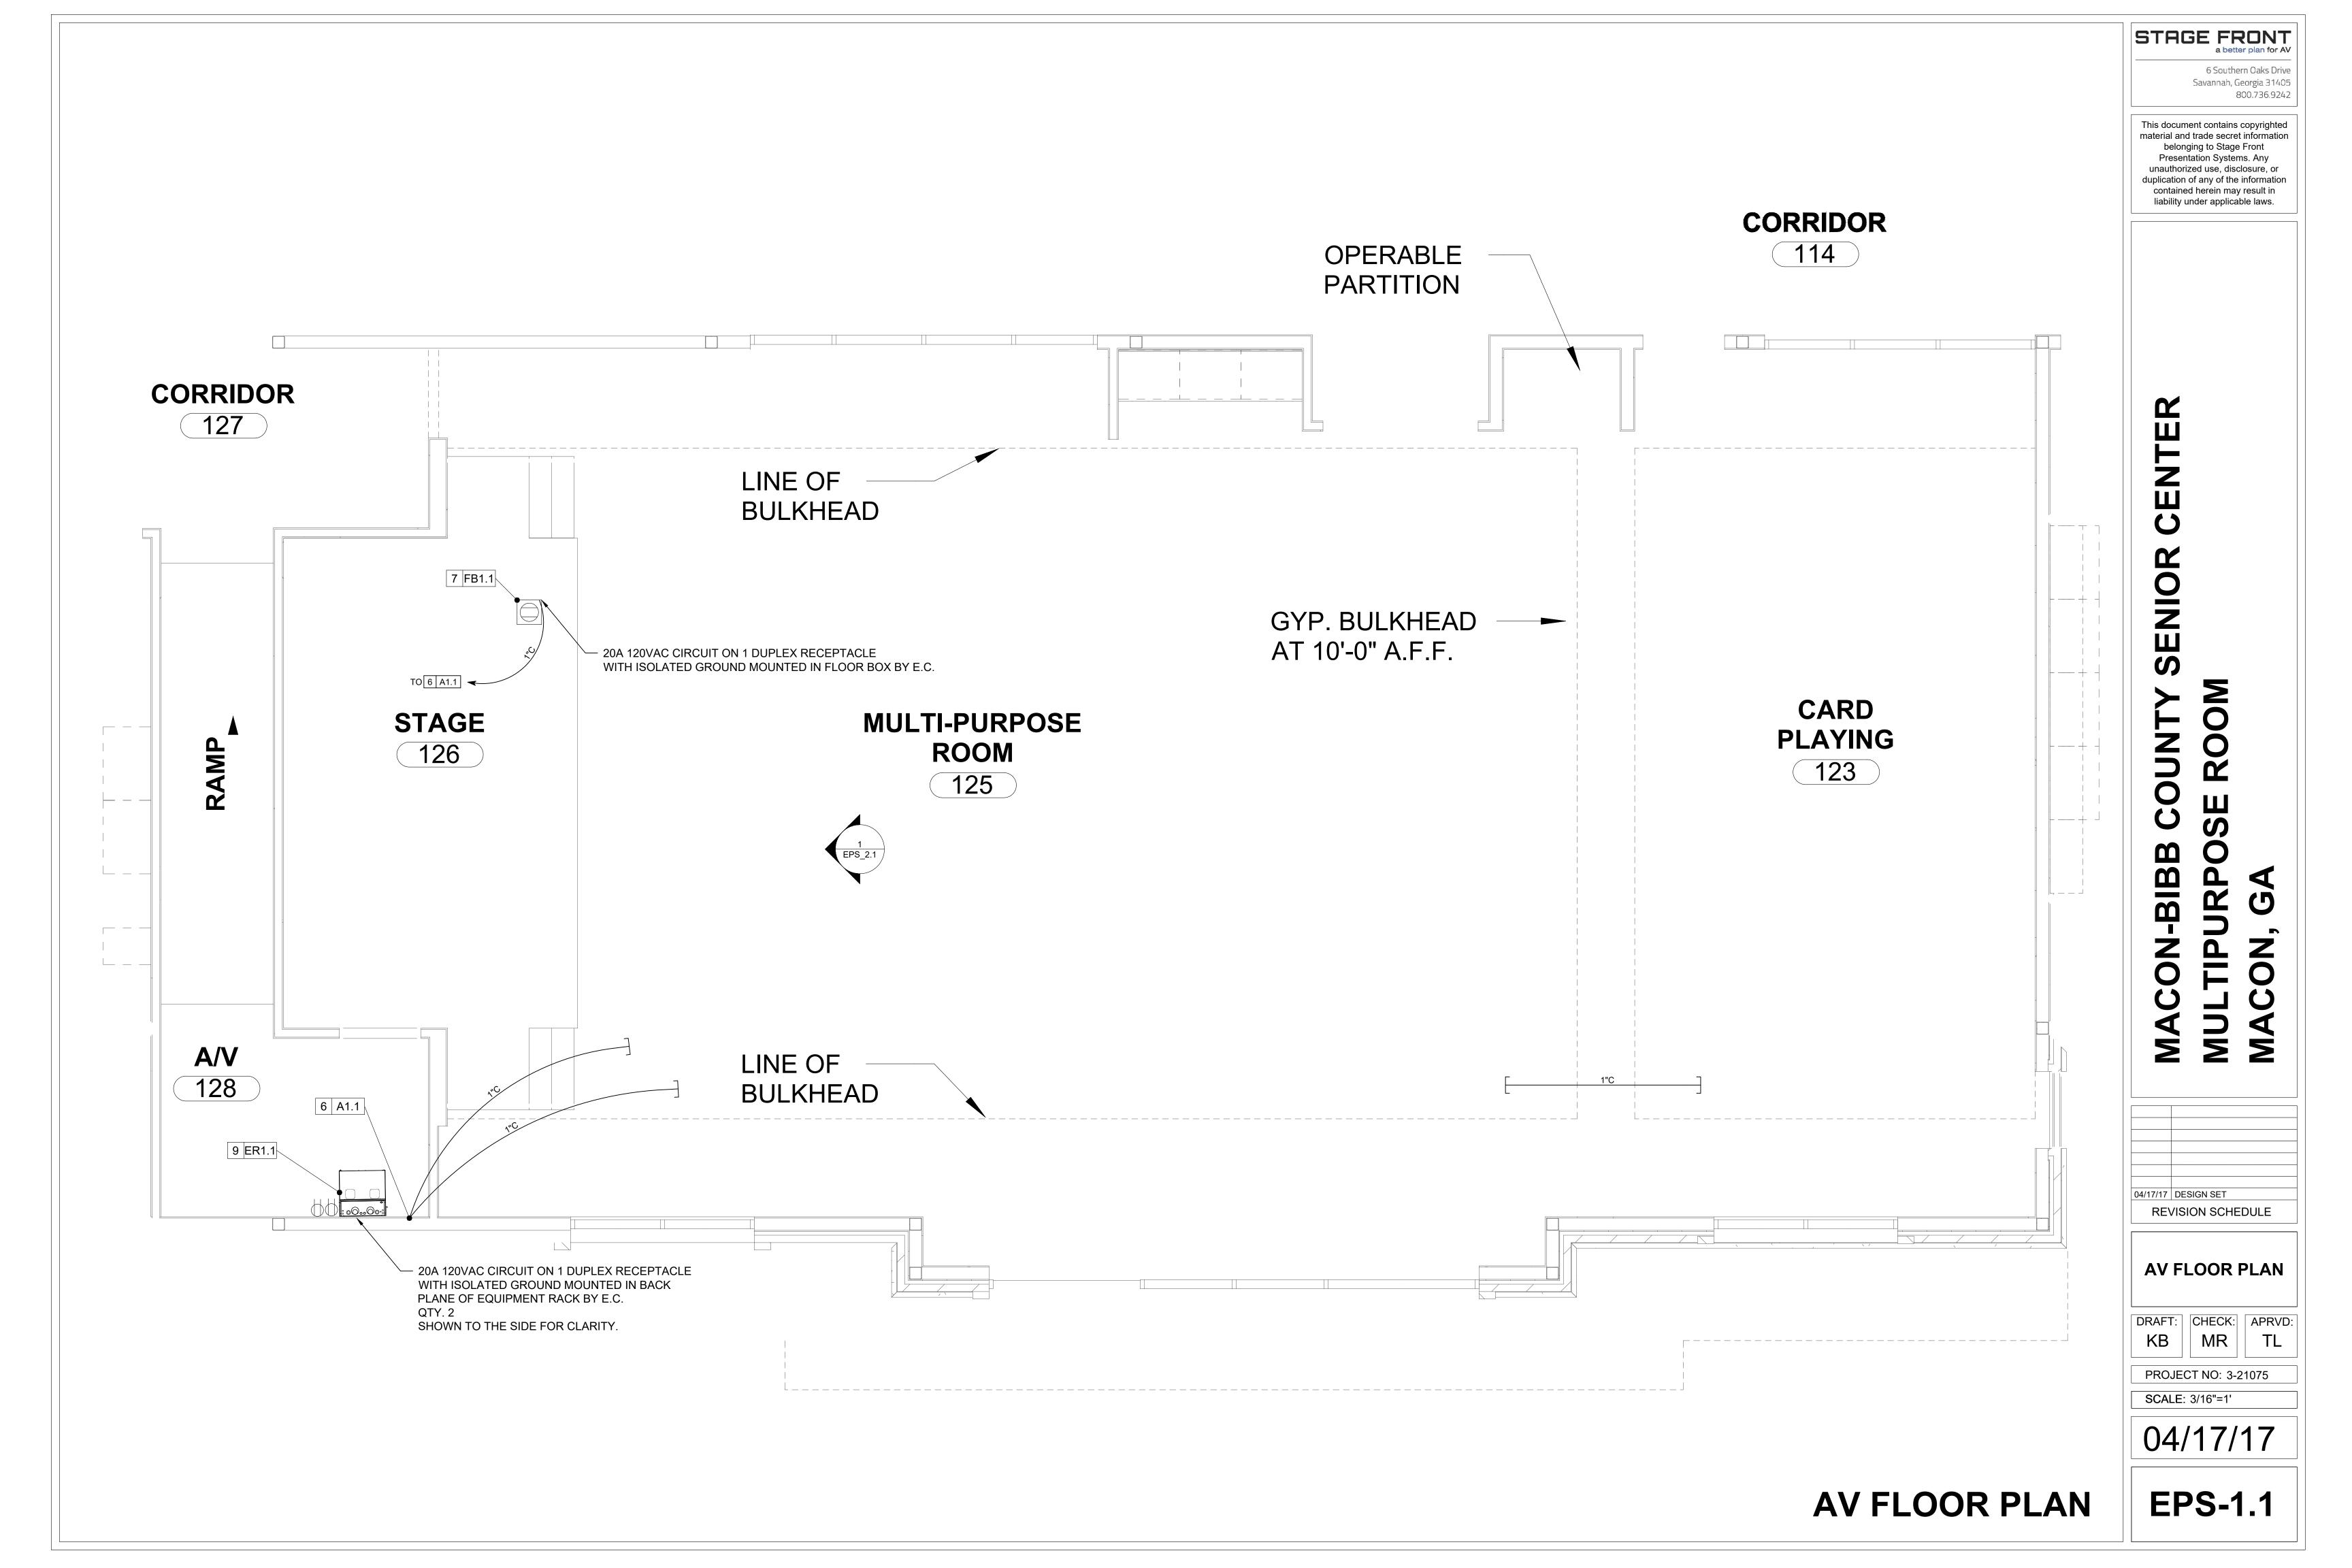

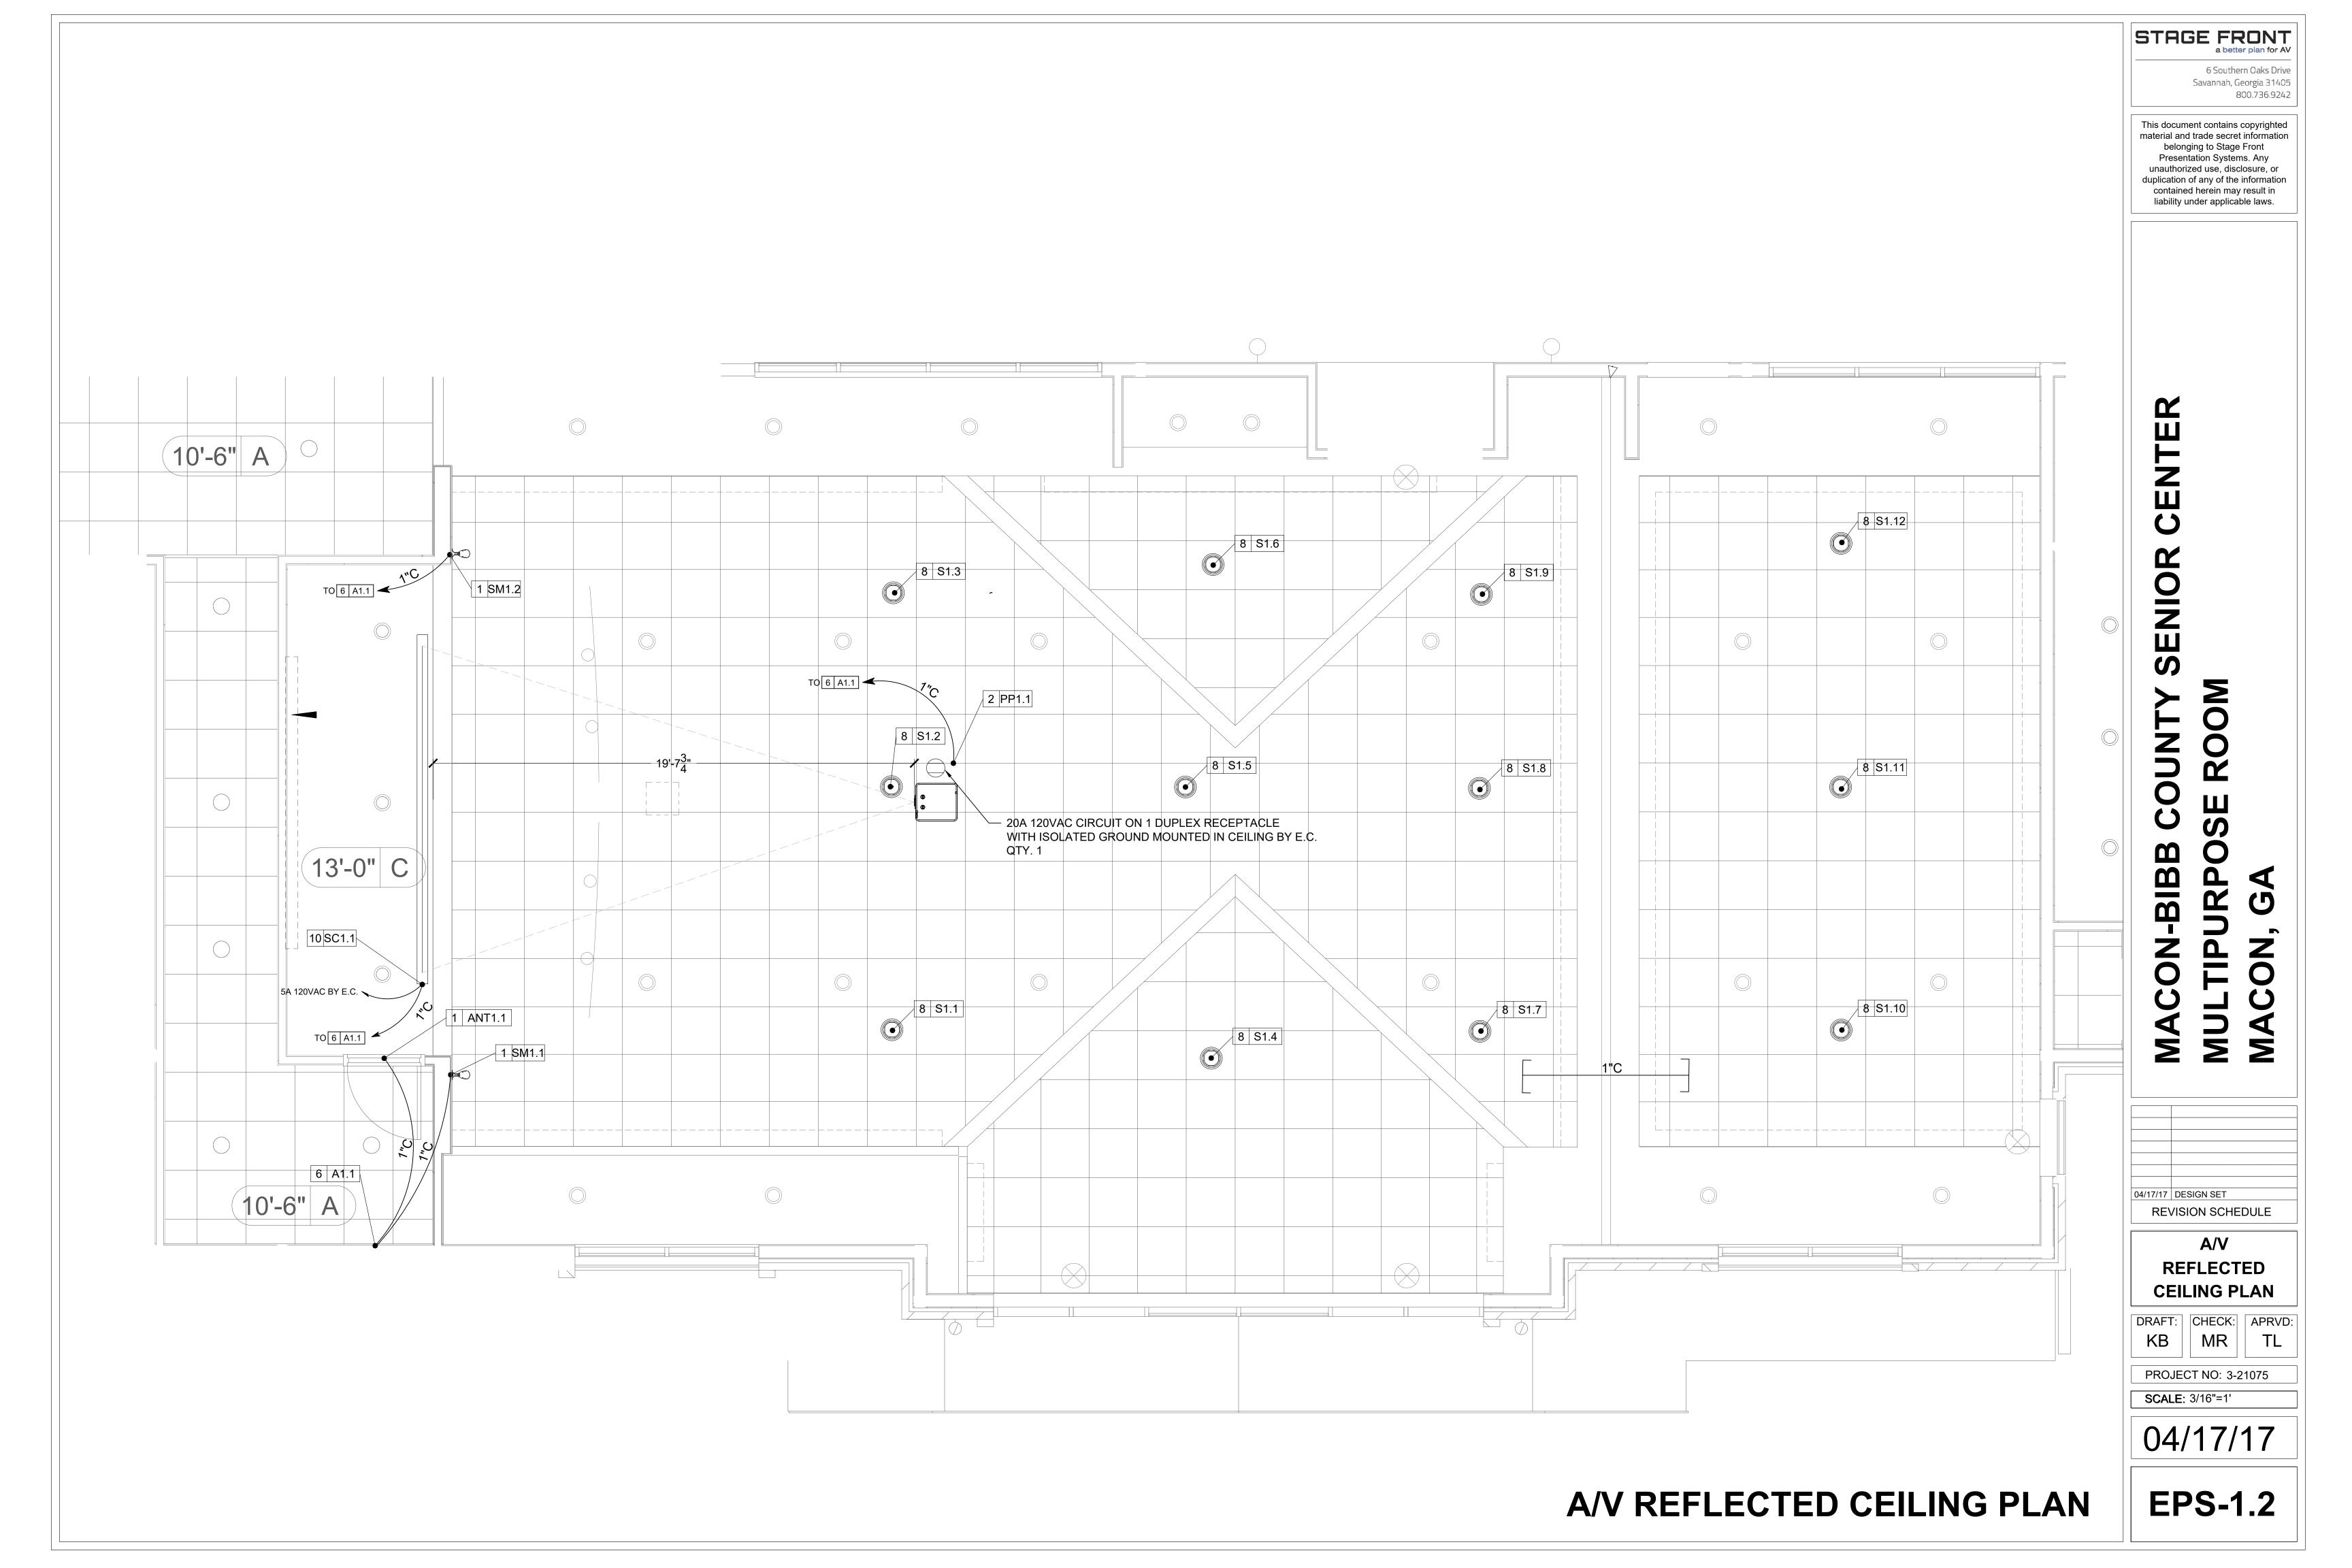




6 SOUTHERN OAKS DR. SAVANNAH, GA. 31405 PH. 912-236-1345 FAX 912-233-5350 www.sfps.net

This document contains copyrighted material and trade secret information belonging to Stage Front
Presentation Systems. Any
unauthorized use, disclosure, or duplication of any of the information contained herein may result in liability under applicable laws.

ON-BIBB MACON, MUL




SECTION


DRAFT: CHECK: APRVD:


PROJECT NO: 3-21075

SCALE: 3/8" = 1' 04/17/17

EPS-2.1 SECTION

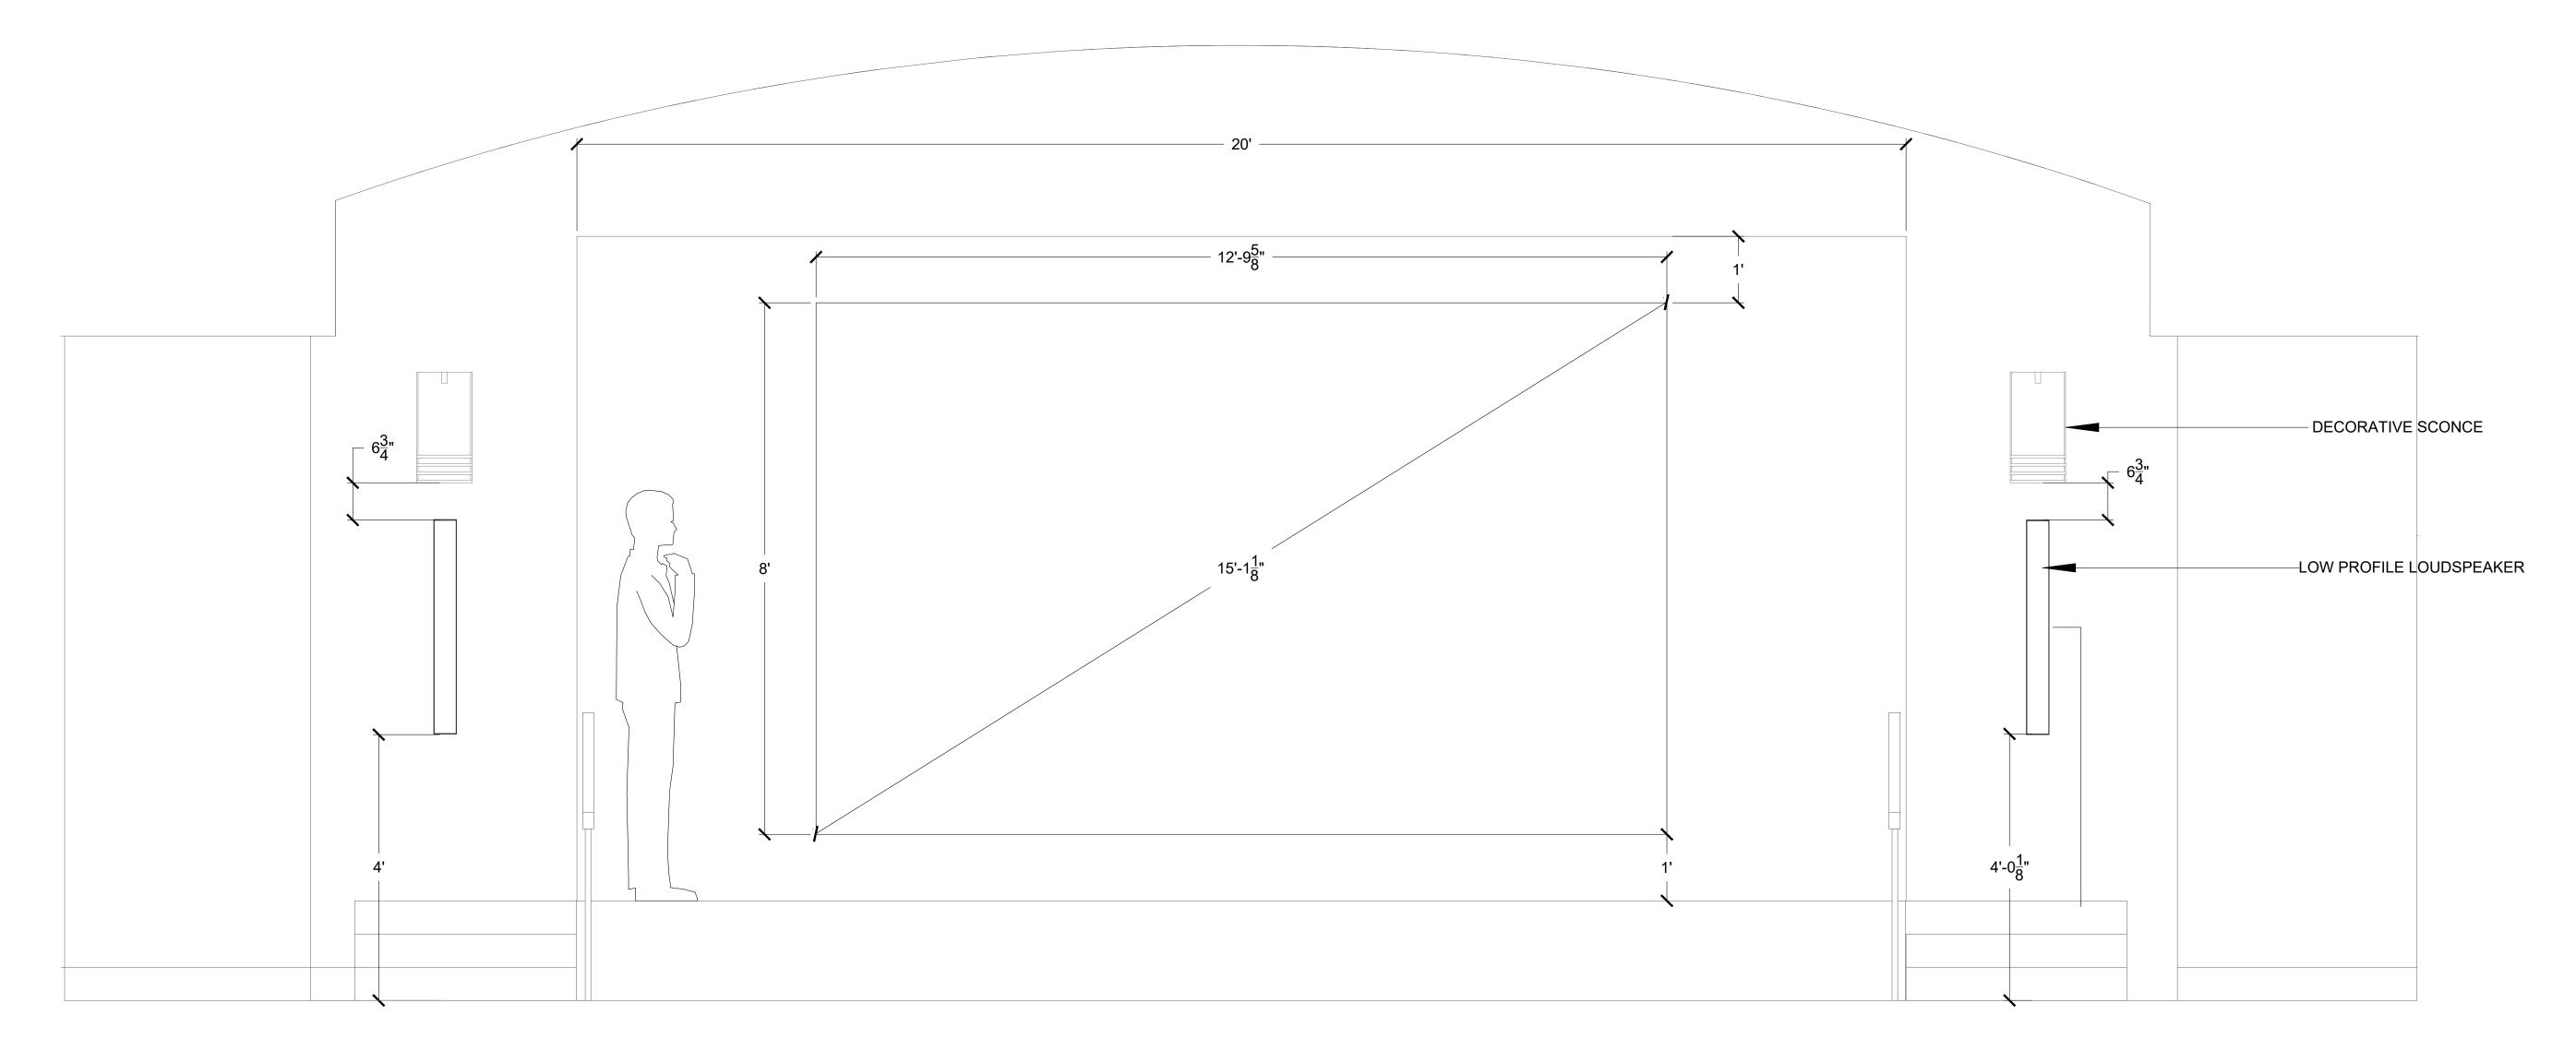




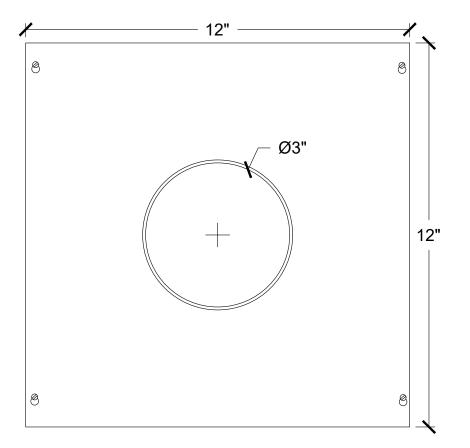


6 A1.1

EQUIPMENT RACK PASS THROUGH PLATE 10" X 10" X 4" SCREW COVER JUNCTION BOX MOUNTED 24" A.F.F. BACKBOX PROVIDED AND INSTALLED BY E.C. BACKBOX PROVIDED AND INSTALLED BY E.C. FACEPLATE PROVIDED AND INSTALLED BY P.S.C.




2 PP1.1

PROJECTOR I/O PLATE TWO GANG BACKBOX SURFACE MOUNTED ON CEILING FACEPLATE PROVIDED AND INSTALLED BY P.S.C.




1 ANT1.1

ANTENNA PASS THROUGH PLATE ONE GANG BACKBOX MOUNTED AT 9' AFF BACKBOX PROVIDED AND INSTALLED BY E.C. FACEPLATE PROVIDED AND INSTALLED BY P.S.C.




1 SM1.1THRU 1 SM1.2

SPEAKER MAINS PASS THROUGH PLATE ONE GANG BACKBOX MOUNTED ON WALL 10' AFF BACKBOX PROVIDED AND INSTALLED BY E.C. FACEPLATE PROVIDED AND INSTALLED BY P.S.C.

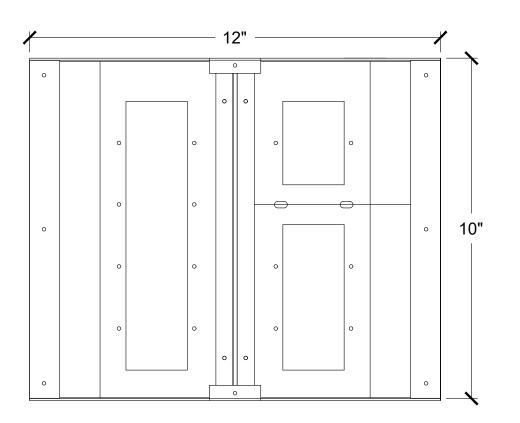


7 FB1.1

FSR FL-500P FLOORBOX FLOORBOX MOUNTED RECESS FLUSH IN STAGE FLOOR FLOORBOX PROVIDED BY PSC AND INSTALLED BY EC AV EQUIPMENT PROVIDED AND INSTALLED BY PSC FLOORBOX REQUIRES (1) DEDICATED 20A 120 VAC CIRCUIT FEEDING DUPLEX RECEPTACLE DUPLEX RECEPTACLES MOUNTED INSIDE FLOORBOX PROVIDED AND INSTALLED BY EC




7 WP1.1

DIGITAL MEDIA FACEPLATE ONE GANG BACKBOX RECESS MOUNTED IN FLOORBOX 7/FB1.1 BACKBOX PROVIDED AND INSTALLED BY E.C. FACEPLATE PROVIDED AND INSTALLED BY P.S.C.




7 MP1.1

STAGE MIC INPUT PLATE TWO GANG BACKBOX RECESS MOUNTED IN FLOORBOX 7/FB1.1 BACKBOX PROVIDED AND INSTALLED BY E.C. FACEPLATE PROVIDED AND INSTALLED BY P.S.C.

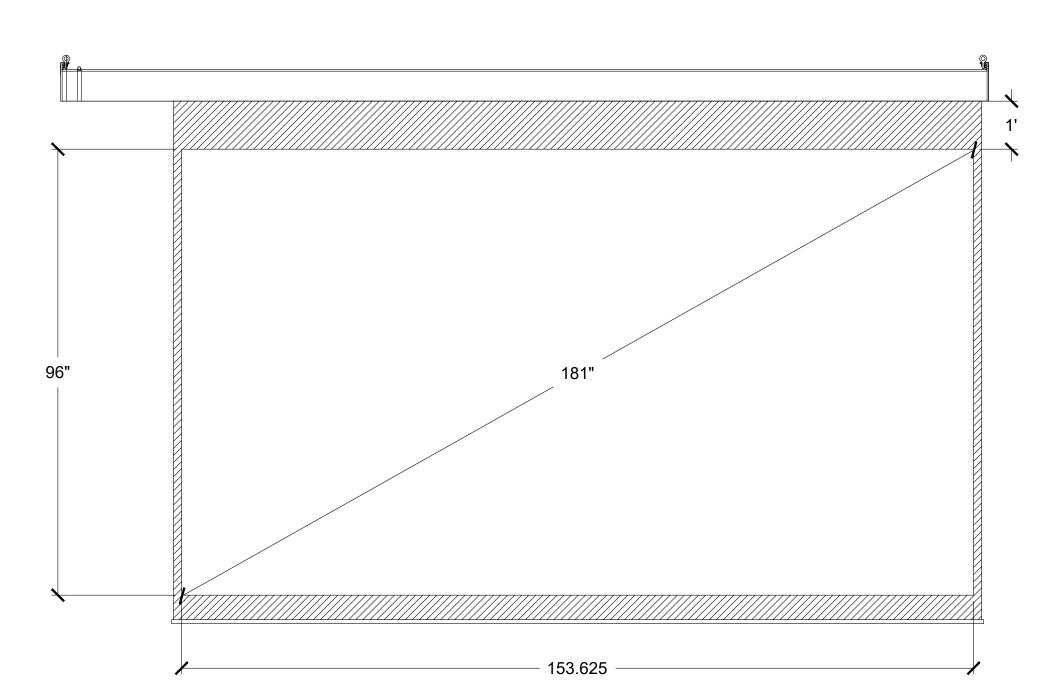

10 SC1.1

181" DIAG. PROJECTION SCREEN SCREEN SUSPENDED FROM STRUCTURE TO BE FLUSH ON BACK OF PROSCENIUM SCREEN WITH CUSTOM DROP AND MASKING PROVIDED AND INSTALLED BY P.S.C. REQUIRES 5A 120VAC INSTALLED BY E.C.



-BIB

PRESENTATION SYSTEMS 6 SOUTHERN OAKS DR. SAVANNAH, GA. 31405 PH. 912-236-1345 FAX 912-233-5350 www.sfps.net

This document contains copyrighted material and trade secret information belonging to Stage Front Presentation Systems. Any unauthorized use, disclosure, or duplication of any of the information

contained herein may result in

liability under applicable laws.

DETAILS

DRAFT: CHECK: APRVD: MR


PROJECT NO: 3-21075

SCALE: 6" = 1'

04/17/17


EPS-3.1

DETAILS

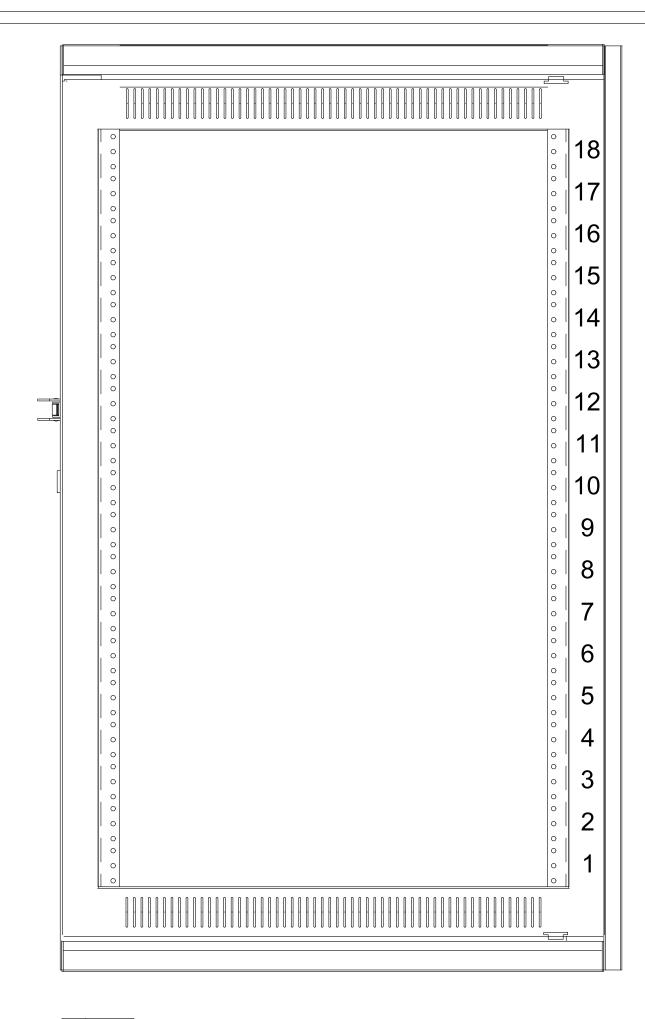


9 ER1.1

MIDDLE ATLANTIC DWR-18-22 EQUIPMENT RACK EQUIPMENT RACK WALL MOUNTED 24" AFF RACK PROVIDED AND INSTALLED BY PSC AV EQUIPMENT PROVIDED AND INSTALLED BY PSC AV RACK REQUIRES (2) DEDICATED 20A 120 VAC CIRCUITS FEEDING DUPLEX RECEPTACLES DUPLEX RECEPTACLES MOUNTED INSIDE AV RACK BACK PAN PROVIDED AND INSTALLED BY EC

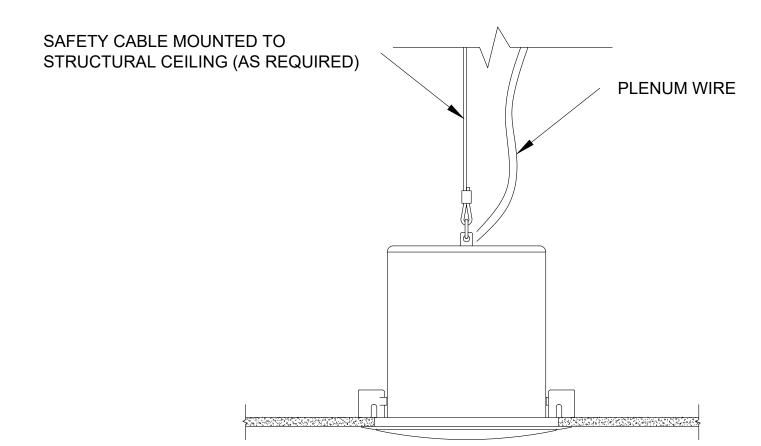

8 SP1.1 THRU 9 SP1.12


CEILING SPEAKER MOUNTED FLUSH IN CEILING TILE SPEAKER PROVIDED BY PSC AND INSTALLED BY PSC

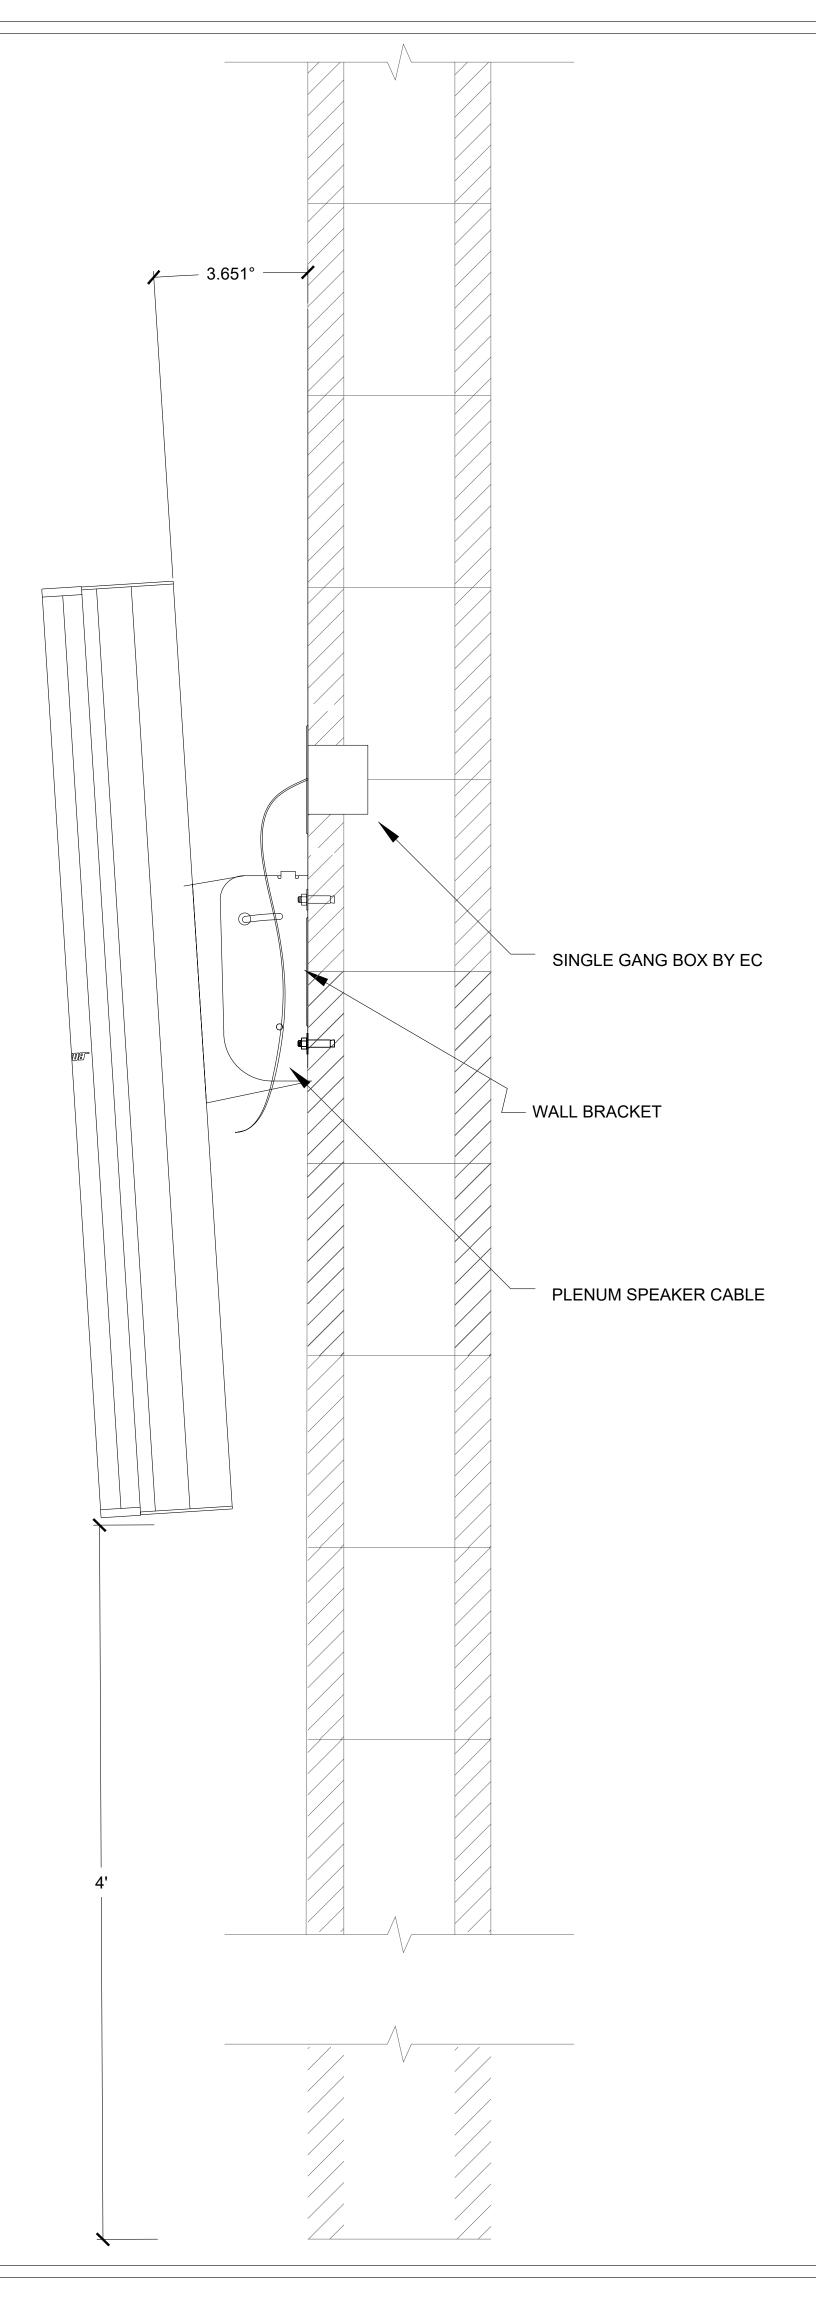

1 SPEAKER MOUNTING DETAIL EPS_3.2 SCALE:3" = 1'

6 SOUTHERN OAKS DR. SAVANNAH, GA. 31405 PH. 912-236-1345 FAX 912-233-5350 www.sfps.net

This document contains copyrighted material and trade secret information belonging to Stage Front Presentation Systems. Any unauthorized use, disclosure, or duplication of any of the information contained herein may result in liability under applicable laws.



DETAILS

DRAFT: CHECK: APRVD:


PROJECT NO: 3-21075


SCALE: 6" = 1'


04/17/17

EPS-3.2

DETAILS

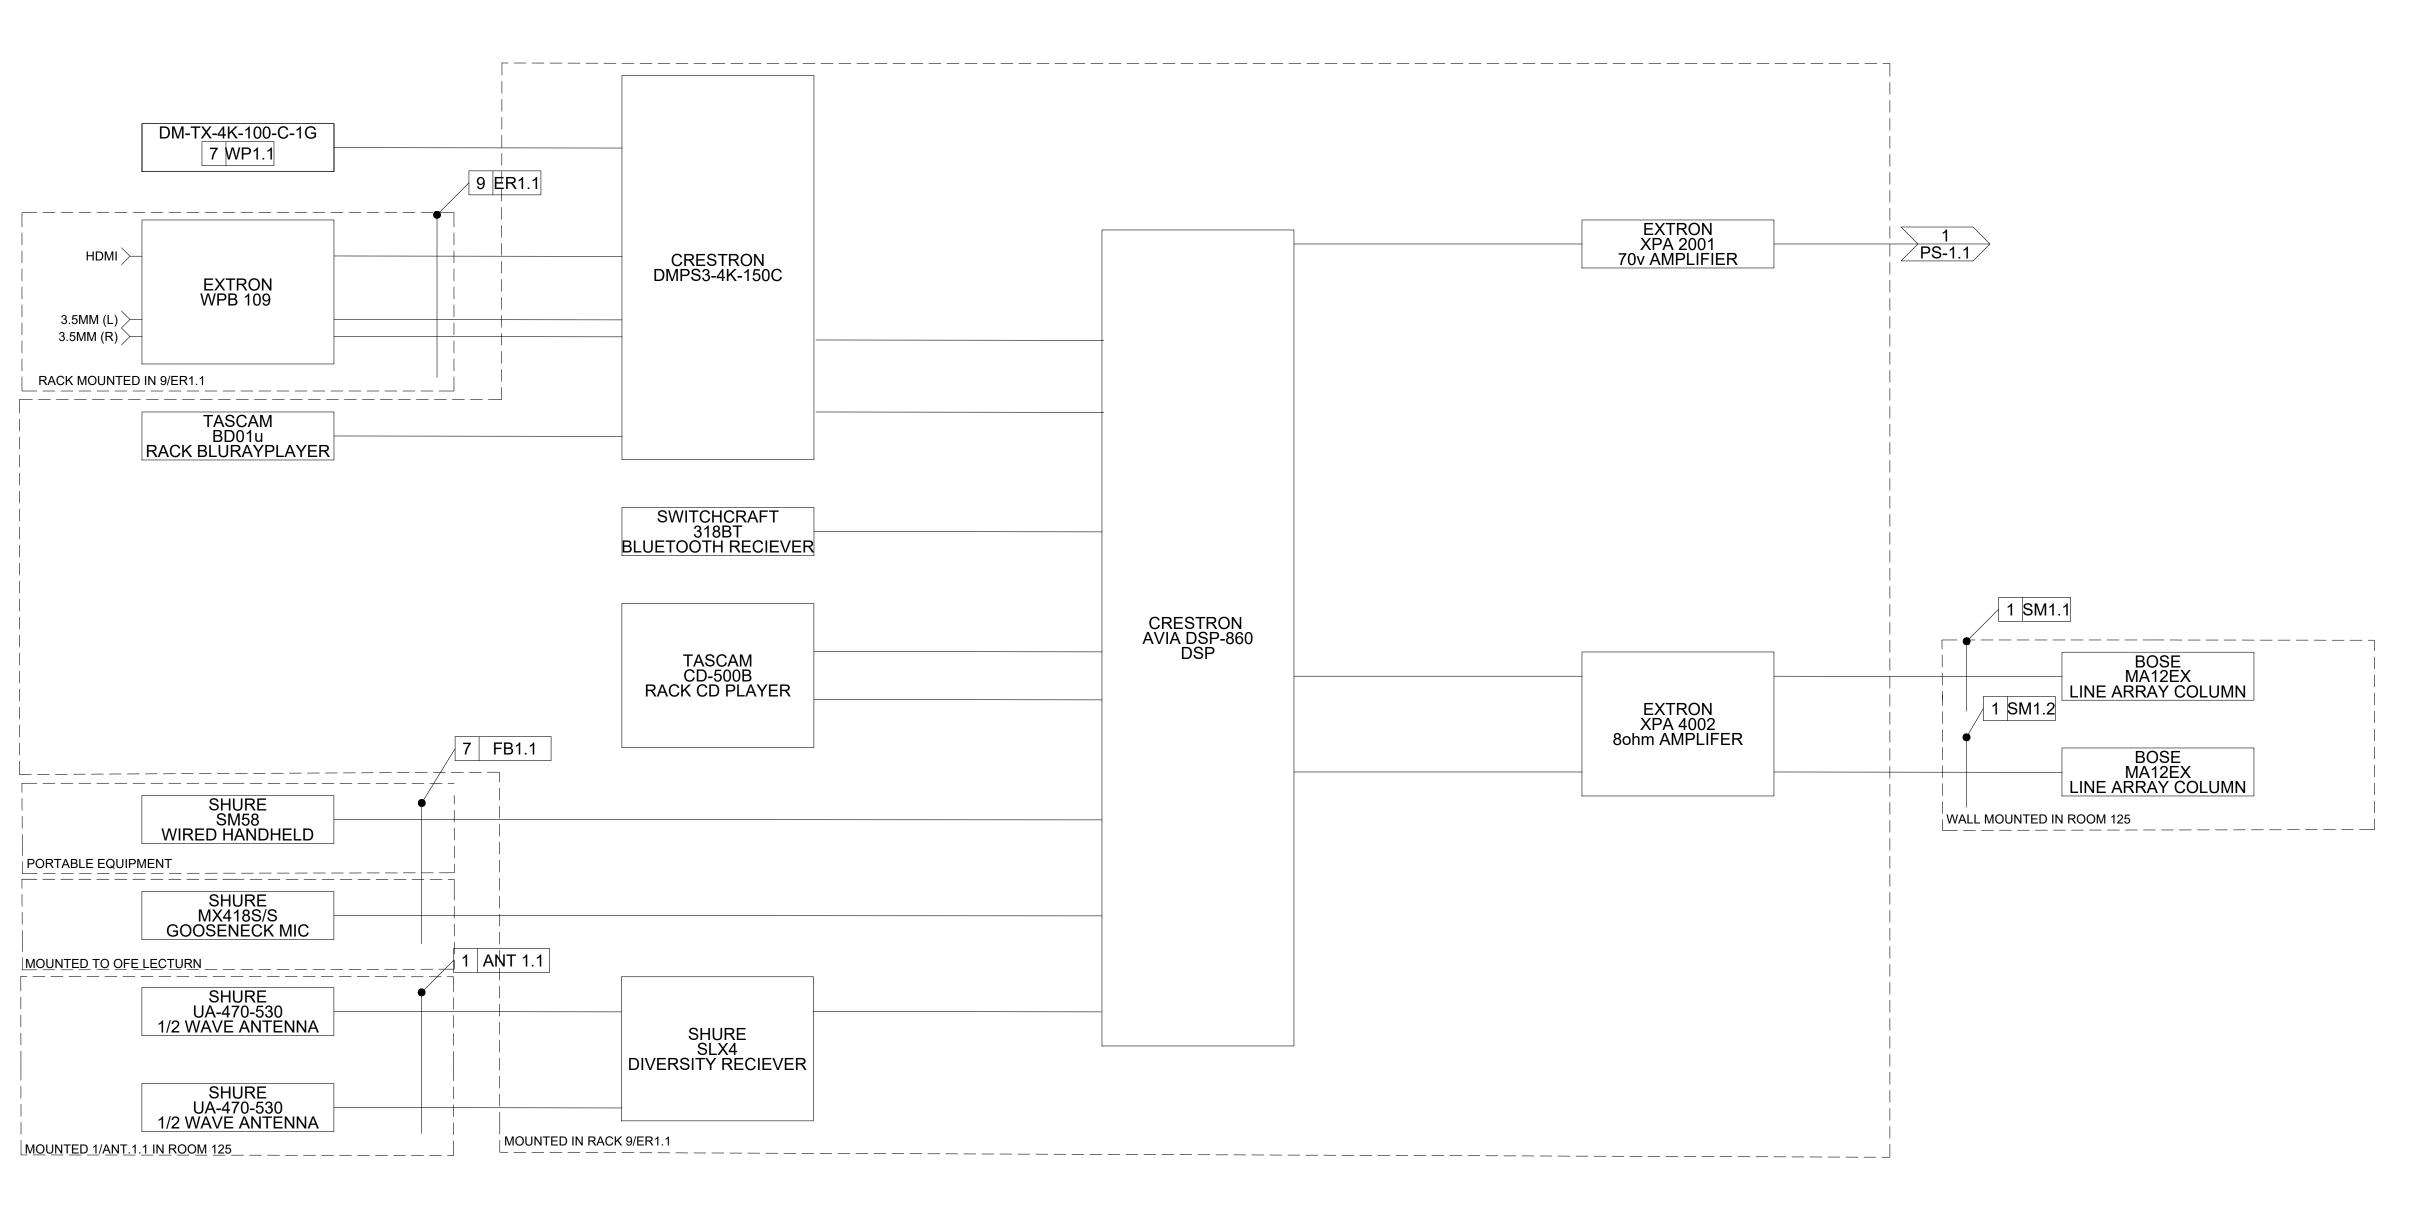



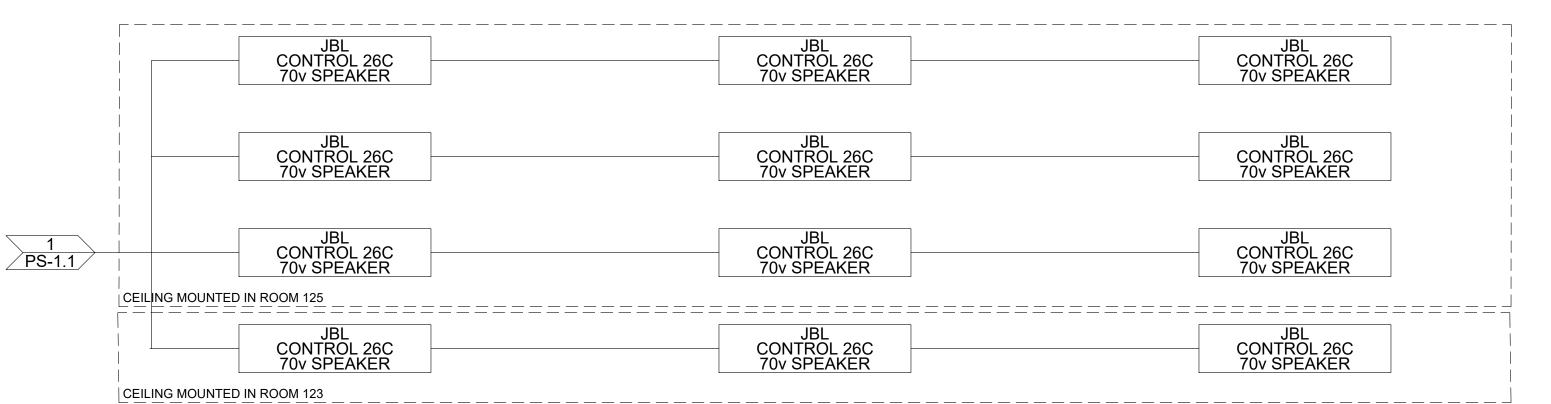

SAVANNAH, GA. 31405 PH. 912-236-1345 FAX 912-233-5350 www.sfps.net This document contains copyrighted material and trade secret information belonging to Stage Front Presentation Systems. Any unauthorized use, disclosure, or duplication of any of the information contained herein may result in liability under applicable laws.

SENIOR MOO I-BIBB

04/17/17 DESIGN SET REVISION SCHEDULE

AUDIO FLOW

DRAFT: CHECK: APRVD: MR

PROJECT NO: 3-21075

SCALE: NONE


04/17/17

PS-1.1



PH. 912-236-1345 FAX 912-233-5350 www.sfps.net

This document contains copyrighted material and trade secret information belonging to Stage Front Presentation Systems. Any unauthorized use, disclosure, or duplication of any of the information contained herein may result in liability under applicable laws.



VIDEO FLOW

DRAFT: CHECK: APRVD:

PROJECT NO: 3-21075

SCALE: NONE

04/17/17

VIDEO SIGNAL FLOW

CRESTRON DMPS3-4K-150C

CRESTRON DM-RMC-4K-SCALER-C

CEILING MOUNTED ROOM#125

OPTOMA ZU519T-W

9 ER1.1

DM-TX-4K-100-C-1G

EXTRON WPB 109

TASCAM BD01u RACK BLURAYPLAYER


MOUNTED TO PANEL ON RACK 9/ER1.1

HDMI >

VGA >

MOUNTED IN RACK 9/ER1.1

PS-1.2

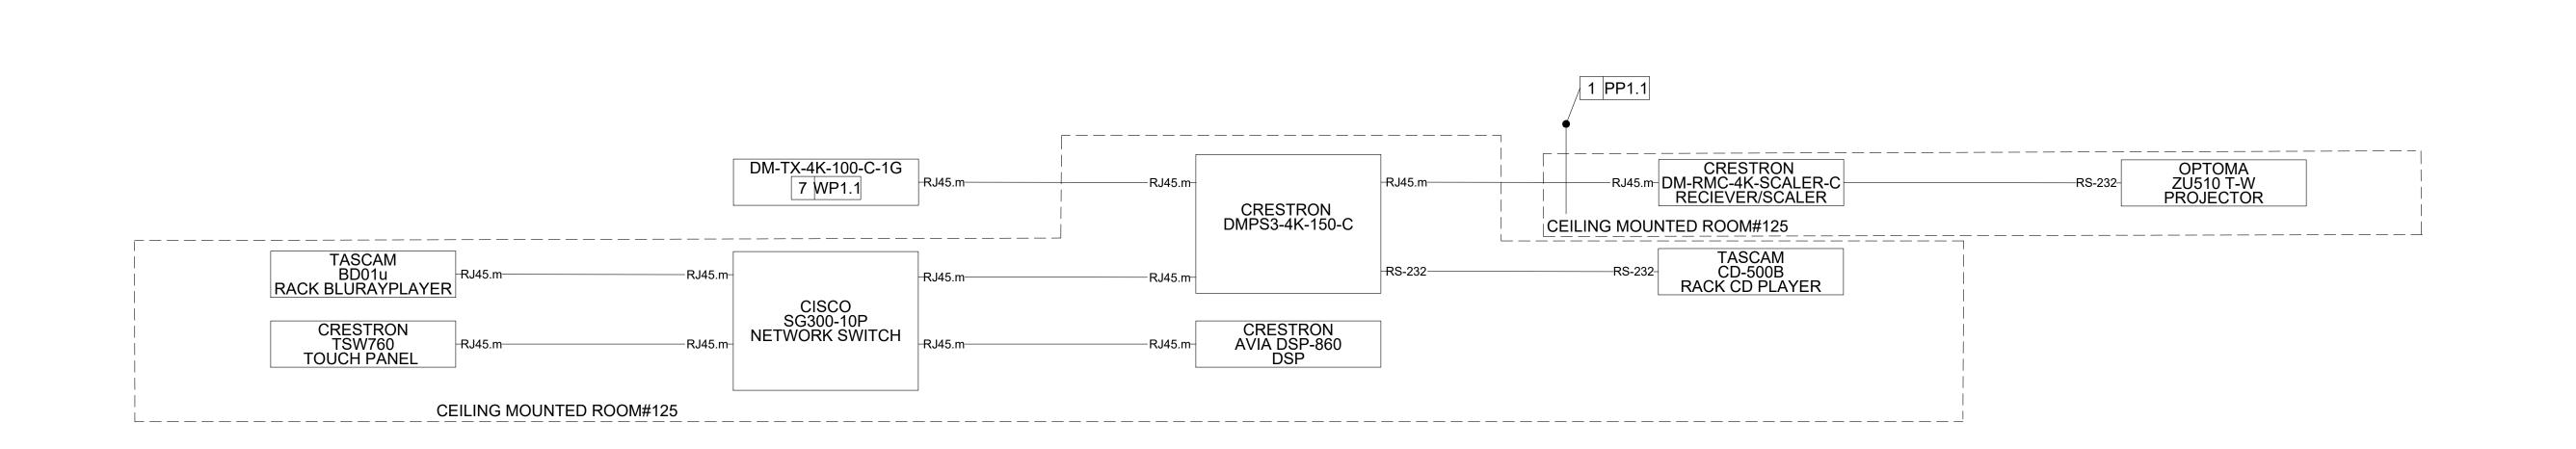


Stage TOIL

6 SOUTHERN OAKS DR. SAVANNAH, GA. 31405 PH. 912-236-1345 FAX 912-233-5350 www.sfps.net

This document contains copyrighted material and trade secret information belonging to Stage Front Presentation Systems. Any unauthorized use, disclosure, or duplication of any of the information contained herein may result in liability under applicable laws.

MACON-BIBB COUNTY SENIOR CENTER MULTIPURPOSE ROOM MACON GA



CONTROL FLOW

DRAFT:	CHECK:	APRV
KB	MR	TL

PROJECT NO: 3-21075

SCALE: NONE

04/17/17

PS-1.3

CONTROL SIGNAL FLOW