ApeosPort-IV


C5575 C4475 C3375 C3373

C2275



ApeosPort-IV C5575 / C4475 / C3375 / C3373 / C2275 Digital Colour Multifunction Device

A new way to work effectively

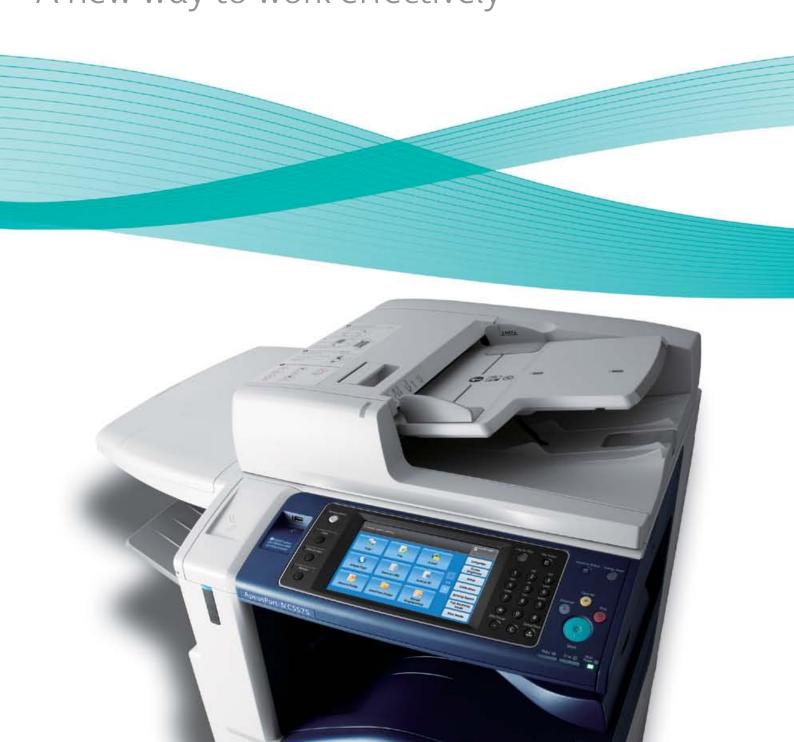

ApeosPort-IV C5575 Series Multifunction Devices

We all want to help protect the environment. It makes sense to do everything we can to minimise our environmental footprint while we work.

It makes good business sense too. Cutting out waste and using less energy can improve the performance, profitability, and longevity of your business. It pays to work smarter, cleaner, and more efficiently than ever before.

The ApeosPort-IV C5575/C4475/C3375/C3373/C2275 series enables personalised and customised document management solutions you can access from the device's touch screen. These applications can leverage your existing infrastructure and databases to improve document management processes and to engage employees in reducing energy use and waste.





Environmental benefits combined with high quality print performance

Fuji Xerox has enhanced its print processes through new technologies to continuously improve the performance of its new multifunction devices. At the same time we have made sure our devices are user friendly for improved productivity and efficiencies in operation.

The multifunction device automatically detects the

user. Fuji Xerox has introduced its revolutionary "Smart WelcomEyes" technology* to the ApeosPort-IV C5575 series multifunction devices. The device is able to detect when a user is approaching and automatically recovers from sleep mode, as if to welcome them. This clever technology eliminates unnecessary operational steps and the user can activate the device immediately.


* Smart WelcomEyes is a trademark of Fuji Xerox.

Smart Energy Management Technology. Our innovative Smart Energy Management Technology reduces energy usage by only activating the functions required by the user. What's more, you will enjoy a much quieter office environment.

Two second start up time – no need to wait! When the ApeosPort-IV C5575/C4475/C3375/ C3373/C2275 multifunction device recovers from sleep mode, it takes only two seconds to start working. Even if the device is routinely set to sleep mode to reduce power use, users don't experience any delays in set-up and operation.

Improved energy efficiency in fuser technology.

Induction Heating fusing technology eliminates the need for pre-heating the fusing unit and minimises power use when the machine is in standby mode.

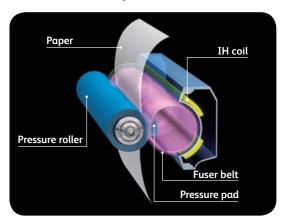




Reduce environmental impacts from use of biomass plastic. Fuji Xerox has been actively promoting research and development to replace plastic parts with more environmentally friendly materials. One example is the use of biomass plastics, comprising more than 61 % of a plant-derived constituent (corn) in some device parts.

High scanning speeds with less power use from our LED scanner. Fuji


Xerox has adopted LED technology, which requires less power than xenon lamps, as the light source. We have succeeded in achieving 1.5 times the brightness of a xenon lamp at one-third the power consumption while maintaining consistent scan image quality.

High-precision LED print head technology for reduced power use.

Digitally Enhanced Lighting Control Imaging System (DELCIS) achieves an output print resolution of 1,200 x 2,400 dpi that is equivalent or even superior to that produced by a conventional laser raster output scanner (ROS) system. LED print head technology makes it possible to build smaller devices and improve energy efficiency.



EA-Eco Toner. The Emulsion Aggregation (EA) Ultra Low-Melt toner achieves a fusing temperature more than 20°C lower than conventional toners, reducing power required during fusion, as well as achieving a brilliant glossy output even on ordinary paper.

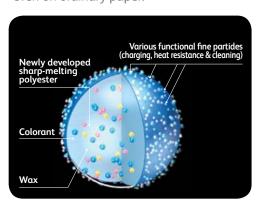



Advanced functions, yet even easier to use

The ApeosPort-IV C5575/C4475/C3375/C3373/C2275 is the perfect device to be used as the "nerve centre" of your business. It works effortlessly as the central device in an office to provide stable, trouble-free productivity and excellent image quality for business requirements.

Dramatically increase your workflow efficiency. Cutting edge scanning functionality opens the door to better ways of getting work done. Scan to Email quickly distributes documents to multiple email addresses. Store files on the device, or in a personal directory. You can also scan documents to network folders, FTP sites and fax servers right from the device.

Scan to Folder feature allows you to scan to a folder on the printer's hard drive to reprint on demand or retrieve via a web browser. Documents stored on the hard drive are displayed as thumbnails and up-close previews on the device touchscreen.

Easy archiving, organising and searching. With scan to searchable PDF*, you can create a fully text-searchable file and integrate it into your workflow process in one easy step.

Significantly smaller scan files. The latest scan-export compression technologies reduce traffic on the network and accelerate document delivery*.

Introduce new workflows or automate repetitive processes within the office environment by automatically routing documents to predefined locations at the touch of a button.

Document conversion to Word/Excel[®] **formats for easy editing.** The ApeosPort-IV C5575 series multifunction devices can detect text, tables and pictures in scanned images and convert them into Microsoft Word and Excel documents so you can edit them easily*. Paper documents and original data that have been lost can be regained and easily used, saving time and hassle for users by eliminating rekeying chores.

booklets (unfolded)

* The optional Advanced Scan Kit is required.



Personalised user interface allows you to configure the control panel to show only the features you regularly use, simply sign in to instantly configure the screen to your preferences. A fast, easy and productive way to work.

High-speed scanning delivers maximum productivity.

The ApeosPort-IV C5575/C4475 multifunction devices are capable of scanning both sides of a document in a single pass, at a maximum rate of 140 images per minute for both colour and black-and-white documents. The lightweight duplex automatic document feeder can also hold a maximum of 130 sheets (80 gsm).

* Applicable with the Single Pass Duplex Automatic Document Feeder

High resolution output – a genuine 2,400 dpi. The ApeosPort-IV C5575/C4475/C3375/C3373/C2275 can produce high resolution output of 2,400 dpi. Users can tailor the final output settings of their documents by selecting "standard", "photo", "presentation", "design", "CAD" or "POP" to suit the image type they require, as well as setting the colour balance or choosing an ICC profile.


To speed up copying and faxing an express (simple) copy and fax feature is available that displays only the basic settings. This is provided in addition to the normal features.

A truly universal print driver. Xerox Global Print Driver lets IT administrators install, upgrade and manage Fuji Xerox and non-Fuji Xerox devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.

Walk-up simplicity. Print from and scan to any USB memory device for faster document delivery when you're not at your computer.









High Capacity Tandem Tray holds up to 3,000 sheets

This high performance finisher features automatic stapling, hole-punching, folding and booklet making.



USB memory slot (optional)

Menu button 8.5" colour

user interface

Authentication

Status display

0 Power-saving button

Main power

Users can analyse the environmental impact of their **print operations** by checking the ecological rating display on the document monitor*. This function displays up to five leaves to indicate how environmentally friendly the print settings are.



* The document monitor is software that is installed on the computer. It can be downloaded from the Fuji Xerox website.

Customise your print driver settings for economy and efficiency. For example, set two-sided printing or choose N-up for printing multiple pages on a single sheet as your default.

WHQL certified PCL and PostScript print drivers

provide a consistent, easy-to-use interface for end-users that can greatly simplify your printing operations.

Save time by storing the settings of frequently printed **documents** as favourites in your print driver. Settings include paper sizes, covers, duplexing, finishing and more.

Forwarding received fax documents. When faxes are received they can be stored in the device folders, and any required documents can be printed after checking thumbnail previews. This cuts waste and reduces paper use. Documents received in a folder can also be forwarded by fax, printed, and sent via e-mail. FTP. or SMB.

Faxes can be sent directly from PCs. This reduces the volume of paper required in an office and eliminates the need for unnecessarily printing faxes.

Eliminating spam faxes. If you do not want to receive faxes from specific or unlisted numbers they can be rejected. This handy function lets you eliminate indiscriminate direct mailing and wasteful printing of unwanted faxes.

IP Fax or FoIP offers a more cost efficient way of doing business. Faxes are sent and received through an IP-based network such as the internet. Faxes can be routed directly to an email account to conserve energy and paper.

The power of mobility and convenience of cloud access

As computers, wireless technology and cell phones have evolved – so has the workforce. People no longer have to sit at their desks to work – they can now connect anywhere and at anytime.

Imagine printing without being physically connected to a corporate network, downloading drivers or worrying about your sensitive documents sitting on a printer tray. Now you can.

Mobile access anywhere, anytime

Mobile workers can conveniently print directly from their mobile device, such as an iPhone®, iPad® or Android-based smartphones by simply downloading the "Print Utility for iOS or Android" application from the App Store. Whether they're travelling or working between offices, users will be able to print PDF documents, HTML emails and JPG image files.

Mobile workers: a powerful growth engine.

"IDC expects the global mobile worker population to increase from 919.4 million in 2008 to more than 1.2 billion in 2013, representing nearly 35% of the worldwide workforce."


Source: IDC, Worldwide Mobile Worker Population 2009-2013 Forcast, DOC # 221309, Dec 2009.



Office workers on-the-go can now print anywhere using Google Cloud Print™

The ApeosPort-IV C5575 series is designed to support Google Cloud Print™, which lets GMail™ and Google Docs™ users print from mobile devices like iPhone®, iPad®, or even a PC. Google Cloud Print™ lets you print documents over an Internet connection without downloading printer drivers.

Google Cloud Print $^{\mathbb{M}}$ is a new technology that connects the multifunction device to the web. Using Google Cloud Print $^{\mathbb{M}}$, you can make the MFD available to you and anyone you choose, from the applications being used every day.

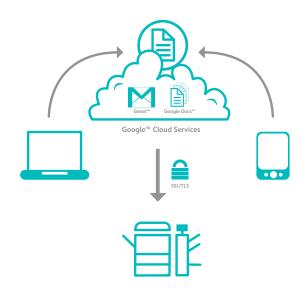

Reporting and management tools

CentreWare™ Internet Services software makes it easy for administrators to configure the device, upload address books, monitor usage and consumables remotely and establish auditing capabilities.



Manage colour printing to minimise costs. Control costs by nominating when colour can be used, and by whom. This ensures that colour is available to those individuals who truly leverage its power, such as sales teams and the marketing department.

Driverless printing for remote users with CentreWare Internet Services web utility. Any connected computer can immediately output PDF, TIFF, JPEG and Docuworks files from any network computer, without using a print driver at all.

Device Configuration Tool allows for simplified device configuration and administration, and lets you easily clone configurations to other similar devices on the network.

Security at every level

Secure print helps prevent unauthorised viewers from seeing documents by holding jobs in the print queue until the user is authenticated.

Image overwrite security feature clears or "overwrites" all traces of any document image data remaining on the hard drive after a print, copy, scan or fax job (when enabled).

Hard disk encryption helps ensure that unauthorised users can't access stored documents.

IPv6 support includes full enablement of the new IPSec standard.

Internal security provides an additional measure of security, providing IP filtering, domain filtering and port blocking.

Device authentication restricts access to copy, print, scan and fax features by validating user names and passwords before use. Audit Log capabilities let you know who sent what, and when.



Extending your capabilities with Image Gateway for Apeos

Image Gateway for Apeos (IGA) is a component based software platfrom for Fuji Xerox ApeosPort devices, providing integrated functionality for the multifunction device (MFD)*. Capabilities including server based cost recovery, scanning, faxing and two-way access point to document management systems using a customisable, full colour, high resolution interface at the device touch panel.

Connect to Electronic Content Management (ECM)

- Live integration to Docushare, HP TRIM, Microsoft®, SharePoint and Interwoven
- Consolidation of document storage and retrieval
- Preview and retrieve documents via the user interface
- Promote data integrity and compliance requirements for document storage and access

 Leverage existing functionality in ECM e.g workflow, notifications and file versioning

SIMEGY

- Predictive energy optimisation technology
- Provides integrated environmental monitoring and reporting of supported Fuji Xerox devices
- Actual power usage data is collected through integrated equipment.
- Your data is presented in easy to read dashboards, allowing a total view of your fleet actual energy trends and equivalent environmental impact.

Image and Data Capture – Smart Scan Module

- Support for batch scanning (including blank page recognition)
- Output file formats such as Word, Excel and high compression PDFA and XPS
- Scan to email and home directory



My Prints – Cost Management

- Single Sign-on via Card ID
- Secure release and Authentication of all Print, Copy, Scan and Fax jobs
- Disburse and control print related costs to users, departments and cost centres
- Enterprise level tracking and reporting
- Active Directory authentication and SSL Encryption
- 'MyPrints' print functionality allowing increased security of document access, also providing reduced usage benefits through only printing and releasing what's required

My Fax – Analogue and Digital Fax

- Interconnectivity for existing or separate RightFax™ servers including support for FoIP
- Removal of individual analogue fax lines for every MFD
- Desktop faxing capability for small to medium workgroups
- Walk up to any IGA connected ApeosPort device and retrieve waiting faxes
- Personalised address book (with cost recovery)

 $^{^*}$ When considering IGA, please ask Fuji Xerox for an overview of the integration and customisation that may be required.

Specifications of ApeosPort-IV C5575 / C4475 / C3375 / C3373 / C2275 Series

	AP-IV C5575	AP-IV C4475	AP-IV C3375	AP-IV C3373	AP-IV C2275	
Memory	2GB					
HDD	160 GB (Usah	ole Space: 128 G	B)			
Colour Capability	Full Colour		_,			
Scanning Resolution	600 x 600 d	oi				
Printing Resolution	1,200 x 2,400 c	lpi (Multi-value-ph	oto), 600 x 600 d	oi (Text / Text-Pho	to / Photo / Map)	
Warm-up Time	28 sec or less	s (at room tem	perature 20°C)			
	24 sec or less	when the mai	n power is on (d	ıt room tempei	rature 20°C)	
Original Paper Size		32 mm (A3, 11 x				
Output Paper Size	Max: SRA3 (320)	Max: SRA3 (320 x 450mm) 12.6 x 17.7" (320 x 449.6 mm), 12 x 18" (304.8 x 457.2 mm)				
	[For Bypass Tray, Max: 320.0 x 482.6 mm]					
		Min: A5 [For Bypass Tray, Postcard (100 x 148 mm), Envelope (120 x 235 mm)]				
	Image loss: With	in 4 mm for lead edge	e, Within 2 mm for tro	iil edge, Within 2 mm	n for left / right side	
Output Paper Weight ¹	Tray: 60 - 25	6 gsm, Bypass	Tray: 55 - 280			
First Copy Output Time	3.7 sec <bw></bw>	4.4 sec <bw></bw>	4.9 sec <bw></bw>	4.9 sec <bw></bw>	6.6 sec <bw></bw>	
		5.7 sec <colour></colour>			8.7 sec <colour></colour>	
Continuous Copy Speed	55 ppm <bw></bw>	45 ppm <bw></bw>	35 ppm <bw></bw>	30 ppm <bw></bw>	25 ppm <bw></bw>	
	50 ppm <colour></colour>	45 ppm <colour></colour>	35 ppm <colour></colour>	30 ppm <colour></colour>	25 ppm <colour></colour>	
	A3:					
	27 ppm <bw></bw>	22 ppm <bw></bw>		17 ppm <bw></bw>	14 ppm <bw></bw>	
	25 ppm <colour></colour>	22 ppm <colour></colour>				
Paper Tray Capacity		090 sheets: 50		ay + Bypass 90	sheets	
	Optional: HCF B1: 2,030 sheets					
	Tandem Tray Module: 2,500 sheets (Available only for English MFD)					
	Max: 5,120 sheets: 500 sheets + Tandem Tray 2,500 sheets (500 +					
	867 + 1,133 sheets) + HCF B1 2,030 sheets + Bypass 90 sheets					
	4,120 sheets: 500 sheets x 4 Tray + HCF B1 2,030 sheets + Bypass 90 sheets					
Output Tray Capacity		250 sheets (A4 l		ter Tray: 250 s	heets (A4 LEF)	
Power Supply		V, 8 A, 50/60 F				
Power Consumption	Max: 2.4 kW, Standby: 60 W, Low Power Mode: 42 W, Sleep Mode: 2.2 W					
Dimensions / Weight	From W 640	v D 685 v H 1	28 mm, From	133 kg		

Drint	Function	

Print runction					
	AP-IV C5575 AP-IV C4475 AP-IV C3375 AP-IV C3373 AP-IV C2275				
Print Resolution	Output Resolution: 1,200 x 2,400 dpi, 1,200 x 1,200 dpi				
	Data Process Resolution: Standard: 600 x 600 dpi,				
	High Resolution: 600 x 600 dpi, High Fine: 1,200 x 1,200 dpi				
PDL	PCL6, PCL5, Adobe [®] PostScript [®] 3 [™]				
Operating System	Microsoft [®] Windows [®] 2000, Microsoft [®] Windows [®] XP,				
	Microsoft [®] Windows Server [®] 2003, Microsoft [®] Windows Vista [®] ,				
	Microsoft [®] Windows Server [®] 2008, Microsoft [®] Windows [®] 7,				
	Microsoft® Windows® XP ×64, Microsoft® Windows Server® 2003×64,				
	Microsoft [®] Windows Vista [®] ×64, Microsoft [®] Windows Server [®] 2008×64,				
	Microsoft® Windows Server® 2008 R2, Microsoft® Windows® 7 x64,				
	Mac OS X 9.2.2, Mac OS X 10.3.9 ~ 10.4.6/10.4.8 ~ 10.4.11/10.5~10.7				
Connectivity	Standard: Ethernet 100BASE-TX / 10BASE-T, USB2.0				
	Optional: Ethernet 1000BASE-T Bidirectional Parallel (IEEE1284 - B5)				

Scan Function

ocan i anccion						
	AP-IV C5575	AP-IV C4475	AP-IV C3375	AP-IV C3373	AP-IV C2275	
Туре	Colour Scan	ner				
Scanning Resolution	600 x 600 d	pi, 400 x 400 d	dpi, 300 x 300 (dpi, 200 x 200	dpi	
Scanning Speed	BW: 70 ipm	, Color: 70 ipm	(DADF)			
	BW: 80 ipm, Color: 80 ipm (Single Pass DADF, Simplex)					
	BW: 140 ipr	n, Color: 140 ij	pm (Single Pass	DADF, Duple	()	
Connectivity	Standard: E	thernet 100BA	ASE-TX / 10BAS	E-T		
	Optional: E	thernet 1000 E	BASE-T			
						_

Fax Function (Optional)

	AP-IV C5575 AP-IV C4475 AP-IV C3375 AP-IV C3373 AP-IV C2275
Send Document Size	Max: A3, 11 x 17", Long document (Max. 600 mm)
Transmission Time	Less than 3 seconds
Transmission Mode	G3
Applicable Lines	Telephone Subscriber Line PBX, PSTN, Max. 3 ports

Duplex Automatic Document Feeder²

	AP-IV C3375 AP-IV C3373 AP-IV C2275
Original Paper Size	Max: A3, 11 x 17", Min: A5
	38 - 128 gsm (In Duplex: 50 - 128 gsm)
Capacity	110 sheets
Feeding Speed (A4LEF)	BW: 35 DPM BW: 35 DPM BW: 35 DPM
	Color: 35 DPM Color: 35 DPM Color: 35 DPM

²Available on AP-IV C3375/C3373/C2275 models only.

Duplex Automatic Document Feeder

	AP-IV C5575 AP-IV C4475			
Туре	Single Pass Duplex Automatic Document Feeder			
Original Paper Size	Max: A3, 11 x 17", Min: A5			
	38 - 128 gsm (In Duplex: 50 - 128 gsm)			
Capacity	130 sheets			
Feeding Speed (A4LEF)	BW: 55 DPM BW: 45 DPM BW: 35 DPM BW: 35 DPM BW: 35 DPM			
	Color: 50 DPM Color: 45 DPM Color: 35 DPM Color: 35 DPM Color: 35 DPM			
Dimensions / Weight	W 560 x D 498 x H 140 mm, 11 kg			

Standard for AP-IV C5575/C4475 models only

Finisher-A1 (Optional)

	AP-IV C3375 AP-IV C3373 AP-IV C2275		
Туре	Sorting (Offset available) / Stacking (Offset available)		
Paper Size / Paper Weight	Max: A3, 11 x 17", Min: Postcards (100 x 148 mm), 55 - 220 g/m ²		
Stacker Capacity			
Finisher Tray	[Without Staples] A4: 500 Sheets, B4: 250 Sheets, A3 or larger: 200 Sheets, Mixed Size		
	Stacking: 250 Sheets, [With Staples] 30 Sets		
Staple			
Capacity	A4: 50 Sheets (Max 90 gsm), B4 or larger: 30 Sheets (Max 90 gsm)		
Size	Max: A3, 11 x 17", Min: B5LEF		
Position	Single (Front / Angled Staple)		

⁴The Optional Finisher-A1 cannot be installed on ApeosPort-IV C5575/C4475.

Finisher-B1 (Optional)

	AP-IV C5575	AP-IV C4475	AP-IV C3375	AP-IV C3373	AP-IV C2275
Туре					
Finisher Tray	Sorting (Offset available) / Stacking (Offset available)				
Paper Size / Paper Weight	Max: A3, 11 x 17", Min: B5, 55 - 220 gsm				
Stacker Capacity	[Without Staple] A4: 2,000 Sheets, B4: 1,000 Sheets, Mixed Size Stacking: 300 Sheets				
	[With Staples] A4: 100 Sets or 1,000 Sheets, B4 or larger: 75 Sets or 750 Sheets Booklet / Fold1: 50 Sets				
	or 600 Sheets, F	old¹: 500 Sheets			
Staple					
Capacity	50 Sheets (N	lax 90 gsm)			
Paper Size	Max: A3, 11 x 17", Min: B5LEF				
Position	Single (Front / Angled, Back / Straight), Dual (Parallel)				
Punch	_	_	_		
Paper Size	A3, 11 x 17", B4, A4, A4 LEF, Letter 8.5 x 11", Letter 8.5 x 11"LEF, B5 LEF				
Number of Holes	2 Holes / 4 Holes, or US 2 / 3 Holes				
Paper Weight	55 - 200 gsm				
Booklet Finishing ⁵					
Capacity	Booklet: 15 sheets, Fold: 5 sheets				
Paper Size	Max: A3, 11 x 17", Min: A4, Letter (8.5 x 11")				
Paper Weight	Saddle-Stapling: 64 - 80 gsm, Half-Folding: 64 - 105 gsm				
Dimensions / Weight	W 620 x D 552 x H 987 mm, 28 kg (w/o Booklet Finisher)				
_	W 575 x D 597 x H 1057 mm, 37 kg (w/ Booklet Finisher)				

The optional Finisher B1 Booklet unit is required.

Booklet Finisher-C1 (Optional)

	AP-IV C5575 AP-IV C4475 AP-IV C3375 AP-IV C3373 AP-IV C2275
Staple	
Capacity	50 Sheets (Max 90 gsm)
Paper Size	Max: A3, 11 x 17", Min: B5
Position	Single (Front / Back / Angled), Dual (Parallel)
Punch	
Paper Size	A3, 11 x 17", B4, A4, A4 LEF, Letter (8.5 x 11"), Letter (8.5 x 11") LEF, B5LEF
Number of Holes	2 / 4 holes (Option US 2 / 3 holes)
Paper Weight	55 - 200 gsm
Booklet Finishing	
Capacity	Saddle-Stapling: 15 Sheets, Half-Folding: 5 Sheets, Bi-Fold: 1 Sheet
Paper Size	Max: SRA3 (320 x 450 mm), 12 x 18" (304.8 x 457.2 mm), Min: A4, Letter (8.5 x 11")
Paper Weight	Saddle-Stapling: 64 - 90 gsm, Half-Folding: 64 - 105 gsm, Bi-Fold: 64 - 220gsm

High Capacity Feeder (Optional)

	AP-IV C55/5 AP-IV C44/5 AP-IV C33/5 AP-IV C33/3 AP-IV C22/5
Paper Size	A4 LEF, 8.5 x 11" LEF, B5 LEF
Paper Weight	55 - 216 gsm
Capacity	2,030 sheets (80 gsm)

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.





Reproduction Prohibitions Please note that reproduction of the following is prohibited by law:

Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates.





 $Unused \ postage \ stamps \ and \ post \ cards. \ Certificate \ stamps \ stipulated \ by \ law. \ The reproduction \ of \ works \ for \ copyright \ purposes \ (literary \ works, \ musical \ works, \ paintings, \ engravings, \ maps, \ cinematographic \ works, \ photographic \ works, \ etc.)$ Descriptions in this material, product specifications and / or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Windows and Windows NT are registered trademarks of Microsoft Corporation. NetWare is a registered trademark of the product of tprohibited except when they are reproduced personally, at home or within limited range according to the above. This product is equipped with an anti-counterfeit feature. This feature is not intended to prevent illegal reproduction. Be extremely careful $of \ Novell, Inc.\ in the \ United \ States.\ Macintosh, Mac \ OS \ and \ Ether \ Talk \ are \ trademarks \ of \ Apple \ Computer, Inc.\ PostScript \ is$ about the management of equipment used a registered trademark of Adobe Systems Incorporated in each country. HP-GL is a registered trademark of Hewlett-Packard Company. Other company names or product names are registered trademarks or trademarks of each company.

Spares for the standard configuration of installed machines is supported for up to 7 years from the date of the end of machine production.

For Your Safe Use

Before using the product, read the Instruction Manual carefully for proper use. Use the product with an appropriate adequate power source and voltage displayed. Be sure to establish a ground. In the case of a failure or short circuit, an electric shock may result.

For more information or detailed product specifications, call or visit us at

Fuji Xerox Australia 101 Waterloo Road, Macquarie Park NSW 2113 Tel. (02) 9856 5000 Fax. (02) 9856 5003

13 14 12

http://www.fujixerox.com.au

