

## Assembly Instructions

# CAR SEAT ADAPTOR

For City Select™ / City Versa™



www.babyjogger.com

This Car Seat Adaptor is designed to be used with the seat mounting brackets on your Baby Jogger City Select™ or City Versa™ stroller. This car seat adaptor is only compatible with these stroller models.

**NOTE:** Before you start, please refer to the Table of Contents on page 2 to ensure you follow the proper instructions for your car seat.

### This Kit Includes:

2 Adaptor Brackets

1 U-Shaped Bar (A)


1 U-Shaped Bar (B)

1 Spring Support Bar (C)

1 Graco Support Bar (D)



*U-Shaped Bar (A)*

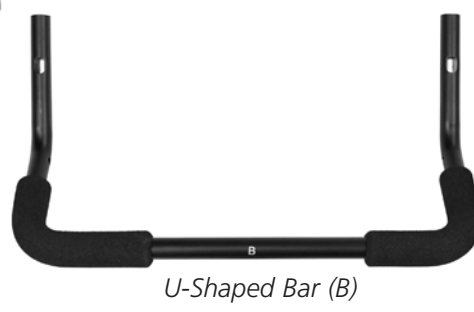

*U-Shaped Bar (B)*



*Adaptor Brackets*



*Spring Support Bar (C)*



*Graco Support Bar (D)*

# Table of Contents

- 3 Graco Snugride**
- 4 Peg Perego Primo Viaggio**
- 5 Chicco Keyfit**
- 6 Baby Trend Flex Loc  
Evenflo Discovery  
Evenflo Embrace  
Evenflo Nurture  
Evenflo SecureRide  
Safety 1st On Board**
- 7 Cybex Aton  
Maxi Cosi**
- 8 Other Available Accessories**

*For the most up to date information on our list of compatible car seats, please visit the FAQ section of our website or call Baby Jogger customer service at 800-241-1848.*


*Car seat models or brands sold internationally are not always confirmed to be compatible with Baby Jogger's car seat adaptors. If you need assistance determining the compatibility of your international car seat, please visit our website to locate the distributor nearest you.*

# Graco

## Uses the 2 Adaptor Brackets, U-shaped bar (A), U-shaped bar (B), Spring support bar (C), and Graco support bar (D)


The car seat adaptor comes fully assembled for use with Graco model car seats. Should you detach the spring support bar (C) or Graco support bar (D) and need to reassemble, please see "Support Bar Configuration" below for instructions.

### Car Seat Adaptor Installation:


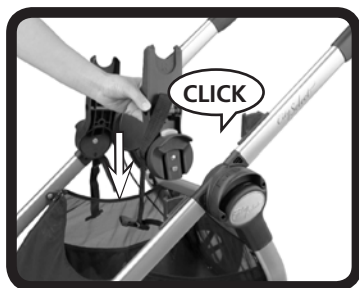


- 1 Insert Adaptor Brackets into the corresponding mounting brackets on your stroller. The Adaptor Brackets are secure when they click into place.


**NOTE:** The right and left mounting brackets on your stroller are determined by standing in front of and facing the stroller.

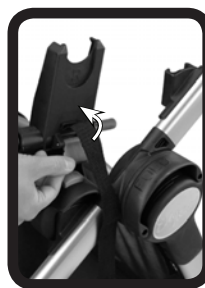


- 2 Open the compression locks on the Adaptor Brackets by flipping the red latches up.

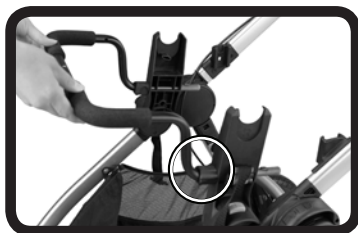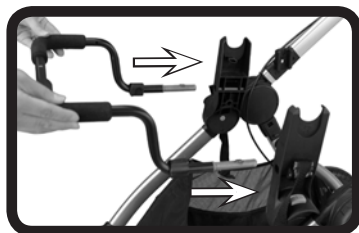

- 3 Insert the U-shaped bar (A) into the openings on the front of the adaptor brackets. The A bar should be inserted all the way so that the stoppers hit the plastic adaptor brackets.

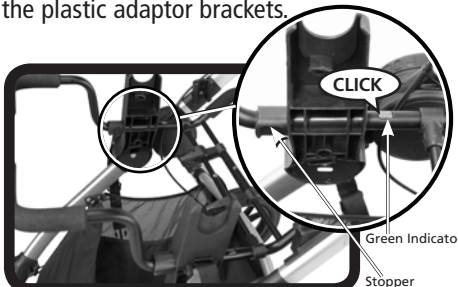

- 5 From the rear of the stroller, connect the second U-shaped bar (B) over the ends of the already installed U-shaped bar (A) until it clicks into place. You will see only green in the indicator on top of the bars when the U-shaped bars are locked in place.

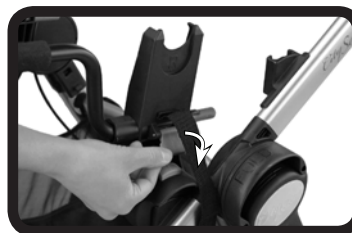

- 4 Close the compression locks on the adaptor brackets by flipping the red latches down, locking the U-shaped bar (A) in place.




- 6 Place car seat on the car seat adaptor and press down firmly until it clicks into place. Fasten and properly tighten the Adaptor Bracket Safety Belt over the car seat before operation.

### Support Bar Configuration:



- 1 Squeeze spring support bar (C) and insert into holes on the inside of U-shaped support bar (B).

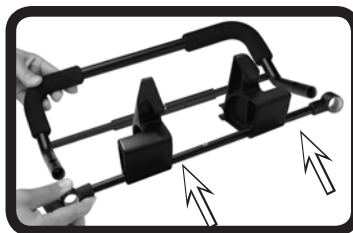

- 2 Align the openings of the Graco support bar (D) with the ends of U-shaped support bar (B). Slide the Graco support bar onto the U-shaped bar (B) and snap onto spring support bar (C). You will hear it click when properly attached.




# Peg-Perego

Uses the 2 Adaptor Brackets, U-shaped bar (A),  
U-shaped bar (B), and the Spring support bar (C)


## Support Bar Configuration:

The car seat adaptor comes fully assembled for use with Graco model car seats. The Graco support bar (D) must be removed prior to attaching your Peg-Perego car seat to the Baby Jogger Car Seat Adaptor.

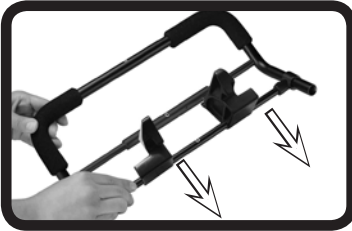

- 1 Holding the U-shaped bar (B), unsnap Graco support bar (D) from the Spring support bar (C) and remove.

## Car Seat Adaptor Installation:


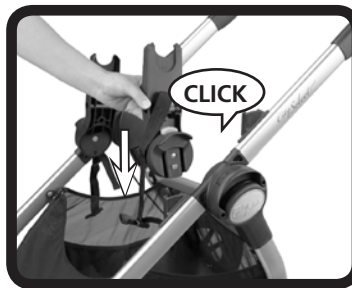


- 1 Insert Adaptor Brackets into the corresponding mounting brackets on your stroller. The Adaptor Brackets are secure when they click into place.


**NOTE:** The right and left mounting brackets on your stroller are determined by standing in front of and facing the stroller.





- 2 Open the compression locks on the Adaptor Brackets by flipping the red latches up.

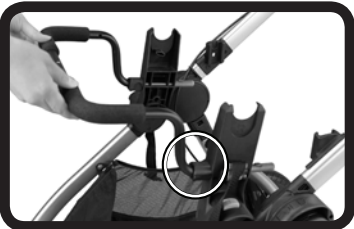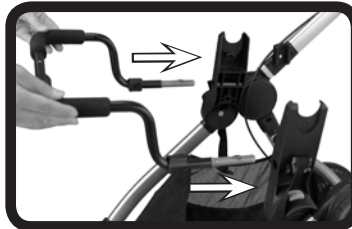

- 3 Insert the U-shaped bar (A) into the openings on the front of the adaptor brackets. The A bar should be inserted all the way so that the stoppers hit the plastic adaptor brackets.

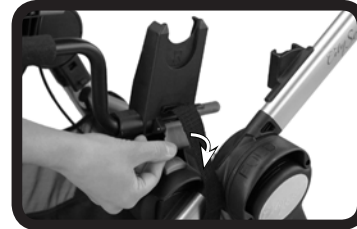

- 4 Close the compression locks on the adaptor brackets by flipping the red latches down, locking the U-shaped bar (A) in place.

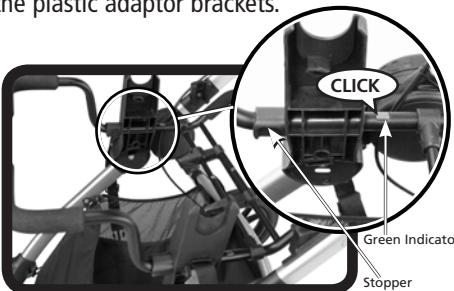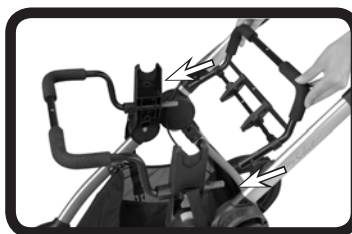

- 5 From the rear of the stroller, connect the second U-shaped bar (B) over the ends of the already installed U-shaped bar (A) until it clicks into place. You will see only green in the indicator on top of the bars when the U-shaped bars are locked in place.


- 6 Place car seat on the car seat adaptor and press down firmly until it clicks into place. Fasten and properly tighten the Adaptor Bracket Safety Belt over the car seat before operation.

# Chicco

## Uses the 2 Adaptor Brackets, U-shaped bar (A), and the U-shaped bar (B)

### Support Bar Configuration:

The car seat adaptor comes fully assembled for use with Graco model car seats. The Graco support bar (D) and spring support bar (C) must be removed prior to attaching your Chicco car seat to the Baby Jogger Car Seat Adaptor.

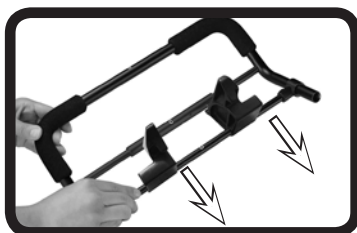


- 1 Holding the U-shaped bar (B), unsnap Graco support bar (D) from the Spring support bar (C) and remove.



- 2 Squeeze spring support bar (C) and remove from U-shaped support bar (B).

### Car Seat Adaptor Installation:

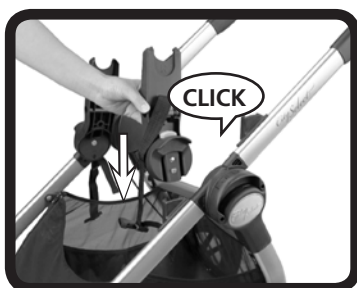


- 1 Insert Adaptor Brackets into the corresponding mounting brackets on your stroller. The Adaptor Brackets are secure when they click into place.


**NOTE:** The right and left mounting brackets on your stroller are determined by standing in front of and facing the stroller.




- 2 Open the compression locks on the Adaptor Brackets by flipping the red latches up.

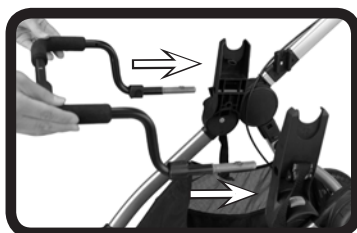


- 3 Insert the U-shaped bar (A) into the openings on the front of the adaptor brackets. The A bar should be inserted all the way so that the stoppers hit the plastic adaptor brackets.

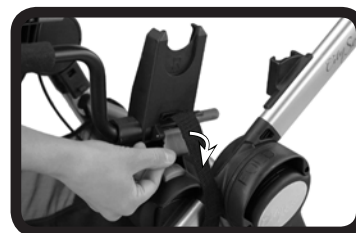

- 4 Close the compression locks on the adaptor brackets by flipping the red latches down, locking the U-shaped bar (A) in place.

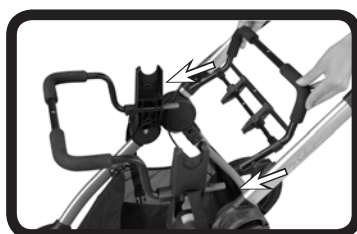

- 5 From the rear of the stroller, connect the second U-shaped bar (B) over the ends of the already installed U-shaped bar (A) until it clicks into place. You will see only green in the indicator on top of the bars when the U-shaped bars are locked in place.

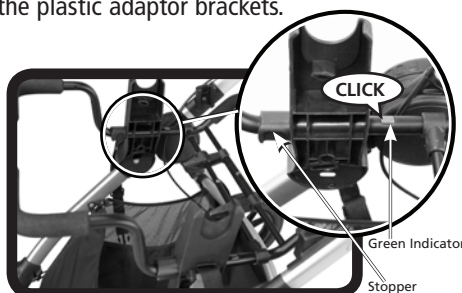

- 6 Place car seat on the car seat adaptor and press down firmly until it clicks into place. Fasten and properly tighten the Adaptor Bracket Safety Belt over the car seat before operation.




# Baby Trend, Evenflo, Safety 1st

Uses the 2 Adaptor Brackets, U-shaped bar (A), and the U-shaped bar (B)

## Support Bar Configuration:

The car seat adaptor comes fully assembled for use with Graco model car seats. The Graco support bar (D) and spring support bar (C) must be removed prior to attaching your car seat to the Baby Jogger Car Seat Adaptor.

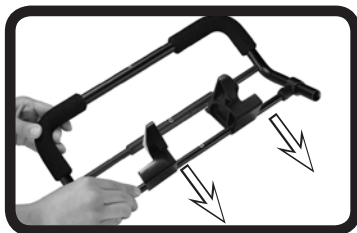


- 1 Holding the U-shaped bar (B), unsnap Graco support bar (D) from the Spring support bar (C) and remove.



- 2 Squeeze spring support bar (C) and remove from U-shaped support bar (B).

## Car Seat Adaptor Installation:

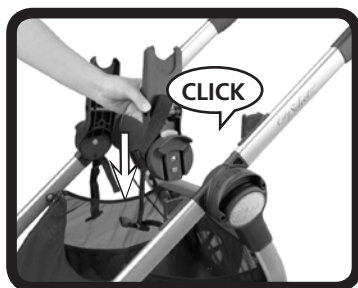


- 1 Insert Adaptor Brackets into the corresponding mounting brackets on your stroller. The Adaptor Brackets are secure when they click into place.


**NOTE:** The right and left mounting brackets on your stroller are determined by standing in front of and facing the stroller.




- 2 Open the compression locks on the Adaptor Brackets by flipping the red latches up.

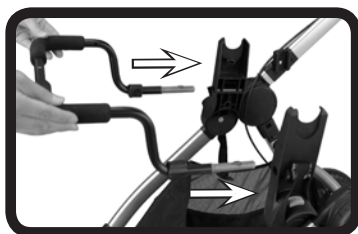


- 3 Insert the U-shaped bar (A) into the openings on the front of the adaptor brackets. The A bar should be inserted all the way so that the stoppers hit the plastic adaptor brackets.

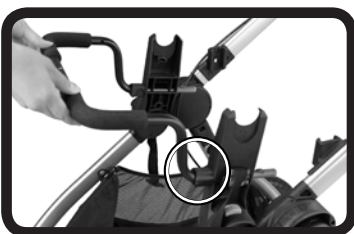

- 4 Close the compression locks on the adaptor brackets by flipping the red latches down, locking the U-shaped bar (A) in place.

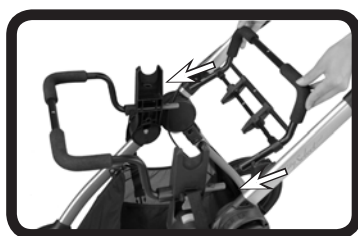

- 5 From the rear of the stroller, connect the second U-shaped bar (B) over the ends of the already installed U-shaped bar (A) until it clicks into place. You will see only green in the indicator on top of the bars when the U-shaped bars are locked in place.

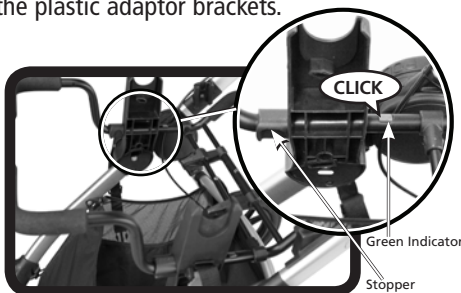


- 6 Place car seat on the car seat adaptor. Fasten and properly tighten the Adaptor Bracket Safety Belt over the car seat before operation.

# Cybex & Maxi Cosi

## Uses the 2 Adaptor Brackets

### Car Seat Adaptor Installation:

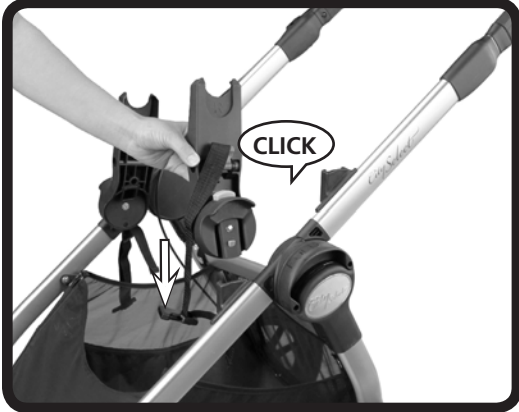

- 1 Insert Adaptor Brackets into the corresponding mounting brackets on your stroller. The Adaptor Brackets are secure when they click into place.

**NOTE:** The right and left mounting brackets on your stroller are determined by standing in front of and facing the stroller.



- 2 Close the compression locks on the adaptor brackets by flipping the red latches down.



- 3 Place car seat on the car seat adaptor and press down firmly until it clicks into place. Fasten and properly tighten the Adaptor Bracket Safety Belt over the car seat before operation.



## Other Available Accessories

### **Second Seat Kit**

Allows you to convert your single City Select stroller into a double. This kit comes with the complete second seat and the second seat mounting brackets.

### **Bassinet Kit**

Allows you to convert your City Select seat into a Bassinet. The Bassinet Kit contains plush fabric and support brackets that convert the City Select's single seat into a Bassinet in a few simple steps.

### **Child Tray**

Features a cup holder and easy to clean surface.

### **Belly Bar**

Provides child with a soft padded area to hold on to when the stroller is in use.

### **Rain Canopy - Seat**

Completely encloses the front and sides of the City Select seat while providing ventilation in inclement weather. Made from BPA and PVC Free material.

### **Rain Canopy - Basket**

Nylon covering designed to protect the contents of the City Select basket from inclement weather.

### **Rain Canopy - Bassinet**

Completely encloses the top and sides of the City Select Bassinet while providing ventilation in inclement weather. Made from BPA and PVC Free material.

### **Carry Bag**

Protects your stroller during transport or storage.

### **Universal Parent Console**

Features a cup holder and additional storage compartments.

### **Glider Board**

Attaches to rear axle of any single or double Baby Jogger stroller to allow your toddler to ride along. Holds up to 45 lbs.

### **Foot Muff**

For children 6-18 mo. Keeps legs & feet warm in inclement weather.

### **Plush Stroller Hand Muff**

Keeps your hands warm and dry while pushing your stroller. Features a soft and plush interior and weatherproof exterior.

### **Cooler Bag**

Designed to help keep food or drinks cold. Holds six 12 oz. cans.