

Atlas Copco

Oil-injected Rotary Screw Compressors

GA 30+-90/GA 37-90 VSD (30-90 kW/40-125 hp)



Sustainable Productivity

Atlas Copco



The ultimate smart solution, driven by efficiency

Atlas Copco's GA 30+90 compressors bring you outstanding sustainability, reliability and performance, while minimizing the total cost of ownership. A choice of three premium compressor types (GA VSD, GA+ and GA) provides you with the compressed air solution that perfectly matches your requirements with clear value propositions. Built to perform even in the harshest environments, these compressors keep your production running efficiently.



NEW HEIGHTS IN SUSTAINABILITY

The GA 30+90 family enables you to realize sustainable productivity through lower lifecycle costs and maximum uptime. IE2 Premium Efficiency motors in combination with the highly efficient element minimize operating cost. The integrated dryer R410A reduces ozone depletion and protects the environment. Maximum uptime is achieved by maintenance from one side and complete drive train accessibility.



NEW MILESTONES IN RELIABILITY

The reliability of the GA 30+90 range starts with the cool canopy and low element outlet temperatures, an oversized separate oil cooler and an aftercooler with patented integrated mechanical separator. The three-stage air/oil separation ensures low oil consumption. All electrical cubicles are in overpressure, preventing electrically conductive dust, thus increasing the lifetime of electrical components.



BENCHMARKING PERFORMANCE

Outstanding performance is ensured by design, with IE2 motors in combination with Atlas Copco's highly efficient element and an oversized cooling arrangement resulting in significant energy savings. Internal pressure drops from inlet to discharge are optimized. Efficient smart compressor controls and Atlas Copco algorithms minimize the working pressure band, saving energy.



GA VSD: ULTIMATE ENERGY SAVER

- Unique integrated Variable Speed Drive (VSD) technology for on average 35% energy savings.
- Industry-leading operating turndown range and flexible pressure selection: 4-13 bar.
- Start under system pressure due to special VSD motor, no idling time.
- Integrated Dryer Saver Cycle saves up to 60% of the dryer's electrical consumption.
- Smart Elektronikon® graphic compressor controller with high-definition color display working to a set point minimizes pressure drops.

IE2 HIGH EFFICIENCY

GA+: INDUSTRY-LEADING PERFORMANCE

- Industry-leading Free Air Delivery and low energy consumption.
- IE2 High Efficiency motor in combination with efficient element.
- Low noise emission suitable for workplace installation.
- Environmentally-friendly R410A integrated dryer reduces footprint and pressure drops.
- Smart Elektronikon® graphic compressor controller with high-definition color display.

GA: PREMIUM COMPRESSOR


- High performance Free Air Delivery.
- IE2 High Efficiency motor in combination with highly efficient element.
- Premium quality at the lowest initial investment.
- Efficient environmentally-friendly R410A integrated dryer reduces footprint and pressure drops.
- Ensured efficiency of Elektronikon® controller with connectivity.

VSD: Driving down your energy costs

Over 80% of a compressor's lifecycle cost is taken up by the energy it consumes. Moreover, the generation of compressed air can account for more than 40% of a plant's total electricity bill. To cut your energy costs, Atlas Copco pioneered Variable Speed Drive (VSD) technology in the compressed air industry. VSD leads to major energy savings, while protecting the environment for future generations. Thanks to continual investments in this technology, Atlas Copco offers the widest range of integrated VSD compressors on the market.

WHY ATLAS COPCO VARIABLE SPEED DRIVE TECHNOLOGY?

- On average 35% energy savings during fluctuations in production demand with an extensive turndown range.
- Integrated Elektronikon® Graphic controller controls the motor speed and high efficiency frequency inverter.
- No wasted idling times or blow-off losses in normal operation.
- Compressor can start/stop under full system pressure without the need to unload with special VSD motor.
- Eliminates peak current penalty during start-up.
- Minimizes system leakage due to a lower system pressure.
- EMC Compliance to directives (2004/108/EG).

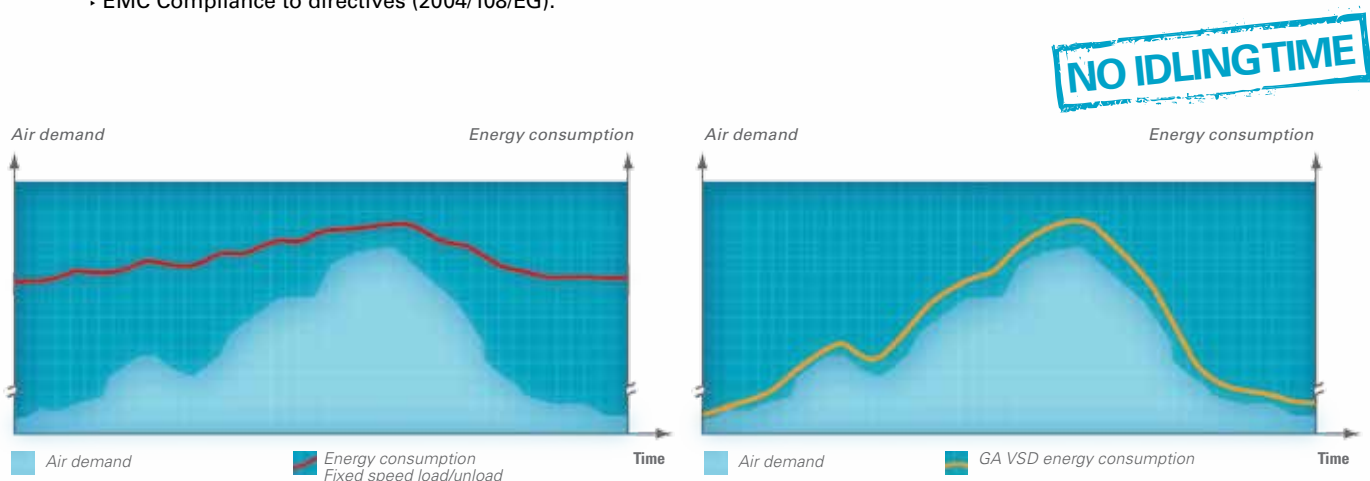


In almost every production environment, air demand fluctuates depending on different factors such as the time of the day, week or even month. Extensive measurements and studies of compressed air demand profiles show that many compressors have substantial variations in air demand.

ON AVERAGE 35% ENERGY SAVINGS

Atlas Copco's GA VSD technology closely follows the air demand by automatically adjusting the motor speed. This results in on average 35% energy savings. The lifecycle cost of a compressor can be cut by an average of 22%. In addition, lowered system pressure with GA VSD dramatically minimizes energy use across your production.


TOTAL COMPRESSOR LIFECYCLE COST

- Energy
- Investment
- Energy savings with VSD
- Maintenance

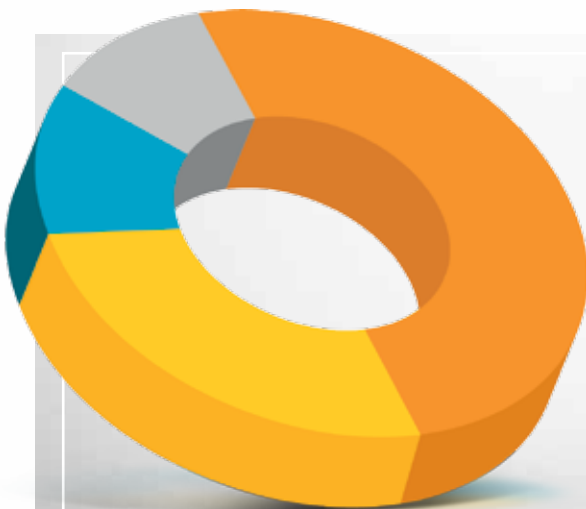


HOW GA VSD TECHNOLOGY SAVES ENERGY

Contact your local Atlas Copco representative for an audit of your compressed air system. A real-time measurement simulation and audit report can be provided with recommendations for additional savings and sizing to meet your compressed air needs.

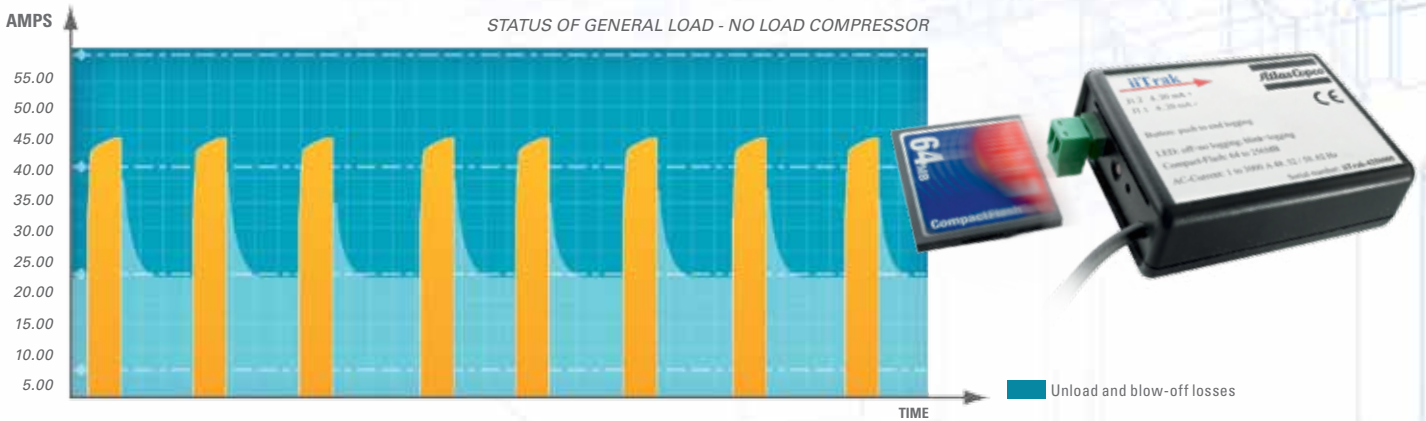


WHAT IS UNIQUE ABOUT THE INTEGRATED ATLAS COPCO GA VSD?

- 1** The Elektronikon® controls both the compressor and the integrated converter, ensuring maximum machine safety within parameters.
- 2** Flexible pressure selection from 4 to 13 bar with electronic gearing reduces electricity costs.
- 3** Special electric motor specifically designed for VSD operation (inverter duty motor). Bearings are protected against induced bearing currents. Both motor and converter are perfectly tuned for highest efficiency across the entire speed range.
- 4** Electric motor specifically designed for low operating speeds with clear attention to motor cooling and compressor cooling requirements.
- 5** All Atlas Copco GA VSD compressors are EMC tested and certified. External sources do not influence compressor operation, nor does the compressor affect the operation of other instruments via emissions or via the power supply line.
- 6** Mechanical enhancements ensure that all components operate below critical vibration levels throughout the entire compressor speed range.
- 7** A highly efficient frequency converter in a cool overpressure cubicle ensures stable operation in high ambient temperatures up to 50°C/122°F*.
* Standard up to 46°C/114.8°F.
- 8** No 'speed windows' that can jeopardize the energy savings and the stable net pressure. Turndown capability of the compressor is maximized to 80-85%.
- 9** The cubicle cooling booster increases the lifetime of electrical components due to a cool cubicle in overpressure and reduced dust ingress.
- 10** Net pressure band is maintained within 0.10 bar, 1.5 psi.

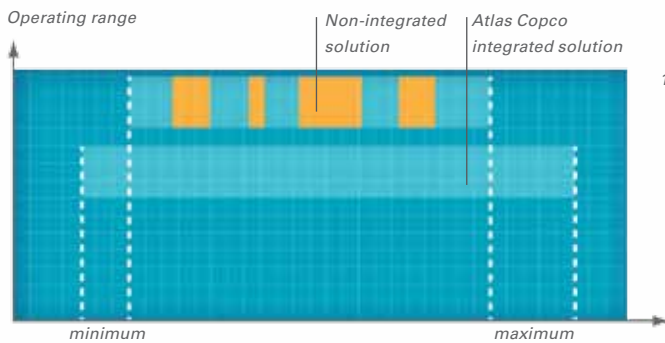

Speed windows

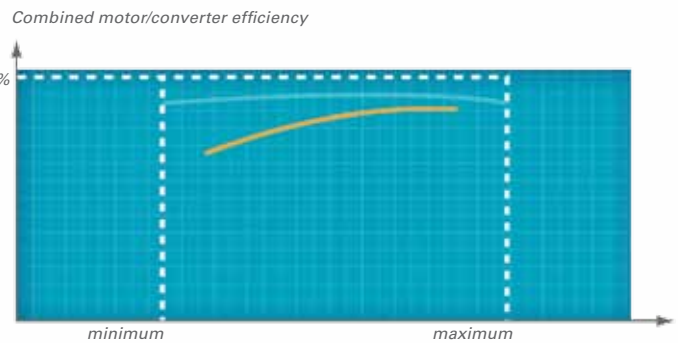

Non-integrated VSD

Integrated VSD

High reliability and smart energy

1

Maintenance-free drive system

- 100% maintenance-free; totally enclosed and protected against dirt and dust.
- Suitable for harsh environments.
- High-efficiency drive arrangement; no coupling or slippage losses.
- Standard up to 46°C/115°F and for high ambient version 55°C/131°F.



2

IE2 High Efficiency electrical motors

- IP55, insulation Class F, B rise.
- Non-drive side bearing greased for life.
- Designed for continuous operation in harsh environments.

3

Robust spin-on oil filter

- High-efficiency, removing 300% smaller particles than a conventional filter.
- Integrated bypass valve with the oil filter.

4

SIL Smart inlet lock system for GA VSD compressors

- Superior designed vacuum and air pressure controlled valve with minimal pressure drop and no springs.
- Smart stop/start which eliminates back-pressure oil vapor.



5

Separate oversized oil cooler and aftercooler

- Low element outlet temperatures, ensuring long oil lifetime.
- Removal of nearly 100% condensate by mechanical separator.
- No consumables.
- Eliminates possibility of thermal shocks in coolers.





11

Cubicle cooling booster

- Cubicle in overpressure minimizes ingress of conductive dust.
- Electrical components remain cool, enhancing lifetime of components.



10

Integrated highly efficient R410A dryer

- Excellence in air quality.
- 50% reduction in energy consumption compared to traditional dryers.
- Zero ozone depletion.
- Incorporates optional DD and PD filters according to Class 1.4.1.



9

Elektronik® for remote monitoring

- Integrated smart algorithms reduce system pressure and energy consumption.
- Monitoring features include warning indications, maintenance scheduling and online visualization of machine's condition.

8

Heavy-duty air intake filter

- Protects the compressor components by removing 99.9% of dirt particles down to 3 microns.
- Differential inlet pressure for proactive maintenance while minimizing pressure drop.



7

Electronic no-loss water drain (optional)

- Ensures constant removal of condensate.
- Manual integrated bypass for effective condensate removal in case of power failure.
- Integrated with compressor's Elektronik® with warning/alarm features.
- No loss of compressed air.



6

Water separator device (WSD)

- High efficient.
- Ensures constant removal of condensate.

A step ahead in monitoring and controls

The next-generation Elektronikon® operating system offers a wide variety of control and monitoring features that allow you to increase your compressor's efficiency and reliability. To maximize energy efficiency, the Elektronikon® controls the main drive motor and regulates system pressure within a predefined and narrow pressure band.



IMPROVED USER-FRIENDLINESS

- 3.5-inch high-definition color display with clear pictograms and extra 4th LED indicator for service.
- Graphical display of key parameters (day, week, month) and 32 language settings.
- Internet-based compressor visualization using a simple Ethernet connection.
- On-screen Delayed Second Stop function and VSD savings indication.
- Graphical indication Serviceplan, remote control and connectivity functions.
- Software upgrade available to control up to 6 compressors by installing the optional integrated compressor controller.




ONLINE & MOBILE MONITORING

Monitor your compressors over the Ethernet with the new Elektronikon® controller. Monitoring features include warning indications, compressor shut-down and maintenance scheduling. The Atlas Copco App is available for iPhone/Android phones as well as iPad and Android tablets. It allows fingertip monitoring of your compressed air system through your own secured network.

Optional integrated compressor controller

Install, with a simple license, the optional integrated compressor controller and get simple, central control to reduce system pressure and energy consumption in installations of up to 4 (ES4i) or 6 (ES6i) compressors.


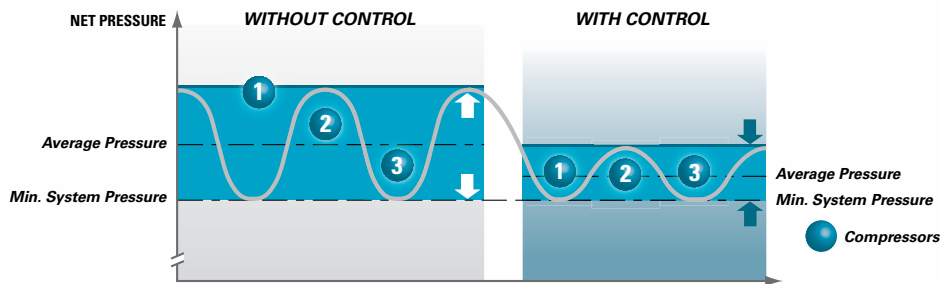


The Elektronikon® continuously monitors critical parameters. Monitoring features include service and warning indications, error detection, compressor shut-down and maintenance scheduling.

DUAL PRESSURE SET POINT & DELAYED SECOND STOP

Most production processes create fluctuating levels of demand which, in turn, can create energy waste in low use periods. Using either the standard or graphic Elektronikon® controller, you can manually or automatically create two different system pressure bands to optimize energy use and reduce costs at low

use times. In addition, the sophisticated Delayed Second Stop (DSS) runs the drive motor only when needed. As the desired system pressure is maintained while the drive motor's run time is minimized, energy consumption is kept at a minimum.

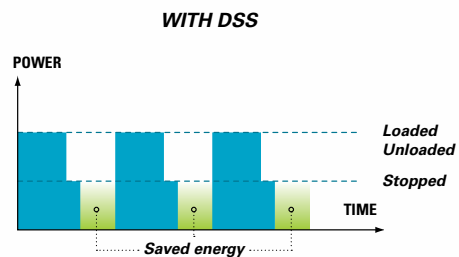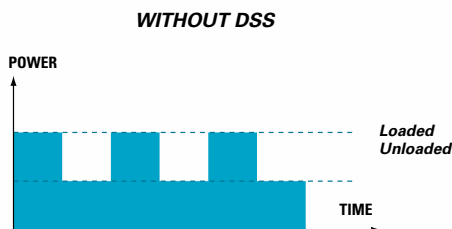

INTEGRATED DRYER SAVER CYCLE

Saver Cycle technology reduces the energy consumption of the integrated refrigerant dryers with the fan in light load applications. Using an ambient sensor to monitor the required

dew point suppression, the Elektronikon® starts and stops the dryer and the fan, minimizing energy use and protecting the air system from corrosion.

Excellence in integrated air quality

Untreated compressed air contains moisture, aerosols and dirt particles that can damage your air system and contaminate your end product, resulting in risk of corrosion and compressed air system leaks. Maintenance costs can far exceed air treatment costs. Our compressors provide the clean, dry air that improves your system's reliability, avoids costly downtime and production delays, and safeguards the quality of your products.

SAVE MONEY AND THE ENVIRONMENT

Avoid risk of corrosion and system leaks, and ensure the effective safe disposal of untreated condensate – all within ISO 14001 standards.

ON AVERAGE 50% ENERGY SAVINGS WITH R410A INTEGRATED DRYERS

- Use of energy-efficient refrigerant R410A reduces operating costs.
- R410A refrigerant reduces global warming potential by an average of 50%.
- Environmentally-friendly characteristics; zero ozone depletion.
- Unique Saver Cycle Control, with ambient temperature sensor and based on dryer load and relative humidity of compressed air, saves energy at partial load.
- Heat exchanger cross-flow technology with low pressure drop.
- Zero waste of compressed air thanks to no-loss condensate drain.
- Pressure dew point of 3°C (100% relative humidity at 20°C).

ZERO OZONE DEPLETION



INTEGRATED PURITY

The optional DD/PD filters and integrated refrigerant air dryer (IFD) efficiently remove moisture, aerosols and dirt particles to protect your investment. This air quality prolongs the life of

downstream equipment, increasing efficiency and ensuring quality of your final product.

ISO quality class*	Dirt particle size	Water pressure dew point**	Oil concentration
3..4	3 microns	-	3 ppm
3.4.4	3 microns	+3°C, 37°F	3 ppm
2.4.2	1 micron	+3°C, 37°F	0.1 ppm
1.4.1	0.01 microns	+3°C, 37°F	0.01 ppm

*The table values reflect the maximum limits according to the temperature ISO gravity class.
 ** Water pressure dew point based on 100% RH at 20°C/68°F.

WorkPlace: Compressed air at the point of use

With the industry-leading low noise operation and integration of air and condensate treatment equipment, the GA+ offers complete versatility for your production. The compressor's integrated design allows it to be placed on the production floor, creating substantial energy savings for your business.

LOW INSTALLATION COSTS

- The GA+ can operate close to the point of use – eliminating the need for a dedicated compressor room.
- The GA+ is delivered ready for use – minimizing production downtime and reducing installation costs.
- Filtration equipment is integrated – reducing the need for costly external piping and minimizing pressure drops.
- Low noise enables the above to be a reality.



REDUCED ENERGY AND MAINTENANCE COSTS

- With less external piping, the GA+ minimizes pressure drop across the system which can reduce energy costs.
- The filtration system produces clean air to prevent network corrosion – minimizing energy, repair and maintenance costs.
- The GA+ operates at the lowest possible system pressure to reduce energy costs thanks to the Elektronikon® advanced monitoring system.

INTEGRATED CONDENSATE MANAGEMENT

- OSCi is an efficient integrated solution that removes oil from condensate.
- Oil carryover contained in condensate can harm the environment.
- Treated condensate protects water, wildlife and ecosystems.
- The delivered water is harmless and can be disposed in a sewage system, reducing disposal costs.



Optimize your system

Some applications may need or may benefit from additional options and more refined control/air treatment systems. To meet these needs, Atlas Copco has developed options and easily integrated compatible equipment.

		GA 30*-90	GA 37-90 VSD
Air treatment	Integrated filter kit class 1*	✓	✓
	Integrated filter kit class 2*	✓	✓
	Dryer bypass*	✓	✓
Condensate	OSCi	✓	✓
Protection	Motor space heater	-	✓
	Motor space heater + thermistors	✓	-
	Water shut-off valve**	✓	✓
	Phase sequence relay (export)	✓	-
	Tropical thermostat	✓	-
	Freeze protection	✓	✓
	Pre-filter	✓	✓
	Advanced monitoring	✓	✓
	Electronic water drain (EWD)	✓	✓
Public works	Rain protection	✓	-
	Main power isolator switch	✓	✓
Communication	ES 100 relays***	✓	✓
	AIReconnect	✓	✓
	Elektronikon® Graphic upgrade (only for GA 37 to GA 75)	✓	-
	ES4/ES6i (for Elektronikon® Graphic)	✓	✓
	Digital I/O expansion module	✓	✓
Oils	Food grade oil	✓	✓
	Roto – Xtend duty oil (8000 hours)	✓	✓
General options	Witness performance test	✓	✓
	Energy recovery	✓	✓
	Modulating control	✓	-
	High-ambient temperature version (HAV 55°C, 131°F)****	✓	✓
	IT/TT ancillaries	-	✓

*FF units only. ** Water-cooled units. *** Includes potential-free contacts: motor running, compressor load/unload. **** FF units max 50°C, 122°F

INTEGRATED ENERGY RECOVERY

As much as 90% of the electrical energy used by a compressed air solution is converted into heat. Using Atlas Copco's integrated energy recovery systems, it is feasible to recover up to 75% of that power input as hot air or hot water without any influence on the compressor's performance. Through efficient usage of the recovered energy, you bring about important energy cost savings and obtain a high return on investment.




ENERGY RECOVERY APPLICATIONS


- Auxiliary or main heating of warehouses, workshops etc.
- Industrial process heating.
- Water heating for laundries, industrial cleaning and sanitary facilities.
- Canteens and large kitchens.
- Food industry.
- Chemical and pharmaceutical industries.
- Drying processes.

Flow charts

VARIABLE SPEED DRIVE: GA VSD

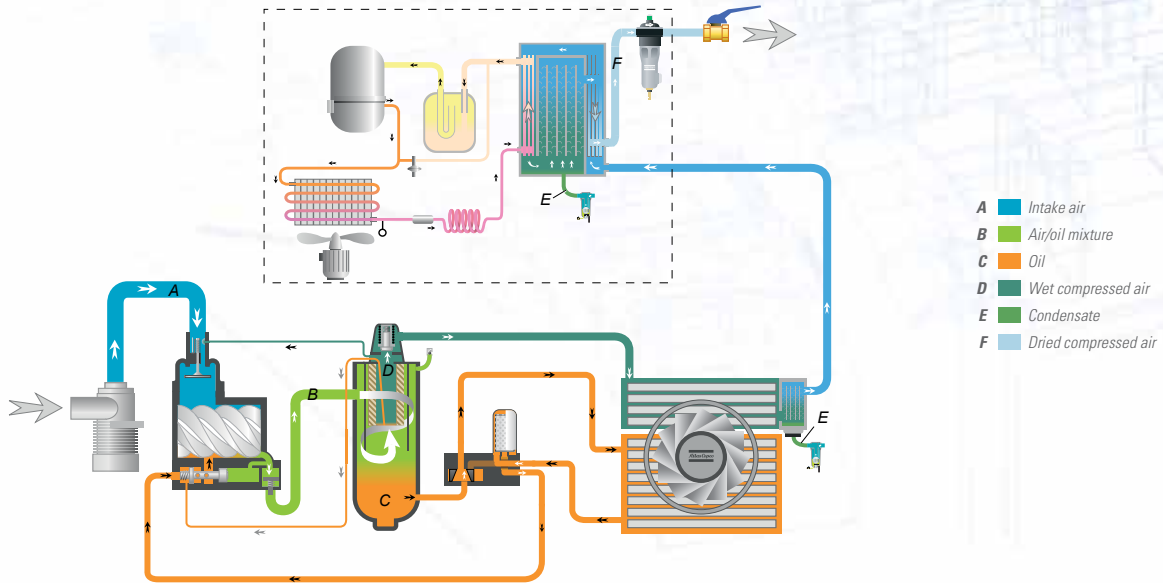

FIXED SPEED: GA+ & GA

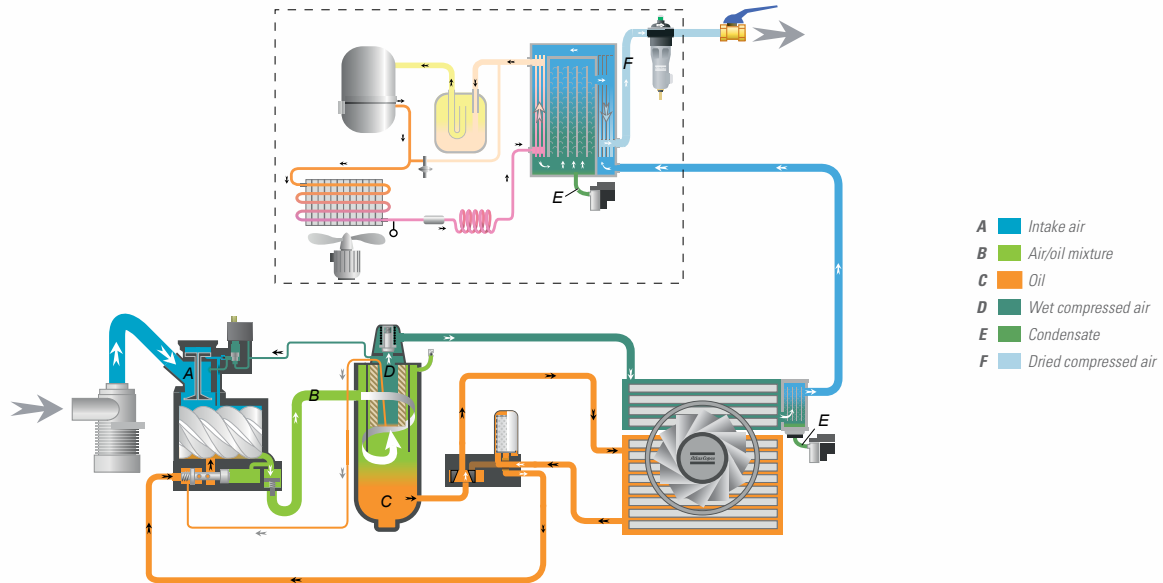

GA 37, 45 VSD Width 1766 mm, 69.5"
GA 30+, 37+, 45+ Depth 970 mm, 38.2"
GA 37, 45 Height 1800 mm, 70.9"

GA 55, 75, 90 VSD Width 2248 mm, 88.5"
GA 55+, 75+ Depth 1080 mm, 42.5"
GA 55, 75, 90 Height 1955 mm, 76.9"



Technical specifications GA 30+90 (50 Hz versions)

COMPRESSOR TYPE	Pressure variant	Max. working pressure WorkPlace		Capacity FAD*			Installed motor power		Noise level**	Weight WorkPlace		Weight WorkPlace Full Feature	
		bar(e)	psig	l/s	m ³ /min	cfm	kW	hp		kg	lbs	kg	lbs
GA 30+	7.5	7.5	109	99	5.9	209	30	40	65	917	2022	998	2200
	8.5	8.5	123	90	5.4	191	30	40	65	917	2022	998	2200
	10	10.0	145	82	4.9	175	30	40	65	917	2022	998	2200
	13	13.0	189	71	4.3	151	30	40	65	917	2022	998	2200
GA 37	7.5	7.5	109	115	6.9	243	37	50	69	920	2028	1005	2216
	8.5	8.5	123	106	6.4	225	37	50	69	920	2028	1005	2216
	10	10.0	145	100	6.0	213	37	50	69	920	2028	1005	2216
	13	13.0	189	81	4.9	172	37	50	69	920	2028	1005	2216
GA 37+	7.5	7.5	109	122	7.3	258	37	50	65	1002	2209	1087	2396
	8.5	8.5	123	118	7.1	250	37	50	65	1002	2209	1087	2396
	10	10.0	145	102	6.1	216	37	50	65	1002	2209	1087	2396
	13	13.0	189	85	5.1	180	37	50	65	1002	2209	1087	2396
GA 45	7.5	7.5	109	137	8.2	291	45	60	72	994	2191	1079	2379
	8.5	8.5	123	127	7.6	268	45	60	72	994	2191	1079	2379
	10	10.0	145	117	7.0	248	45	60	72	994	2191	1079	2379
	13	13.0	189	102	6.1	217	45	60	72	994	2191	1079	2379
GA 45+	7.5	7.5	109	149	8.9	315	45	60	66	1070	2359	1160	2557
	8.5	8.5	123	139	8.3	295	45	60	66	1070	2359	1160	2557
	10	10.0	145	128	7.7	270	45	60	66	1070	2359	1160	2557
	13	13.0	189	106	6.4	225	45	60	66	1070	2359	1160	2557
GA 55	7.5	7.5	109	169	10.1	359	55	75	69	1329	2930	1429	3150
	8.5	8.5	123	159	9.5	337	55	75	69	1329	2930	1429	3150
	10	10.0	145	148	8.9	313	55	75	69	1329	2930	1429	3150
	13	13.0	189	126	7.6	267	55	75	69	1329	2930	1429	3150
GA 55+	7.5	7.5	109	180	10.8	381	55	75	66	1458	3214	1558	3435
	8.5	8.5	123	172	10.3	364	55	75	66	1458	3214	1558	3435
	10	10.0	145	153	9.2	324	55	75	66	1458	3214	1558	3435
GA 75	7.5	7.5	109	226	13.6	478	75	100	66	1371	3023	1491	3287
	8.5	8.5	123	209	12.5	444	75	100	73	1371	3023	1491	3287
	10	10.0	145	190	11.4	401	75	100	73	1371	3023	1491	3287
	13	13.0	189	162	9.7	344	75	100	73	1371	3023	1491	3287
GA 75+	7.5	7.5	109	247	14.8	523	75	100	68	1525	3362	1645	3627
	8.5	8.5	123	232	13.9	492	75	100	68	1525	3362	1645	3627
	10	10.0	145	207	12.4	439	75	100	68	1525	3362	1645	3627
	13	13.0	189	173	10.4	367	75	100	68	1525	3362	1645	3627
GA 90	7.5	7.5	109	281	16.9	596	90	125	73	1525	3362	1645	3627
	8.5	8.5	123	275	16.5	582	90	125	73	1525	3362	1645	3627
	10	10.0	145	250	15.0	529	90	125	73	1525	3362	1645	3627
	13	13.0	189	216	13.0	458	90	125	73	1525	3362	1645	3627

* Unit performance measured according to ISO 1217, Annex C, Edition 4

Reference conditions:

- Absolute inlet pressure 1 bar (14.5 psi)
- Intake air temperature 20°C, 68°F

FAD is measured at the following working pressures:

- 7.5 bar versions at 7 bar
- 8.5 bar versions at 8 bar
- 10 bar versions at 9.5 bar
- 13 bar versions at 12.5 bar

** A-weighted emission sound pressure level at the work station, Lp WSA (re 20 µPa) dB (with uncertainty 3 dB).

Values determined according to noise level test code ISO 2151 and noise measurement standard ISO 9614.

Pressure dew point of integrated refrigerant dryer at reference conditions: 2°C to 3°C, 36°F to 37°F.



Technical specifications GA 30+90 (60 Hz versions)

COMPRESSOR TYPE	Pressure variant	Max. working pressure Workplace		Capacity FAD*			Installed motor power		Noise level**	Weight Workplace		Weight Workplace Full Feature	
		bar(e)	psig	l/s	m ³ /min	cfm	kW	hp		kg	lbs	kg	lbs
GA 30+	100	7.4	107	100	6.0	212	30	40	65	917	2022	998	2200
	125	9.1	132	91	5.5	192	30	40	65	917	2022	998	2200
	150	10.8	157	82	4.9	174	30	40	65	917	2022	998	2200
	175	12.5	181	75	4.5	158	30	40	65	917	2022	998	2200
GA 37	100	7.4	107	116	7.0	246	37	50	69	920	2028	1005	2216
	125	9.1	132	108	6.5	229	37	50	69	920	2028	1005	2216
	150	10.8	157	96	5.8	204	37	50	69	920	2028	1005	2216
	175	12.5	181	87	5.2	185	37	50	69	920	2028	1005	2216
GA 37+	100	7.4	107	120	7.2	255	37	50	65	1002	2209	1087	2396
	125	9.1	132	111	6.7	234	37	50	65	1002	2209	1087	2396
	150	10.8	157	100	6.0	212	37	50	65	1002	2209	1087	2396
	175	12.5	181	91	5.4	192	37	50	65	1002	2209	1087	2396
GA 45	100	7.4	107	139	8.3	294	45	60	72	994	2191	1079	2379
	125	9.1	132	128	7.7	271	45	60	72	994	2191	1079	2379
	150	10.8	157	118	7.1	250	45	60	72	994	2191	1079	2379
	175	12.5	181	105	6.3	222	45	60	72	994	2191	1079	2379
GA 45+	100	7.4	107	146	8.8	310	45	60	66	1070	2359	1160	2557
	125	9.1	132	134	8.0	284	45	60	66	1070	2359	1160	2557
	150	10.8	157	126	7.5	266	45	60	66	1070	2359	1160	2557
	175	12.5	181	111	6.7	236	45	60	66	1070	2359	1160	2557
GA 55	100	7.4	107	174	10.5	369	55	75	69	1329	2930	1429	3150
	125	9.1	132	154	9.3	327	55	75	69	1329	2930	1429	3150
	150	10.8	157	142	8.5	300	55	75	69	1329	2930	1429	3150
	175	12.5	181	128	7.7	272	55	75	69	1329	2930	1429	3150
GA 55+	100	7.4	107	181	10.9	384	55	75	67	1458	3214	1558	3435
	125	9.1	132	163	9.8	345	55	75	67	1458	3214	1558	3435
	150	10.8	157	138	8.3	292	55	75	67	1458	3214	1558	3435
	175	12.5	181	111	6.7	236	45	60	66	1070	2359	1160	2557
GA 75	100	7.4	107	225	13.5	476	75	100	67	1371	3023	1491	3287
	125	9.1	132	198	11.9	424	75	100	73	1371	3023	1491	3287
	150	10.8	157	186	11.2	401	75	100	73	1371	3023	1491	3287
	175	12.5	181	169	10.1	358	75	100	73	1371	3023	1491	3287
GA 75+	100	7.4	107	247	14.8	523	75	100	69	1525	3362	1645	3627
	125	9.1	132	226	13.6	479	75	100	69	1525	3362	1645	3627
	150	10.8	157	201	12.1	426	75	100	69	1525	3362	1645	3627
	175	12.5	181	179	10.7	379	75	100	69	1525	3362	1645	3627
GA 90	100	7.4	107	284	17.0	602	90	125	74	1525	3362	1645	3627
	125	9.1	132	262	15.7	555	90	125	74	1525	3362	1645	3627
	150	10.8	157	245	14.7	519	90	125	74	1525	3362	1645	3627
	175	12.5	181	224	13.4	475	90	125	74	1525	3362	1645	3627

Please refer to the footnotes, reference conditions and FAD details of the 50 Hz versions.

Technical specifications GA 37-90 VSD (50/60 Hz versions)

COMPRESSOR TYPE	Working pressure		Capacity FAD*						Installed motor power		Noise level**	Weight Workplace		Weight Workplace Full Feature	
			l/s		m ³ /min		cfm								
	bar(e)	psig	min	max	min	max	min	max	kW	hp	dB(A)	kg	lbs	kg	lbs
GA 37 VSD	4	58	26.0	124	1.6	7.4	55	263	37	50	66/67	1142	2518	1227	2705
	7	102	26.0	123	1.6	7.4	55	260	37	50	66/67	1142	2518	1227	2705
	10	145	25.8	107	1.5	6.4	55	226	37	50	66/67	1142	2518	1227	2705
	13	189	40.3	87	2.4	5.2	85	185	37	50	66/67	1142	2518	1227	2705
GA 45 VSD	4	58	26.0	146	1.6	8.8	55	310	45	60	69/72	1200	2646	1290	2844
	7	102	26.0	145	1.6	8.7	55	307	45	60	69/72	1200	2646	1290	2844
	10	145	25.8	128	1.5	7.7	55	271	45	60	69/72	1200	2646	1290	2844
	13	189	40.3	107	2.4	6.4	85	226	45	60	69/72	1200	2646	1290	2844
GA 55 VSD	4	58	32.4	197	1.9	11.8	69	418	55	75	69/72	1480	3263	1580	3483
	7	102	26.0	175	1.6	10.5	55	371	55	75	69/72	1480	3263	1580	3483
	10	145	25.4	155	1.5	9.3	54	328	55	75	69/72	1480	3263	1580	3483
	13	189	37.0	129	2.2	7.7	78	273	55	75	69/72	1480	3263	1580	3483
GA 75 VSD	4	58	37.8	248	2.3	14.9	80	525	75	100	69/70	1632	3598	1752	3862
	7	102	37.4	246	2.2	14.8	79	521	75	100	69/70	1632	3598	1752	3862
	10	145	48.1	216	2.9	13.0	102	458	75	100	69/70	1632	3598	1752	3862
	13	189	58.3	180	3.5	10.8	124	381	75	100	69/70	1632	3598	1752	3862
GA 90 VSD	4	58	37.0	290	2.2	17.4	78	614	90	125	73/74	1632	3598	1752	3862
	7	102	39.4	289	2.4	17.3	84	612	90	125	73/74	1632	3598	1752	3862
	10	145	48.3	253	2.9	15.2	102	536	90	125	73/74	1632	3598	1752	3862
	13	189	59.4	209	3.6	12.5	126	443	90	125	73/74	1632	3598	1752	3862

* Unit performance measured according to ISO 1217, Annex E, Edition 4
Maximum working pressure for VSD machines: 13 bar(e) (188 psig)



Driven by innovation

With more than 135 years of innovation and experience, Atlas Copco will deliver the products and services to help maximize your company's efficiency and productivity. As an industry leader, we are dedicated to offering high air quality at the lowest possible cost of ownership. Through continuous innovation, we strive to safeguard your bottom line and bring you peace of mind.



Building on interaction

As part of our long-term relationship with our customers, we have accumulated extensive knowledge of a wide diversity of processes, needs and objectives. This gives us the flexibility to adapt and efficiently produce customized compressed air solutions that meet and exceed your expectations.



A committed business partner

With a presence in over 170 countries, we will deliver high-quality customer service anywhere, anytime. Our highly skilled technicians are available 24/7 and are supported by an efficient logistics organization, ensuring fast delivery of genuine spare parts when you need them. We are committed to providing the best possible know-how and technology to help your company produce, grow, and succeed. With Atlas Copco you can rest assured that your superior productivity is our first concern!

