

PRATT®

BF Series Wafer/Lug Butterfly Valves



**Engineering Creative Solutions
for Fluid Systems Since 1901**



401 South Highland Avenue
Aurora, Illinois 60506-5563
www.henrypratt.com
phone: 630.844.4000
moreinfo@henrypratt.com

Table of Contents

Pratt® BF Series Butterfly Valves – 2" to 48"

Construction Specification.....	1
Features.....	1
Design Details.....	2
Suggested Specification	3
CV Flow Data	4
Dimensional Data - Wafer.....	5-6
Dimensional Data - Lug.....	7-8

Construction Specification: Pratt® BF Series Butterfly Valves



Valve with Electric Operator



Valve with Gear Operator

Sizes: 2" through 48"

Body: Ductile Iron (65-45-12)

Disc: Ductile Iron Nickle Plated, Ductile Iron Nylon 11,
CF8M Stainless Steel, Aluminum Bronze

Stem: 416 S.S. Heat Treated

Resilient Seat: EPDM, Buna-N, Viton

Actuation Options: Worm Gear, Lever,
Pneumatic, Electric

Pressure Ratings: 2" – 12" 230psi
14" – 48" 150psi


* For installation between ANSI 125/150

** Substitute material may result in pressure rating change. Contact factory for details.

Features:

- Innovative 3 point connection, tongue and groove seat allows for higher pressure rating and full Vacuum service
- Unique secondary shaft seals prevent leakage from shaft.
- Our two piece shaft design provides maximum strength and a high flow characteristic disc.

Pratt® BF Series Butterfly Valve Design Details: Butterfly Valve, sizes 2" through 48" 2"-12" 230psi, 14"-48" 150psi

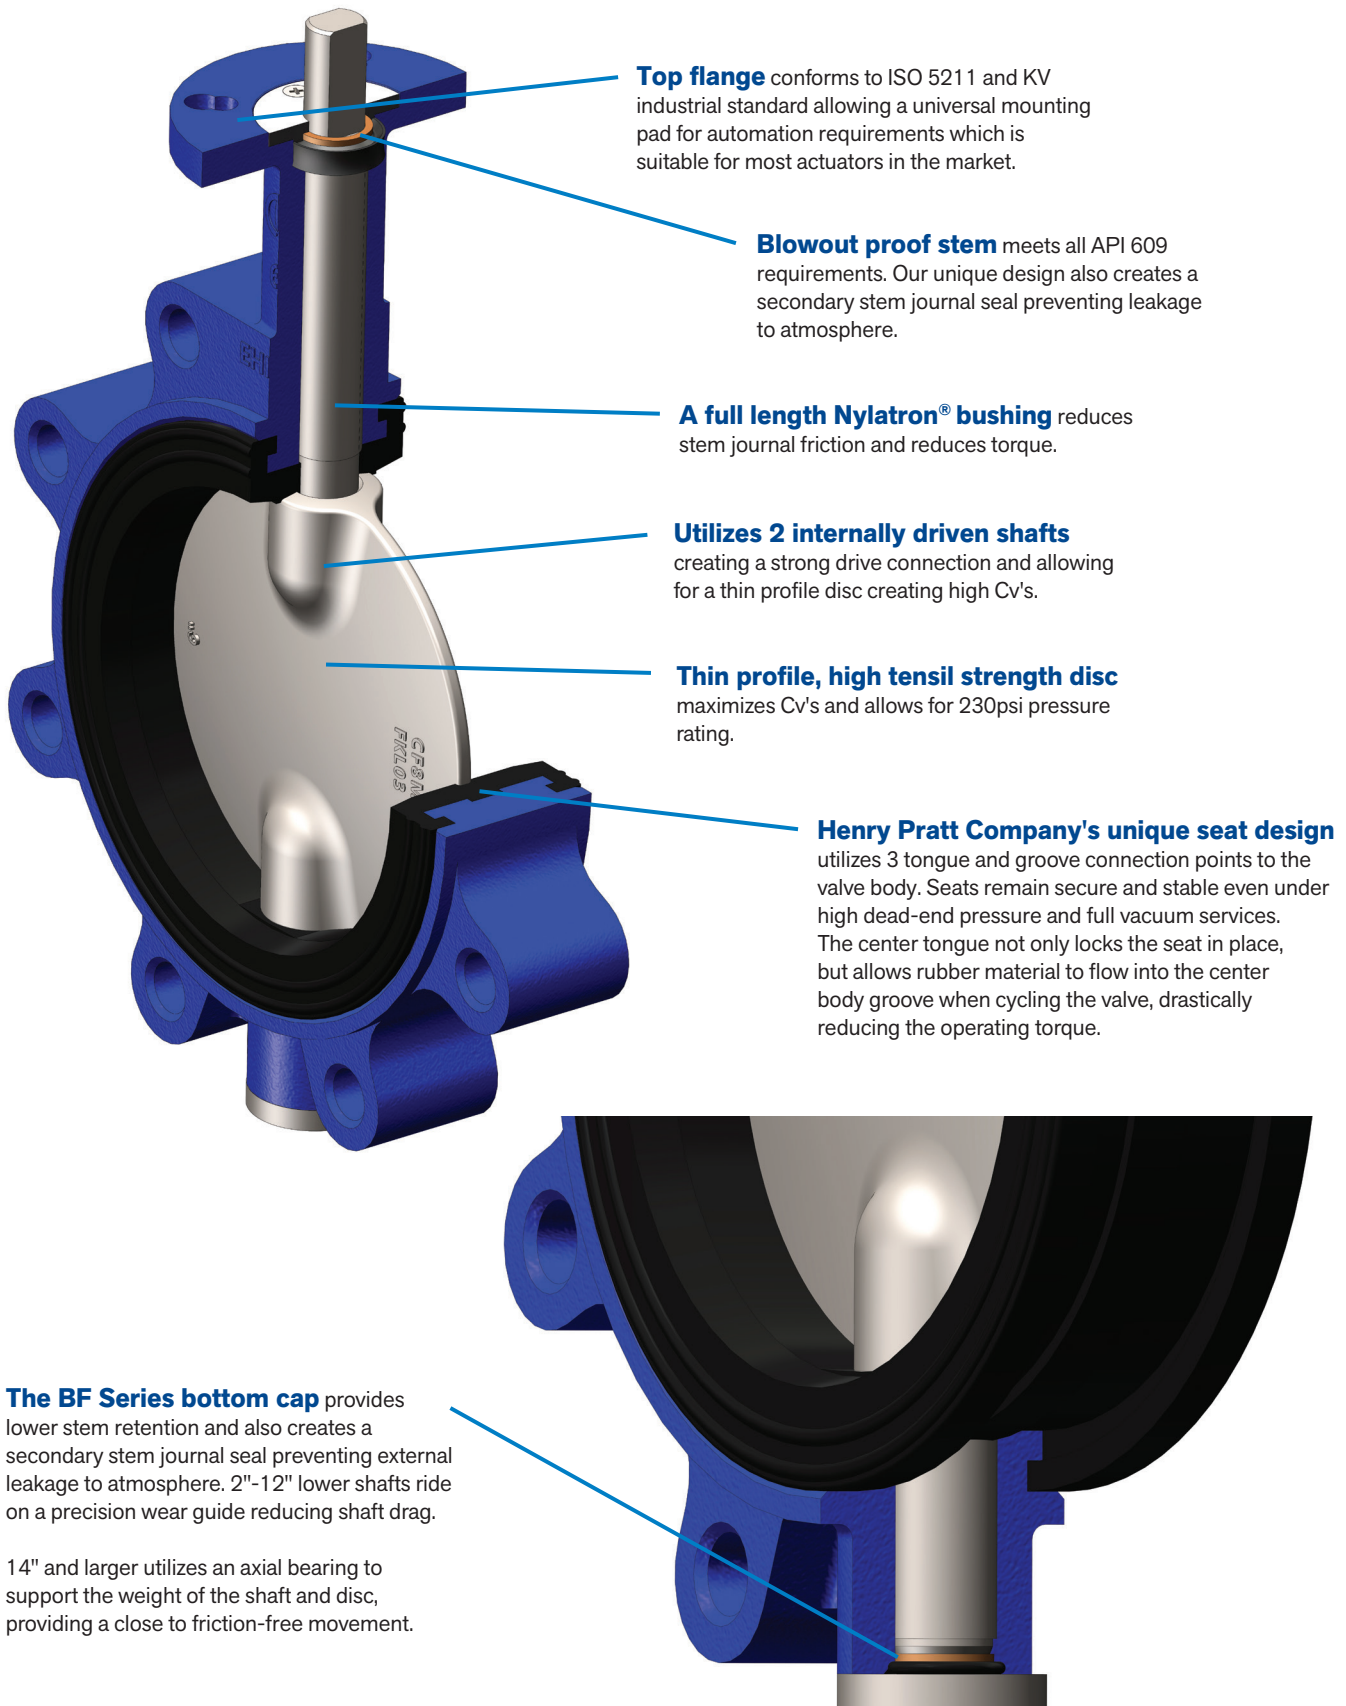

The BF Series bottom cap provides lower stem retention and also creates a secondary stem journal seal preventing external leakage to atmosphere. 2"-12" lower shafts ride on a precision wear guide reducing shaft drag.

14" and larger utilizes an axial bearing to support the weight of the shaft and disc, providing a close to friction-free movement.

Suggested Specifications: Pratt® BF Series Wafer/Lug Butterfly Valve, Sizes 2" through 48" 2"-12" 230psi, 14"-48" 150psi

General

Valves shall be of the Wafer or Lug design for installation between ANSI 125/150 flanges. All valves shall be capable of bi-directional, end of line, bubble tight service to rated pressure. Valves are also rated to full vacuum service. Design Standards: API 608 category A.

Pressure Rating

2" – 12" – 230psi to fit between ANSI 125/150 flanges

14" – 48" – 150psi to fit between ANSI 125/250 flanges

Body

Valve body shall be a 1 piece Ductile Iron ASTM A-536 (65-45-12) construction with a laying length conforming to the latest revision of ISO 5752 and a flange connection B16.1/B16.5.

Disc

Valve disc shall be Ductile iron ASTM A-536 Grade 65-45-12 with ENP plating or Nylon 11 coating, CF8M Stainless Steel, or Aluminum Bronze. Disc shall be designed to accommodate an upper and lower shaft with a thin center profile giving higher Cv values combined with strength.

Shaft

Valve shaft shall be constructed of Heat Treated 416 Stainless Steel. Valve shall be designed to accommodate (2) shafts (1 upper and 1 lower). The upper shaft shall have a positive engagement in the disc utilizing an internal square drive and shall be retained by the body Top Cap and End Cap.

Seat

Seat shall be EPDM, Buna-N or Viton. Seat design shall consist of 3 Tongues (2 located on the side walls and 1 located in the center bore) that engage into 3 grooves in the body. These 3 tongue and groove connection points prevent seat movement in a radial and axial direction. Seats shall be field replaceable.

Shaft Seals

Upper Shaft Seal shall be self-adjusting V-type and shall be suitable for Pressure or Vacuum service. Packing shall be located above the bushing and shall create a positive seal against the Top Cap. Bottom end cap contains a captive o-ring creating a positive seal against external leakage.

Bushings

Valve shall consist of (2) full length Nylatron® bushings (upper and lower) offering superior protection against friction, corrosion and impacts. Pratt's unique bushings design provide protection against shaft side loading.

Testing


All valves shall be leak tested in the factory at their rated pressure per API 598.

CV Flow Data: Pratt® BF Series BFV



During its product development phase, the Pratt® BF Series Wafer/Lug Butterfly Valve was tested to ensure that it met our own rigorous standards for flow capacity. Throughout testing, the Pratt BF Series valve has consistently produced high Cv values which translates to lower flow resistance, and in turn, lowering system operating costs to the user over the life of the valve. The following Cv chart represents the flow characteristics for all sizes available.

Valve Opening (deg)	Cv by Valve Size													
	2"	2.5"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
10	1	2	3.5	6	8.5	14	18	28.1	40.5	55.1	72	91.1	112.5	162
20	1.8	2.9	4.1	7.4	11.5	16.5	29.4	185.5	267.1	363.6	474.9	601.1	742.1	1069
30	10.8	16.9	24.3	43.2	67.5	97.1	172.7	381.5	549.4	747.8	976.7	1236	1526	2198
40	22.1	34.5	49.7	88.4	138.1	198.8	353.4	683.1	983.6	1339	1749	2213	2732	3935
50	38.5	60.2	86.7	154.2	240.9	346.9	616.8	1161	1671	2275	2971	3761	4643	6685
60	65.3	102	146.9	261.1	408	587.6	1045	1944	2799	3810	4976	6298	7775	11196
70	111	173.5	249.8	444.1	693.9	999.2	1776	3232	4654	6335	8274	10472	12928	18617
80	176.2	275.2	396.3	704.6	1101	1585	2818	6215	8950	12182	15911	20138	24862	35801
90	206.4	322.5	464.4	825.6	1290	1858	3302	6420	9245	12583	16435	20801	25680	36979

Pratt® BF Series Wafer / Lug Butterfly Valves being tested at an independent research laboratory

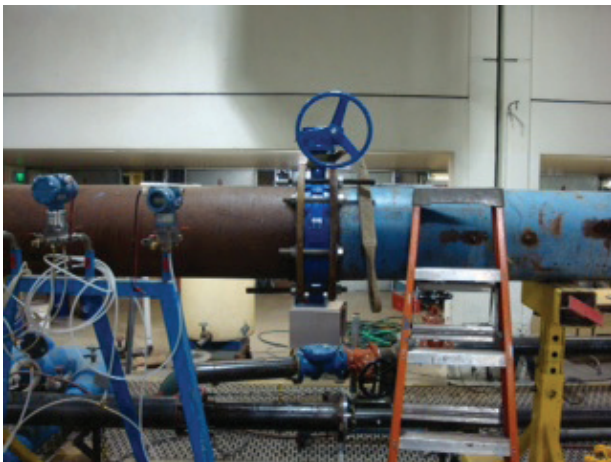


Dimensional Data: Pratt® BF Series BFV, Wafer

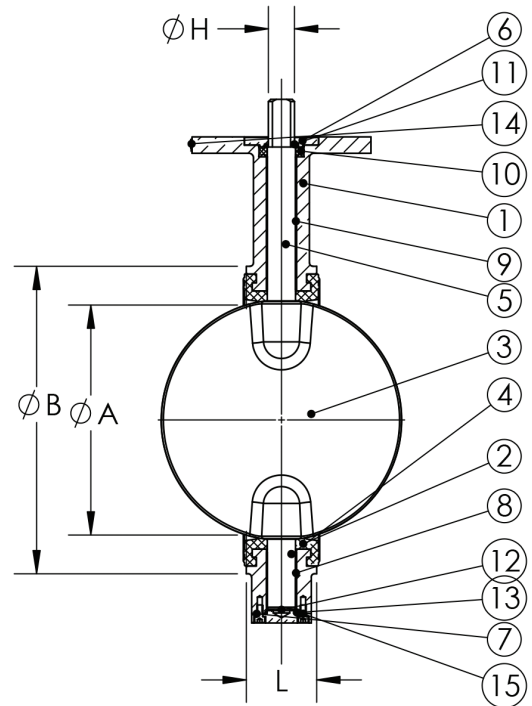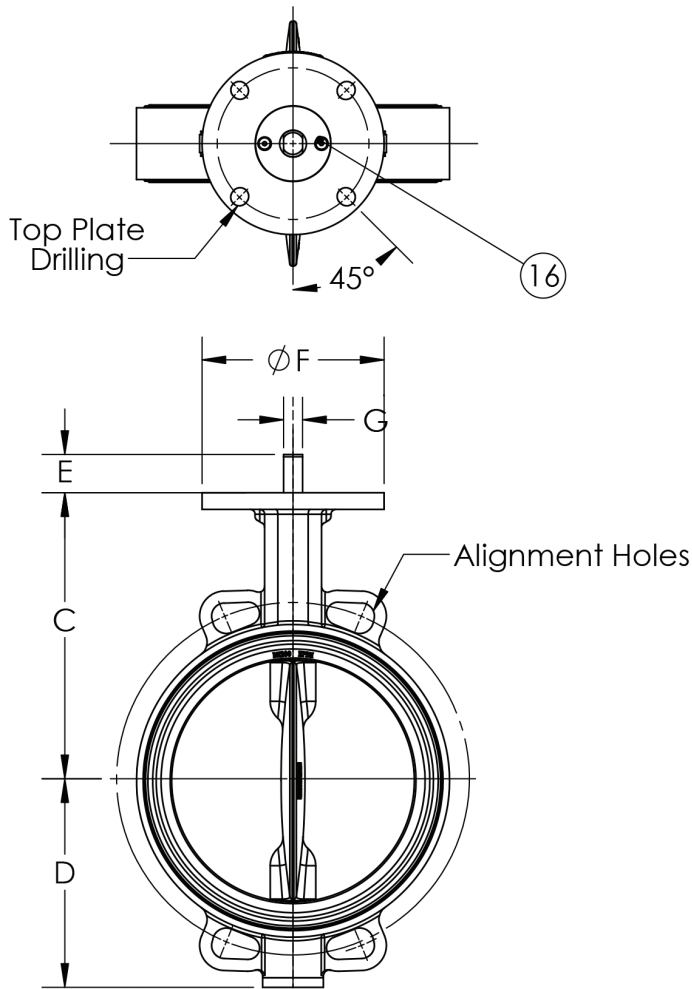


Part No.	Part Name	Material	Qty.
1	Wafer Body	DI	1
2	Seat	EPDM/NBR/Viton	1
3	Disc	SS316/DI/C954/Nylon 11	1
4	Lower Stem	SS416/SS316/SS630	1
5	Upper Stem	SS416/SS316/SS630	1
6	Top Cap	1020 Steel	1
7	End Cap	1020 Steel	1
8	Lower Bushing	Nylatron®	1
9	Upper Bushing	Nylatron®	1
10	V-packing	NBR	1
11	Washer	SS304	1
12	Wear Shim	SS304	1
13	O-ring	NBR	1
14	Data Plate	SS304	1
15	End Cap Bolt	SS304	2
16	Top Cap Bolt	SS304	2

Size	lbs	ΦA	ΦB	C	D	E	ΦF	G	ΦH	L	Key	Pratt Standard Top Plate Drilling			ISO 5211 Top Plate Drilling			Alignment Holes		
												Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Hole Dia.
2"	5.51	1.079	3.500	5.000	2.579	1.260	4.000	0.375	0.563	1.693	-	3.25	4	0.437	2.760	4	0.402	4.75	4	0.75
2.5"	6.39	1.862	4.094	5.500	2.854	1.260	4.000	0.375	0.563	1.811	-	3.25	4	0.437	2.760	4	0.402	5.5	4	0.75
3"	7.49	2.429	4.646	5.709	3.642	1.260	4.000	0.375	0.563	1.811	-	3.25	4	0.437	2.760	4	0.402	6	4	0.75
4"	10.58	3.500	5.827	6.496	4.429	1.260	4.000	0.437	0.625	2.047	-	3.25	4	0.437	2.760	4	0.402	7.5	4	0.75
5"	15.65	4.567	7.205	7.500	4.921	1.260	4.000	0.500	0.750	2.205	-	3.25	4	0.437	2.760	4	0.402	8.5	4	0.88
6"	17.63	5.433	7.992	7.874	5.433	1.260	4.000	0.500	0.750	2.205	-	3.25	4	0.437	2.760	4	0.402	9.5	4	0.88
8"	31.52	7.744	10.315	9.500	6.811	1.260	6.000	0.625	0.875	2.362	-	5	4	0.563	4.921	4	0.563	11.75	4	0.88
10"	50.03	9.646	12.598	10.866	8.110	2.000	6.000	-	1.125	2.677	1/4" * 1/4"	5	4	0.563	4.921	4	0.563	14.25	4	1
12"	67.00	11.339	14.567	12.205	9.713	2.000	6.000	-	1.125	3.071	1/4" * 1/4"	5	4	0.563	4.921	4	0.563	17	4	1

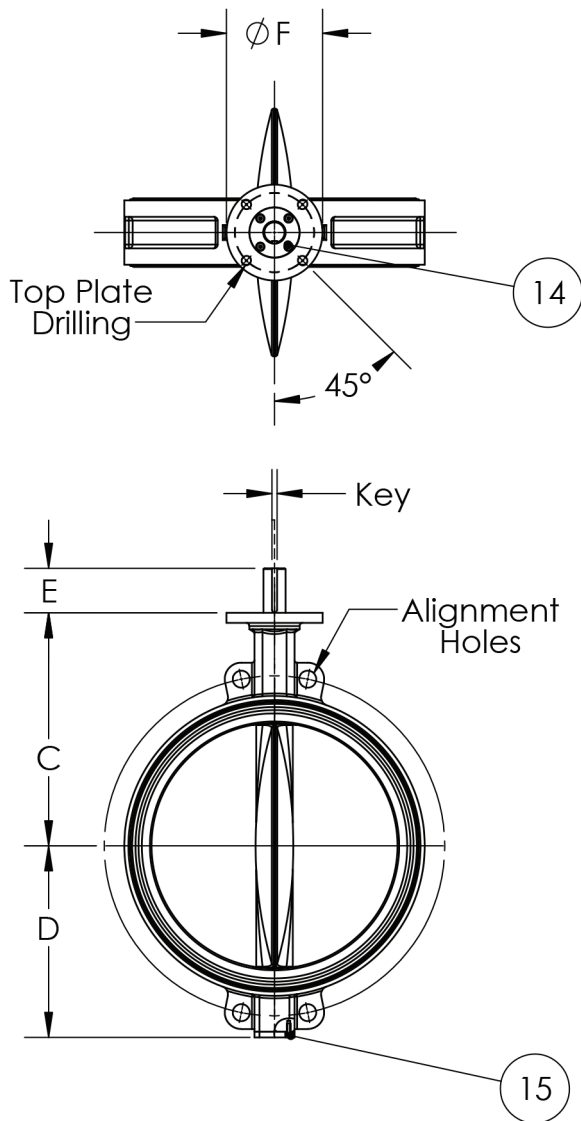



SECTION B-B

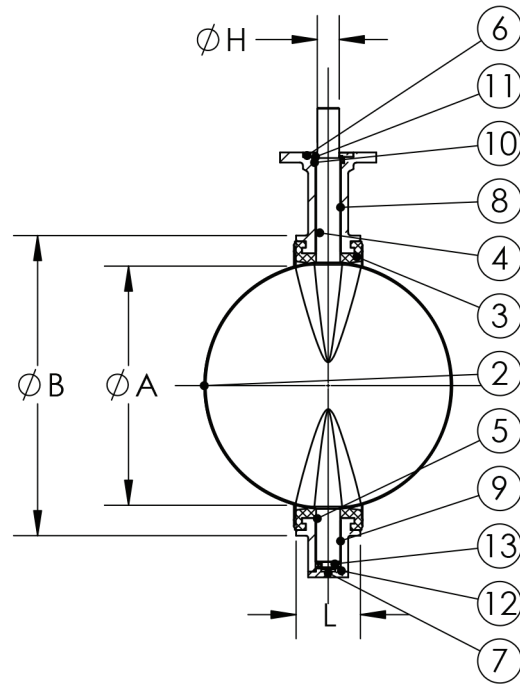

Part No.	Part Name	Material	Qty.
1	Wafer Body	DI	1
2	Disc	SS316/DI/C954/Nylon 11	1
3	Seat	EPDM/NBR/Viton	1
4	Upper Stem	SS416/SS316/SS630	1
5	Lower Stem	SS416/SS316/SS630	1
6	Top Cap	1020 Steel	1
7	End Cap	1020 Steel	1
8	Upper Bushing	Nylatron®	1
9	Lower Bushing	Nylatron®	1
10	V-packing	NBR	1
11	Washer	SS304	1
12	O-ring	NBR	1
13	Bearing	Steel	1
14	Top Cap Bolt	SS304	4
15	End Cap Bolt	SS304	4


Size	Lbs	ϕA	ϕB	C	D	E	ϕF	ϕH	L	Key	Pratt Standard Top Plate Drilling			ISO 5211 Top Plate Drilling			Alignment Holes		
											Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Hole Dia.
14"	80.01	12.677	16.772	12.992	10.984	2.760	6.000	1.374	3.071	5/16" * 5/16"	5	4	0.563	4.92	4	0.563	18.75	4	1.122
16"	110.20	14.921	18.748	14.567	11.969	2.760	6.000	1.374	4.016	5/16" * 5/16"	5	4	0.563	4.92	4	0.563	21.25	4	1.122
18"	160.89	16.693	20.945	15.551	13.189	3.000	8.000	1.626	4.488	3/8" * 3/8"	6.5	4	0.811	6.5	4	0.811	22.75	4	1.26
20"	207.18	18.504	23.189	16.850	14.528	3.500	8.000	1.874	5.000	1/2" * 1/2"	6.5	4	0.811	6.5	4	0.811	25	4	1.26
24"	317.38	22.480	27.008	19.685	16.693	3.500	8.000	1.874	6.063	1/2" * 1/2"	6.5	4	0.811	6.5	4	0.811	29.5	4	1.378

Dimensional Data: Pratt® BF Series BFV, Lug

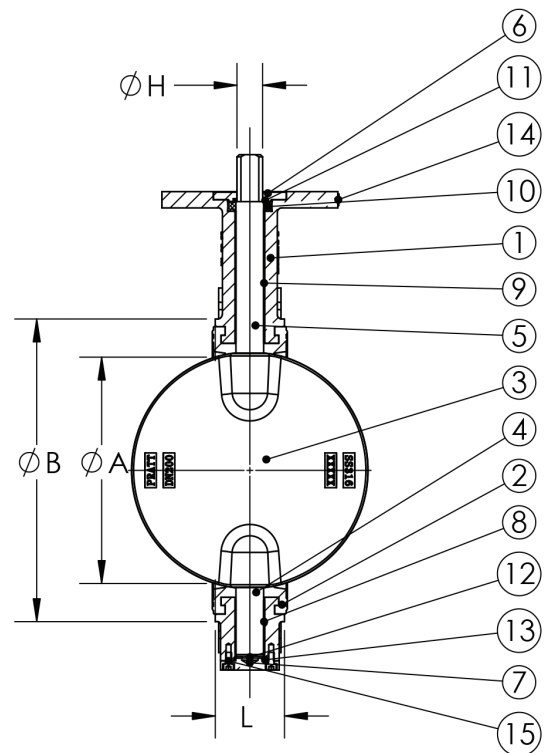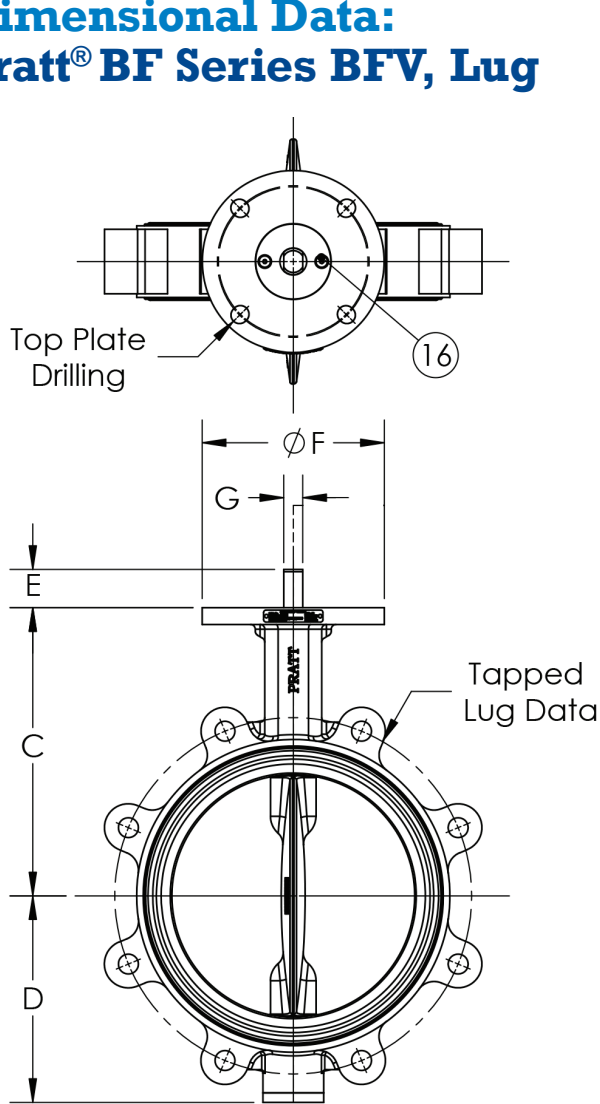


Part No.	Part Name	Material	Qty.
1	Lug Body	DI	1
2	Seat	EPDM/NBR/Viton	1
3	Disc	SS316/DI/C954/Nylon 11	1
4	Lower Stem	SS416/SS316/SS630	1
5	Upper Stem	SS416/SS316/SS630	1
6	Top Cap	1020 Steel	1
7	End Cap	1020 Steel	1
8	Lower Bushing	Nylatron®	1
9	Upper Bushing	Nylatron®	1
10	V-packing	NBR	1
11	Washer	SS304	1
12	Wear Shim	SS304	1
13	O-ring	NBR	1
14	Data Plate	SS304	1
15	End Cap Bolt	SS304	2
16	Top Cap Bolt	SS304	2

Size	Lbs	Pratt Standard Top Plate Drilling				ISO 5211 Top Plate Drilling			Tapped Lug Data			Key	Pratt Standard Top Plate Drilling			ISO 5211 Top Plate Drilling			Tapped Lug Data		
		ΦA	ΦB	C	D	E	ΦF	G	ΦH	L	Bolt Circle		No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Tapped	
2"	7.05	1.079	3.500	5.000	2.579	1.260	4.000	0.375	0.563	1.693	-	3.25	4	0.437	2.760	4	0.402	4.75	4	5/8"	
2.5"	8.15	1.862	4.094	5.500	2.854	1.260	4.000	0.375	0.563	1.811	-	3.25	4	0.437	2.760	4	0.402	5.5	4	5/8"	
3"	11.24	2.429	4.646	5.709	3.642	1.260	4.000	0.375	0.563	1.811	-	3.25	4	0.437	2.760	4	0.402	6	4	5/8"	
4"	14.55	3.500	5.827	6.496	4.429	1.260	4.000	0.437	0.625	2.047	-	3.25	4	0.437	2.760	4	0.402	7.5	8	5/8"	
5"	20.72	4.567	7.205	7.500	4.921	1.260	4.000	0.500	0.750	2.205	-	3.25	4	0.437	2.760	4	0.402	8.5	8	3/4"	
6"	22.92	5.433	7.992	7.874	5.433	1.260	4.000	0.500	0.750	2.205	-	3.25	4	0.437	2.760	4	0.402	9.5	8	3/4"	
8"	38.35	7.744	10.315	9.500	6.811	1.260	6.000	0.625	0.875	2.362	-	5	4	0.563	4.921	4	0.563	11.75	8	3/4"	
10"	62.59	9.646	12.598	10.866	8.110	2.000	6.000	-	1.125	2.677	1/4" * 1/4"	5	4	0.563	4.921	4	0.563	14.25	12	7/8"	
12"	83.53	11.339	14.567	12.205	9.713	2.000	6.000	-	1.125	3.071	1/4" * 1/4"	5	4	0.563	4.921	4	0.563	17	12	7/8"	

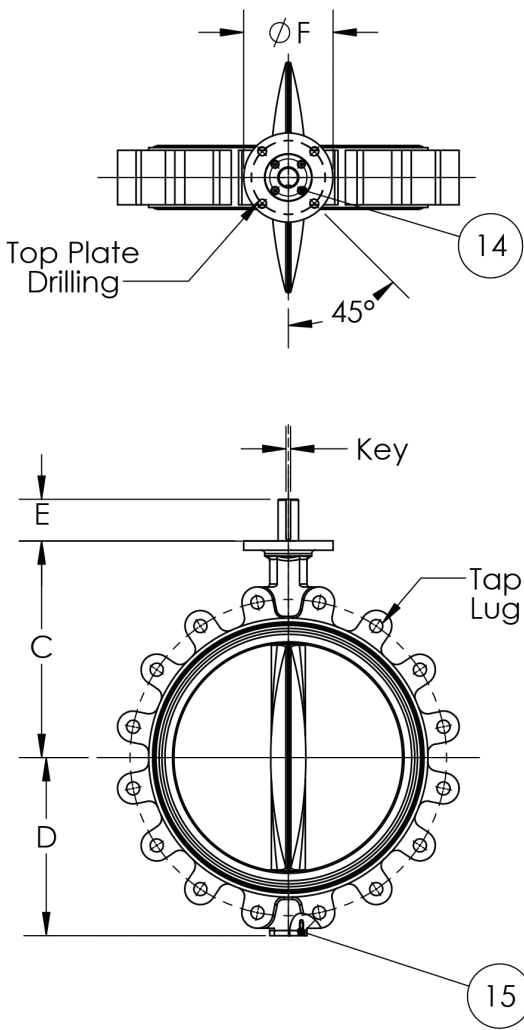

SECTION A-A

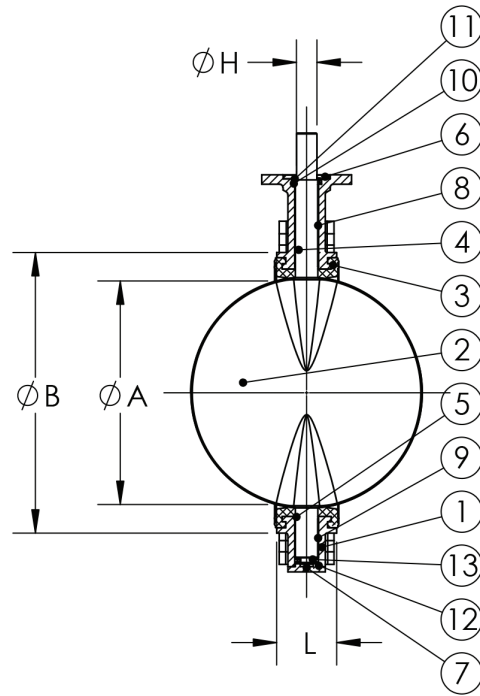


Part No.	Part Name	Material	Qty.
1	Lug Body	DI	1
2	Disc	SS316/DI/C954/Nylon 11	1
3	Seat	EPDM/NBR/Viton	1
4	Upper Stem	SS416/SS316/SS630	1
5	Lower Stem	SS416/SS316/SS630	1
6	Top Cap	1020 Steel	1
7	End Cap	1020 Steel	1
8	Upper Bushing	Nylatron®	1
9	Lower Bushing	Nylatron®	1
10	V-packing	NBR	1
11	Washer	SS304	1
12	O-ring	NBR	1
13	Bearing	Steel	1
14	Top Cap Bolt	SS304	4
15	End Cap Bolt	SS304	4

Size	Lbs	Pratt Standard Top Plate Drilling									ISO 5211 Top Plate Drilling			Tapped Lug Data					
		ϕA	ϕB	C	D	E	ϕF	ϕH	L	Key	Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Hole Dia.	Bolt Circle	No. of Holes	Tapped
14"	110.20	12.677	16.772	12.992	10.984	2.760	6.000	1.374	3.071	5/16" * 5/16"	5	4	0.563	4.92	4	0.563	18.75	12	1"
16"	160.89	14.921	18.748	14.567	11.969	2.760	6.000	1.374	4.016	5/16" * 5/16"	5	4	0.563	4.92	4	0.563	21.25	16	1"
18"	222.60	16.693	20.945	15.551	13.189	3.000	8.000	1.626	4.488	3/8" * 3/8"	6.5	4	0.811	6.5	4	0.811	22.75	16	1 1/8"
20"	275.50	18.504	23.189	16.850	14.528	3.500	8.000	1.874	5.000	1/2" * 1/2"	6.5	4	0.811	6.5	4	0.811	25	20	1 1/8"
24"	407.74	22.480	27.008	19.685	16.693	3.500	8.000	1.874	6.063	1/2" * 1/2"	6.5	4	0.811	6.5	4	0.811	29.5	20	1 1/4"

Notes


PRATT® PRODUCT GUIDE




**Model
2FII**




**Monoflange
MKII**




**Plug
Valve**




**Triton®
XR70**



**Indicating Butterfly Valve
UL & FM approved**




**Tilting Disc
Check Valve**




**Triton®
XL**



**N-Stamp Nuclear
Butterfly Valve**




**Cone
Valve**




Rectangular




**PIVA Post Indicating Valve Assembly
UL & FM approved**




**Sleeve
Valve**




**Rubber Seated
Ball Valve**



**Triton®
HP250**




**Check
Valve**



**Metal Seated
Ball Valve**




**Control
Systems**



Plunger Valve

PRATT®



Air Valve

Mueller Co.

Reliable Connections®

The trademarks, logos and service marks displayed in this document herein are the property of Henry Pratt Company, LLC, its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. Copyright © 2016 Henry Pratt Company, LLC. All Rights Reserved.