

2017

LAWN & GARDEN

GRAVELY

**BUILT
AROUND
YOU.**



GRAVELLY

GRAVELY® GETS IT.

Good work takes hard work. Endless days. Miles of terrain. We know, because we've been there. Acre after acre, year after year, since 1916 – dedicated to match the demands of professionals.

We're not just punching in to log hours. We're constantly listening, learning and putting that experience to work for you.

To invent and improve. To make things faster, stronger, smarter, easier.

Together we're working to change the landscape of commercial mowing. And all of that work has paid off.

INTRODUCING OUR 2017 LINEUP OF GRAVELY LAWN & GARDEN EQUIPMENT. BUILT BY GRAVELY. INSPIRED BY YOU.

TABLE OF CONTENTS

FOR PROFESSIONALS	4
WORKING FOR YOU	6
PRODUCT DEVELOPMENT	8
COMMERCIAL ZERO-TURN	10
COMMERCIAL ATTACHMENTS AND ACCESSORIES	22
STAND-ON	24
WALK BEHIND	30
VEHICLE	32
SOCIAL STORIES	34
RESIDENTIAL ZERO-TURN	36
RESIDENTIAL ATTACHMENTS AND ACCESSORIES	48
SPECIFICATIONS	50





FOR PROFESSIONALS. BY PROFESSIONALS.

In our profession, our first job is to understand yours. So we put ourselves in your grass-stained shoes to think, design and develop like a pro. From cutting precision to control location, every touch point is manufactured with you in mind. Gravely machines set the commercial standard because they are inspired and informed by commercial demands.

When creators connect with consumers, the result is a powerful thing:
PROFESSIONAL-GRADE PERFORMANCE THAT MORE PROFESSIONALS PREFER.



WE WORK FOR YOU.




Our machines are stamped Gravelly. But they belong to you – the ones out there earning a living and building a reputation.

The designs we create and the decisions we make are driven by your day-to-day demands. Our mission and motivation is to get inside the mind of the professional. We hear what you need and then work to make it a reality.

We're powered to put professionals in a position to succeed. To work smarter, faster, longer and more comfortably. And to perform at a level you can be proud of.

At the end of the day we're all working toward the same thing – the satisfaction of a job well done.

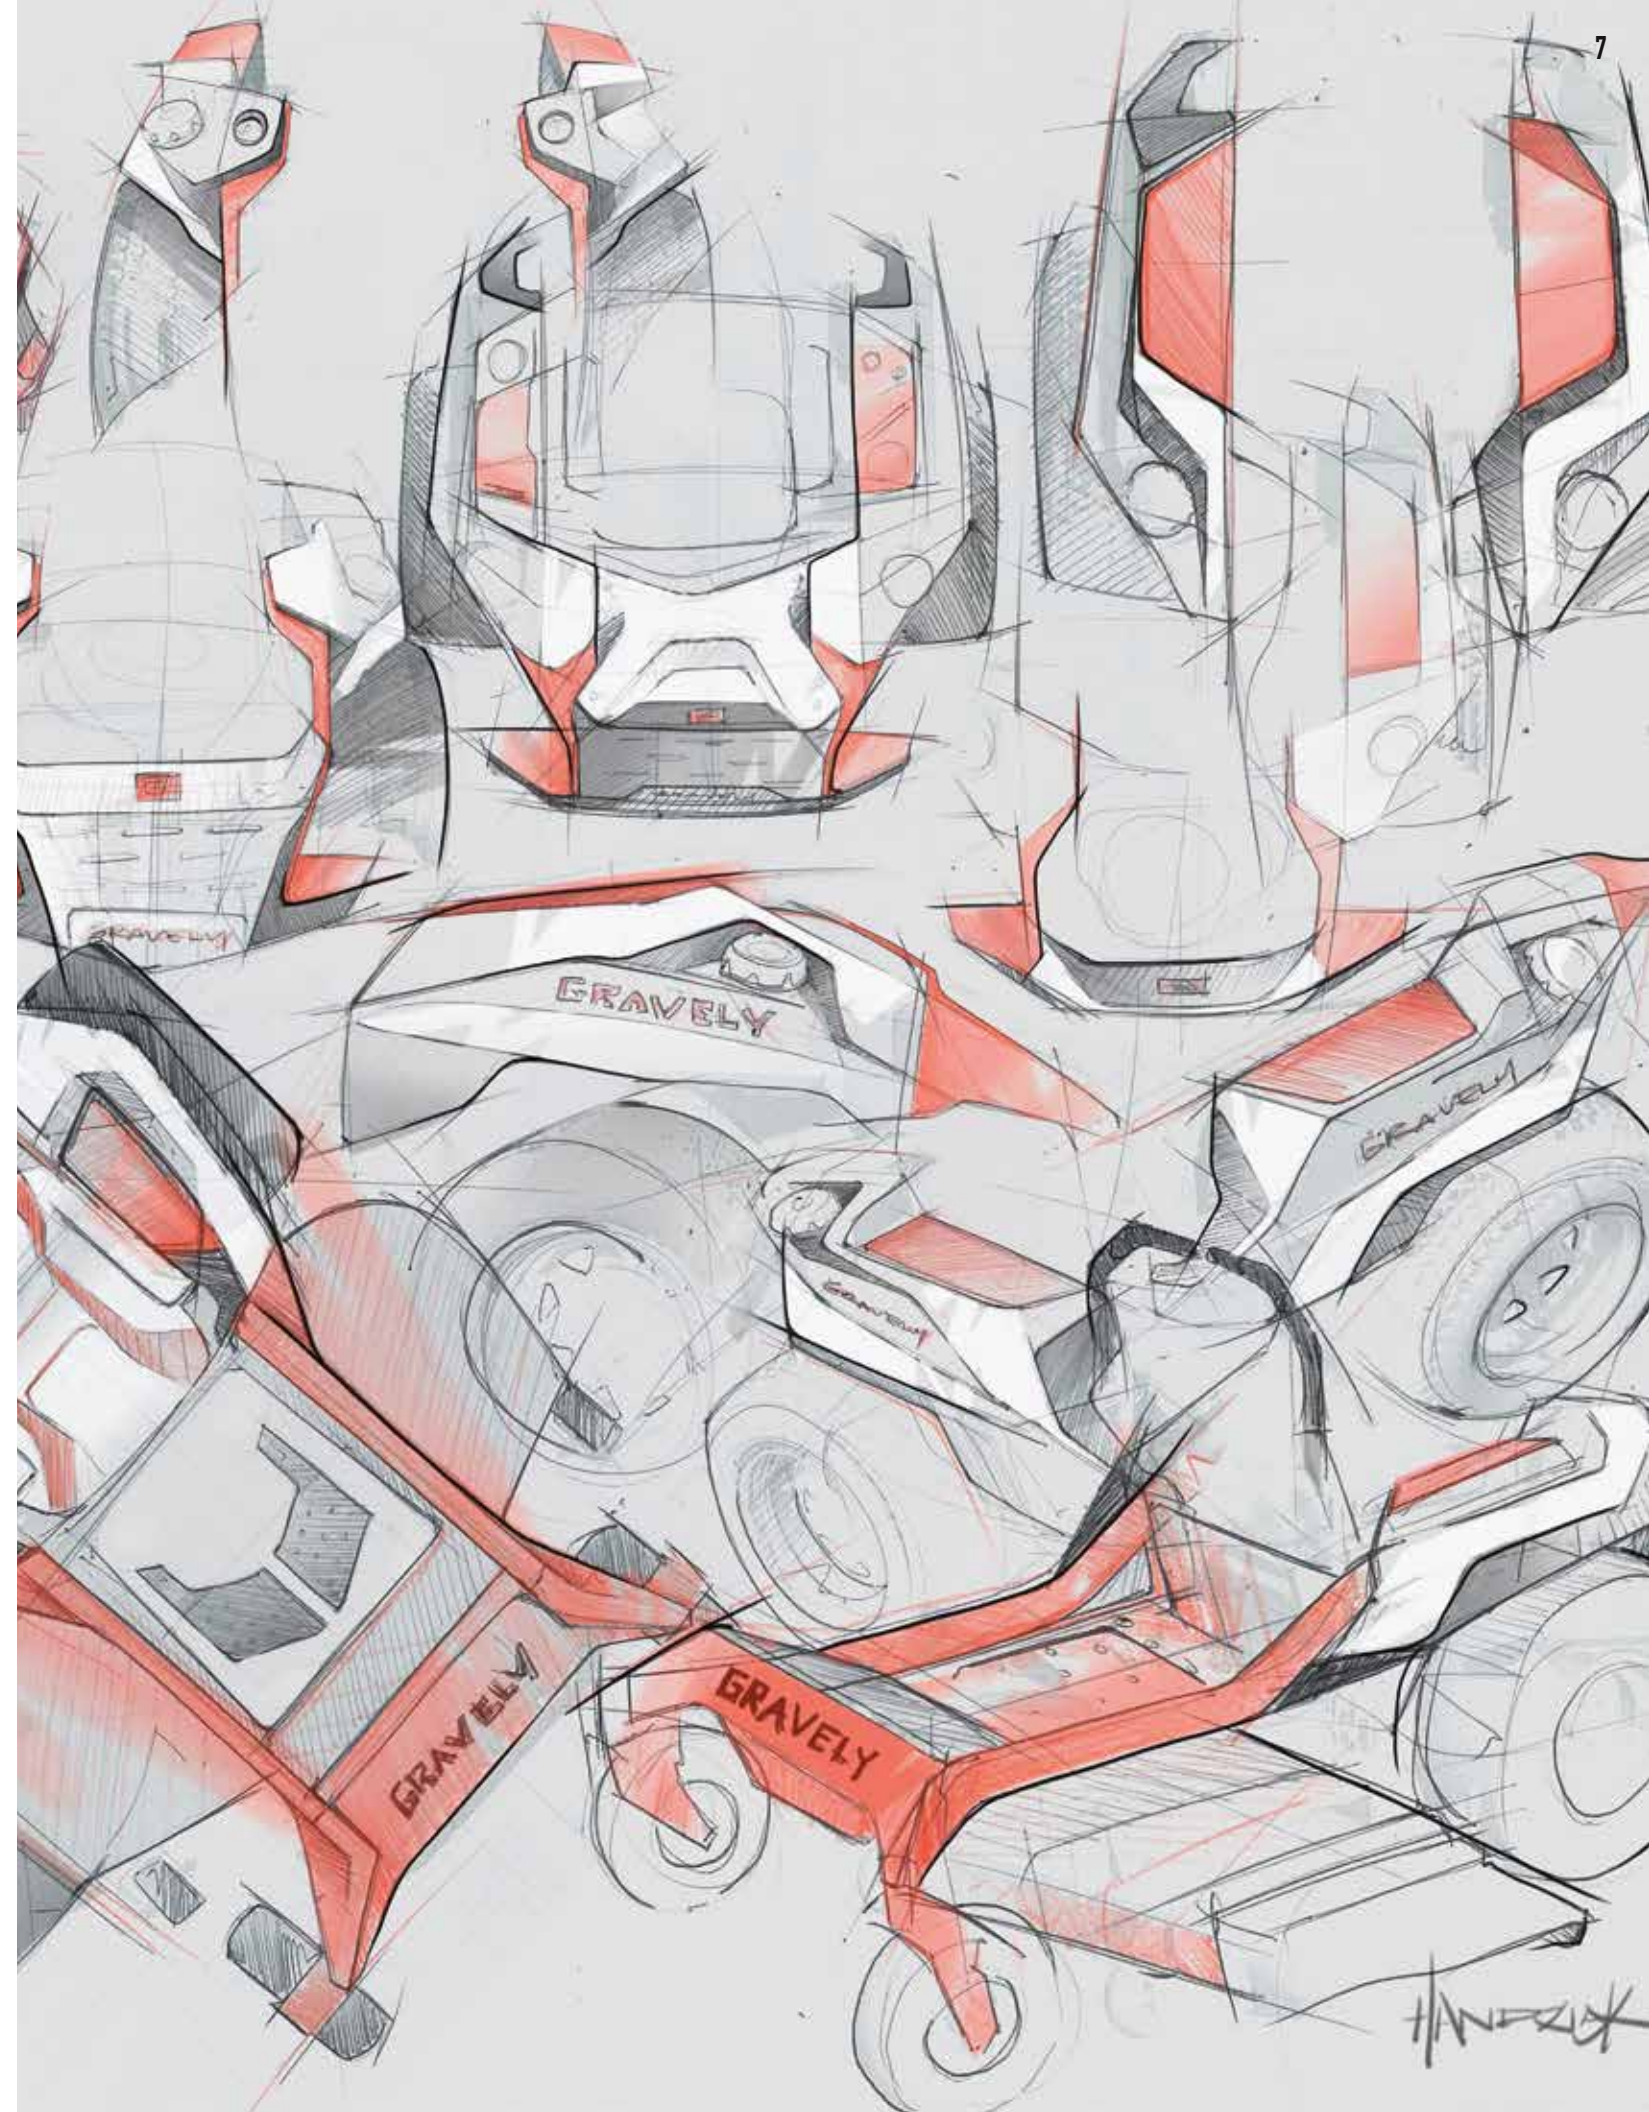



**LISTEN
AND LEARN.
DEVELOP
AND ENGINEER.
PRODUCE
AND TEST.**

It seems as easy as 1-2-3,
but the truth is, our product
development process runs
deep. From gathering insight
from professionals in the
field right down to the final
tests, every single product
that leaves our shop has been
scrutinized down to the last
detail to deliver the signature
Gravelly performance that you
demand and prefer.

THE BEST IN THE BUSINESS.



No nonsense, no sick days and refusing to take "no" for an answer.

It's no surprise that the most proud and passionate professionals drive Gravely. Because this family is wired the same way.

Our work and wit and will have separated us from the rest. But we're not so different from the people that sit in our seats.

First to the job, last to leave. Not calling it quits until the job's done right. Always staying a step ahead. It's how we've powered through the past century. It's how we've earned your trust.

IT'S HOW WE WORK.

IT'S HOW WE THINK.

IT'S HOW WE SUCCEED.

IT'S HOW WE'RE DRIVEN.

PRO- TURN[®] SERIES

PREFERRED BY PROFESSIONALS.

With 100 years of industry insight at our back, Gravely Pro-Turns[®] are poised to raise the standard of professional performance. Smarter controls, longer run times, lower maintenance and a more comfortable ride are proof that we listened and learned from professionals and went to work to perfect the Pro-Turn experience. The result is the most impressive and productive Pro-Turn lineup ever to be unleashed.



PRO-TURN® 400



PRO-TURN 400
COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
992273	27 hp/852 cc Kawasaki® FX850	52"
992282 992289*	29 hp/824 cc Yamaha EFI MXV775	52"
992274	31 hp/999 cc Kawasaki® FX921V	60"
992275	35 hp/999 cc Kawasaki® FX1000V	60"
992278	33 hp/824 cc Kohler® EFI ECV880	60"
992283 992288*	33 hp/824 cc Yamaha® EFI MXV825	60"
992280**	29 hp/824 cc Kohler® LP PSV860 EFI**	60"
992284 992290*	33 hp/824 cc Yamaha® EFI MXV825	72"
992276	35 hp/999 cc Kawasaki® FX1000V	72"

** LP available on previous models. Features will vary. * = CARB Compliant



THE BEST IN THE BUSINESS.

If you're looking to run with the best, look no further than the Pro-Turn 400. With a stronger frame, smarter controls and a smoother ride, the PT 400 continues to set the pace, leading the way with unparalleled professional performance.

DECK

X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



SEAT

AIR-RIDE SUSPENSION SEAT

The industry's first air-ride suspension system is enhanced with seat isolators to absorb large vertical impacts and designed with an oversized, pillow-top, extra high-back seat for all-day comfort.



CBT

CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



DECK LIFT

EZ-LIFT™ DECK SYSTEM

The EZ-Lift Deck System takes 25% less effort to raise and lower the deck. Plus, 19 cutting positions with .25-inch increments help eliminate overhung loads.



CHASSIS

STEEL CHASSIS

A heavy-duty, 1.5-inch x 3-inch steel, singular tubular frame is fabricated with four engine frame isolation points to reduce cockpit vibration by 45% while lessening operator fatigue.



TIRES

RADIAL REAR TIRES

Radial rear tires come standard, delivering automotive-style performance, industry-leading handling and hill holding, while being gentler to the turf.



PRO-TURN® 200



PRO-TURN 200
COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
992268	27 hp/852 cc Kawasaki® FX850V	52"
992271	29 hp/824 cc Kohler® EFI ECV860	52"
992284 992291*	29 hp/824 cc Yamaha® EFI MXV775	52"
992267	25 hp/747 cc Kohler® ZT740	60"
992269	27 hp/852 cc Kawasaki® FX850V	60"
992272	29 hp/824 cc Kohler® EFI ECV860	60"
992281 992292*	29 hp/824 cc Yamaha® EFI MXV775	60"
992270	31 hp/999 cc Kawasaki® FX921V	72"
992295 992283*	33 hp/824 cc Yamaha® EFI MXV825	72"

* = CARB Compliant



HARDWORKING HERITAGE.

Pro-Turn 200 mowers feature the same DNA, determination and leading-edge design as the Pro-Turn 400. So it's built to carry the legacy and live up to the standard of signature Gravely commercial-grade performance.

DECK

X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



CUT

DECK LEVEL DESIGN

A simple four-point adjustment uses half the parts and zero deck hanging welds, making it quick and easy to adjust and maintain superior cutting performance.



SEAT

SEATING SYSTEM

A full-suspension seat provides added lateral stability and improved durability with vibration control and a 4-inch seat slide for all-day comfort.



CHASSIS

STEEL CHASSIS

A heavy-duty, 1.5-inch x 3-inch steel, singular tubular frame is fabricated with four engine frame isolation points to reduce cockpit vibration by 45% and lessen operator fatigue.



CBT

CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



PRO-TURN® 100



PRO-TURN 100
COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
991128 991137*	22 hp/726 cc Kawasaki® FX691V	48"
991131	23 hp/747 cc Kohler® ZT730	48"
991134	23 hp/725 cc Kohler® ZT725 EFI	48"
991129 991138*	22 hp/726 cc Kawasaki® FX691V	52"
991132	23 hp/747 cc Kohler® ZT730	52"
991135	25 hp/725 cc Kohler® ZT725 EFI	52"
991130 911139*	23.5 hp/726 cc Kawasaki® FX730V	60"
991133	25 hp/747 cc Kohler® ZT740	60"
991136	25 hp/747 cc Kohler® ZT740 EFI	60"

* = CARB Compliant



NEVER SETTLE.

Uncompromised Gravelly performance with a slightly smaller price tag. We've taken 100 years of experience and turned the Pro-Turn 100 into the toughest, most versatile and powerful commercial value on the market.

DECK

X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



CBT

CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



ROPS

ROPS

Foldable ROPS comes standard to provide additional protection for the operator.



DESIGN

INSIGHTFUL DESIGN

An updated design creates improves the operator experience, providing a clear line of sight to the deck cutting edge.



SEAT

SEATING SYSTEM

The high-back suspension seats provides improved lateral stability with added vibration control and a 4-inch seat slide for all-day comfort.



PRO-TURN®




BRAINS, BRAWN AND BRILLIANT DESIGN.

We've always worked to surpass even the highest commercial demands. The Gravelly Pro-Turn remains the undisputed benchmark, using industry insight to provide professionals with the commercial performance required to get the job done right.

DECK

X-FACTOR® II DECK

The 10-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.

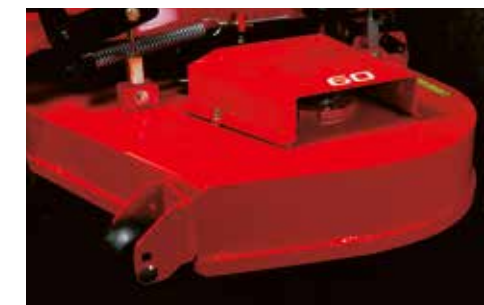

SEAT

SEATING SYSTEM

The high-back suspension seats features adjustable arm rests, seat isolators and large diameter steering arms to reduce fatigue and provide all-day comfort.



LIFT

DECK LIFT SYSTEM

Effortless foot-operated system offers 17 cutting positions in .25-inch increments and eliminates over-hung loads.



CHUTE

DISCHARGE CHUTE

The flip-up side discharge chute is designed to avoid potential damage to the surrounding environment.



CBT

CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



PRO-TURN
COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
991215 991221*	23 hp/726 cc Kawasaki® FS691V	48"
991218	23 hp/747 cc Kohler® ZT730	48"
991216 991222*	23 hp/726 cc Kawasaki® FS691V	52"
991219	23 hp/747 cc Kohler® ZT730	52"
991217 991223*	24 hp/726 cc Kawasaki® FS730V	60"
991220	25 hp/747 cc Kohler® ZT740	60"

LIMITED WARRANTY
— COMMERCIAL —

2 OR **1000** **5 YEAR**
YEAR HOUR LIMIT DECK SHELL AND FRAME

See your professional dealer for complete warranty details.

* = CARB Compliant

COMPACT-PRO®



SIZE IT UP.

Designed to fit your budget and exceed your demands, the Compact Pro® measures up to the best. Loaded with creature comforts, these versatile zero-turns are built with uncompromised strength, and born with a dedication to commercial-grade quality that doesn't quit.

FRAME

SMALLER FOOTPRINT


The compact commercial tubular frame gives you more flexibility to fit on trailers, maneuver through tight spaces and pass through 36-inch gates.



LIFT

QUICK-RELEASE DECK LIFT

Easily change from one cut height to the next with nine cutting positions in .5 inch increments ranging from 1 inch to 5 inches.

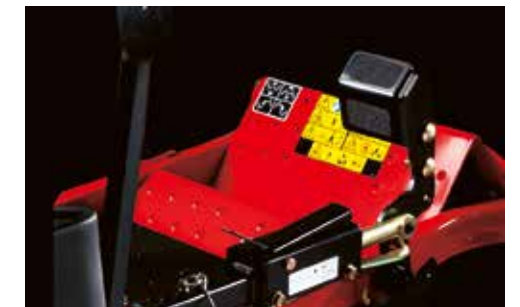

ENGINE

KAWASAKI® FX ENGINE

Powered by a Kawasaki FX Engine that touts a heavy-duty canister air cleaner to optimize performance in all conditions and extend engine life.



GEARS

HYDROSTATIC HYDRO GEAR

The Hydrostatic Hydro Gear 10cc pump provides smooth response and operation with the ability to go 8 to 9 miles per hour in effortless fashion.



WARRANTIES

PEACE OF MIND

We stand behind every Compact-Pro with a 2-year overall warranty, a three-year spindle warranty and a lifetime warranty on your deck and frame.

COMPACT-PRO
COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
991088	15.5 hp/603 cc Kawasaki® FX	34"
991105*	15.5 hp/603 cc Kawasaki® FX	34"



* = CARB Compliant

TOOLS OF THE TRADE.

Bottom line, Gravely commercial baggers and accessories are good for business. With increased comfort, improved efficiency and enhanced performance, Gravely can help outfit your fleet to get the job done right.

1 COMMERCIAL BAGGER SYSTEMS

Fabric cover doesn't crack like the plastic counterparts and provides improved airflow and venting. Plus, the top opens fully and is held open by gas cylinders. Choose from a 3-bucket, 12-bushel capacity or 2-bucket, 8-bushel capacity which includes: Blower, bag frame, tube and weight kit. (Mounting kit sold separately)

- 3-bucket bagger fits the Pro-Turn(R) 400 and 200 models with X-Factor(R) II deck.
- 2-bucket bagger fits the Pro-Turn 100 and Pro-Turn models with X-Factor(R) II deck.

2 MULCH KIT

Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.

3 SUNSHADE

Cut all day in comfort while staying cool and protected from the sun.

4 POWERED DECK LIFT

This powered lift kit makes cutting height adjustments smooth and simple.

5 OPERATOR-CONTROLLED DISCHARGE CHUTE

Control the dispersion of grass clippings directly from the operator position to keep clippings out of unwanted areas.

6 HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.

7 CHROME WHEEL COVERS

Add custom style to your profile with chrome wheel covers, available for both front and rear wheels in 6-, 10- and 12-inch sizes.

1



2




3



4



5

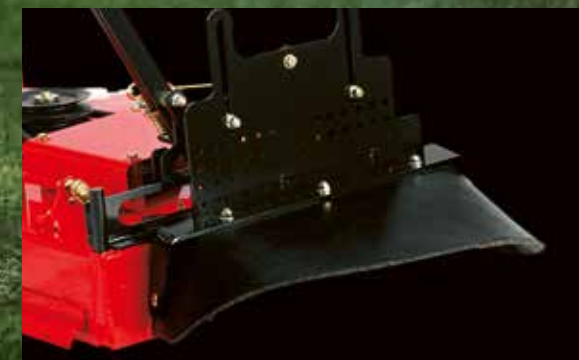

6



7



PRO-STANCE®



PRO STANCE
COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
994131 994139*	18.5 hp/603 cc Kawasaki® FS 600 V-Twin	36"
994132	22 hp/726 cc Kawasaki® FX 691 V-Twin	48"
994133	22 hp/726 cc Kawasaki® FX 691 V-Twin	52"
994142	22 hp/747 cc Kohler® EFI EZT725	52"
994134	23 hp/747 cc Kohler® ZT730	52"
994136*	24 hp/747 cc Kohler® PCV740 EFI LP	52"
994140*	24 hp/747 cc Kohler® PCV740 EFI LP	60"
994137	23.5 hp/726 cc Kawasaki® FX 730 V-Twin	60"
994143	25 hp/747 cc Kohler® EFI EZT740	60"

* = CARB Compliant



TAKE A STAND.

Here's further proof that Gravelly stands for efficiency, quality and durability. Built to stand up to whatever crosses your path, the Pro-Stance features an easily adjustable deck and convertible suspension platform to keep you in control all day long.

HEIGHT ADJUSTMENT

HEIGHT ADJUSTMENT

An effortless foot pedal feature offers improved leverage for smaller operators who normally struggle with traditional hand lever lifts.



TIRES

TIRES

The Pro-Stance is booted with industry leading, 13-inch, semi-pneumatic tires up front and radial, Superior Traction Technology (STT) tires in the rear.



FLIP-UP SUSPENSION PLATFORM

FLIP-UP SUSPENSION PLATFORM

The flip-up suspension platform provides all-day standing comfort and can easily transition from a stand-on to a walk-behind.



DECK LEVEL SYSTEM

DECK LEVEL SYSTEM

A simple 4-point adjustment uses half the parts and zero deck hanging welds, making it quick and easy to adjust and maintain superior cutting performance.



TECH ADVANCED 3400 TRANSMISSION

TECH ADVANCED 3400 TRANSMISSION

The 3400 integrated transmission boasts an industry leading 1.125-inch axle for heavy loads.



LIFETIME WARRANTY

LIFETIME WARRANTY

We provide industrial-strength peace of mind and stand behind our X-Factor II® Deck with an exclusive lifetime warranty.

PRO-WALK[®]



PRO WALK
COMMERCIAL

MODEL #	DESCRIPTION HYDRO DRIVE	DECK SIZE
988156	14.5 hp/603 cc Kawasaki [®] FS481V	36"
988172	18.5 hp/603 cc Kawasaki [®] FS600V	48"
988173	18.5 hp/603 cc Kawasaki [®] FS600V	52"
988174	23 hp/726 cc Kawasaki [®] FS691V	60"
988181**	22 hp/747 cc Kohler [®] PCV680 EFI LP	48"
MODEL #	DESCRIPTION GEAR DRIVE	DECK SIZE
988150	14.5 hp/603 cc Kawasaki [®] FS481V	32"
988151	14.5 hp/603 cc Kawasaki [®] FS481V	36"
988152	14.5 hp/603 cc Kawasaki [®] FS481V	48"

** LP available on previous models. Features will vary.

* = CARB Compliant

LIMITED WARRANTY
COMMERCIAL

2 YEAR | **NO** HOUR LIMIT | **LIMITED LIFETIME**
DECK SHELL AND FRAME

See your professional dealer for complete warranty details.

WALK THE WALK.

Completely redesigned and tough enough to take on any terrain, our Pro-Walk commercial lawn mowers are built for minimal maintenance and maximum performance, so powering across the landscape feels like a walk in the park.

CONTROLS

CONTROLS

Intuitive steering shortens the learning curve and provides precise handling while ergonomic controls position the operator in a neutral position to lessen fatigue.



HANDLEBARS

HANDLEBARS

Adjustable handlebars provide four height positions to comfortably accommodate operators of any size.



WHEELS

WIDE WHEEL BASE

Cut with confidence and control with a wide wheel base that provides superior hillside stability.



CUT

HEIGHT OF CUT

A single-point height of cut allows you to control your cutting performance in .25-inch increments.



DECK

X-FACTOR[®] II DECK

The 7-gauge, all-steel welded X-Factor[®] II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



CHUTE

DISCHARGE CHUTE

The flip-up side discharge chute is designed to avoid potential damage to the surrounding environment.



PRO-QXT™



PRO-QXT
COMMERCIAL

MODEL #	DESCRIPTION
985910*	14HP/404 cc Subaru® — PRO-QXT TRACTOR
MODEL #	ATTACHMENTS
885911	POWER BRUSH Attachment 44"
885910	DOZER BLADE Attachment 48"
885912	SNOW BLOWER Attachment 32"
885913	BRUSH MOWER Attachment 32"
885914	FINISH MOWER Attachment 36"
885915	FINISH MOWER Attachment 48"

* = CARB Compliant



TWO-WHEELS. COUNTLESS CAPABILITIES.

This two-wheeled, walk-behind workhorse is the single solution for clearing the way with convenience and commercial capability. From a power brush and brush mower to a snow head and scraper blade, the Pro-QXT Tractor features a quick attach system provides unmatched versatility to get the job done right season after season.

CONTROL

RAPID™ CONTROL SYSTEM

Variable speed control allows operators to quickly change direction, increasing productivity. The combination of the Rapid Control System and intuitive power steering results in smooth, seamless and easy operation.



ATTACHMENT

QUICK-ATTACH SYSTEM

The Pro-QXT Tractor provides a quick, single-person attachment changes are with minimal effort, allowing an operator to easily transition between attachments.



ENGINE

ALL-SEASON ENGINE

12v electric start Subaru® engine with recoil assist provides optimal performance in any weather condition.



STEERING

HYDROSTATIC DRIVE

Intuitive power steering provides effortless operation in all applications, increasing efficiency and productivity.



CONTROLS

ERGONOMIC CONTROLS

Fully adjustable controls allow for comfortable operation by a variety of operators with the ability to fold handles down for condensed storage and transport.



ALL SEASON

ALL SEASON DESIGN

Designed to deliver a seamless transition through all seasons without the need to alter the tractor between extreme conditions.



POWER BRUSH



A CLEAR ADVANTAGE.

Gravelly multi-functional power brushes are engineered with the versatility you need to clean clear to the surface in any season. Whether snow, slush, salt, sand, gravel, grime or general debris, choose from a 28-inch or 36-inch model and put the finishing touches on a job well done.

ENGINE

ALL-SEASON SUBARU® ENGINE

The Subaru engine puts the "power" in our Power Brush, delivering optimized performance in any weather.



TRACTION

TRACTION CONTROL

Automatic traction control provides enhanced maneuverability and effortless steering.



BRUSH

BRUSH ANGLE

With 40-degree brush head rotation and operator controlled pivot lock, dirt and debris have no place to hide.



HEIGHT

TOOLLESS HEIGHT ADJUSTMENT SYSTEM

Step your game up (or down) to accommodate varying surfaces and minimize brush wear.



MODEL #	DESCRIPTION	HOUSING SIZE
921026*	6 hp/169 cc Subaru®, EX17	28"
926063*	9 hp/265 cc Subaru®, EX27	36"
926064*	9.5 hp/287 cc Subaru®, EX30 HYDROSTATIC TRANSMISSION, 12V KEY START	36"

* = CARB Compliant

ATLAS JSV[®]



Windshield, roof, doors and winch accessories shown do not come standard. See the full line-up of Atlas JSV accessories on Gravelly.com

PLAYTIME IS OVER.

With class-leading towing capacity and a heavy-duty suspension, the Atlas JSV doesn't play around when it comes to getting the job done right. Born to haul, tow, work or dump, it's also built to seat 3 or 6 passengers comfortably.

CAPACITY

CAPACITY

With a class-leading bed capacity of 1250 lbs. and a 1900-lb. total payload, the Atlas JSV holds its own, and then some.



SUSPENSION

SUSPENSION

Our heavy-duty de Dion suspension minimizes sag, to maintain full ground clearance even with cargo, tongue weight and towing maxed out.



TOWING

TOWING

The Atlas JSV can tow a ton. Literally. Hitch up a full 2000 lbs. of trailer and cargo and you'll get more done in less time.



ENGINE

POWER

Choose the 3-cylinder, 1028cc Kohler Diesel engine to maximize torque and traction. Or run with an electronically fuel-injected DOHC gasoline engine that's been tested at 13,000 ft. and temperatures from -25° to 110°F.



BOX

ALL-STEEL JOBBOX

The Atlas JSV's fabricated all-steel cargo bed won't buckle or bend. Dump cargo with the touch of a button and haul a fully loaded pallet, thanks to a generous 18 cubic feet of cargo space.



SEATING

SEATING

The Atlas JSV-3000 seats three adults comfortably, with a total payload capacity of 1,900 lbs. The crew-size JSV-6000 seats six adults across two benches, with a total payload of 2,100 lbs.



ATLAS JSV
COMMERCIAL

MODEL #	DESCRIPTION	SEATING CAPACITY
996200	Atlas® JSV – 3000 – EFI	3
996202	Atlas® JSV – 3000 – DIESEL	3
996201	Atlas® JSV – 6000, CREW-EFI	6
996203	Atlas® JSV-6000, CREW – DIESEL	6



A HARD- WORKING NETWORK.

Gravely enthusiasts put the "work" back into the social network. While we were around decades before the world wide web, we've always strived to stay connected with hard working professionals who were proud of a job well done.

SO ONCE YOU'VE FINALLY CALLED IT A DAY,
KICK OFF YOUR BOOTS AND JOIN
THE CONVERSATION.



WE'VE DONE OUR HOMEWORK.

Gravely mowers are built to exceed the toughest commercial expectations. As a homeowner who takes pride in your lawn's appearance, you can put that professional-grade performance to work for you. Gravely machines outlast and outperform any other mower in the industry—residential or commercial. And you can bring that best-in-class comfort, power and precision home to cut like a pro.



THE GRASS- FED BEAST HAS BEEN REBORN.

Introducing an entirely new breed of residential riding mower.

THE ALL-NEW ZT HD FROM GRAVELY.

Professional DNA and a bold new design make it stronger, smarter and virtually unstoppable. Bring it home and unleash the beast.



ZT HD



ZT HD
RESIDENTIAL

MODEL #	ENGINE	DECK SIZE
991160 991180*	21.5 hp/726 cc Kawasaki® FR V-Twin	44"
991162 991182*	23 hp/726 cc Kawasaki® FR V-Twin	48"
991152	25 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	48"
991164 991184*	23 hp/726 cc Kawasaki® FR V-Twin	52"
991154	25 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	52"
991166 991186*	24 hp/726 cc Kawasaki® FR V-Twin	60"
991156	26 hp/747 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	60"

* = CARB Compliant



A PROFESSIONAL DEBUT.

The best residential riding mower ever. It's a bold statement. And there's only one mower strong enough to back it up— The all-new ZT HD from Gravely. It's redesigned from the ground up and relentlessly tested to elevate the standard of style, comfort, speed and precision. Bring it home to make your lawn look professional while all other mowers look like amateurs.

STYLE

STYLE

Redesigned, aggressive stance not only looks bold, but also provides better control, a smoother ride and improved stability.



CUT

CUT SELECTION

Offers 15 cutting positions ranging from 1.5 inches to 5 inches, to make your lawn look its best.



DECK

10-GAUGE FABRICATED DECK

The 5.5-inch deep deck delivers superior airflow to handle challenging mowing conditions and includes a reinforced leading edge.



FRAME

FULLY WELDED TUBULAR FRAME

This fully welded tubular frame is a professional-grade backbone tough enough get the job done in your backyard.



TRANSMISSION

GEARED FOR GREATNESS.

HYDRO-GEAR® ZT-3100 TRANSMISSIONS

Switch gears from ordinary performance with a commercial-grade, high-efficiency design that delivers responsive control and increased torque.



SEAT

CLAIM YOUR THRONE. SEATING COMFORT

This plush, high-back seat with cut and sewn armrests ensures upgraded comfort for longer mowing sessions.



ZT XL



ZT XL
RESIDENTIAL

MODEL #	ENGINE	DECK SIZE
915202	24 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	42"
915206 915238*	21.5 hp/726 cc Kawasaki® FR V-Twin	42"
915200	25 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	52"
915204 915240*	23 hp/726 cc Kawasaki® FR V-Twin	52"
915216	26 hp/747 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	60"
915218 915242*	24 hp/726 cc Kawasaki® FR V-Twin	60"

* = CARB Compliant



CUT LIKE A PRO.

Take a few passes across your property and let your pride swell to extra large proportions. Because no other mower can match the the zero-turn performance, cutting precision or the professional grade quality of the ZT XL.

FRAME

FULLY WELDED TUBULAR FRAME

This 3-inch tall, fully fabricated tubular frame is welded into a single piece, providing a strong, stable backbone you won't get from a bolted frame.



TRANSMISSION

COMMERCIAL-GRADE TRANSMISSION

Offers a commercial-grade, Hydro-Gear® ZT-2800 transmission with increased torque, a smoother ride and longer life.



DECK

10-GAUGE FABRICATED DECK

Our 4.5-inch deep fabricated deck features an optimized airflow design to produce best in class cut quality and discharge performance.



TIRES

HANDLING

Roll right by the competition with 20-inch drive tires and 11-inch x 6-inch front caster wheels— designed to provide better traction, control and handling.



SEAT

SEATING COMFORT

This plush, high back seat with cut and sewn armrests ensures upgraded comfort for longer mowing sessions.



POWER

Kawasaki® engines provide professional-grade power, durability and dependability. The Kohler® 7000 Series™ engines with Smart Choke™ technology are ready to run as soon as you turn the key.



ZT X



EXCEED EXPECTATIONS.

Fully welded tubular frames, intuitive deck systems and all-day comfort. Our ZT X riding lawn mower combines zero-turn efficiency with Gravelly performance, so you can look after your property with commercial-grade precision.

FRAME

FULLY WELDED TUBULAR FRAME

Unlike the competitive c-channel frames, this fully-welded, steel-frame tubular frame provides superior rigidity and strength.



CUT

CUT SELECTION.

We cut out the pins and levers to offer a simple and intuitive cutting selection solution. Press the pedal to raise the deck and turn the dial.



DECK

10-GAUGE FABRICATED DECK

Our 4.5-inch deep fabricated deck features an optimized airflow design to produce best in class cut quality and discharge performance.



LIFT

DUAL ARM DECK LIFT

The dual arm deck lift features a 4-point hanging system for deck stability and even cutting performance.



SEAT

SEATING COMFORT

A plush, high-back seat features forward and backward adjustment right from the operator position, without slowing down.



ZTX
RESIDENTIAL

MODEL #	ENGINE	DECK SIZE
915172 917176*	24 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	42"
915174	25 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	52"
915230 915236*	23 hp/726 cc Kawasaki® FR V-Twin	52"



* = CARB Compliant

ZT

**HOME RUN.**

With 34- to 50-inch options, no other model in its class measures up to the ZT. Inspired by our commercial lineage, the brings home a professional level of quality and performance that no other zero-turn can match.

LIFT

DECK LIFT

The effortless and intuitive foot-operated deck lift makes it easy to adjust between 7 cutting heights, from 1.5 to 4.5 inches.



SEAT

COMFORT

A high-back seat, available on the 42" and 52" ZT models, can be adjusted directly from the operator's position to deliver a comfortable, customized cutting experience.



DECK

DECK

The 12-gauge Xlerator™ stamped deck features a tunneled cutting area for maximum airflow to move grass up and out.



CONTROLS

FLIP-OUT CONTROLS

The ZT features flip-out controls to provide easy access to and from the operating position.



STABILITY

DECK SYSTEM

The 4-point deck lift system provides superior deck stability that can be immediately felt once you are in the seat



COMPACT

DESIGN

The compact 34-inch deck option allows for enhanced maneuverability to easily move through a standard 36-inch gate.

ZT
RESIDENTIAL

MODEL #	ENGINE	DECK SIZE
915210 915208*	21 hp/660 cc Kohler® 6000 Series V-Twin	34"
915212 915232*	22 hp/725 cc Kohler® 7000 Series V-Twin	42"
915214 915234*	24 hp/725 cc Kohler® 7000 Series V-Twin	50"



FINISH THE JOB.

Gravely accessories aren't just extra parts. They're essential to setting yourself apart from every other house in the neighborhood. Complement your cutting experience and finish the job like a professional with more speed, efficiency, comfort and convenience.

1 BAGGER SYSTEMS

Whether the 2-bag, powered or non-powered bagger, Gravely bagger systems offer heavy-duty cloth bags and superior grass/air velocity to keep your lawn look clean and professionally manicured.

2 MULCH KIT

Advanced design delivers exceptional airflow, pushing clippings back into the lawn for a professionally manicured appearance.

3 SUNSHADE

Cut all day in comfort while staying cool and protected from the sun.

4 FLUIDS

Maintain next level performance by leveling off with Gravely certified liquids to keep your key components running right.

5 OPERATOR-CONTROLLED DISCHARGE CHUTE

Control the dispersion of grass clippings directly from the operator position to keep clippings out of unwanted areas.

6 APPAREL

There are going to be a lot of eyes on your lawn. Make sure you look good and feel with a full line of high-performance gear from Gravely.

7 CHROME WHEEL COVERS

Add custom style to your profile with chrome wheel covers, available for both front and rear wheels in 6-, 10- and 12-inch sizes.



PRO-TURN 400

PRODUCT NAME	Pro-Turn 452	Pro-Turn 452	Pro-Turn 460	Pro-Turn 460	Pro-Turn 460	Pro-Turn 460	Pro-Turn 472	Pro-Turn 472	Pro-Turn 460
MODEL NUMBER	992273	992282 992289*	992274	992275	992278	992283 992288*	992276	992284 992290*	992280**
ENGINE	Kawasaki® FX850 Air-cooled, Heavy-Duty Air Cleaner	Yamaha® EFI MXV775 Air-cooled, Heavy-Duty Air Cleaner	Kawasaki® FX921V Air-cooled, Heavy-Duty Air Cleaner	Kawasaki® FX1000V Air-cooled, Heavy-Duty Air Cleaner	Kohler® EFI ECV880 Air-cooled, Heavy-Duty Air Cleaner	Yamaha® EFI MXV825 Air-cooled, Heavy-Duty Air Cleaner	Kawasaki® FX1000V Air-cooled, Heavy-Duty Air Cleaner	Yamaha® EFI MXV825 Air-cooled, Heavy-Duty Air Cleaner	Kohler® LP PCV860 EFI Air-cooled, Heavy-Duty Air Cleaner
HORSEPOWER	27	29	31	35	33	33	35	33	29
DISPLACEMENT (CC)	852	824	999	999	824	824	999	824	824
DRIVE SYSTEM	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor
FUEL CAPACITY - GALLONS (LITERS)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	Twin 33.5# tanks (tanks not included)
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph

DECK

DECK MATERIAL	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement
DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
BLADE TIP SPEED (FPM)	18,348	18,348	18,633	18,633	18,633	18,633	18,229	18,229	18,633
SPINDLE HOUSING MATERIAL	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
DECK ENGAGEMENT	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch
CUTTING WIDTH	52"	52"	60"	60"	60"	60"	72"	72"	60"
CUTTING HEIGHTS	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"
CUTTING POSITIONS	19	19	19	19	19	19	19	19	19

WHEELS

FRONT AXLE	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes	Fixed with greaseable caster fork tubes
FRONT	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x 6-6 Semi Pneumatic
REAR	Radial Turf 23x10-12	Radial Turf 24x12-12	Radial Turf 24x12-12	Radial Turf 24x12-12	Radial Turf 24x12-12	Radial Turf 24x12-12	Radial Turf 24x12-12	Radial Turf 24x12-12	Radial Turf 24x12-12

FEATURES

SEAT	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators	High Back w/ Full Air Ride Suspension and seat isolators
HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
FOLDABLE ROPS	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard

MACHINE

WEIGHT (LBS) W/O FUEL	1326	1332	1358	1358	1360	1356	1453	1445	1579
LENGTH (INCHES)	80"	80"	80"	80"	80"	80"	80"	80"	80"
WIDTH (INCHES) (W/O CHUTE)	55.5"	55.5"	63"	63"	63"	63"	75"	75"	63"
WIDTH W/ CHUTE	67.75"	67.75"	75.25"	75.25"	75.25"	75.25"	87.25"	87.25"	75.25"
HEIGHT W/ ROPS EXT/ DOWN (INCHES)	70/47.75"	70/47.75"	70/47.75"	70/47.75"	70/47.75"	70/47.75"	70/47.75"	70/47.75"	70/47.75"

WARRANTY

UNIT	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial	3 Year Limited Commercial
DECK SHELL & FRAME	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
SPINDLES	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited

ATTACHMENTS & ACCESSORIES

Mulching Kit, Discharge Cover Kit, Hub Cap Kit, Flexend Shoulder Support Kit, True Power Tire Kit, Trailer Hitch Kit, Headlight Kit, Striping Kit, Bucket Bagger (12bu.) with Heavy Duty Vac

** LP available on previous models. Features will vary. * = CARB Compliant

PRO-TURN 200

PRODUCT NAME	Pro-Turn 252	Pro-Turn 252	Pro-Turn 252	Pro-Turn 260	Pro-Turn 260	Pro-Turn 260	Pro-Turn 260	Pro-Turn 272	Pro-Turn 272
MODEL NUMBER	992268	992271	992284 992291*	992267	992269	992272	992281 992292*	992270	992295 992283*
ENGINE	Kawasaki® FX850V Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kohler® EFI ECV860 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Yamaha® EFI MXV775 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kohler® ZT740 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kawasaki® FX850V Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kohler® EFI ECV860 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Yamaha® EFI MXV775 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kawasaki® FX921V Air-cooled Vertical twin Heavy-Duty Air Cleaner	Yamaha® EFI MXV825 Air-cooled Vertical twin Heavy-Duty Air Cleaner
HORSEPOWER	27	29	29	25	27	29	29	31	33
DISPLACEMENT (cc)	852	824	824	747	852	824	824	999	824
DRIVE SYSTEM	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor
FUEL CAPACITY - Gallons (LITERS)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph

DECK

DECK MATERIAL	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement	7 ga steel with 25 inch spindle reinforcement
DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
BLADE TIP SPEED (FPM)	18,348	18,348	18,348	18,633	18,633	18,633	18,633	18,229	18,633
SPINDLE HOUSING MATERIAL	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
DECK ENGAGEMENT	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch
CUTTING WIDTH	52"	52"	52"	60"	60"	60"	60"	72"	72"
CUTTING HEIGHTS	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"
CUTTING POSITIONS	17	17	17	17	17	17	17	17	17

WHEELS

FRONT AXLE	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes
FRONT	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6
REAR	Turf 23 x 10.5-12	Turf 23 x 10.5-12	Turf 23 x 10.5-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12

FEATURES

SEAT	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension
HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
FOLDABLE ROPS	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard

MACHINE

WEIGHT (lbs) W/O Fuel	1302	1166	1166	1322	1336	1232	1228	1410	1414
LENGTH (inches)	80"	80"	80"	80"	80"	80"	80"	82"	80"
WIDTH (inches) W/O Chute	55.5"	55.5"	55.5"	63	63	63	63	75	75
WIDTH W/ CHUTE	67.5"	67.5"	67.5"	75"	75"	75"	75"	87"	87"
HEIGHT W/ ROPS EXT/DOWN (inches)	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75

WARRANTY

UNIT	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial
DECK SHELL & FRAME	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame
SPINDLES	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle	3 Year Limited Spindle

ATTACHMENTS & ACCESSORIES

3 Bucket Bagger (12 bu.) with Heavy Duty Vac, 12V Outlet, Seat Isolator Kit, Radial Drive, Tires, Striping Kit, Operator-Controlled Discharge Chute, Semi-Pneumatic Front Tire Kit and Headlight Kit

* = CARB Compliant

PRO-TURN 100

PRODUCT NAME	Pro-Turn 148	Pro-Turn 148	Pro-Turn 148	Pro-Turn 152	Pro-Turn 152	Pro-Turn 152	Pro-Turn 160	Pro-Turn 160	Pro-Turn 160	
MODEL NUMBER	991128 991137*	991131	991134	991129 991138*	991132	991135	991130 911139*	991133	991136	
ENGINE	Kawasaki® FX691V Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT730 Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT725 EFI Air-cooled, V-twin Heavy-Duty Air Cleaner	Kawasaki® FX691V Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT730 Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT725 EFI Air-cooled, V-twin Heavy-Duty Air Cleaner	Kawasaki® FX730V Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT740 Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT740 EFI Air-cooled, V-twin Heavy-Duty Air Cleaner	
HORSEPOWER	22	23	22	22	23	22	23.5	25	25	
DISPLACEMENT (CC)	726	747	725	726	747	725	726	747	747	
DRIVE SYSTEM	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	
FUEL CAPACITY - GALLONS (LITERS)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	
STARTER	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	
DECK MATERIAL	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	
DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	
NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3	
BLADE TIP SPEED (FPM)	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000	
SPINDLE HOUSING MATERIAL	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	
SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	
SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	
DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt	
DECK ENGAGEMENT	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	
DECK LIFT SYSTEM	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	
CUTTING WIDTH	48"	48"	48"	52"	52"	52"	60"	60"	60"	
CUTTING HEIGHTS	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	
CUTTING POSITIONS	17	17	17	17	17	17	17	17	17	
FRONT AXLE	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	
FRONT	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	
REAR	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	Turf 23 x 10.50-12	
SEAT	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	
HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
HOOR METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	
SUSPENSION SEAT W/ PAD ARMREST	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	
FOLDABLE ROPS	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	
WEIGHT (LBS)	1062	1051	1056	1079	1068	1073	1121	1110	1115	
LENGTH (INCHES)	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	
WIDTH W/O CHUTE	50"	50"	55.5"	55.5"	55.5"	63	63"	63	63	
WIDTH (INCHES)	62"	62"	62"	67.5"	67.5"	67.5"	75"	75"	75"	
HEIGHT W/ ROPS	71" / 48"	71" / 48"	71" / 48"	71" / 48"	71" / 48"	71" / 48"	71" / 48"	71" / 48"	71" / 48"	
UNIT	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	
DECK SHELL & FRAME	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	
SPINDLES	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	
ATTACHMENTS & ACCESSORIES	Mulching Kit, Discharge Cover Kit, Hub Cap Kit, Solid Tire Kit, True Power Tire Kit, Trailer Hitch Kit, Headlight Kit, Striping Kit, Sunshade Kit, Powered Bagger Kit									

* = CARB Compliant

PRO-TURN

PRODUCT NAME	Pro-Turn 48	Pro-Turn 48	Pro-Turn 52	Pro-Turn 52	Pro-Turn 60	Pro-Turn 60
MODEL NUMBER	991215 991221*	991218	991216 991222*	991219	991217 991223*	991220
ENGINE	Kawasaki® FS691V Air-cooled, V-twin	Kohler® ZT730 Air-cooled, V-twin	Kawasaki® FS691V Air-cooled, V-twin	Kohler® ZT730 Air-cooled, V-twin	Kawasaki® FS730V Air-cooled, V-twin	Kohler® ZT740 Air-cooled, V-twin
HORSEPOWER	23	23	23	23	24	25
DISPLACEMENT (CC)	726	747	726	747	726	747
DRIVE SYSTEM	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles
FUEL CAPACITY - GALLONS (LITERS)	10.0(37.8)	10.0(37.8)	10.0(37.8)	10.0(37.8)	10.0(37.8)	10.0(37.8)
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	9 mph/5 mph	9 mph/5 mph	9 mph/5 mph	9 mph/5 mph	9 mph/5 mph	9 mph/5 mph
STARTER	Electric	Electric	Electric	Electric	Electric	Electric
DECK MATERIAL	10 ga steel w/ 1/4" spindle reinforcement	10 ga steel w/ 1/4" spindle reinforcement	10 ga steel w/ 1/4" spindle reinforcement	10 ga steel w/ 1/4" spindle reinforcement	10 ga steel with 10ga spindle reinforcement	10 ga steel with 10ga spindle reinforcement
DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated
NUMBER OF SPINDLES	3	3	3	3	3	3
BLADE TIP SPEED (FPM)	18,000	18,000	18,000	18,000	18,000	18,000
SPINDLE HOUSING MATERIAL	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel
SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
DECK DRIVE	V-Belt	V-Belt	V-Belt	V-Belt	V-Belt	V-Belt
DECK ENGAGEMENT	Electric Ogura® GT1A	Electric Ogura® GT1A	Electric Ogura® GT1A	Electric Ogura® GT1A	Electric Ogura® GT1A	Electric Ogura® GT1A
DECK LIFT SYSTEM	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated
CUTTING WIDTH	48"	48"	52"	52"	60"	60"
CUTTING HEIGHTS	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"
CUTTING POSITIONS	17	17	17	17	17	17
FRONT AXLE	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes
FRONT	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6	Smooth 13x6.50-6
REAR	Turf 22 x 10-10	Turf 22 x 10-10	Turf 22 x 10-10	Turf 22 x 10-10	Turf 22 x 10-10	Turf 22 x 10-10
SEAT	High Back Comfort w/ Integrated Suspension	High Back Comfort w/ Integrated Suspension	High Back Comfort w/ Integrated Suspension	High Back Comfort w/ Integrated Suspension	High Back Comfort w/ Integrated Suspension	High Back Comfort w/ Integrated Suspension
HOOD	N/A	N/A	N/A	N/A	N/A	N/A
HOOR METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard
SUSPENSION SEAT W/ PAD ARMREST	N/A	N/A	N/A	N/A	N/A	N/A
FOLDABLE ROPS	Standard	Standard	Standard	Standard	Standard	Standard
WEIGHT	964	953	977	966	1006	995
LENGTH	78.5"	78.5"	78.5"	78.5"	78.5"	78.5"
WIDTH W/O CHUTE	50"	50"	55.5"	55.5"	63"	63"
WIDTH WITH CHUTE	62.25"	62.25"	67.75"	67.75"	75.25"	75.25"
HEIGHT W/ ROPS FOLDED DOWEXT/ DOWN	70" / 46.7"	70" / 46.7"	70" / 46.7"	70" / 46.7"	70" / 46.7"	70" / 46.7"
UNIT	2 Year/1000 Hour Limited Commercial	2 Year/1000 Hour Limited Commercial	2 Year/1000 Hour Limited Commercial	2 Year/1000 Hour Limited Commercial	2 Year/1000 Hour Limited Commercial	2 Year/1000 Hour Limited Commercial
DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited
ATTACHMENTS & ACCESSORIES	Mulching Kit, Discharge Cover Kit, Hub Cap Kit, Solid Tire Kit, Trailer Hitch Kit, Headlight Kit, Striping Kit, Sunshade Kit, Powered Bagger Kit					

* = CARB Compliant

COMPACT PRO

	PRODUCT NAME	Compact-Pro 34
	MODEL NUMBER	991088/991105*
	ENGINE	Kawasaki® FX Air-cooled vertical twin, Heavy Duty Air Cleaner
	HORSEPOWER	15.5
	DISPLACEMENT (CC)	603
	DRIVE SYSTEM	Hydrostatic Hydro-Gear® 10cc Pumps with Hydro-Gear® 12P Wheel motors
	FUEL CAPACITY – GALLONS (LITERS)	7.3 (27.6)
	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	9 mph / 4.5 mph
	STARTER	Electric
DECK		
	DECK MATERIAL	7 ga steel with 7 ga (.179") spindle reinforcement
	DECK CONSTRUCTION	Welded
	NUMBER OF SPINDLES	2
	BLADE TIP SPEED (FPM)	18,000
	SPINDLE HOUSING MATERIAL	Cast Iron
	SPINDLE SHAFT	Steel
	SPINDLE BEARINGS	Ball Bearing
	DECK DRIVE	Belt
	DECK ENGAGEMENT	Electric Ogura® GT1A
	DECK LIFT SYSTEM	Foot Operated
	CUTTING WIDTH	34"
	CUTTING HEIGHT	1.0"-5.0"
	CUTTING POSITIONS	9
WHEELS		
	FRONT AXLE	Fixed
	FRONT	Smooth 13 x 5-6
	REAR	21 x 7-10 turf
FEATURES		
	SEAT	High Back w/ seat springs
	HOOD	N/A
	HOUR METER W/ MAINTENANCE REMINDER	Standard
	SUSPENSION SEAT W/ PAD ARMREST	N/A
	FOLDABLE ROPS	N/A
MACHINE		
	WEIGHT (LBS) W/O FUEL	725
	LENGTH	71.5"
	WIDTH WITHOUT CHUTE	35.4"
	WIDTH WITH CHUTE	50"
WARRANTY		
	UNIT	2 Year Limited Commercial
	DECK SHELL & FRAME	Limited Lifetime
	SPINDLES	3 Year Limited Spindle
ATTACHMENTS & ACCESSORIES		
	Mulching Kit, Discharge Cover Kit, Hub Cap Kit, Flexend Shoulder Support Kit, Solid Tire Kit, True Power Tire Kit, Trailer Hitch Kit, Headlight Kit, Striping Kit, Plush Armrest Kit, Sunshade Kit, Powered Bagger Kit	

* = CARB Compliant

PRO-STANCE

	PRODUCT NAME	Pro-Stance 36FL	Pro-Stance 48FL	Pro-Stance 52FL	Pro-Stance 52FL	Pro-Stance 52FL	Pro-Stance 60FL	Pro-Stance 60FL	Pro-Stance 52FL	Pro-Stance 60FL
	MODEL NUMBER	994131 994139*	994132	994133	994142	994134	994137	994143	994136*	994140*
	ENGINE	Kawasaki® FS 600 V-Twin	Kawasaki® FX 691 V-Twin	Kawasaki® FX 691 V-Twin	Kohler® EFI EZT725	Kohler® ZT730	Kawasaki® FX 730 V-Twin	Kohler® EFI EZT740	Kohler® PCV740 EFI LP	Kohler® PCV740 EFI LP
	HORSEPOWER	18.5	22	22	22	23	23.5	25	24	24
	DISPLACEMENT (CC)	603	726	726	747	747	726	747	747	747
	DRIVE SYSTEM	Hydro-Gear® ZT-3100 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor	Hydro-Gear® ZT-3400 Integrated pump/motor
	FUEL CAPACITY GALLONS (LITERS)	6 gallon (22.7 L)	9 gallon (34.1 L)	9 gallon (34.1 L)	9 gallon (34.1 L)	9 gallon (34.1 L)	9 gallon (34.1 L)	9 gallon (34.1 L)	33.5# Tank (Tank not included)	33.5# Tank (Tank not included)
	GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	8 mph / 3 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph
	STARTER	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric
DECK										
	DECK MATERIAL	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga
	DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
	NUMBER OF SPINDLES	2	3	3	3	3	3	3	3	3
	BLADE TIP SPEED (FPM)	18,220	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000
	SPINDLE HOUSING MATERIAL	Cast	Cast	Cast	Cast	Cast	Cast	Cast	Cast	Cast
	SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
	SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
	DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt
	DECK ENGAGEMENT	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch
	DECK LIFT SYSTEM	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
	CUTTING WIDTH	36"	48"	52"	52"	52"	60"	60"	52"	60"
	CUTTING HEIGHTS	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"
	CUTTING POSITIONS	15	15	15	15	15	15	15	15	15
WHEELS										
	FRONT AXLE	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid
	FRONT	11x4.00-5 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic
	REAR	18 x 8.50 - 8	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial
FEATURES										
	HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	HOUR METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	SUSPENSION SEAT	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
MACHINE										
	WEIGHT (LBS)	784	995	1015	1015	1004	1043	1048	1108 w/ full LP tank	1136 w/ full LP tank
	LENGTH (INCHES)	59.5	60.63	60.63	60.63	60.63	62	62	60.63	62
	WIDTH W/O CHUTE (INCHES)	36.5	50	55.5	55.5	55.5	63	63	55.5	63
	WIDTH W/CHUTE (INCHES)	49	62.25	67.75	67.75	67.75	75.25	75.25	67.75	75.25
	HEIGHT (INCHES)	48	48	48	48	48	48	48	48	48
WARRANTY										
	UNIT	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial
	DECK SHELL & FRAME	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
	SPINDLES	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited
ATTACHMENTS & ACCESSORIES										
	Mulching Kit, Operator Controlled Discharge Baffle, Grass Collector									

* = CARB Compliant

PRO-WALK

	Pro-Walk 32GR	Pro-Walk 36GR	Pro-Walk 48GR	Pro-Walk 36HR PS	Pro-Walk 48HE	Pro-Walk 52HE	Pro-Walk 60HE	Pro-Walk 48 HR PS
PRODUCT NAME								
MODEL NUMBER	988150*	988151*	988152*	988156*	988172 988176*	988173 988177*	988174 988178*	988181*
ENGINE	Kawasaki® FS481V	Kawasaki® FS481V	Kawasaki® FS481V	Kawasaki® FS481V	Kawasaki® FS600V	Kawasaki® FS600V	Kawasaki® FS691V	Kohler® PCV680 EFI LP
HORSEPOWER	14.5	14.5	14.5	14.5	18.5	18.5	23	22
DISPLACEMENT (CC)	603	603	603	603	603	603	726	747
DRIVE SYSTEM	Peerless Gear Drive	Peerless Gear Drive	Peerless Gear Drive	10cc Pumps and 12ci Motors	Hydro-Gear® ZT-2800 Integrated pump/motor	Hydro-Gear® ZT-2800 Integrated pump/motor	Hydro-Gear® ZT-2800 Integrated pump/motor	10cc Pumps and 12ci Motors
FUEL CAPACITY GALLONS (LITERS)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	5.4 mph / Reverse Assist	5.4 mph / Reverse Assist	5.4 mph / Reverse Assist	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph
STARTER	Recoil	Recoil	Recoil	Recoil	Electric	Electric	Electric	Electric
DECK								
DECK MATERIAL	7 Ga	7 Ga	7 Ga	7 Ga	10 Ga	10 Ga	10 Ga	7 Ga
DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
NUMBER OF SPINDLES	2	2	3	2	3	3	3	3
BLADE TIP SPEED (FPM)	18,500	18,152	18,500	18,261	18,000	18,000	18,000	18,261
SPINDLE HOUSING MATERIAL	Aluminum	Aluminum	Aluminum	Aluminum	Cast	Cast	Cast	Aluminum
SPINDLE SHAFT	1" Steel	1" Steel	1" Steel	1" Steel	Steel	Steel	Steel	1" Steel
SPINDLE BEARINGS	1" Sealed	1" Sealed	1" Sealed	1" Sealed	Ball Bearing	Ball Bearing	Ball Bearing	1" Sealed
DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt
DECK ENGAGEMENT	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch
DECK LIFT SYSTEM	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
CUTTING WIDTH	32"	36"	48"	36"	52"	52"	52"	36"
CUTTING HEIGHTS	1.5" - 4.5"	1.5" - 4.5"	1.5" - 4.5"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"
CUTTING POSITIONS (1/4" INCREMENTS)	13	13	13	15	15	15	15	15
WHEELS								
FRONT AXLE	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
FRONT WHEELS	9 x 3.50	9 x 3.50	9 x 3.50	9 x 3.50	11x4.00-5 Semi-Pneumatic	11x4.00-5 Semi-Pneumatic	11x4.00-5 Semi-Pneumatic	9 x 3.50
REAR	13 x 5	13 x 6.5	13 x 6.5	16 x 6.5	20 X 8-10	20 X 8-10	20 X 8-10	16 x 7.5
FEATURES								
HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
HOOD METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
MACHINE								
WEIGHT (LBS)	504	504	572	558	758	768	788	765 w/ Full Tanks
LENGTH (INCHES)	77"	77"	77"	72"	79"	81"	83"	77"
WIDTH (INCHES)	45.7"	48.4"	60.8"	37"	51"	55"	63"	48.5"
HEIGHT (INCHES)	41.9"	41.9"	41.9"	43"	44"	44"	44"	43"
WARRANTY								
UNIT	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial
DECK SHELL & FRAME	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime
SPINDLES	2 Year Limited	2 Year Limited	2 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited
ATTACHMENTS & ACCESSORIES	Mulching Kit, Cloth Grass Collector, Grass Catcher Attachment Bracket, Single Wheel Sully, Two Wheel Sully, Operator Controlled Discharge Baffle							

PRO-QXT™ TRACTOR

	PRO-QXT Tractor
PRODUCT NAME	
MODEL NUMBER	985910*
ENGINE	Subaru®
HORSEPOWER	14
DISPLACEMENT (CC)	404
DRIVE SYSTEM	Hydro-Gear® ZT - 2800 Transaxles
FUEL CAPACITY – GALLONS (LITERS)	1.8 gallon (7.0 L)
GROUND SPEED (APPROX. MPH) FORWARD/REVERSE)	5 mph / 2 mph
STARTER	Electric & Recoil
TIRES	
REAR	Turf 20 x 8 - 10
MACHINE	
WEIGHT (LBS) W/O FUEL	520
LENGTH	55.5"
WIDTH	30.5"
HEIGHT	39"
PTO COUPLER	
PTO SPEED	900 rpm
ENGAGEMENT	Electric
PTO DRIVE	Dual Belt
FEATURES	
HOOD METER	Standard
POWER STEERING	Standard
POWER STEERING LOCK OUT	Standard
WARRANTY	
TRACTOR	2 Year Limited
ENGINE	5 Year Limited
ACCESSORIES	Work Light, Tire Chain, Ag Tires, Twist Grip Ring

PRO-QXT™ TRACTOR ATTACHMENTS

PRODUCT NAME	MODEL	WIDTH
POWER BRUSH	885911	44"
DOZER BLADE	885910	48"
SNOW BLOWER	885912	32"
BRUSH MOWER	885913	32"
FINISH MOWER	885914	36"
FINISH MOWER	885915	48"

* = CARB Compliant

POWER BRUSH

	PRODUCT NAME	Power Brush 28"	Power Brush 36"	Hydro Brush 36"
	MODEL NUMBER	921026*	926063*	926064*
	ENGINE	Subaru® EX17	Subaru® EX27	Subaru® EX30
	HORSEPOWER	169	265	287
	DISPLACEMENT (CC)	169	265	287
	DRIVE SYSTEM	Disc-O-Matic	Disc-O-Matic	Hydrostatic
	STEERING	Automatic Traction Control	Automatic Traction Control	Automatic Traction Control
	SPEEDS	6 forward / 2 reverse	6 forward / 2 reverse	Variable
	STARTER	120 v / Recoil	120 v / Recoil	12 v Key Start
CLEARING FEATURES				
	CLEARING WIDTH	28"	36"	36"
	AUGER DIAMETER	18" Brush	25" Brush	25" Brush
	AUGER TYPE	Brush	Brush	Brush
WHEELS				
	TIRE SIZE	15 x 5	16 x 6.5	16 x 6.5
	TIRE TYPE	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread
FEATURES				
	HALOGEN HEADLIGHT	No	Standard	Standard
	HANDWARMERS	No	No	Standard
MACHINE				
	WEIGHT (LBS)	202	325	418
	LENGTH	65"	72"	72"
	WIDTH	33"	44"	44"
	HEIGHT	44"	43"	43"
WARRANTY				
	UNIT	3 Year Limited Consumer, 90 Day Commercial	3 Year Limited Consumer, 1 Year Commercial	3 Year Limited Consumer, 1 Year Commercial
ATTACHMENTS & ACCESSORIES				
		Electric Start, One Hand Interlock	Halogen Headlight, Electric Start, One Hand Interlock	Halogen Headlight, Handwarmers, Electric Start, One Hand Interlock

ATLAS JSV

	PRODUCT NAME	Atlas JSV-3000 EFI Gas	Atlas JSV-6000 EFI Gas Crew	Atlas JSV-3000 Diesel	Atlas JSV-6000 Diesel Crew
	MODEL NUMBER	996200	996201	996202	996203
	ENGINE	Polaris® 1-cylinder, DOHC, Gas	Polaris® 1-cylinder, DOHC, Gas	Kohler® 3-Cylinder Diesel	Kohler® 3-Cylinder Diesel
	HORSEPOWER	40	40	24	24
	DISPLACEMENT (CC)	570 cc	570 cc	1028 cc	1028 cc
	DRIVE SYSTEM	OnDemand True AWD/2WD/ VersaTrac Turf Mode	OnDemand True AWD/2WD/ VersaTrac Turf Mode	OnDemand True AWD/2WD/ VersaTrac Turf Mode	OnDemand True AWD/2WD/ VersaTrac Turf Mode
	FUEL CAPACITY – GALLONS (LITERS)	10 gallons EFI	10 gallons EFI	10 gallons Indirect Injection	10 gallons Indirect Injection
	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	35 mph	35 mph	35 mph	35 mph
	STARTER	Electric Ignition	Electric Ignition	Electric Ignition	Electric Ignition
TIRES & WHEELS					
	FRONT & REAR TIRES	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)
	FRONT & REAR WHEELS	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)
FEATURES					
	BED LIFT	Standard, Electric	Standard, Electric	Standard, Electric	Standard, Electric
	FRONT BUMPER	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty
	HITCH	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty
	ROPS	According to ANSI/OPEI B71.9, OSHA 1928.53			
VEHICLE DIMENSIONS					
	WEIGHT (LBS) W/O FUEL	1,575	1,800	1,675	1,900
	LENGTH	128"	165"	128"	128"
	WIDTH X HEIGHT	64" x 73.5"	64" x 73.5"	64" x 73.5"	64" x 73.5"
	WHEEL BASE	84"	116"	84"	116"
	GROUND CLEARANCE	12"	12"	12"	12"
WARRANTY					
	UNIT	1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial
INSTRUMENTATION					
		Speedometer, tachometer, fuel gauge, hour meter, odometer & trip meter, gear indication, glow plug indicator light* & engine oil pressure* (*diesel models only), seat belt reminder light, battery voltage charge system, engine/coolant temp, 2 in-dash 12V power outlets			

ZT HD

PRODUCT NAME	ZT HD 44	ZT HD 48	ZT HD 48	ZT HD 52	ZT HD 52	ZT HD 60	ZT HD 60
MODEL NUMBER	991160/ 991180*	991162/ 991182*	991152	991164/ 991184*	991154	991166/ 991186*	991156
ENGINE	Kawasaki® FR V-Twin	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™
HORSEPOWER	21.5	23	25	23	25	24	26
DISPLACEMENT (CC)	726	726	725	726	725	726	747
DRIVE SYSTEM	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles
FUEL CAPACITY – GALLONS (LITERS)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)
GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph
DECK							
DECK MATERIAL	10 ga steel	10 ga steel	10 ga steel	10 ga steel	10 ga steel	10 ga steel	10 ga steel
DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded
NUMBER OF SPINDLES	3	3	3	3	3	3	3
BLADE TIP SPEED (FPM)	18,000	18,000	18,000	17,500	17,500	18,000	18,000
SPINDLE HOUSING MATERIAL	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel	Steel
SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt
DECK ENGAGEMENT	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®
DECK LIFT SYSTEM	Foot Operated	Foot Operated	Foot Operated	Foot Operated	Foot Operated	Foot Operated	Foot Operated
CUTTING WIDTH	44"	48"	48"	52"	52"	60"	60"
CUTTING HEIGHT	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"
CUTTING POSITIONS	15	15	15	15	15	15	15
WHEELS							
FRONT AXLE	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
FRONT	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6
REAR	22 x 10-12	22 x 10-12	22 x 10-12	22 x 10.5-12	22 x 10.5-12	22 x 12-12	22 x 12-12
FEATURES							
SEAT	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests
HOURLY METER	Standard	Standard	Standard	Standard	Standard	Standard	Standard
MACHINE							
WEIGHT	800	823	823	832	832	853	853
LENGTH	71.5"	71.5"	74.5"	74.5"	74.5"	74.5"	74.5"
WIDTH WITHOUT CHUTE	46.8"	50"	50"	55"	55"	62.8"	62.8"
HEIGHT	42"	42"	42"	42"	42"	42"	42"
WARRANTY							
UNIT	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial
DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited
ATTACHMENTS & ACCESSORIES							
	2 Bag Powered Bagger, Bagger Mount Kit, Mulch Kit, Operator Controlled Chute Baffle, Discharge Cover Kit, Vacuum Baffle Kit, Lawn Striping Kit, Light Kit, Flex-Tend® Shoulder Support System, Seat Isolator kit, Seat Spring Kit, Folding ROPS Kit, Sunshade, Chrome Front Wheel Covers, Chrome Rear Wheel Covers, Hitch Kit, 48" Plug Aerator, 36" Poly Roller, 48" Dethatcher, 15 Gallon Sprayer, Tow Behind Spreader						

* = CARB Compliant

ZT XL

PRODUCT NAME	ZT XL 42	ZT XL 42	ZT XL 52	ZT XL 52	ZT XL 60	ZT XL 60
MODEL NUMBER	915202	915206/915238*	915200	915204/915240*	915216	915218/ 915242*
ENGINE	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin
HORSEPOWER	24	21.5	25	23	26	24
DISPLACEMENT (CC)	725	726	725	726	747	726
DRIVE SYSTEM	Hydro-Gear® ZT-2800 Transaxles	Hydro-Gear® ZT-2800 Transaxles	Hydro-Gear® ZT-2800 Transaxles	Hydro-Gear® ZT-2800 Transaxles	Hydro-Gear® ZT-2800 Transaxles	Hydro-Gear® ZT-2800 Transaxles
FUEL CAPACITY – GALLONS (LITERS)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)
GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph
DECK						
DECK MATERIAL	10 ga steel	10 ga steel	10 ga steel	10 ga steel	10 ga steel	10 ga steel
DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded
NUMBER OF SPINDLES	3	3	3	3	3	3
BLADE TIP SPEED (FPM)	17,000	17,000	17,000	17,000	17,000	17,000
SPINDLE HOUSING MATERIAL	Steel	Steel	Steel	Steel	Steel	Steel
SPINDLE SHAFT	1" Diameter Steel	1" Diameter Steel	1" Diameter Steel	1" Diameter Steel	1" Diameter Steel	1" Diameter Steel
SPINDLE BEARINGS	1" Sealed	1" Sealed	1" Sealed	1" Sealed	1" Sealed	1" Sealed
DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt
DECK ENGAGEMENT	Electric Warner®	Electric Warner®	Electric Warner®	Electric Warner®	Electric Warner®	Electric Warner®
DECK LIFT SYSTEM	Foot Operated, Dial Selection	Foot Operated, Dial Selection	Foot Operated, Dial Selection	Foot Operated, Dial Selection	Foot Operated, Dial Selection	Foot Operated, Dial Selection
CUTTING WIDTH	42"	42"	52"	52"	60"	60"
CUTTING HEIGHT	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
CUTTING POSITIONS	13	13	13	13	13	13
WHEELS						
FRONT AXLE	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
FRONT	11 x 6-5	11 x 6-5	11 x 6-5	11 x 6-5	11 x 6-5	11 x 6-5
REAR	20 x 8 - 10	20 x 8 - 10	20 x 10 - 10	20 x 10 - 10	20 x 12 - 10	20 x 12 - 10
FEATURES						
SEAT	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests
HOURLY METER	Standard	Standard	Standard	Standard	Standard	Standard
MACHINE						
WEIGHT	661	661	679	679	694	697
LENGTH	77.5"	77.5"	77.5"	77.5"	77.5"	77.5"
WIDTH	54.2"	63.4"	54.2"	63.4"	73.75"	73.75"
HEIGHT	40.9"	40.9"	40.9"	40.9"	40.9"	40.9"
WARRANTY						
UNIT	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer
DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited	5 Year Limited
ATTACHMENTS & ACCESSORIES						
	2 Bag Powered Bagger, Mulch Kit, L.E.D. Light Kit, Flex-Tend® Shoulder Support System, Chrome Front Wheel Covers, Chrome Rear Wheel Covers, 48" Plug Aerator, 36" Poly Roller, 48" Dethatcher, 15 Gallon Sprayer, Tow Behind Spreader					

* = CARB Compliant

ZT X

PRODUCT NAME	ZT X 42	ZT X 52	ZT X 52
MODEL NUMBER	915172 917176*	915174	915230 915236*
ENGINE	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin
HORSEPOWER	24	25	23
DISPLACEMENT (CC)	725	725	726
DRIVE SYSTEM	Hydro-Gear® EZT Transaxles	Hydro-Gear® EZT Transaxles	Hydro-Gear® EZT Transaxles
FUEL CAPACITY – GALLONS (LITERS)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)
GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph
DECK			
DECK MATERIAL	10 ga steel	10 ga steel	10 ga steel
DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated
NUMBER OF SPINDLES	3	3	3
BLADE TIP SPEED (FPM)	17,000	17,000	17,000
SPINDLE HOUSING MATERIAL	Steel	Steel	Steel
SPINDLE SHAFT	Steel	Steel	Steel
SPINDLE BEARINGS	1" Sealed	1" Sealed	1" Sealed
DECK DRIVE	Belt	Belt	Belt
DECK ENGAGEMENT	Electric Warner®	Electric Warner®	Electric Warner®
DECK LIFT SYSTEM	Foot Operated, Dial Selection	Foot Operated, Dial Selection	Foot Operated, Dial Selection
CUTTING WIDTH	42"	52"	52"
CUTTING HEIGHT	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
CUTTING POSITIONS	13	13	13
WHEELS			
FRONT AXLE	Fixed	Fixed	Fixed
FRONT	11 x 4-5	11 x 4-5	11 x 4-5
REAR	18 x 8.5-8	18 x 8.5-8	18 x 8.5-8
FEATURES			
SEAT	High Back Comfort w/ Seat Springs, Lever Adjust, Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Arm Rests
HOUR METER	Standard	Standard	Standard
MACHINE			
WEIGHT	605	635	635
LENGTH	77.5"	77.5"	77.5"
WIDTH	54.2"	63.4"	63.4"
HEIGHT	40.9"	40.9"	40.9"
WARRANTY			
UNIT	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer
DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited
ATTACHMENTS & ACCESSORIES			
2 Bag Powered Bagger, Mulch Kit, L.E.D. Light Kit, Flex-Tend® Shoulder Support System, Chrome Rear Wheel Covers, 48" Plug Aerator, 36" Poly Roller, 48" Dethatcher, 15 Gallon Sprayer, Tow Behind Spreader			

* = CARB Compliant

ZT

PRODUCT NAME	ZT 34	ZT 42	ZT 50
MODEL NUMBER	915210 915208*	915212 915232*	915214 915234*
ENGINE	Kohler® 6000 V-Twin	Kohler® 7000 V-Twin	Kohler® 7000 V-Twin
HORSEPOWER	21	22	24
DISPLACEMENT (CC)	660	725	725
DRIVE SYSTEM	Hydro-Gear® EZT Transaxles	Hydro-Gear® EZT Transaxles	Hydro-Gear® EZT Transaxles
FUEL CAPACITY – GALLONS (LITERS)	2.0 gallon (7.5 L)	2.0 gallon (7.5 L)	2.0 gallon (7.5 L)
GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	6 mph / 3 mph	6 mph / 3 mph	6 mph / 3 mph
DECK			
DECK MATERIAL	12 ga steel	12 ga steel	12 ga steel
DECK CONSTRUCTION	Stamped	Stamped	Stamped
NUMBER OF SPINDLES	2	3	3
BLADE TIP SPEED (FPM)	17,500	17,000	17,800
SPINDLE HOUSING MATERIAL	Steel	Steel	Steel
SPINDLE SHAFT	Steel	Steel	Steel
SPINDLE BEARINGS	Sealed	Sealed	Sealed
DECK DRIVE	Belt	Belt	Belt
DECK ENGAGEMENT	Electric Warner®	Electric Warner®	Electric Warner®
DECK LIFT SYSTEM	Foot Operated	Foot Operated	Foot Operated
CUTTING WIDTH	34"	42"	50"
CUTTING HEIGHT	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
CUTTING POSITIONS	7	7	7
WHEELS			
FRONT AXLE	Fixed	Fixed	Fixed
FRONT	11 x 4-5	11 x 4-5	11 x 4-5
REAR	18 x 8.5-8	18 x 8.5-8	18 x 9.5-8
FEATURES			
SEAT	Mid Back w/ Seat Springs	High Back Comfort w/ Seat Springs, Lever Adjust	High Back Comfort w/ Seat Springs, Lever Adjust
HOUR METER	N/A	N/A	N/A
MACHINE			
WEIGHT	425	440	475
LENGTH	64"	64"	64"
WIDTH	42"	54"	62"
HEIGHT	37"	43"	43"
WARRANTY			
UNIT	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer
DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited
ATTACHMENTS & ACCESSORIES			
2 Bag Non-Powered Bagger, Mulch Kit, Arm Rest Kit, Flex-Tend® Shoulder Support System, Chrome Rear Wheel Covers, Hitch Kit, 48" Plug Aerator, 36" Poly Roller, 48" Dethatcher, 15 Gallon Sprayer, Tow Behind Spreader			

* = CARB Compliant

VISIT US ONLINE AT GRAVELY.COM

for Product Information, Consumer Reviews, Product Videos,
Dealer Locator, Product Selector, and Customer Support.



Registered trademark and TM trademark of Ariens Company. Kohler®, Kawasaki®, Yamaha®, Subaru® and Hydro-Gear® are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit www.gravelly.com for a complete listing of engine manufacturer power rating information. Product features and specifications subject to change without notice. Photos are a representation of the product; actual product may vary. © Copyright 2016 Ariens Company All rights reserved. 1216



GRAVELY