
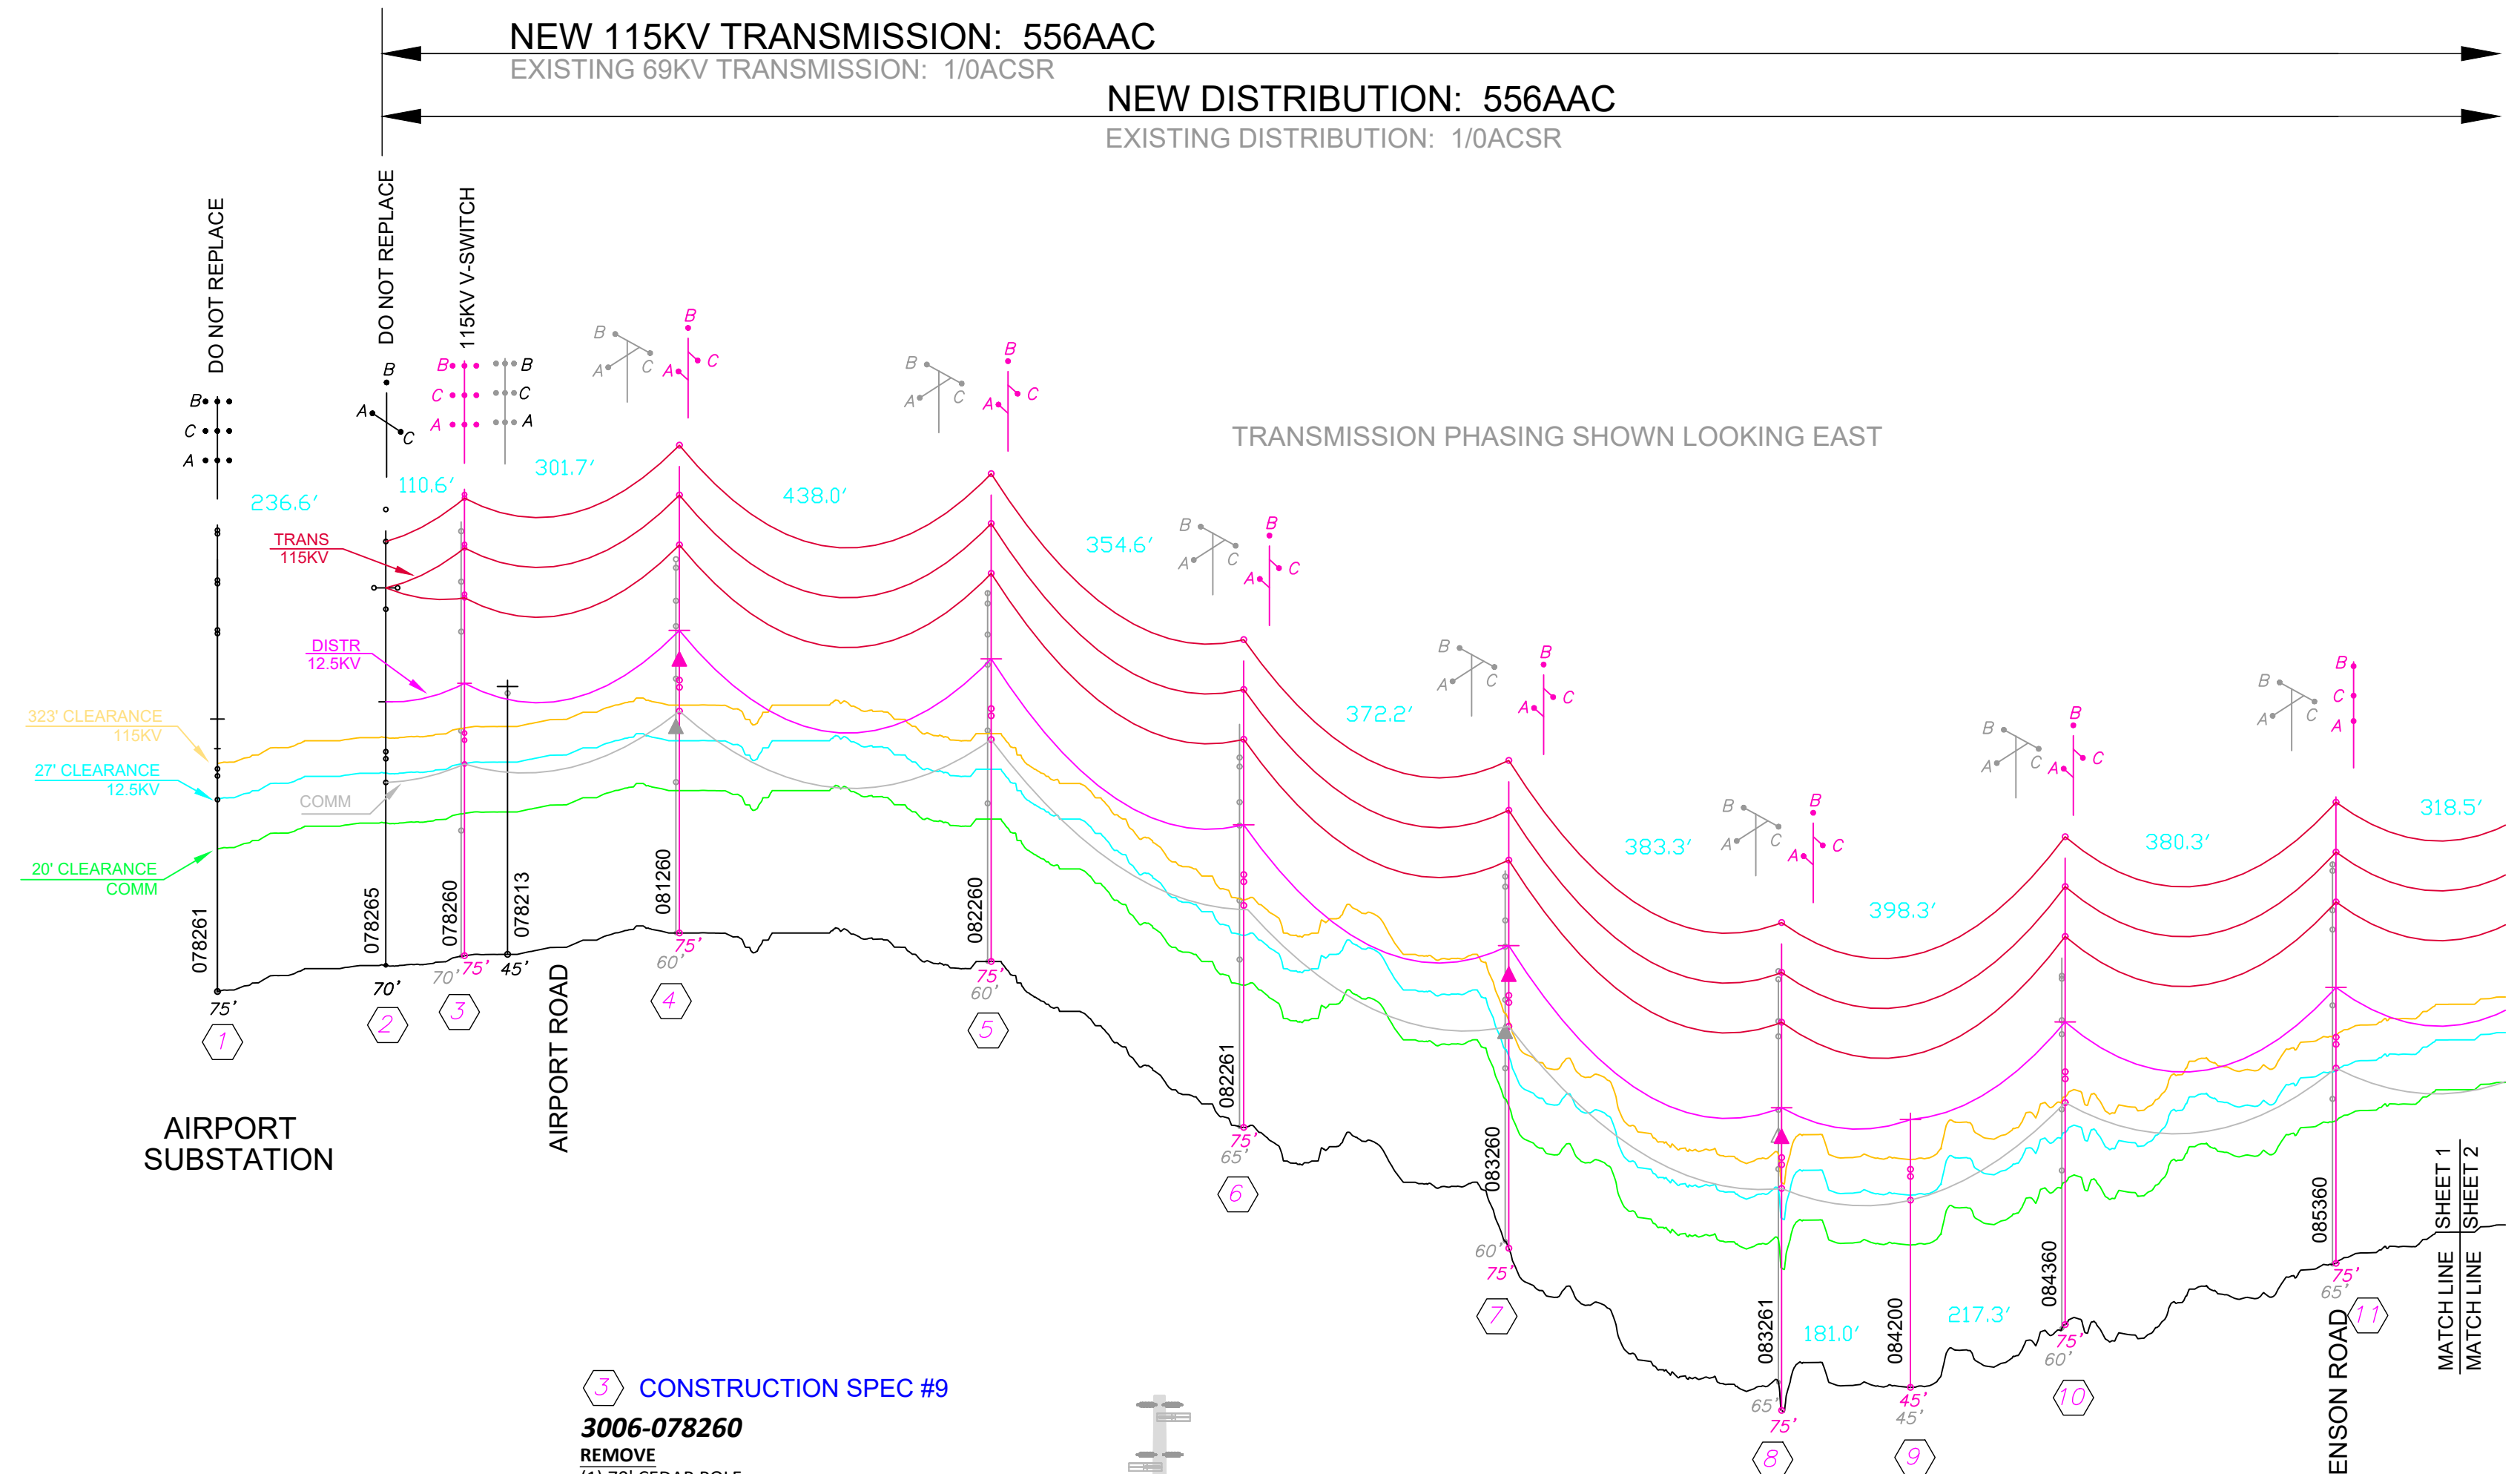


TRANSMISSION LINE CONSTRUCTION PLANS

AIRPORT ROAD TO CHERRY STREET

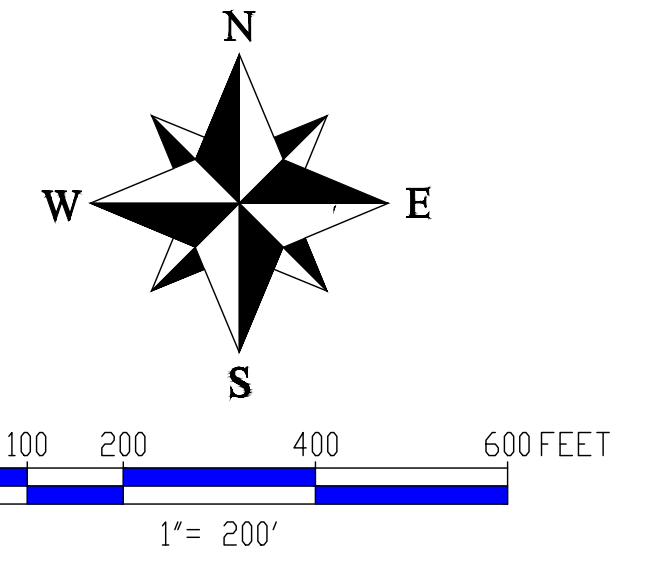

1 DO NOT REPLACE POLE
3006-078261
INSTALL - TRANSMISSION
 (3) 4066000, 115KV HORIZONTAL POST INSULATOR
 (3) CL-PI-4, 556AAC POST INSULATOR CLAMP, NO ARMOR ROD
 (3) TJUMP556A, 556AAC JUMPER
 (6) CNF-13, AMPACT, 556AAC TO 556AAC

2 START OF NEW CONDUCTOR DO NOT REPLACE POLE
3006-078265
REMOVE
 (3) DES-J, 556AAC COMPRESSION DEAD-END
 (3) CNF-13, AMPACT, 556AAC-556AAC
INSTALL - TRANSMISSION
 (3) DES-J, 556AAC COMPRESSION DEAD-END
 (3) CNF-13, 556AAC TO 556AAC AMPACT
INSTALL - DISTRIBUTION
 (4) DES-J, 556AAC COMPRESSION DEAD-END
 (4) CNF-13, 556AAC TO 556AAC AMPACT

3 CONSTRUCTION SPEC #9
3006-078260
REMOVE
 (1) 70' CEDAR POLE
 (1) 69KV V-SWITCH
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
 (1) TP75FBGLS-CLH4, 75' CL-H4 FIBERGLASS POLE
 (1) 115DV2-1-C, DOUBLE DEAD END
 (6) DES-J, 556AAC COMPR DEAD END
 (1) T115-SW1, 115KV TRANSMISSION V-SWITCH
 (6) TJUMP556A, 556AAC JUMPER
 (6) 6522100, 556AAC JUMPER PADDLE
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

4 CONSTRUCTION SPEC #6
3006-081260
REMOVE
 (1) 60' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
 (1) 15KVA TRANSFORMER #25953
INSTALL
 (1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
 (1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (1) TR1-A2/CT1, OVERHEAD 1Ø TRANSFORMER
 (1) T15A1, 15KVA TRANSFORMER (XFMR #)
 (1) DFUN2-1/2X, 15K FUSE
 (1) CL-ST-8, 556AAC STIRRUP CLAMP
 (1) SVC-1A, OVERHEAD SECONDARY 1-PHASE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

5 CONSTRUCTION SPEC #6
3006-082260
REMOVE
 (1) 60' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
 (1) TP75FBGLS-CLH2, 75' CL-H2 FIBERGLASS POLE
 (1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (2) SP-CL1, SPOOL & CLEVIS
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

6 CONSTRUCTION SPEC #6
3006-082261
REMOVE
 (1) 65' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
 (1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
 (1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

7 CONSTRUCTION SPEC #6
3006-083260
REMOVE
 (1) 60' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
 25KVA TRANSFORMER
INSTALL
 (1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
 (1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (1) TR1-A2/CT-1, OVERHEAD 1Ø TRANSFORMER
 (1) T15A1, 15KVA TRANSFORMER (XFMR #)
 (1) DFUN2-1/21K, 15K FUSE
 (1) CL-ST-8, 556AAC STIRRUP CLAMP
 (1) SVC-1A, OVERHEAD SECONDARY 1-PHASE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

9 CONSTRUCTION SPEC #11
3006-084200
REMOVE
 (1) 40' CEDAR POLE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
 (1) TP45FBGLS, 45' CL-H1 FIBERGLASS POLE
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY6-J, 556AAC SINGLE TIE
 (1) A4-3.16, DEADEND, 1Ø PRIMARY UPPER-N
 (2) DDEBS1/OAS, 4ACSR BOLTED DEAD-END
 (1) XB651-224, 15KV CUT-OUT ASSY
 (1) DFUN15K, 15K FUSE FUSE
 (1) CL-ST-8, 556AAC STIRRUP CLAMP
 (1) CL-ST-1, 4ACSR STIRRUP CLAMP
 (2) DJUMP4AS, 4ACSR JUMPER
 (2) CNF-2, 556AAC TO 4ACSR AMPACT
 (1) DZCR4/O2ST, 4/0-#6 CU CRIMPIT
 (1) GY-4.1, DOWN GUY, FBGLS CROSS ARM
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

8 CONSTRUCTION SPEC #6
3006-083261
REMOVE
 (1) 65' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
 15KVA TRANSFORMER #7810
INSTALL
 (1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
 (1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (1) TR1-A2/CT1, OVERHEAD 1Ø TRANSFORMER
 (1) T25A1/CT1, 25KVA TRANSFORMER (XFMR #)
 (1) DFUN6K, 25KVA TRANSFORMER FUSE
 (1) CL-ST-8, 556AAC STIRRUP CLAMP
 (2) SVC-1A, OVERHEAD SECONDARY 1-PHASE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

10 CONSTRUCTION SPEC #6
3006-084360
REMOVE
 (1) 60' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
 (1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
 (1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY1-J, 556AAC SINGLE TIE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT

11 CONSTRUCTION SPEC #8
3006-085360
REMOVE
 (1) 65' CEDAR POLE
 (1) 69KV TANGENT WISHBONE
 (1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
 (1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
 (1) 115TV1, 3-HORIZONTAL POST
 (3) CL-PI-8, 556AAC POST INSULATOR CLAMP
 (3) TY6-J, 556AAC ARMOR ROD
 (1) C3.18, DBL CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
 (4) TY4-J, 556AAC DOUBLE SIDE TIE
 (1) B4-3.16, PRIMARY VØ SINGLE DEAD END, LOWER NEUTRAL
 (3) DDEBS1/OAS, #4-1/0 ACSR BOLTED DEAD END
 (2) CL-ST-8, 556AAC STIRRUP CLAMP
 (2) CL-ST-2, 2ACSR STIRRUP CLAMP
 (2) XB651-224, 15KV CUT-OUT ASSY
 (2) DFUN65K, 65K FUSE
 (1) 6060700, #2-#2 CU CRIMPIT
 (1) RPI-SPL, 1Ø RISER ASSEMBLY W/ SPLICE KIT
 (1) DFUN15K, 15K FUSE
 (1) CNF-7, 556AAC TO 1/0 AMPACT
 (1) CL-ST-8, 556AAC STIRRUP CLAMP
 (1) GY-7, TRANSMISSION DOWN GUY 10M
 (3) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
 (2) GY4.1, DISTRIBUTION DOWN GUY 10M, 2-BOLT EYE PLATE
 (1) GR-27, GROUND, UPPER-N
TRANSFER
 (1) PUD FIBER-OPTIC CABLE
 (1) FIBSUP144, FIBER OPTIC SUPPORT


NOTE: 3D DEPICTIONS OF POLES ON THIS DRAWING ARE FOR REFERENCE ONLY. PHASING IS NOT INDICATED IN THESE DEPICTIONS.

THIS DRAWING WAS PREPARED BY CLALLAM COUNTY PUD FOR A SPECIFIC PROJECT, TAKING INTO CONSIDERATION THE SPECIFIC AND UNIQUE REQUIREMENTS OF THE PROJECT. REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM BOTH CLALLAM AND CLALLAM'S CLIENT IS GRANTED.

REV	REVISIONS	DATE	DRN	DSGN	CKD	APPD	REFERENCE DRAWINGS
2	ADDENDUM #3 REVISIONS	3/9/21	BENP	BENP	DA	DA	
1	CHG TO STK 18, 20, 22, 30 7 OTHER MINOR PART CHANGES	3/4/21	BENP	BENP	DA	DA	
0	ISSUED FOR BIDDING	2/1/2021	BENP	BENP	DA	DA	

DSGN	BENP	2020
SURV	JCW	2021
STKD		

SCALE: 1" = 200'
FOR 22x34 DWG ONLY


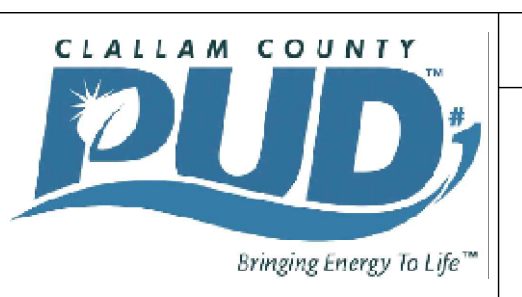


CLALLAM COUNTY PUD #1
 AIRPORT RD. TO CHERRY ST.
 115KV TRANSMISSIO REBUILD
 PLAN & PROFILE

WORK ORDER # 18-0210
 DRAWING NUMBER SHT. 1 OF 4

TRANSMISSION LINE CONSTRUCTION PLANS

AIRPORT ROAD TO CHERRY STREET

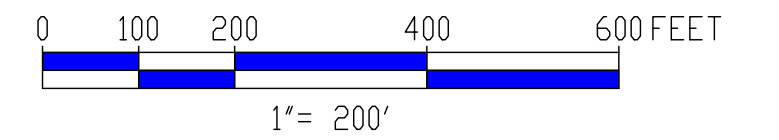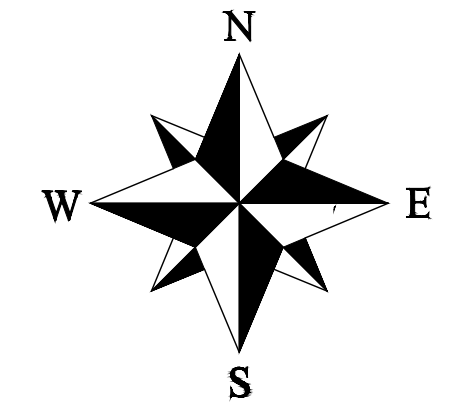


SCALE
HORIZONTAL: 1" = 200'
VERTICAL: 1" = 20'

NEW 115KV TRANSMISSION: 556AAC

EXISTING 69KV TRANSMISSION: 1/OACSR

NEW DISTRIBUTION: 556AAC

EXISTING DISTRIBUTION: 1/OACSR

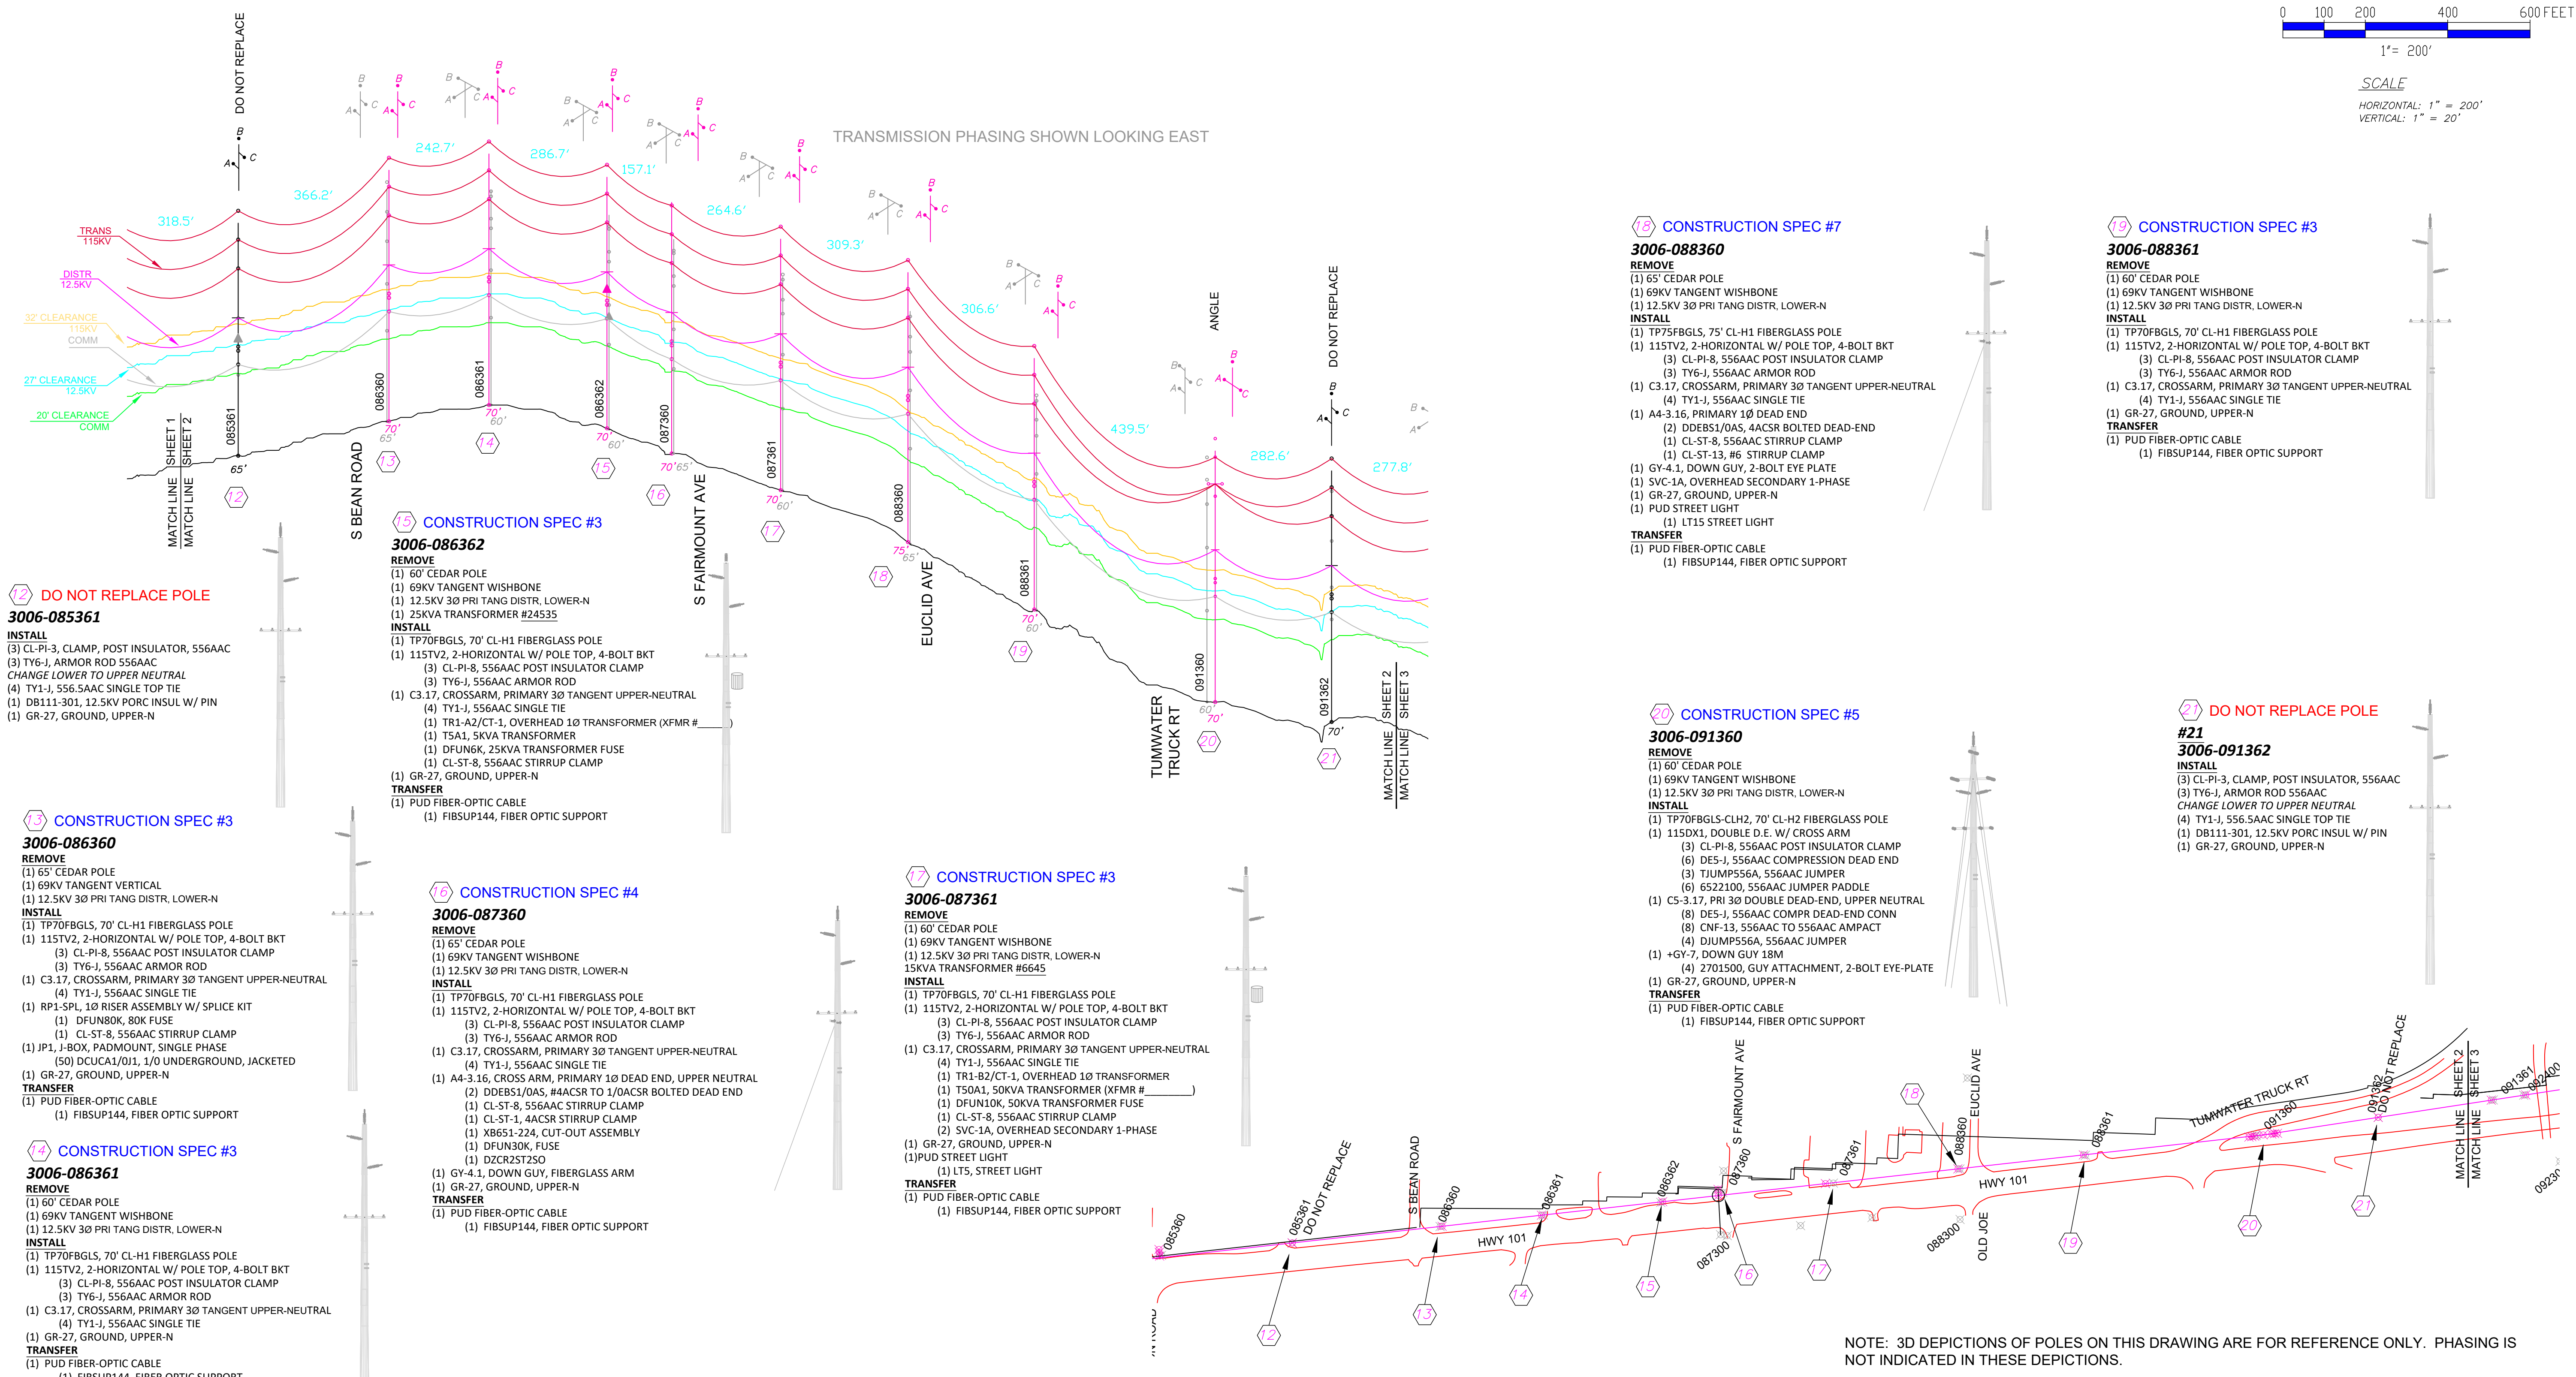

- CONSTRUCTION SPEC #7**
3006-088360
REMOVE
(1) 65' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
(1) TP70FBGLS, 70' CL-H1 FIBERGLASS POLE
(1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-J, 556AAC ARMOR ROD
(1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) A4-3.16, PRIMARY 1Ø DEAD END
(2) DDEBS1/OAS, 4ACSR BOLTED DEAD-END
(1) CL-ST-8, 556AAC STIRRUP CLAMP
(1) CL-ST-13, #6 STIRRUP CLAMP
(1) GY-4.1, DOWN GUY, 2-BOLT EYE PLATE
(1) SVC-1A, OVERHEAD SECONDARY 1-PHASE
(1) GR-27, GROUND, UPPER-N
(1) GR-27, STREET LIGHT
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- CONSTRUCTION SPEC #8**
3006-088361
REMOVE
(1) 60' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
(1) TP70FBGLS, 70' CL-H1 FIBERGLASS POLE
(1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-J, 556AAC ARMOR ROD
(1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- DO NOT REPLACE POLE**
3006-085361
INSTALL
(3) CL-PI-3, CLAMP, POST INSULATOR, 556AAC
(3) TY6-J, ARMOR ROD 556AAC
CHANGE LOWER TO UPPER NEUTRAL
(4) TY1-J, 556AAC SINGLE TOP TIE
(1) DB111-301, 12.5KV PORC INSUL W/ PIN
(1) GR-27, GROUND, UPPER-N

- CONSTRUCTION SPEC #3**
3006-086362
REMOVE
(1) 60' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
(1) 25KVA TRANSFORMER #24535
INSTALL
(1) TP70FBGLS, 70' CL-H1 FIBERGLASS POLE
(1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-J, 556AAC ARMOR ROD
(1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) TR1-A2/CT-1, OVERHEAD 1Ø TRANSFORMER (XFMR #)
(1) T5A1, 5KVA TRANSFORMER
(1) DFUN6K, 25KVA TRANSFORMER FUSE
(1) CL-ST-8, 556AAC STIRRUP CLAMP
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- CONSTRUCTION SPEC #3**
3006-086360
REMOVE
(1) 65' CEDAR POLE
(1) 69KV TANGENT VERTICAL
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
(1) TP70FBGLS, 70' CL-H1 FIBERGLASS POLE
(1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-J, 556AAC ARMOR ROD
(1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) RP1-SPL, 1Ø RISER ASSEMBLY W/ SPLICE KIT
(1) DFUN80K, 80K FUSE
(1) CL-ST-8, 556AAC STIRRUP CLAMP
(1) DCUCA1/OJ1, 1/Ø UNDERGROUND, JACKETED
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- CONSTRUCTION SPEC #4**
3006-087360
REMOVE
(1) 65' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
(1) TP70FBGLS, 70' CL-H1 FIBERGLASS POLE
(1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-J, 556AAC ARMOR ROD
(1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) A4-3.16, CROSS ARM, PRIMARY 1Ø DEAD END, UPPER NEUTRAL
(2) DDEBS1/OAS, #4ACSR TO 1/OACSR BOLTED DEAD END
(1) CL-ST-8, 556AAC STIRRUP CLAMP
(1) CL-ST-1, 4ACSR STIRRUP CLAMP
(1) XB651-224, CUT-OUT ASSEMBLY
(1) DFUN30K, FUSE
(1) DZCR2ST250
(1) GY-4.1, DOWN GUY, FIBERGLASS ARM
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- CONSTRUCTION SPEC #3**
3006-087361
REMOVE
(1) 60' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
(1) 15KVA TRANSFORMER #6645
INSTALL
(1) TP70FBGLS, 70' CL-H1 FIBERGLASS POLE
(1) 115TV2, 2-HORIZONTAL W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-J, 556AAC ARMOR ROD
(1) C3.17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) TR1-B2/CT-1, OVERHEAD 1Ø TRANSFORMER
(1) T50A1, 50KVA TRANSFORMER (XFMR #)
(1) DFUN10K, 50KVA TRANSFORMER FUSE
(1) CL-ST-8, 556AAC STIRRUP CLAMP
(2) SVC-1A, OVERHEAD SECONDARY 1-PHASE
(1) GR-27, GROUND, UPPER-N
(1) PUD STREET LIGHT
(1) LTS, STREET LIGHT
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- CONSTRUCTION SPEC #5**
3006-091360
REMOVE
(1) 60' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR, LOWER-N
INSTALL
(1) TP70FBGLS-CLH2, 70' CL-H2 FIBERGLASS POLE
(1) 115DX1, DOUBLE D.E. W/ CROSS ARM
(6) DE5-J, 556AAC COMPRESSION DEAD END
(3) TJUMPS56A, 556AAC JUMPER
(6) 6522100, 556AAC JUMPER PADDLE
(1) CS-3.17, PRI 3Ø DOUBLE DEAD-END, UPPER NEUTRAL
(8) DE5-J, 556AAC COMPR DEAD-END CONN
(8) CNF-13, 556AAC TO 556AAC AMPACT
(4) DJUMPS56A, 556AAC JUMPER
(1) +GY-7, DOWN GUY, 18Ø
(4) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT


- DO NOT REPLACE POLE**
#21
3006-091362
INSTALL
(3) CL-PI-3, CLAMP, POST INSULATOR, 556AAC
(3) TY6-J, ARMOR ROD 556AAC
CHANGE LOWER TO UPPER NEUTRAL
(4) TY1-J, 556AAC SINGLE TOP TIE
(1) DB111-301, 12.5KV PORC INSUL W/ PIN
(1) GR-27, GROUND, UPPER-N

NOTE: 3D DEPICTIONS OF POLES ON THIS DRAWING ARE FOR REFERENCE ONLY. PHASING IS NOT INDICATED IN THESE DEPICTIONS.

THIS DRAWING WAS PREPARED BY CLALLAM COUNTY PUD FOR A SPECIFIC PROJECT, TAKING INTO CONSIDERATION THE SPECIFIC AND UNIQUE REQUIREMENTS OF THE PROJECT. REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM BOTH CLALLAM AND CLALLAM'S CLIENT IS GRANTED.

REV	REVISIONS	DATE	DRN	DSGN	CKD	APPD	REFERENCE DRAWINGS
2	ADDENDUM #3 REVISIONS	3/9/21	BENP	BENP	DA	DA	
1	CHG TO STK 18, 20, 22, 30 7 OTHER MINOR PART CHANGES	3/4/21	BENP	BENP	DA	DA	
0	ISSUED FOR BIDDING	2/1/2021	BENP	BENP	DA	DA	

DSGN	BENP	2020
SURV	JCW	2021
STKD		
SCALE:	1" = 200'	
	FOR 22x34 DWG ONLY	

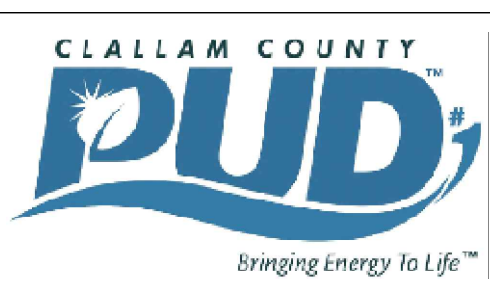





CLALLAM COUNTY PUD #1
AIRPORT RD. TO CHERRY ST.
115KV TRANSMISSION REBUILD
PLAN & PROFILE

WORK ORDER #
18-0210
DRAWING NUMBER
SHT. 2 OF 4


TRANSMISSION LINE CONSTRUCTION PLANS

AIRPORT ROAD TO CHERRY STREET


SCALE
HORIZONTAL: 1" = 200'
VERTICAL: 1" = 20'

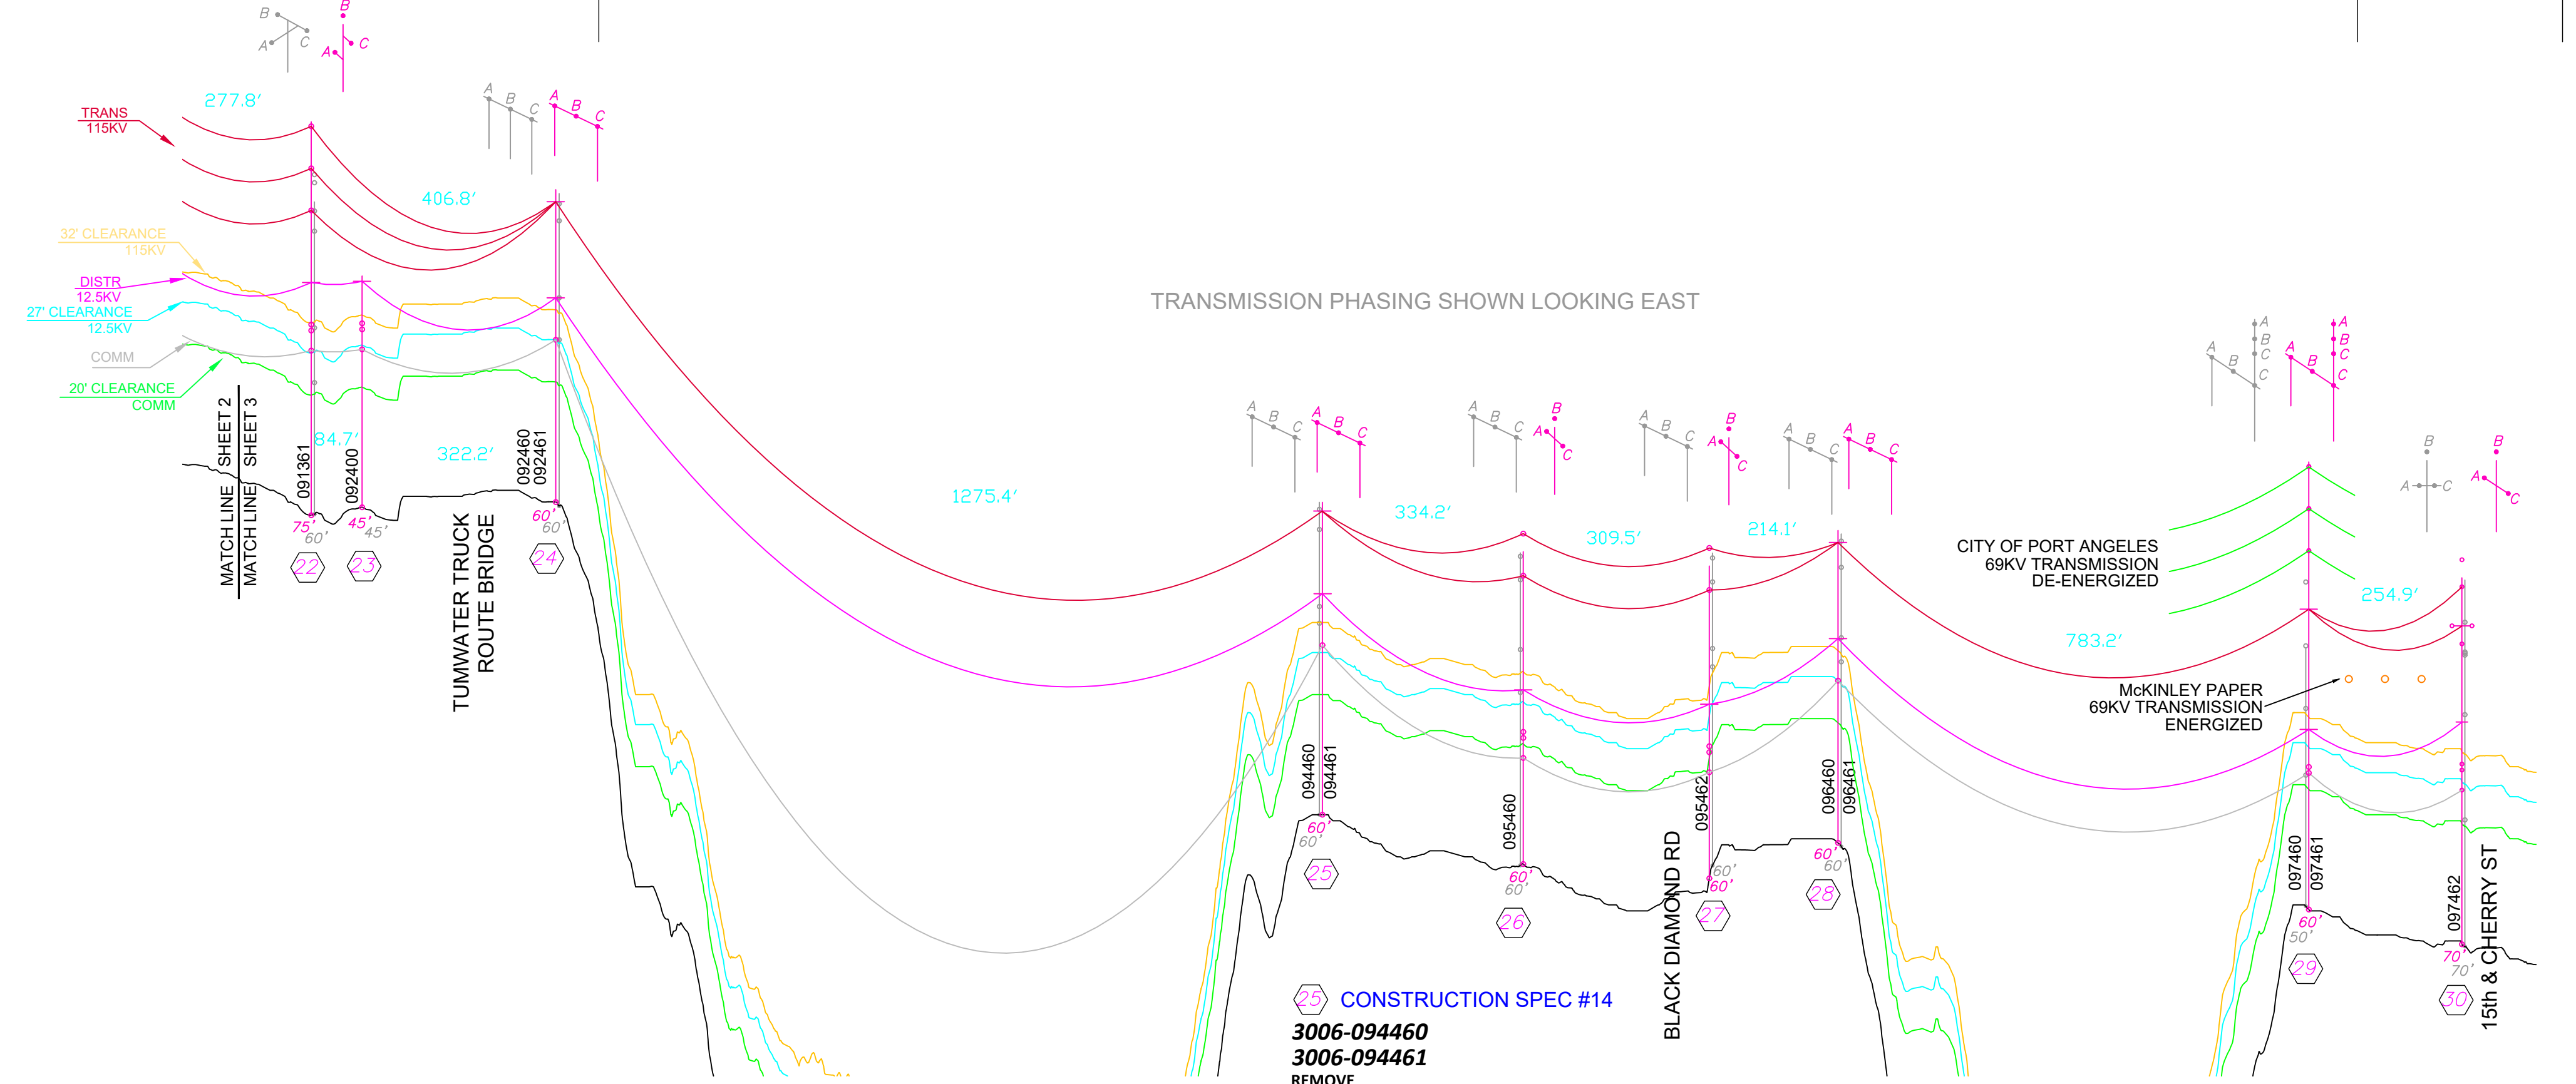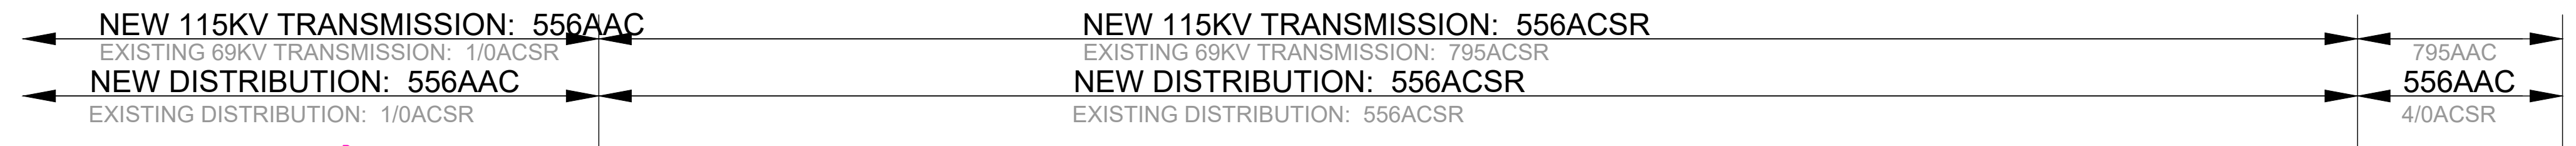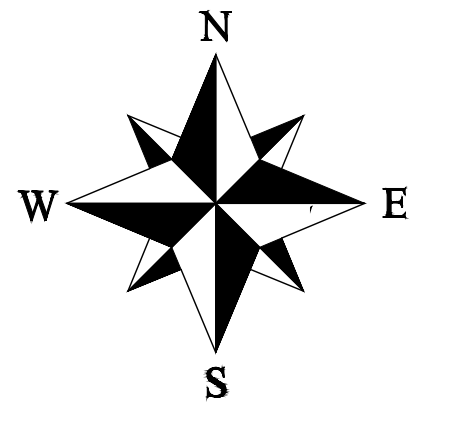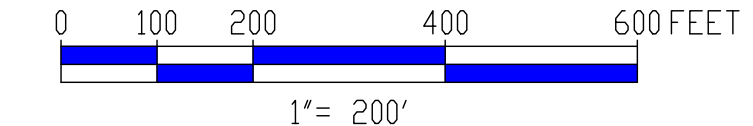


- CONSTRUCTION SPEC #7**
3006-091361
REMOVE
(1) 60' CEDAR POLE
(1) 69KV TANGENT WISHBONE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) TP75FBGLS, 75' CL-H1 FIBERGLASS POLE
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-F, 556AAC ARMOR ROD
(1) C3-17, CROSSARM, PRIMARY 3Ø TANGENT UPPER-NEUTRAL
(4) TY1-J, 556AAC SINGLE TIE
(1) A4-3.16, PRIMARY 1Ø DEAD END, UPPER NEUTRAL
(1) CL-ST-8, 556AAC STIRRUP CLAMP
(1) XB651-224, 15KV CUT-OUT ASSY
(1) DFUN15K, FUSE
(1) GY-4.1, DOWN GUY
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

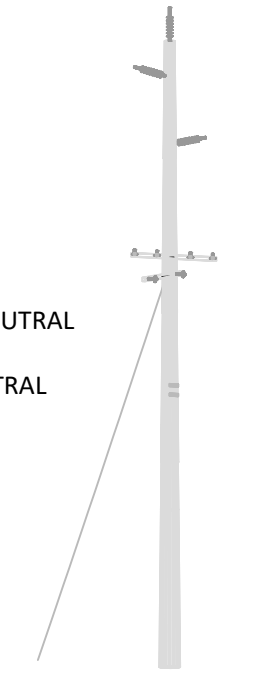

- CONSTRUCTION SPEC #13**
3006-092460
3006-092462 REMOVE
REMOVE
(3) 60' CEDAR POLE H-FRAME
(1) 69KV TANGENT TRANSMISSION
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) PP-0600-F-0205-C, 60' CL-H2 FIBERGLASS POLE
(1) PP-0650-F-0105-C, 65' CL-H2 FIBERGLASS POLE
(1) 115DDH2, 115KV H-FRAME DOUBLE D.E.
(2) DD4000252E31743, 21FT PUPI DEAD-END CROSS ARM
(3) DES-F, 556AAC COMPR DEAD-END CONN
(3) DES-F, 556AAC COMPR DEAD-END
(6) 6522100, 556AAC DEAD END JUMPER PADDLE
(3) TJUMP556A, 556AAC JUMPER
(2) 4066000, POST INSULATOR, HORIZONTAL, 115KV POLY
(1) CL-PI-4, POST INSULATOR CLAMP, 556AAC NO ARMOR ROD
(7) 4070000, SUSPENSION INSULATOR, 115KV POLY
(1) CL-SP-4, SUSPENSION CLAMP, 556AAC NO ARMOR ROD
(1) 4950700, Y-CLEVIS EYE
(1) XBR40001923373, PUPI X-BRACE ASSEMBLY
(1) X-BRACE HARDWARE KIT
(2) +GY-7, TRANSMISSION HEAVY DUTY DOWN GUY 18M
(6) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBDE44, DEAD-END FIBER OPTIC SUPPORT

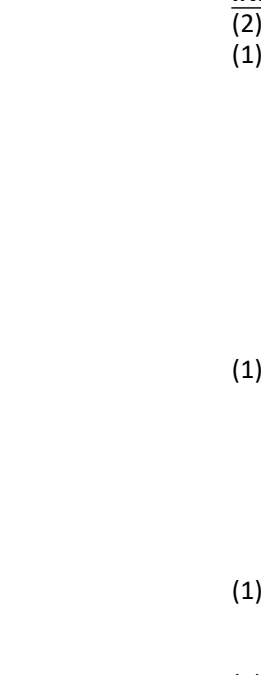


- CONSTRUCTION SPEC #14**
3006-094460
3006-094461
REMOVE
(2) 60' CEDAR POLE H-FRAME
(1) 69KV TANGENT TRANSMISSION
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(2) PP-0600-F-0205-C, 60' CL-H2 FIBERGLASS POLE
(1) 115DDH2, 115KV H-FRAME DOUBLE D.E.
(2) DD4000252E31743, 21FT PUPI DEAD-END CROSS ARM
(6) DES-F, 556AAC COMPR DEAD END
(6) 6522100, 556AAC DEAD END JUMPER PADDLE
(3) TJUMP556A, 556AAC JUMPER
(2) 4066000, POST INSULATOR, HORIZONTAL, 115KV POLY
(1) CL-PI-4, POST INSULATOR CLAMP, 556AAC NO ARMOR ROD
(7) 4070000, SUSPENSION INSULATOR, 115KV POLY
(1) CL-SP-4, SUSPENSION CLAMP, 556AAC NO ARMOR ROD
(1) 4950700, Y-CLEVIS EYE
(1) XBR40001923373, PUPI X-BRACE ASSEMBLY
(1) X-BRACE HARDWARE KIT
(2) +GY-7, TRANSMISSION HEAVY DUTY DOWN GUY 18M
(6) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBDE44, DEAD-END FIBER OPTIC SUPPORT

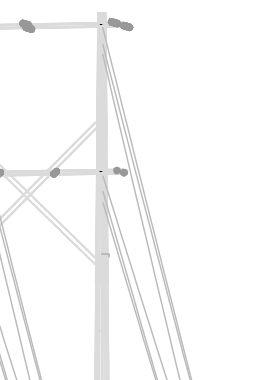

- CONSTRUCTION SPEC #1**
3006-095460
REMOVE 3006-095461
REMOVE
(2) 60' CEDAR POLE H-FRAME
(1) 69KV TANGENT TRANSMISSION
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T60FBGLS, 60' CL-H1 FIBERGLASS POLE
(1) 115TV3, 2-HORZ OPPOSED W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-6, 556AAC POST INSULATOR CLAMP
(3) TY6-F, 556AAC ARMOR ROD
(1) C3.18, DOUBLE CROSSARM, PRI 3Ø TANGENT UPPER-N
(4) TY4-F, 556ACSR DOUBLE SIDE TIE
(1) 4070000, SUSPENSION INSULATOR, 115KV POLY
(1) CL-SP-4, SUSPENSION CLAMP, 556AAC NO ARMOR ROD
(1) 4950700, Y-CLEVIS EYE
(1) XBR40001923333, PUPI X-BRACE ASSEMBLY, TOP
(2) XBR40001923303 X-BRACE ARM
(1) X-BRACE HARDWARE KIT
(1) MOUNTING KIT
(3) +GY-7, TRANSMISSION HEAVY DUTY DOWN GUY
(9) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT


- CONSTRUCTION SPEC #2**
3006-095462
REMOVE 3006-095463
REMOVE
(2) 60' CEDAR POLE H-FRAME
(1) 69KV TANGENT TRANSMISSION
(1) 12.5KV 3Ø PRI TANG DISTR
(1) V-PHASE PRIMARY TAP & ARM
INSTALL
(1) T60FBGLS, 60' CL-H1 FIBERGLASS POLE
(1) 115TV3, 2-HORZ OPPOSED W/ POLE TOP, 4-BOLT BKT
(3) CL-PI-8, 556AAC POST INSULATOR CLAMP
(3) TY6-F, 556ACSR ARMOR ROD
(1) C3.18, DOUBLE CROSSARM, PRI 3Ø TANGENT UPPER-NL
(4) TY4-F, 556ACSR DOUBLE SIDE TIE
(1) DDEBS1/OAS, 1/0 ACSR BOLTED DEAD-END
(3) CL-ST-8, 556AAC STIRRUP CLAMP
(3) CL-ST-3, 1/0 ACSR STIRRUP CLAMP
(4) DIJUMP1/OAS, 1/0 ACSR JUMPER
(1) GY-4.1, DOWN-GUY 10M, FBGLS ARM
(1) GR-27, GROUND, UPPER-N

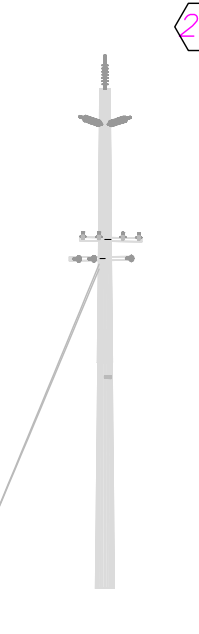


- CONSTRUCTION SPEC #15**
3006-096460
3006-096461
REMOVE
(2) 60' CEDAR POLE H-FRAME
(1) 69KV TANGENT TRANSMISSION
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(2) PP-0600-F-0205-C, 60' CL-H2 FIBERGLASS POLE
(1) 115DDH2, 115KV H-FRAME DOUBLE D.E.
(2) DD4000252E32453, 21FT PUPI DEAD-END CROSS ARM
(6) DES-F, 556AAC COMPR DEAD END
(6) 6522100, 556AAC JUMPER PADDLE
(3) TJUMP556A, 556AAC JUMPER
(2) 4066000, POST INSULATOR, 115KV POLY
(2) CL-PI-4, POST INSULATOR CLAMP, 556AAC NO ARMOR ROD
(7) 4070000, SUSPENSION INSULATOR, 115KV POLY
(1) CL-SP-4, SUSPENSION CLAMP, 556AAC NO ARMOR ROD
(1) 4950700, Y-CLEVIS EYE
(1) C5-3.17, PRI 3Ø DOUBLE DEAD-END
(2) DD4000252E42463, 21FT PUPI DEAD-END CROSS ARM
(4) DIJUMP556A, 556ACSR JUMPER
(8) CNG-13, AMPACT 556AAC TO 556ACSR
(8) 4011500, POST INSULATOR, 12.5KV CERAMIC
(8) 4500100, CROSSARM PIN
(4) 6484800, DOUBLE SUPPORT TIE, 556AAC
(1) XBR40001203353, PUPI X-BRACE ASSEMBLY
(2) XBR40001203343 X-BRACE ARMS
(1) X-BRACE HARDWARE KIT
(2) +GY-7, TRANSMISSION HEAVY DUTY DOWN GUY 18M
(6) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBDE44, DEAD-END FIBER OPTIC SUPPORT



- CONSTRUCTION SPEC #16**
3006-097460
3006-097461
REMOVE
(1) 60' CEDAR POLE H-FRAME
(1) 75' CEDAR POLE H-FRAME
(1) 69KV DOUBLE DEAD-END
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL-CITY OF PORT ANGELES
(1) 69DV2-C, 69KV D.E., 2-WAY STAGGERED
(6) DES-J, 556AAC COMPRESSION DEAD-END
(3) TJUMP556A, 556AAC JUMPER
(6) 6522100, 556AAC JUMPER PADDLE
(2) GY-7, TRANSMISSION DOWN GUY
INSTALL
(1) PP-0850-F-0711-C, 85' CLASS HG FIBERGLASS POLE
(1) PP-0600-F-0911-C, 60' CLASS HG FIBERGLASS POLE
(1) 115DDH2, 115KV H-FRAME DOUBLE D.E.
(2) DD4000252E31743, 21FT PUPI DEAD-END CROSS ARM
(3) DES-F, 556AAC COMPR DEAD END
(3) DES-K, 795AAC COMPR DEAD END
(6) 6522100, 556AAC JUMPER PADDLE
(3) TJUMP556A, 556AAC JUMPER
(2) 4066000, POST INSULATOR, 115KV POLY
(2) CL-PI-4, POST INSULATOR CLAMP, 556AAC NO ARMOR ROD
(1) 4070000, SUSPENSION INSULATOR, 115KV POLY
(1) CL-SP-4, SUSPENSION CLAMP, 556AAC NO ARMOR ROD
(1) 4950700, Y-CLEVIS EYE
(1) C5-3.17, PRI 3Ø DOUBLE DEAD-END
(2) DD4000252E41773, 21FT PUPI DEAD-END CROSS ARM
(4) CNG-13, AMPACT 556AAC TO 556ACSR
(4) CNG-13, AMPACT 556AAC TO 556AAC
(4) DIJUMP556A, 556AAC JUMPER
(8) 4011500, POST INSULATOR, 12.5KV CERAMIC
(8) 4500100, CROSSARM PIN
(4) 6484800, DOUBLE SUPPORT TIE, 556AAC
(2) XBR40001923333, PUPI X-BRACE ASSEMBLY, TOP
(2) XBR40001923303 X-BRACE ARM
(1) X-BRACE HARDWARE KIT
(1) MOUNTING KIT
(3) +GY-7, TRANSMISSION HEAVY DUTY DOWN GUY
(9) 2701500, GUY ATTACHMENT, 2-BOLT EYE-PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

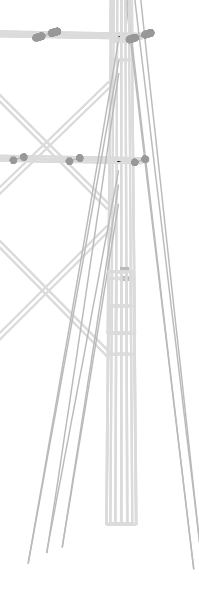


- CONSTRUCTION SPEC #10**
3006-097462
REMOVE
(1) 70' CEDAR POLE
(1) 69KV DOUBLE DEAD-END
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) TP70FBGLS-CLH2, 70' CL-H2 FIBERGLASS POLE
(1) 115DX1, 115KV DOUBLE D.E. W/ POLE TOP
(6) DES-K, 795AAC COMPRESSION DEAD-END
(3) TJUMP795A, 795AAC JUMPER
(3) CL-PI-8, 795AAC POST INSUL CLAMP, NO ARM ROD
(3) 6522700, 795AAC JUMPER PADDLE
(1) C5-3.17, PRI 3Ø DOUBLE DEAD-END
(4) DES-J, 556AAC COMPR DEAD-END CONN
(3) DDEBS1/OAS, 1/0ACSR BOLTED DEAD-END CONN
(1) DDEBS1/OAS, 1/0ACSR BOLTED DEAD-END CONN
(4) CNF-13, AMPACT 556AAC-556AAC
(3) CNF-10, AMPACT 556AAC-4/0ACSR
(1) CNF-7, AMPACT 556AAC-1/0ACSR
(4) DIJUMP556A, 556AAC JUMPER
(1) +GY-7, TRANSMISSION DOWN GUY
(1) +GY-SP3.1, SPAN GUY, 2-BOLT EYE PLATE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

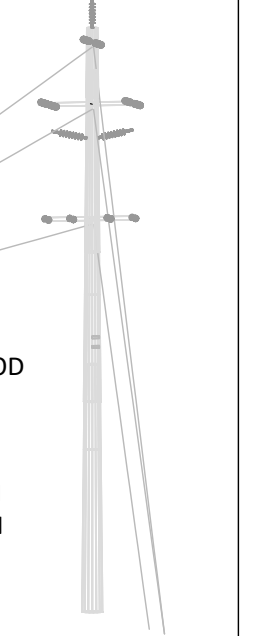


- CONSTRUCTION SPEC #10**
3006-097463
REMOVE
(1) 40' CEDAR POLE
INSTALL
(1) TP40FBGLS, 40' FIBERGLASS POLE
(3) +GY-3.1, DOWN GUY 18M, 2-BOLT EYE PLATE



- CONSTRUCTION SPEC #10**
3006-097463
REMOVE
(1) 40' CEDAR POLE
INSTALL
(1) TP40FBGLS, 40' FIBERGLASS POLE
(3) +GY-3.1, DOWN GUY 18M, 2-BOLT EYE PLATE

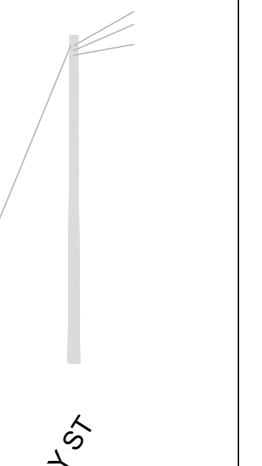


- CONSTRUCTION SPEC #12**
3006-092400
REMOVE
(1) 40' CEDAR POLE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T45FBGLS, 45' CL-H1 FIBERGLASS POLE
(1) C3.17, PRIMARY 3Ø TANGENT, UPPER-N
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

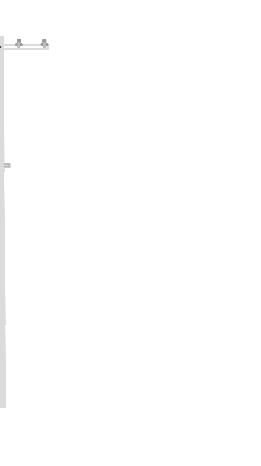

- CONSTRUCTION SPEC #12**
3006-092400
REMOVE
(1) 40' CEDAR POLE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T45FBGLS, 45' CL-H1 FIBERGLASS POLE
(1) C3.17, PRIMARY 3Ø TANGENT, UPPER-N
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT



- CONSTRUCTION SPEC #12**
3006-092400
REMOVE
(1) 40' CEDAR POLE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T45FBGLS, 45' CL-H1 FIBERGLASS POLE
(1) C3.17, PRIMARY 3Ø TANGENT, UPPER-N
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

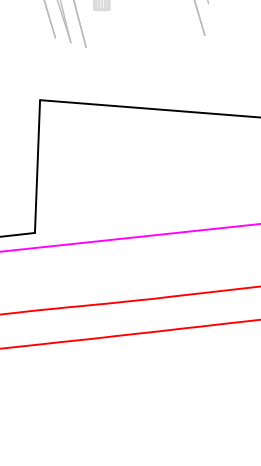


- CONSTRUCTION SPEC #12**
3006-092400
REMOVE
(1) 40' CEDAR POLE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T45FBGLS, 45' CL-H1 FIBERGLASS POLE
(1) C3.17, PRIMARY 3Ø TANGENT, UPPER-N
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

- CONSTRUCTION SPEC #12**
3006-092400
REMOVE
(1) 40' CEDAR POLE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T45FBGLS, 45' CL-H1 FIBERGLASS POLE
(1) C3.17, PRIMARY 3Ø TANGENT, UPPER-N
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT



- CONSTRUCTION SPEC #12**
3006-092400
REMOVE
(1) 40' CEDAR POLE
(1) 12.5KV 3Ø PRI TANG DISTR. LOWER-N
INSTALL
(1) T45FBGLS, 45' CL-H1 FIBERGLASS POLE
(1) C3.17, PRIMARY 3Ø TANGENT, UPPER-N
(4) TY1-J, 556AAC SINGLE TIE
(1) GR-27, GROUND, UPPER-N
TRANSFER
(1) PUD FIBER-OPTIC CABLE
(1) FIBSUP144, FIBER OPTIC SUPPORT

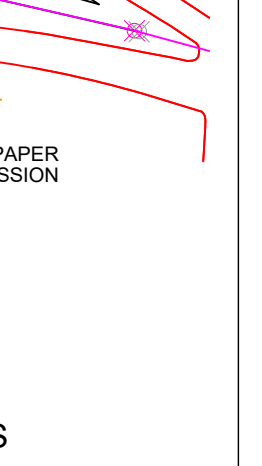

NOTE: 3D DEPICTIONS OF POLES ON THIS DRAWING ARE FOR REFERENCE ONLY. PHASING IS NOT INDICATED IN THESE DEPICTIONS.

THIS DRAWING WAS PREPARED BY CLALLAM COUNTY PUD FOR A SPECIFIC PROJECT, TAKING INTO CONSIDERATION THE SPECIFIC AND UNIQUE REQUIREMENTS OF THE PROJECT. REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM BOTH CLALLAM AND CLALLAM'S CLIENT IS GRANTED.

REV	REVISIONS	DATE	DRN	DSGN	CKD	APPD	REFERENCE DRAWINGS
2	ADDENDUM #3 REVISIONS	3/9/21	BENP	BENP	DA	DA	
1	CHG TO STK 18, 20,22,30 7 OTHER MINOR PART CHANGES	3/4/21	BENP	BENP	DA	DA	
0	ISSUED FOR BIDDING	2/1/2021	BENP	BENP	DA	DA	

DSGN	BENP	2020
SURV	JCW	2021
STKD		
SCALE:	1" = 200'	
	FOR 22x34 DWG ONLY	





CLALLAM COUNTY PUD #1
AIRPORT RD. TO CHERRY ST.
115KV TRANSMISSION REBUILD
PLAN & PROFILE

WORK ORDER #
18-0210
DRAWING NUMBER
SHT. 3 OF 4

TRANSMISSION LINE CONSTRUCTION PLANS


AIRPORT ROAD TO CHERRY STREET

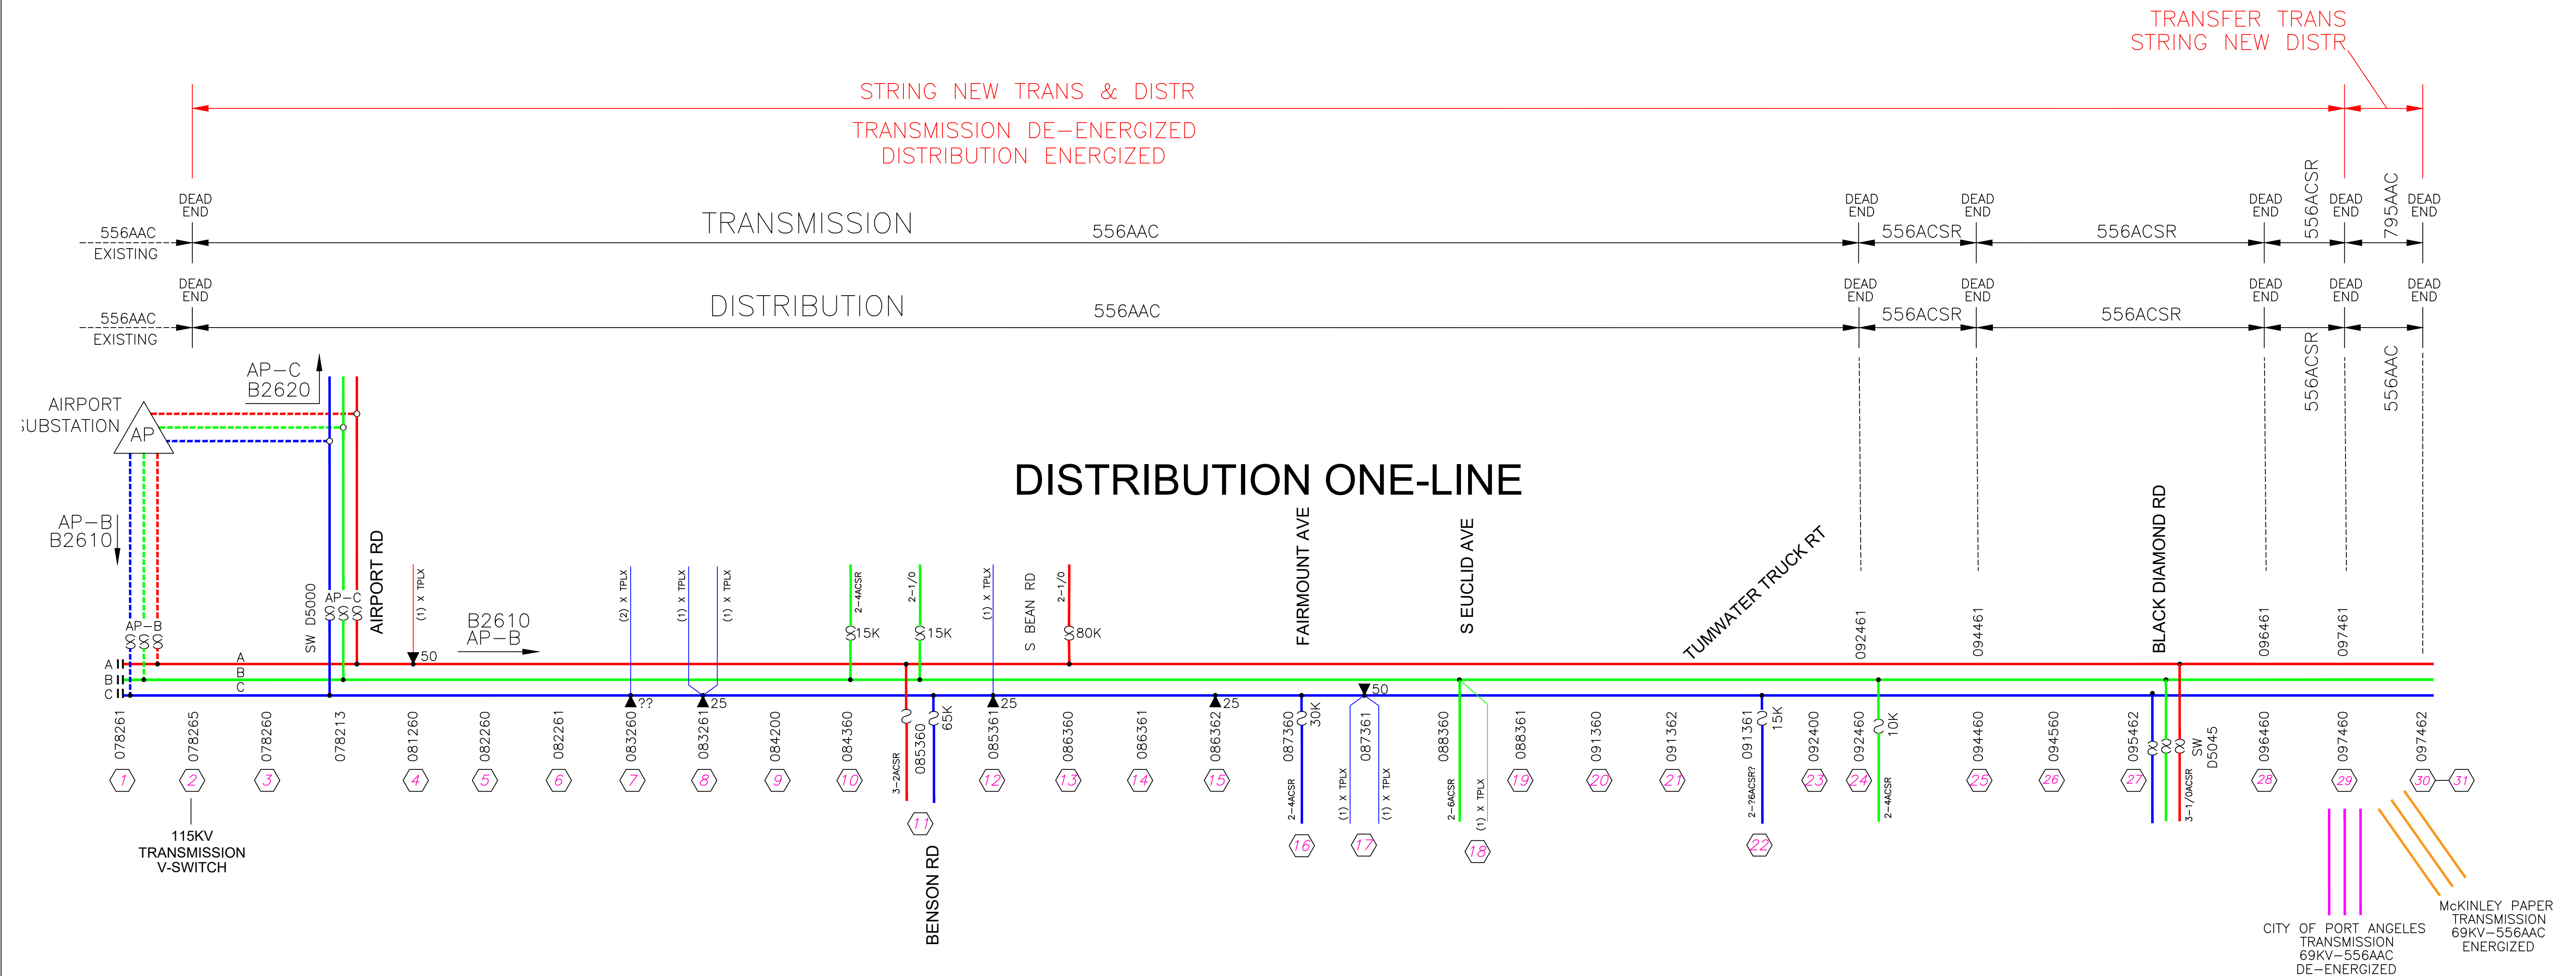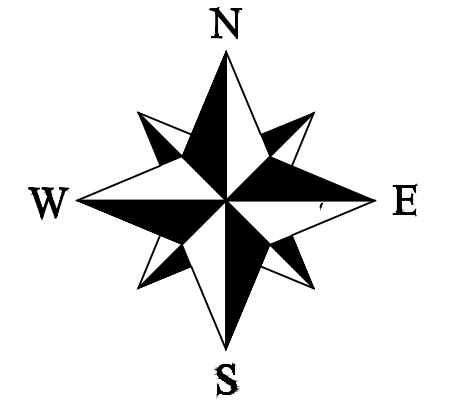

THIS DRAWING WAS PREPARED BY CLALLAM COUNTY PUD FOR A SPECIFIC PROJECT, TAKING INTO CONSIDERATION THE SPECIFIC AND UNIQUE REQUIREMENTS OF THE PROJECT. REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM BOTH CLALLAM AND CLALLAM'S CLIENT IS GRANTED.

REV	REVISIONS	DATE	DRN	DSGN	CKD	APPD	REFERENCE DRAWINGS
2	ADDENDUM #3 REVISIONS	3/9/21	BENP	BENP	DA	DA	
1	CHG TO STK 18, 20, 22, 30 7 OTHER MINOR PART CHANGES	3/4/21	BENP	BENP	DA	DA	
0	ISSUED FOR BIDDING	2/1/2021	BENP	BENP	DA	DA	

DSGN	BENP	2020
SURV	JCW	2021
STKD		
SCALE:	NTS	
	FOR 22x34 DWG ONLY	


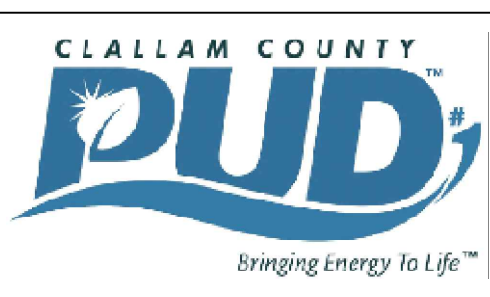


CLALLAM COUNTY PUD #1
 AIRPORT RD. TO CHERRY ST.
 115KV TRANSMISSION REBUILD
 DISTRIBUTION ONE-LINE

WORK ORDER #	18-0210
DRAWING NUMBER	SHT. 4 OF 4
REV	2

PUD FIBER TRANSFER DETAILS

AIRPORT ROAD TO CHERRY STREET

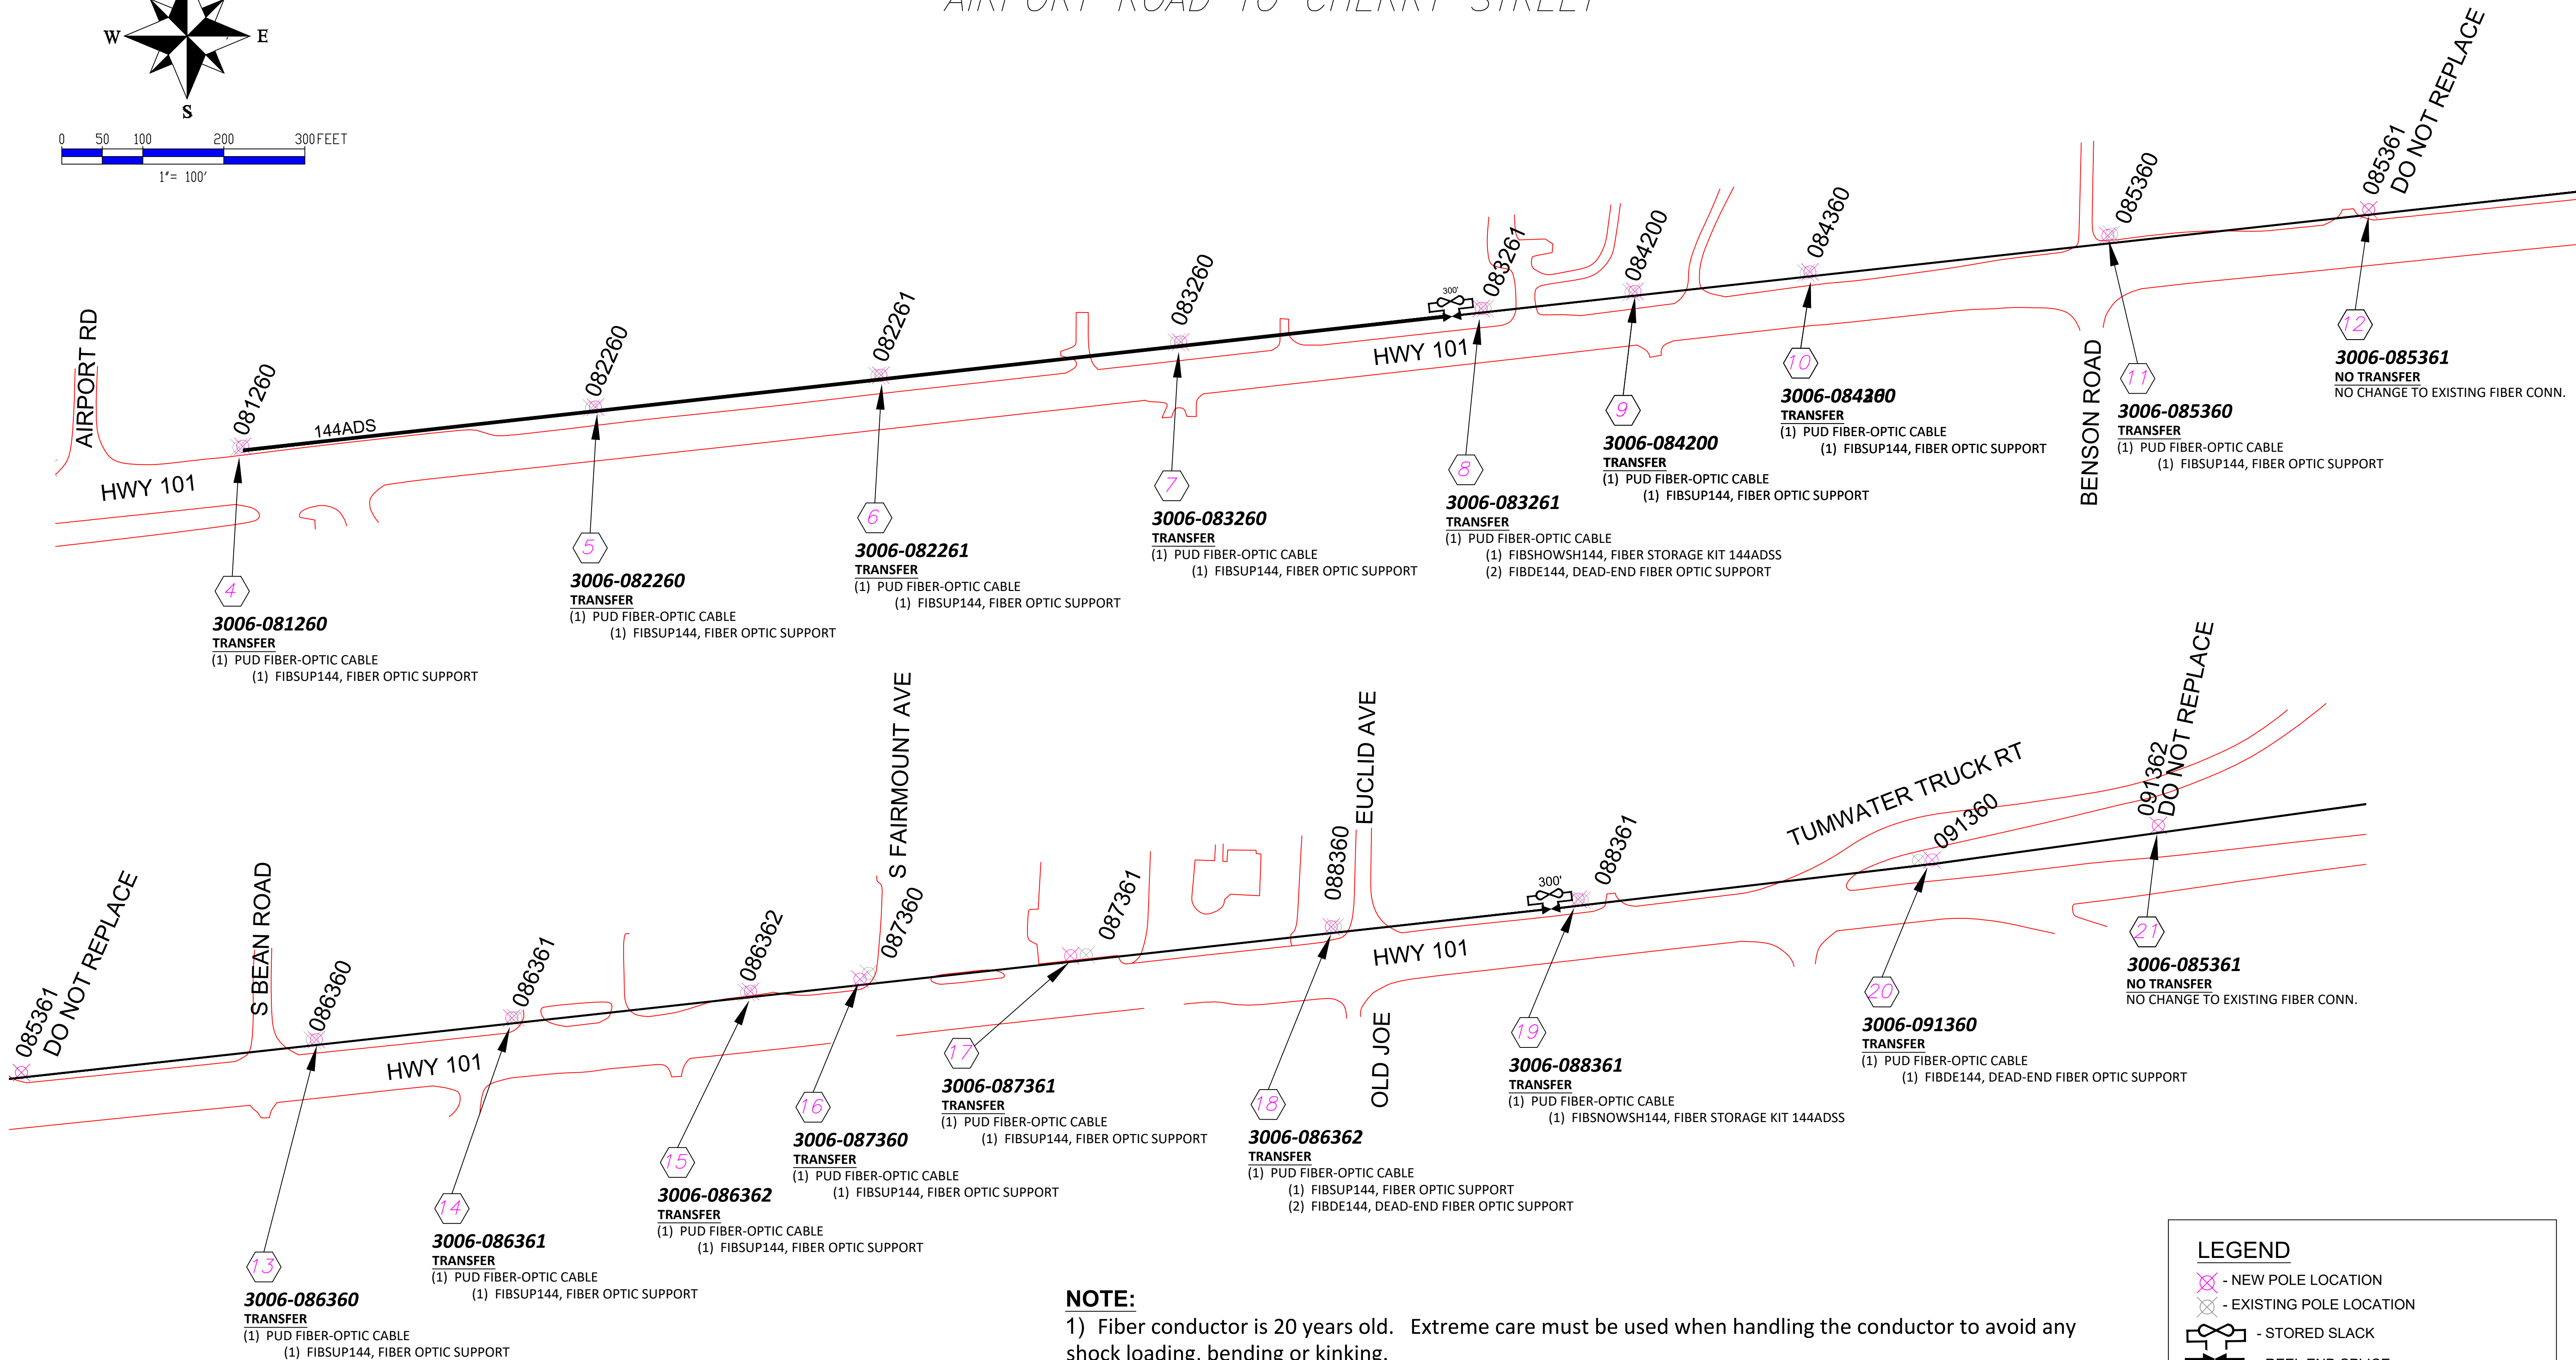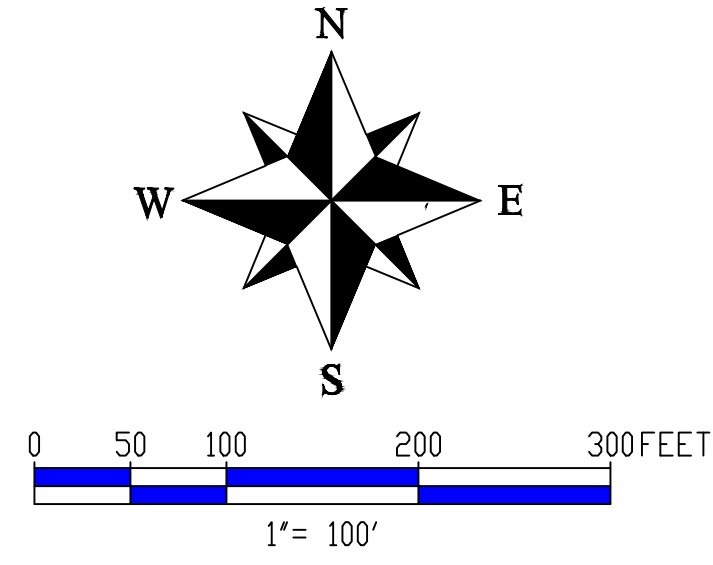

NOTE:

- 1) Fiber conductor is 20 years old. Extreme care must be used when handling the conductor to avoid any shock loading, bending or kinking.
- 2) PUD Will supply all new tangent supports & dead-end kits to replace existing.
- 3) Fiber attachment height is per Construction Specification Drawings.
- 4) Re-Tension fiber as necessary to match distribution sag.


LEGEND

- NEW POLE LOCATION
- EXISTING POLE LOCATION
- STORED SLACK
- REEL END SPLICE
- DEAD-END CABLE SUPPORT

THIS DRAWING WAS PREPARED BY CLALLAM COUNTY PUD FOR A SPECIFIC PROJECT, TAKING INTO CONSIDERATION THE SPECIFIC AND UNIQUE REQUIREMENTS OF THE PROJECT. REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM BOTH CLALLAM AND CLALLAM'S CLIENT IS GRANTED.

0	ISSUED FOR ADDENDUM #3	3/19/21	BENP	BENP	SD	SD	
REV	REVISIONS	DATE	DRN	DSGN	CKD	APPD	REFERENCE DRAWINGS

DSGN BENP 2021
 SURV
 STKD
 SCALE: 1" = 100'




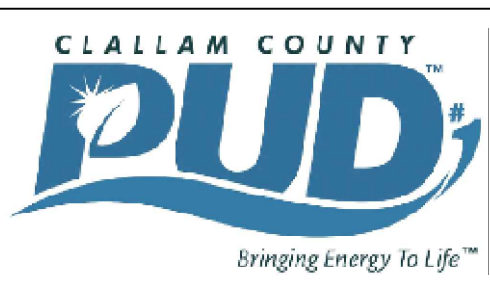


CLALLAM COUNTY PUD #1
EXHIBIT X
 AIRPORT RD. TO CHERRY ST.
 PUD FIBER TRANSFER DETAILS

WORK ORDER # 18-0210
 DRAWING NUMBER SHT. 1 OF 2

PUD FIBER TRANSFER DETAILS

AIRPORT ROAD TO CHERRY STREET

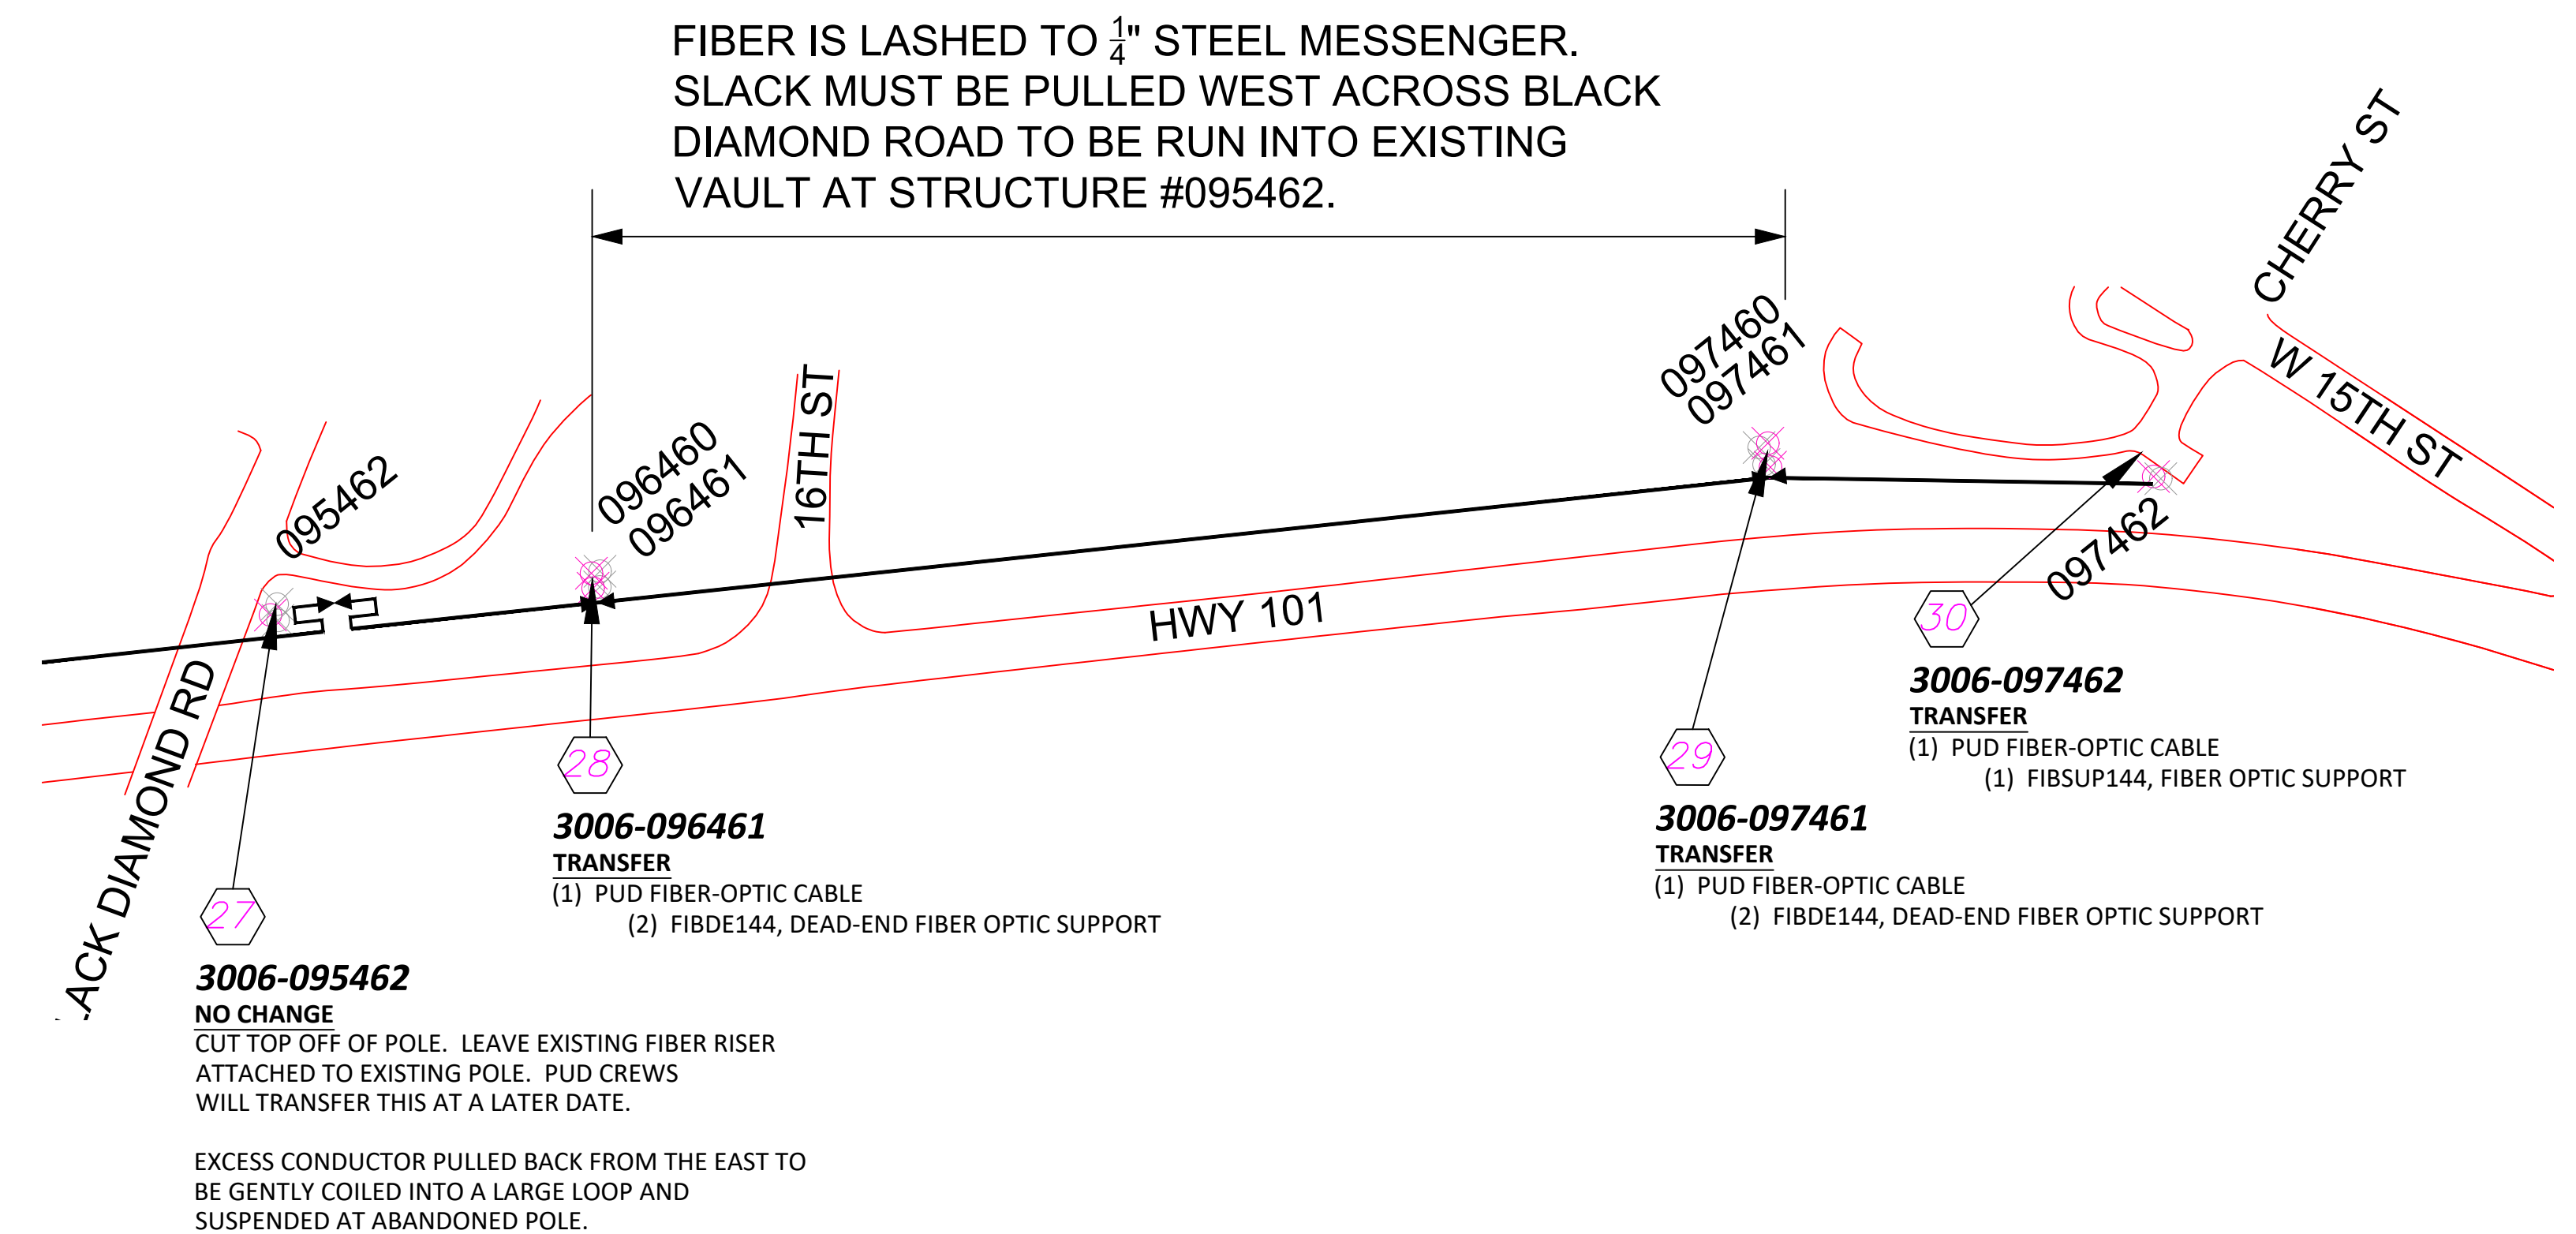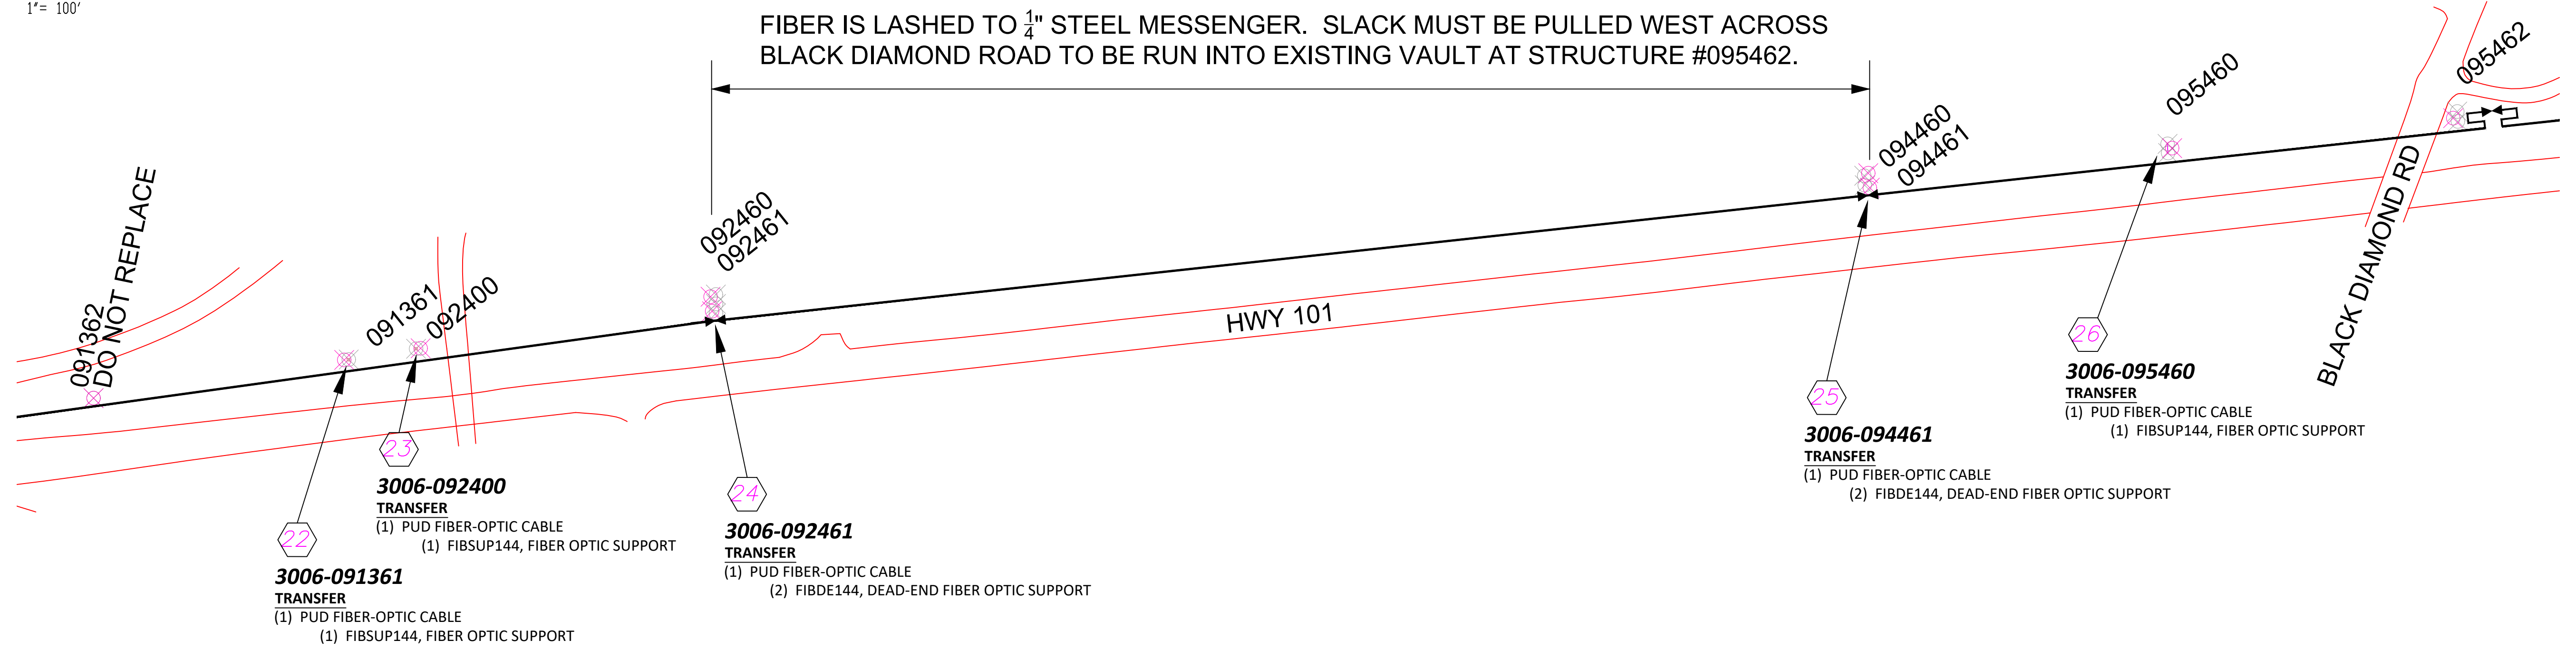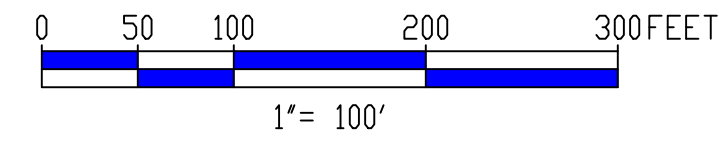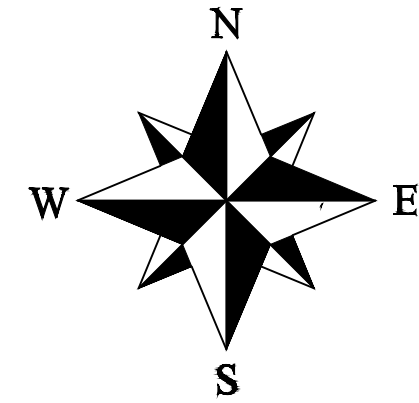

LEGEND

- NEW POLE LOCATION
- EXISTING POLE LOCATION
- STORED SLACK
- REEL END SPLICE
- DEAD-END CABLE SUPPORT

THIS DRAWING WAS PREPARED BY CLALLAM COUNTY PUD FOR A SPECIFIC PROJECT, TAKING INTO CONSIDERATION THE SPECIFIC AND UNIQUE REQUIREMENTS OF THE PROJECT. REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM BOTH CLALLAM AND CLALLAM'S CLIENT IS GRANTED.

0	ISSUED FOR ADDENDUM #3	3/19/21	BENP	BENP	SD	SD			
REV	REVISIONS	DATE	DRN	DSGN	CKD	APPD	REFERENCE DRAWINGS		

DSGN BENP 2020
 SURV
 STKD
 SCALE: 1" = 100'



CLALLAM COUNTY PUD #1
EXHIBIT X
 AIRPORT RD. TO CHERRY ST.
 PUD FIBER TRANSFER DETAILS

WORK ORDER # 18-0210
 DRAWING NUMBER SHT. 2 OF 2