



Draka

UC^{FIBRE} Optical Fibre Cable

CABLE SOLUTIONS FOR NETWORKS TO LAST



A brand of the

Prysmian
Group

Prysmian Group - a leading player in the cable industry

2011 will go down in the history of the cable industry as the founding year of a successful merger.

With 22,000 employees across 50 countries, sales of some € 7 billion and 98 plants, the new Prysmian Group is the world leading manufacturer of cables and accessories for the energy and telecommunications industry. In the energy sector, the Prysmian Group portfolio ranges from high voltage and extra high voltage underground and submarine power transmission cables, medium and low voltage cables for the construction and infrastructure industry to

special cables for applications in these industries. The telecommunications portfolio includes cables and accessories for the voice, video and data transmission industry as well as optical fibre cables for almost all communication applications. The Prysmian Group has a strong position in high-tech markets and in the production of optical fibre cables. With its know-how, first-class products, services and technologies, the Prysmian Group provides solutions for all market segments. Innovation, customer satisfaction and outstanding service make the Prysmian Group with its global presence the leader in the cable industry. More information here: www.prysmiangroup.com




Application of UC^{FIBRE}: LAN

When it comes to data transmission cables, more and more users decide for fibre technology. It is the undisputed number one in today's Local Area Networks (LAN) – structured cabling in campus and riser networks.


The decision to use either fibre optic or copper data cables as an ideal solution for horizontal networks depends on many factors like application environment, previous network basis and future needs.

Whatever you decide for, with fibre optic data cables of the UC^{FIBRE} series – specifically designed to meet the requirements of all structural levels of local networks – you are on the safe side for the future.

Transmission rates are developing exponentially. New transmission protocols follow in ever shorter periods of time. 10 years ago 1 Gb/s was state of the art and only foreseen for communication between switches, servers and storage systems. 5 years ago the 10 Gb/s protocol was developed and is becoming mainstream.

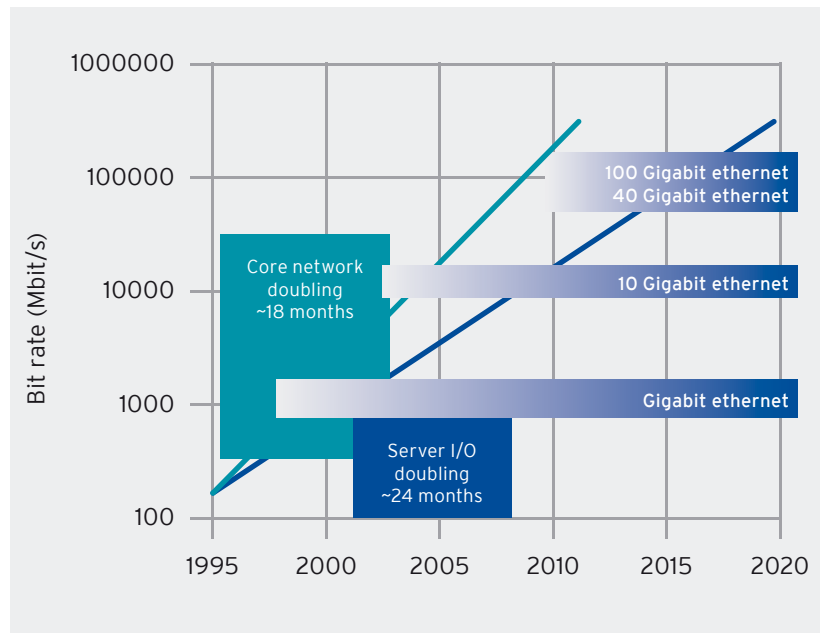


Next generation 40 Gb/s and 100 Gb/s are already here. Using MaxCap advanced optical fibres from Draka insures that your network can be upgraded to the coming generations of network in all cases where the protocols are compliant.

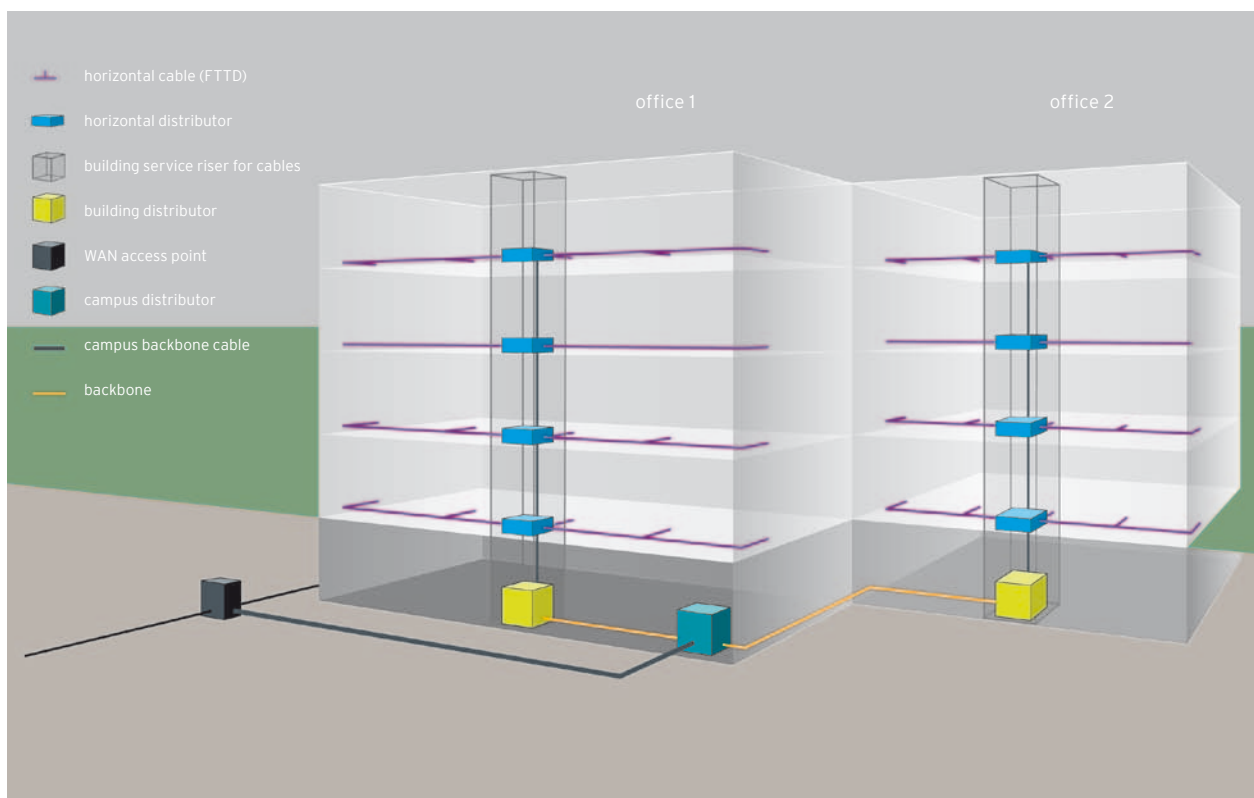

Application of UC^{FIBRE}: Data Centre

x.86 Servers by Ethernet Port Speed

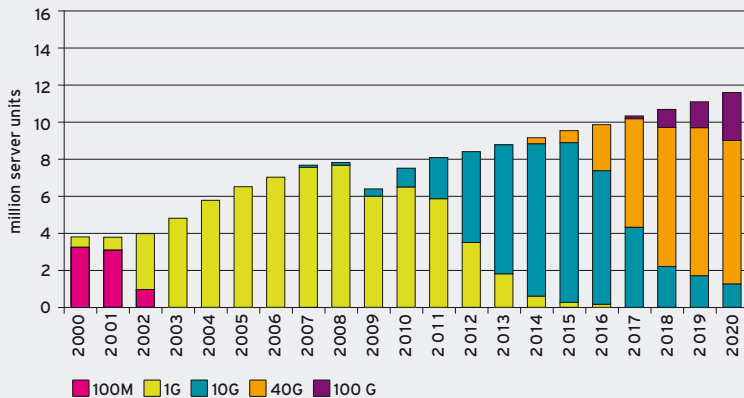

Every data centre is a unique structure. There are various segments of different requirements which need to be understood before creating any solution.

Data centre backbones are already equipped with optical fibre technology. Optical fibre technology offers lowest attenuation, highest bandwidth and longer link lengths. Thus supporting the highest data rates which is a prerequisite for backbone data links. Within data centres it forms one of the most critical components due to the highly aggregated data traffic there.

As soon as 10 Gigabit Ethernet comes to the agenda at client level, a data centre backbone capable of 10GbE to link between access and distribution level turns into a real bottleneck. Despite the fact that copper data cables are capable of covering a distance of up to 100m at 10Gbit/s, the preference in this place should be laser optimized multimode fibre according to the OM4 specification. Today's recommendation is clearly to take this future proof solution which is the only short-link technology that is also part of the 40 Gigabit Ethernet and likewise 100GbE Ethernet. It is based on multi-lane structures of OM4 or OM3 channel links. A data centre backbone in OM4 can therefore be easily expanded to the Next Generation Ethernet and secures investments for a longer pay-off time.

Draka's patented PCVD fibre manufacturing technology enables high-precision refractive index profiles which are the key to laser launched high-speed links. This makes the difference between MaxCap-BB-OM4 or MaxCap-BB-OM3 and traditional multimode fibres like OM1 and OM2.

This fibre technology is available in all Draka cable designs to meet any specific needs.

Specific for the protected, yet demanding environment of data centres are requirements for small dimensions and easy installation. Thus Draka are presenting new and innovative cables directed for these high fibre count applications. The advanced cables are developed to work together with the most advanced optical connectors on the market like the MPO/MTP® connector families. The cables come in different styles and with different fibre types, thus satisfying any need for high fibre count data centre cabling.



Application of UC^{FIBRE}: Industry

Ethernet – the classic office application – is increasingly accepted also in industrial automation. In addition to bus solutions still to be encountered, Ethernet makes it possible to manage communication. It is possible to selectively access every single point in the network which makes adjustments and modifications much easier and in the end leads to a reduction of idle times and an increase in productivity.

Fibre optic cables of the series UC^{FIBRE} are the first choice for Ethernet in a rough industrial environment. Here the cables prove their superiority as to mechanical, chemical and climatic capacity – and, of course, you don't have to care about electromagnetic interferences.

Relevant Ethernet standards:

International Standards

- ISO/IEC 11801 (2002)
Information technology
- Generic cabling for customer premises
- ISO/IEC 24702 (2006)
Information technology
- Generic cabling – Industrial premises
- ISO/IEC 24764 (2010)
Information technology
- Generic cabling for data centres
- ISO/IEC 15018 (2004)
Information technology
- Generic cabling for homes

European Standards

- EN 50173-1 (2007) Information technology
- Generic cabling systems
- Part 1: General requirements
- EN 50173-2 (2007) Information technology
- Generic cabling systems
- Part 2: - Office premises
- EN 50173-3 (2007) Information technology
- Generic cabling systems
- Part 3: - Industrial premises
- EN 50173-4 (2007) Information technology
- Generic cabling systems
- Part 4: - Homes
- EN 50173-5 (2007) Information technology
- Generic cabling systems
- Part 5: - Data centres




| Class | | | |
|-----------------|----------------|----------------|----------------|
| Mechanical | M ₁ | M ₂ | M ₃ |
| Ingress | I ₁ | I ₂ | I ₃ |
| Climatic | C ₁ | C ₂ | C ₃ |
| Electromagnetic | E ₁ | E ₂ | E ₃ |

Mice Matrix

MICE is the heading under which the demands for wiring is covered in a standardized way. A set of requirements is defined which consists of mechanical (M), ingress (I), climatic (C) and electromagnetic (E) components. A difference is made between three categories (1, 2 and 3): office (1), light industry (2) and heavy industry (3). The crucial factor: a newly designed product, built up from experience must demonstrate the right combination of properties for its envisaged purpose.

How do we make optical fibre?

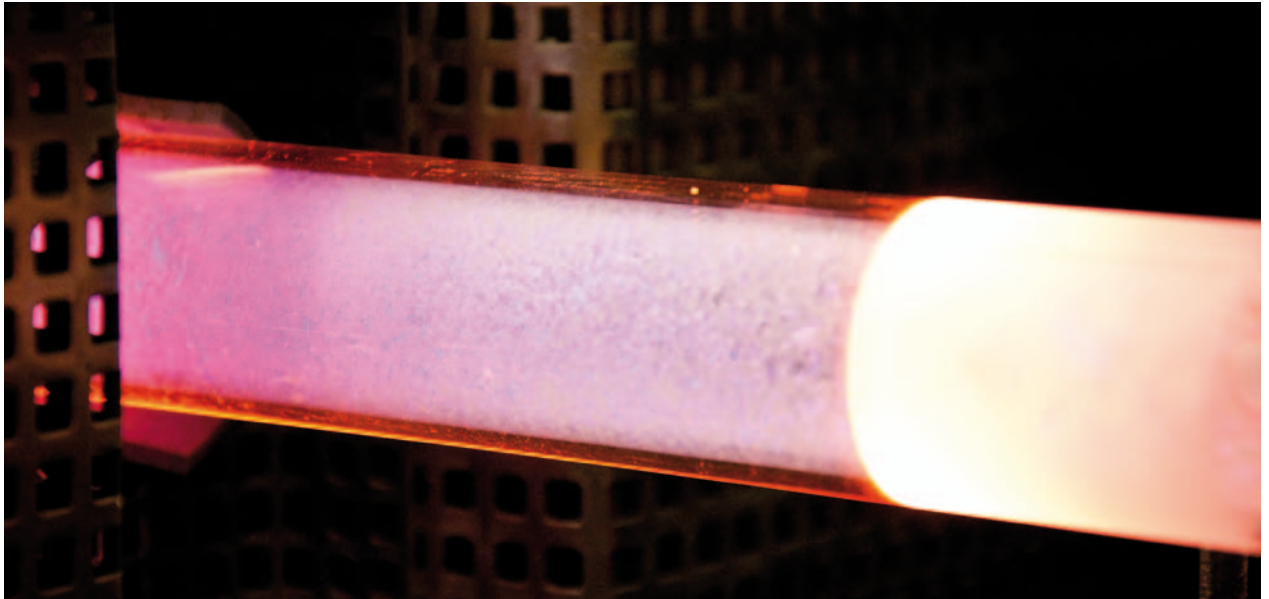

Optical fibres used for Telecom or Datacom applications are thin threads of glass - 0.125mm in diameter - and surrounded with a polymer protection coating, in total 0.242mm diameter (Roughly the size of a human hair). They are drawn from a 15cm diameter glass rod, which is called a Preform. This preform already contains the light-guiding area of the final fibre - the core - built up in many layers. After all, an optical fibre is composed of different areas of glass and polymers.

The essence is a core of very high quality glass with a 0.009mm diameter (single mode fibre if you are a specialist). A multimode fibre - used in Datacom - has a larger core diameter of e.g. 0.05mm. The core is where the light and thus communication signals passes through. The core is surrounded by a different type of glass (the cladding), followed by a double layer polymer coating. The process of manufacturing an optical fibre may vary from one manufacturer to the other. Here is an explanation of how Draka produces optical fibres.

How to make a preform

In Eindhoven (NL) and elsewhere within Draka, the PCVD process (Plasma Chemical Vapour Deposition)

is being used for the production of a glass preform. The basis of the preform is a high-grade quartz hollow tube. This tube is placed in a PCVD-lathe, allowing a special gas mixture to pass through, which is ionized into plasma by using high power microwaves. This microwave power is created in a magnetron (similar to that in your kitchen, only more powerful) and is connected to a resonator. This assembly moves up and down the length of the tube, coupling power into the gasses passing through the tube. The high power creates plasma (ionized gases, similar as in a fluorescent lamp). The plasma causes the gases, to react, depositing thin glass layers onto the inside of the tube. PCVD is a unique highly efficient process developed by Philips, now owned by Draka.

Collapsing: transforming a tube into a solid rod

In the PCVD deposition process, the wall thickness of the tube is increased because of the newly deposited glass layers. To render this tube into a solid rod, this hollow space needs to be removed and for that the preform is placed into a so-called 'Collapsing' lathe. Here, an induction furnace at about 2000°C moves up and down the quartz tube and the heat causes the tube to 'collapse' into a solid glass core rod, due to surface tension. The beauty of this method is that it doesn't change the qualities of the final preform, maintaining the core-to-cladding ratio.

Over-Cladding Process

The collapsed core rod now requires a glass over-cladding. Silica (very clean sand) is heated and de-

posited as extra glass layers over the core rod using a plasma torch until the required diameter of the final preform is met. This process is called APVD (Advanced Plasma and Vapour Deposition)

From Preform to Fibre

Next fibre is drawn from the final preform in tall drawing towers. Such a tower is erected in a vibration-free setup as the slightest trembling could disturb the process. The preform is slowly lowered into a furnace fixed at the top of the tower where the preform end is heated above 2000°C. A thin 0.125mm diameter fibre is drawn from the preform in this extreme hot area. Subsequently the fibre is cooled down and a double layer of polymer coating is added, for protecting the glass thread. The polymer coatings are achieved by passing the fibre a cell filled with liquid acrylate polymer, which are cured using UV-lamps.

Finally this dual-layer coated fibre is wound onto a take-up drum (see drawing). At the same time, special equipment monitors the fibre's diameter. By modifying the drawing speed, the glass diameter can be maintained at a diameter of 0.125 +/- 0.001mm over several hundreds of kilometres.

Cutting and testing

Because the fibre on the take-up drum is too long for most applications after drawing, it is re-spoiled on to shorter, more manageable lengths. During this process, the fibre is checked by performing a 'Tensile strength test', by introducing a tension which elongates the fibre up to 1%, which the fibre is expected to survive.



Quality control

To guarantee perfect quality, each fibre is checked using dedicated measuring equipment. For instance, fibres are tested for geometry, attenuation (loss of light) and fibre capacity (bandwidth or dispersion limitations). Products that do not meet the requirements are moved to quarantine and root cause analysis done.

Optional colouring

A last, yet optional step can be the fibre's colouring. By customer's request, a fibre can be supplied in twelve different colours. Sometimes an additional black ring marking is applied to easily differentiate between coloured fibres, within a high fibre count cable. Similar to the operation during the drawing process, the fibre runs through a bath of acrylate coloured polymer. This extra thin coloured coating layer is cured immediately by means of UV light.

Conclusion

Finally, the fibres are transported to a warehouse when the production is complete and all test reports are positive. At a later stage and depending on the final use, fibres can be selected against customer order requirements and shipped to cable customers. Here the fibres are assembled to form a cable, sometimes even in combination with copper cable. Manufacturing of optical fibre cables does not happen in Eindhoven, but elsewhere within Draka. Ultimately optical cables are transported to their final installation location, where all fibres are spliced either to fibres in next cable segments or connectorised.



BendBright® and MaxCap® fibres: Standards compliant fibres with extraordinary features.

BendBright fibres.

The very first bend insensitive Single Mode fibres were introduced by Draka in 2002. These fibres featured a 10x improvements in attenuation at narrow bends over the ITU-T requirements for a single mode fibre. The original BendBright fibre was characterised by the right relationship between mode field diameter and cut-off wavelength value. While, 10x improvements in itself was good, we at Draka embraced the concept of continuous improvement, which resulted in the introduction of BendBright-XS fibre in 2006. This fibre shows 100x lower attenuation at narrow bends compared to what is required for a standard G.652.D single mode fibre. The BendBright-XS fibre features a minimum bending radius of 7.5mm with only limited attenuation increase.


Not only should the bending performance be improved; but in addition the fibre should be compliant to the traditional single mode fibre G.652.D. A special technology was needed for achieving this outstanding feature.

The solution is the introduction of a trench in the refractive index profile of the fibre. As the trench is just

outside the core of the fibre it improves the confinement of the light to the core, preventing it from being lost under tight bending and without impairing the transmission properties of the fibre. The trench is designed as an area of circular cross section with lower refractive index than the cladding. As the trench is outside of the core, the fibre is 100 % compliant with a traditional fibre; both with regard to insertion loss and splice loss.

The next step was taken in 2008 when Draka introduced the BendBright-Elite fibre. This fibre, build on the technology platform of BendBright-XS, features a minimum bending radius of 5.0mm, thus improving the performance even further.

For making the trench Draka takes advantage of its unique technology platform of the PCVD (Plasma Chemical Vapour Deposition) fabrication process for the fibres. The PCVD process is able to make many thin layers for the inner part of the fibre, thus giving a correct index profile of the core and more importantly, the precise position and size of the trench.

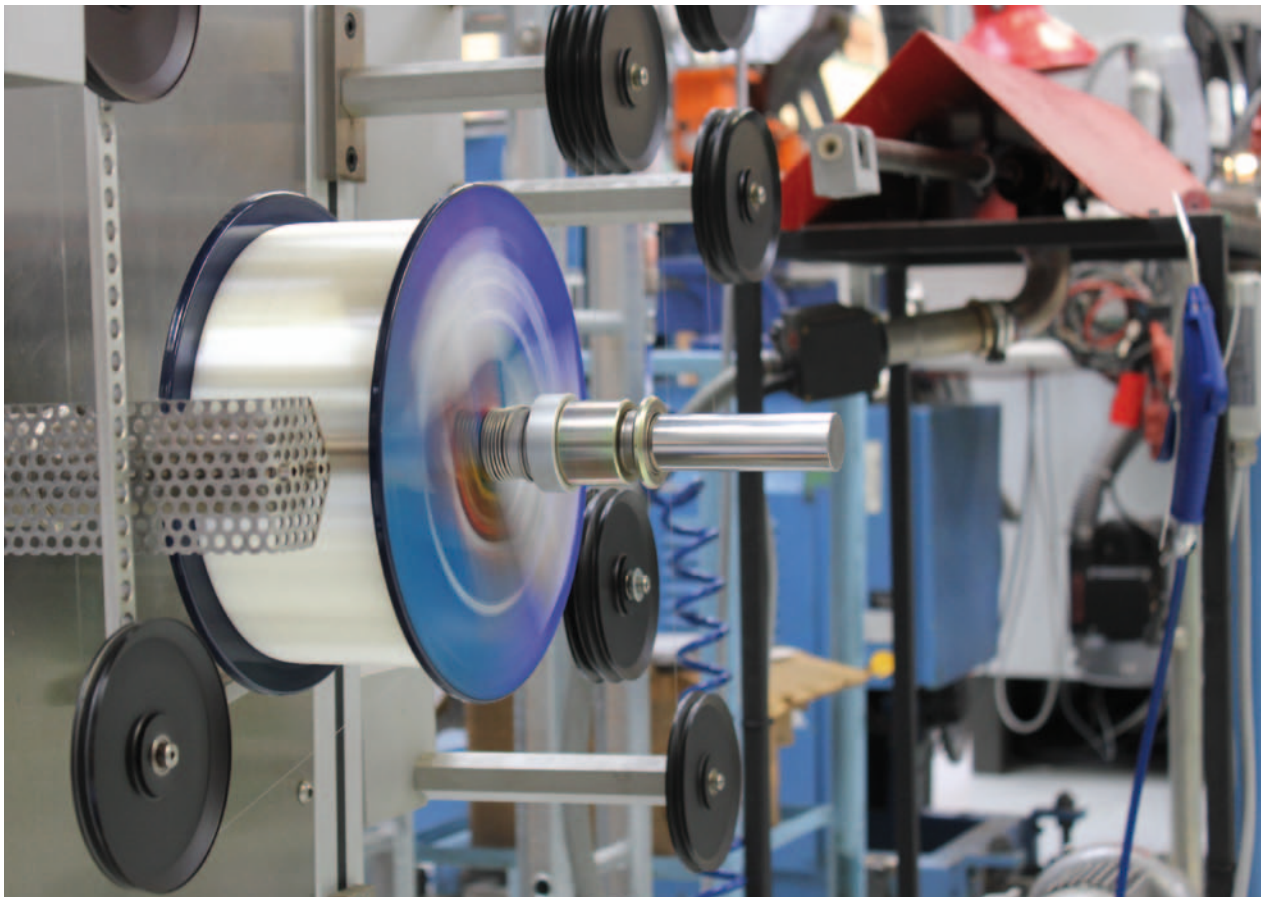

| G657 version 2 | | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------------------------------------------------------------|----------------------------------------|
| | Category A | | Category B | |
| Fibre type | G.652.D compliant | | Not G.653.D compliant | |
| Application | Outside plant and in-building cabling All bands: (O, E, S, C, L) utilization No distance limitation | | In-building cabling Limited bands: 1310, 1550 and 1625 nm Restricted distances | |
| | Sub-category A.1 (= former A) | Sub-category A.2 | Sub-category B.2 (= former B) | Sub-category B.3 |
| Bending performance | ≈ x 10 improvement vs. G652 | ≈ x 10 improvement vs. G657.A1 | ≈ x 10 improvement vs. G657.A1 | ≈ x 3 improvement vs. G657.B2 at 10 mm |
| | Radius: 15 and 10 mm | Radius: 15, 10 and 7.5 mm | Radius: 15, 10 and 7.5 mm | Radius: 10, 7.5 and 5 mm |
| Draka Fibre Compliance | BendBright-XS BendBright-Elite | BendBright-XS BendBright-Elite | BendBright-XS BendBright-Elite | BendBright-Elite |

MaxCap Fibres

The MaxCap multimode fibres of Draka are high bandwidth fibres with extraordinary features. Draka started the development of high capacity multimode fibres directly following the establishment of the 1 gigabit Ethernet standard in 1998.

The MaxCap300 (now MaxCap-OM3) fibre was introduced in 2002. It was the first fibre compliant to the 10G Ethernet transmission protocol of IEEE for 10GBASE-SR. The protocol specifies a 300m minimum link length for transmission at 850nm using a VCSEL laser. The OM3 fibre was born.

Further to this introduction, Draka drove the evolution forward and introduced the MaxCap550 (now MaxCap-OM4) in 2003, with a possible link length of a stunning 550m at 850nm.

The MaxCap fibres have a core diameter of 50µm optimized for transmission at 850 nm. The conventional bandwidth need to be very high and in addition one needs to carefully address the additional challenges of using a VCSEL laser at the high speed of 10 gigabit per second or even higher in the future. The interaction of VCSEL laser and fibre DMD (Differential Mode Delay) results in EMB (Effective Modal Bandwidth). High EMB values are needed for reliable 10Gb/s transmission over 300m and even more over 550m. In order to make a perfect MaxCap fibre, the core profile should be a near perfect match to the ideal graded-index profile. The PCVD process offers just that, as this process is able to build the core out

of several thousands of ultra thin layers compared to conventional processes which use much less and thicker layers.

The quality of the transmission parameters are insured by measuring the DMD (Differential Mode Delay) of each fibre and check this to tight specifications.



| Macrobend loss: 2 turns | 850 nm | 1300 nm |
|----------------------------|----------|----------|
| R = 7.5 mm | ≤ 0.2 dB | ≤ 0.5 dB |
| R = 15 mm | ≤ 0.1 dB | ≤ 0.3 dB |

Macro bend loss for a MaxCap-BB-OMx fibre.
Up to 10x improvement compared to the ITU-T G651.1 (2007) of 1 dB per 2 turns for both 850 nm and 1300 nm

MaxCap-BB-OM3 / OM4 fibre compared in practical bend testing to regular OM3 / OM4 multimode fibre:

2mm indoor cable tested in sharp 90 degree angel



Regular OM3: 2.75dB



MaxCap-BB-OM3: 0.01dB

The combination: Bend-insensitive multimode fibres

By combining the technologies for making the Bend-Bright single mode fibres and the MaxCap high bandwidth laser optimized fibres, new unique products were born: the MaxCap-BB-OMx fibres. These fibres are made by combining the trench-assisted Bend-Bright technology with the special features of the MaxCap fibres: The MaxCap-BB-OM3 and MaxCap-BB-OM4. In addition, a MaxCap-BB-OM2 fibre is also offered. The Max-Cap-BB-OMx fibres feature up to 10x improvement in bending loss up to a bend radius of 7.5mm compared to ITU-T G651.1 (2007) requirements.

This ensures an error free transmission even for installation in difficult environments. Making a bend-insensitive multimode fibre is actually a much more complicated task than making a single mode fibre. A multimode fibre guides, as the name indicates, many modes of the light. The fibres behave differently when they are put through a few bends.: The higher order modes (travelling in the outer region of the core) are more bend-sensitive than the lower order modes (travelling in the central part of the core).

The trench-assisted MaxCap-BB-OMx fibre concept improves the macro-bend losses through a better confinement of the higher order guided modes. Careful designs are required for a significant improvement of the bend sensitivity and at the same time ensure full backward compatibility (including absence of splice issues), OM4 grade capability, etc.

The unique and patented PCVD fibre manufacturing process of Draka is the ideal platform for making fibres meet these and other challenges. The MaxCap-BB-OMx fibres are thus the optimized combination of the BendBright technology and the MaxCap high bandwidth features.



Ethernet Applications at 850 nm

Ethernet applications and permissible channel lengths with MaxCap multimode fibre

| | MaxCap-BB-OM4 | MaxCap-BB-OM3 | MaxCap-BB-OM2 |
|--------------------------|---------------|---------------|---------------|
| 1 Gb/s (1000BASE-SX) | 1100 m | 1000 m | 550 m |
| 10 Gb/s (10GBASE-SR) | 550 m | 300 m | 82 m |
| 40 Gb/s (40GBASE-SR4) | 150 m | 100 m | - |
| 100 Gb/s (100GBASE-SR10) | 150 m | 100 m | - |

Optical properties

Cabled multimode fibres

| Draka brand name | | | MaxCap-BB-OM2 | MaxCap-BB-OM3 | MaxCap-BB-OM4 |
|------------------------------------------------------|-------|--------|---------------|---------------|---------------|
| ISO/IEC 11801 / EN 50173 | OM1 | OM2 | OM2 | OM3 | OM4 |
| IEC 60793-2-10/ EN 60793-2-10 | A1.b | A1.a.1 | A1.a.1 | A1.a.2 | A1.a.3 |
| TIA/ANSI-492 | AAAA | AAAB | AAAB | AAAC | AAAD |
| Bandwidth OFL @ 850 nm [MHz · km] ≥ | 200 | 500 | 500 | 1500 | 3500 |
| Bandwidth EMB @ 850 nm [MHz · km] ≥ | - | - | - | 2000 | 4700 |
| Bandwidth OFL @ 1300 nm [MHz · km] ≥ | 600 | 500 | 500 | 500 | 500 |
| Attenuation @ 850 nm [dB/km] ≤ | 3.2 | 2.7 | 2.7 | 3.0 | 3.0 |
| Attenuation @ 1310 nm [dB/km] ≤ | 1.0 | 0.8 | 0.8 | 1.0 | 1.0 |
| Bending loss R= 7.5 mm @ 850/1300 nm ≤ [db/2 turns] | | | 0.2 / 0.5 | 0.2 / 0.5 | 0.2 / 0.5 |
| Bending loss R= 15 mm @ 850/1300 nm ≤ [db/2 turns] | | | 0.1 / 0.3 | 0.1 / 0.3 | 0.1 / 0.3 |
| Bending loss R= 75 mm @ 850/1300 nm ≤ [db/100 turns] | 0.5 | 0.5 | | | |
| Group index of refraction @850 nm | 1.496 | 1.482 | 1.482 | 1.482 | 1.482 |
| Group index of refraction @1300 nm | 1.491 | 1.477 | 1.477 | 1.477 | 1.477 |
| Numerical aperture | 0.275 | 0.200 | 0.200 | 0.200 | 0.200 |
| Link length 100BASE FX [m] | 2000 | 2000 | 2000 | 2000 | 2000 |
| Link length 1000BASE SX [m] | 275 | 550 | 550 | 1000 | 1100 |
| Link length 1000BASE LX [m] | 550 | 550 | 550 | 550 | 550 |
| Link length 10GBASE SW/SR [m] | 33 | 82 | 82 | 300 | 550** |
| Link length 10GBASE LX4 [m] | 300 | 300 | 300 | 300 | 300 |
| Link length 40GBASE SR4 [m] | | | | 100 | 150 |
| Link length 100GBASE SR10 [m] | | | | 100 | 150 |
| For more information see data sheet | C02 | C23 | C34 | C31 | C32 |

Cabled single mode fibres

| Draka brand name | ESMF | BendBright-XS |
|------------------------------------------------------------|---------------|---------------|
| ISO/IEC 11801 / EN 50173 | OS2 | OS2 |
| ITU | G652.D | G657.A2 |
| IEC 60793-2-10/ EN 60793-2-10 | B.1.3 | B.6_b |
| Attenuation 1310 nm - 1625 nm [dB/km] ≤ | 0.39 / 0.36*) | 0.38 |
| Attenuation @1550 nm [dB/km] ≤ | 0.25 / 0.23*) | 0.23 |
| Bending loss R= 7.5 mm @ 1550 nm ≤ [db/turn] | | 0.5 |
| Bending loss R= 15 mm @ 1550 nm ≤ [db/10 turns] | | 0.03 |
| Bending loss R= 25 mm @ 1310/1550/1625 nm ≤ [db/100 turns] | 0.05 | <0.01 |
| Group index of refraction @1310 nm | 1.467 | 1.467 |
| Group index of refraction @1550 nm | 1.468 | 1.467 |
| Link length 1000BASE LX | 5000 | 5000 |
| Link length 10GBASE L | 10000 | 10000 |
| Link length 10GBASE EW/ER | 30000/40000*) | 40000 |
| Link length 40GBASE LR4 | 10000 | 10000 |
| Link length 100GBASE ER4 | 10000 | 10000 |
| For more information see data sheet | C03e/C06e*) | C24 |

Note: *)Values applicable for stranded loose tube cable; data sheet C06e

**) For properly engineered links

Cable description

| Code | Meaning | Explanation |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------|
| 1st position: Brand | | |
| UC ^{FIBRE} | Universal cable FIBRE | Cables for general data communication use |
| UC ^{FUTURE} FO | Universal cable FUTURE Fibre Optic | Cables specially developed for data centre applications |
| 2nd position: Installation environment | | |
| I | Indoor | |
| I/O | Indoor/Outdoor | |
| O | Outdoor | |
| 3rd position: Build | | |
| S | Single fibre cable | |
| T | Twin fibre cable | Figure-8 cable or zipcord cable |
| FL | Flat cable | Cable build with single cable units and common sheath |
| DI | Distribution cable | Also called mini breakout cable |
| B | Break-out cable | Also called full breakout cable |
| CT | Central tube cable | Also called unitube cable |
| ST | Stranded loose tube cable | |
| 3rd position for UC^{FUTURE} FO cables: | | |
| RIP | Ribbon in parallel | Cable build with 12 fibre Ribbon |
| LBP | Loose bundle in parallel | Cable build with a number of fibres arranged without any structure |
| B3S | Bundle 3 mm stranded | Cable build like a breakout cable with a number of stranded units, ø3 mm |
| FS | Flextube stranded | Stranded cable build with a number of flextubes |
| 4th position: Water blocking | | |
| D | Dry waterblocked | |
| N | No water blocking | |
| 5th position: Armouring | | |
| DA | Dielectric armouring | Other additional protection |
| MA | Metallic armouring | Steel tape armouring |
| 6th position: Sheathing materials | | |
| LSHF-FR | Low smoke halogen free, fire retardant | |
| LSHF | Low smoke halogen free | |
| PE | Polyethylene | |
| PUR | Polyurethane | |
| PA | Polyamide | |
| 7th position: Tensile strength, dimension and fibre count | | |
| X kN | The tensile strength, applicable for CT and LT types | |
| n.n mm | Diameter of cable or cable units in mm, applicable for S, T, FL and B types | |
| X x n | X = number of elements N number of fibres | In case of one element or no grouping, only the fibre count. |
| 8th position: Fibre type | | |
| MM61 | OM1 62.5/125µm | According to data sheet C02 |
| OM2B | MaxCap-BB-OM2 fibre | According to data sheet C34 |
| OM3B | MaxCap-BB-OM3 fibre | According to data sheet C31 |
| OM4B | MaxCap-BB-OM4 fibre | According to data sheet C32 |
| MM51 | OM2 50/125 µm 500/500 | According to data sheet C23 |
| MM52 | OM2 50/125 µm 600/1200 | According to data sheet C01a |
| SM2D | Single mode 9/125 G652.D | According to data sheets C03e/C06e |
| SM2D.P | Single mode 9/125 G652.D | patch cords According to data sheet C18e for |
| SM7B | BendBright XS single mode G657.A2 | According to data sheet C24 |

Indoor cables

The Draka range of indoor cables is designed with detailed consideration to the safety of the end user and the ease of installation in mind.

All cables are made with LSHF-FR sheathing fulfilling the strict requirements of EN 50290-2-27. As an added benefit, all cable sheaths are UV stabilized, so they can stand to be exposed to direct sunlight. Typical installations cover hospitals, airports, and hotels. All these places generally have a high density of working or resident human population, where a great deal of precautionary and safety measures need to be put in place for the cabling systems to ensure the wellbeing of people. Other important installation conditions are buildings where a breakdown would involve high expenses (e.g. industrial plants, electric power stations, EDP centres, banks, power plants) as well as in alarm, signal and control systems.

The indoor cables are either grey or colour coded to show the fibre type used in the cable. The cable colours follow the ISO/IEC and the TIA recommendations and are listed below:

| | | |
|-------------------------|--------|----------|
| Single mode OS1 and OS2 | Yellow | RAL 1021 |
| Multimode OM1 62.5/125 | Grey | RAL 7037 |
| Multimode OM2 50/125 | Orange | RAL 2003 |
| Multimode OM3 and OM4 | Aqua | RAL 6027 |

Note: The RAL numbers indicate the nearest RAL colour as per DIN/VDE 60304

Improved fire protection characteristics

IEC 60332-3-24: No spread of fire (fire propagation)

IEC 60754-1: No halogen content, which may lead to emission of poisonous and corrosive gases


IEC 60754-2: No emission of corrosive gases, which can cause acid with extinguishing water

IEC 61034-2: Very low smoke development

Considerably low toxicology of fire gases

UC^{FIBRE} | DI N LSHF-FR ES9

D02b



Selected properties

| Number of fibres | 2 | 4 | 6 | 8 | 12 | 24 |
|------------------------------------|-----------|------|------|------|------|------|
| Cable diameter (mm) | 4.5 | 5 | 5.5 | 6 | 6.5 | 8 |
| Weight (kg/km) | 21 | 26 | 30 | 35 | 45 | 65 |
| Installation tensile strength (N) | 1000 | 1000 | 1000 | 1000 | 1200 | 1500 |
| Minimum bending radius (mm) | 50 | 50 | 50 | 50 | 75 | 115 |
| Compressive strength (N) | 3000 | | | | | |
| Operational temperature range (°C) | -20 to 70 | | | | | |

Construction

Mini-breakout or distribution cable build with ES9 easy strippable fire retardant and halogen free buffer. Aramid yarn as strength members, outer LSHF-FR sheath in colour indicating the fibre type. Buffer diameter is 900 µm.


Application

Typical application areas include indoor medium range connections, often in cases where field installable connectors are preferred.



UC^{FIBRE} | B LSHF-FR ES9 2.0

D03b

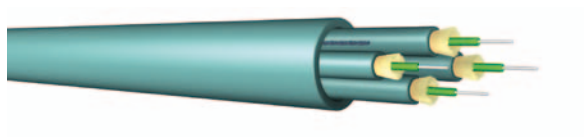

Selected properties

| Number of fibres | 2, 4 | 6 | 8 | 12 | 24 |
|------------------------------------|-----------|------|------|------|------|
| Cable diameter (mm) | 7.5 | 8.5 | 10 | 12.5 | 14.5 |
| Weight (kg/km) | 60 | 75 | 100 | 160 | 210 |
| Installation tensile strength (N) | 1300 | 1800 | 2400 | 3500 | 4500 |
| Minimum bending radius (mm) | 75 | 100 | 100 | 150 | 175 |
| Compressive strength (N) | 1500 | | | | |
| Operational temperature range (°C) | -20 to 70 | | | | |

Construction


A full breakout cable having ø2.0 fibre units and a LSHF-FR sheath with colour indicating the fibre type completes. The ø2.0 mm fibre units have an ES9 easy strippable fire retardant and halogen free tight buffer.

Application

The application includes short to medium range connections. The breakout cable is well suited for making assemblies factory fitted with connectors. The single fibre units' fits small form factor connectors.

UC^{FIBRE} | ST D LSHF-FR 1.8 kN

N06a

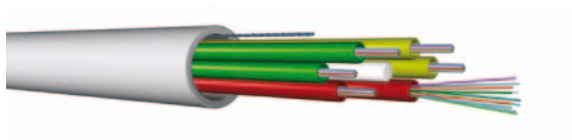

Selected properties

| Number of fibres | up to 72 | 96 | 144 |
|------------------------------------|-----------|------|------|
| Cable diameter (mm) | 10.5 | 12 | 15 |
| Weight (kg/km) | 140 | 180 | 260 |
| Installation tensile strength (N) | 1800 | 1800 | 1800 |
| Minimum bending radius (mm) | 160 | 180 | 225 |
| Compressive strength (N) | 3000 | | |
| Operational temperature range (°C) | -40 to 70 | | |

Construction


Stranded loose tube cable with LSHF-FR sheath. A combination of loose tubes and fillers are stranded around a FRP central strength member. The tubes are colour coded with a pilot-marker system.

Application

The application includes long range connections where medium to high fibre counts are employed. This cable is intended for installation in ducts and on cable trays. It may be blown for shorter distances.

UC^{FIBRE} | B N LSHF-FR ES9

D06b

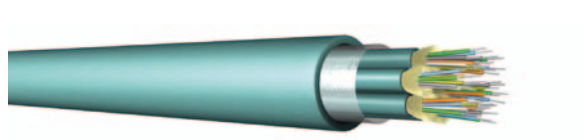

Selected properties

| Number of fibres | 36 | 48 | 60 | 72 | 96 |
|------------------------------------|-----------|------|------|------|------|
| 12.5 (mm) | 12.5 | 14.5 | 17 | 20 | 19 |
| Weight (kg/km) | 165 | 230 | 300 | 375 | 325 |
| Installation tensile strength (N) | 3600 | 4200 | 4800 | 5400 | 6600 |
| Minimum bending radius (mm) | 150 | 150 | 200 | 200 | 200 |
| Compressive strength (N) | 3000 | | | | |
| Operational temperature range (°C) | -40 to 70 | | | | |

Construction


Distribution cable with up to 96 fibres featuring ES9 easy strippable LSHF-FR sheathing, build with multiple 6-fibre sub units stranded around a central strength member

Application

Applications include high fibre count indoor medium range connections, often in cases where field installable connectors are preferred.

UC^{FIBRE} | B LSHF-FR ES9 2.1

D23/D24

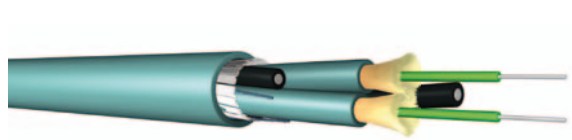

Selected properties

| Number of fibres | 2 | 4 |
|------------------------------------|-----------|-----|
| Cable diameter (mm) | 5.5 | 6.5 |
| Weight (kg/km) | 30 | 30 |
| Installation tensile strength (N) | 500 | 850 |
| Minimum bending radius (mm) | 15 | 20 |
| Compressive strength (N) | 3000 | |
| Operational temperature range (°C) | -20 to 60 | |

Note: The cables are not completely round

Construction

These two cables are designed as flexible full breakout cables with 2 or 4 fibre units ø2.1 mm. A thin LSHF-FR sheath completes the cable. The sheath colour indicates the fibre type.

Application

The application is point to point connections in server rooms and data centres. Fits most types of connectors, is well suited both for making preassembled cable sets as well as fitting of connectors in the field.

Universal cables

Draka universal cables or indoor / outdoor cables are cables designed for combined indoor and outdoor use. The cables are designed with a LSHF sheathing making them perfectly suitable for indoor installation, where the requirements to flame spread are limited.

The universal cables in our portfolio use the FireBur™ fire retardant sheathing material. The FireBur™ sheathing material offers outstanding properties for outdoor use and at the same time fulfils EN 50290-2-27. The characteristic colour of the universal cables is blue (RAL 5015).

Improved fire protection characteristics

- IEC 60332-1-2: limited vertical flame propagation
- IEC 60754-1: No halogen content, which may lead to emission of poisonous and corrosive gases
- IEC 60754-2: No emission of corrosive gases, possibly creating acid with extinguishing water
- IEC 61034-2: Very low smoke development

Considerably low toxicology of fire gases

UC^{FIBRE} I/O CT D DA LSHF 1.0kN

E14a



Selected properties

| Number of fibres | 4, 6, 8, 12 | 24 |
|----------------------------------|-------------|-----|
| Cable diameter mm | 6.0 | 6.5 |
| Weight kg/km | 40 | 45 |
| Installation tensile strength N | 1000 | |
| Minimum bending radius mm | 60 | |
| Compressive strength N | 1500 | |
| Operational temperature range °C | -30 to 60 | |

Construction

Uni-tube cables build with a central loose tube. Coated glass yarns ensure sufficient high tensile strength (1.0 kN). A blue FireBur™ LSHF sheath completes the cable. The cable is longitudinal water blocked

Application

The application is medium to long LAN backbones where the requirement is to have a compact cable and easy to install cable. The cable can be installed in cable trays, in ducts and tunnels.

UC^{FIBRE} I/O CT D DA LSHF 1.5kN

E10a



Selected properties

| Number of fibres | 4, 6, 8, 12 | 24 |
|----------------------------------|-------------|-----|
| Cable diameter mm | 7.5 | 8.0 |
| Weight kg/km | 55 | 60 |
| Installation tensile strength N | 1500 | |
| Minimum bending radius mm | 60 | |
| Compressive strength N | 2000 | |
| Operational temperature range °C | -30 to 70 | |

Construction

A uni-tube cable build with coated glass yarns ensure sufficient high tensile strength (1.5kN) and a nominal rodent resistance. A blue FireBur™ LSHF sheath completes the cable. The cable is longitudinal water blocked

Application

The application is medium to long LAN backbones where the requirement is to have a robust medium strength and still compact cable. The cable can be installed in cable trays, in ducts and tunnels.



UC^{FIBRE} I/O CT N MA LSHF 1.0kN

E07a



Selected properties

| Number of fibres | 4, 6, 8, 12 | 24 |
|----------------------------------|-------------|-----|
| Cable diameter mm | 8.5 | 8.5 |
| Weight kg/km | 75 | 85 |
| Installation tensile strength N | 1000 | |
| Minimum bending radius mm | 55 | |
| Compressive strength N | 2000 | |
| Operational temperature range °C | -40 to 70 | |

Construction

Uni-tube cables build with a central loose tube. Coated glass yarns ensure sufficient high tensile strength. A corrugated steel tape armouring makes the cable rodent proof. A blue FireBur™ LSHF sheath completes the cable.

Application

The application is medium to long LAN backbones, and SCADA systems, where the main requirement is for having a tough, robust and rodent proof cable. The cable can be installed on trays, in ducts and tunnels.

UC^{FIBRE} I/O DI N LSHF ES9

D12b



Selected properties

| Number of fibres | 2 | 4 | 6 | 8 | 12 | 24 |
|----------------------------------|--------------|------|------|------|------|------|
| Cable diameter mm | 6 | 6.5 | 6.5 | 7 | 7 | 8.5 |
| Weight kg/km | 32 | 34 | 36 | 39 | 43 | 63 |
| Installation tensile strength N | 1500 | 1500 | 1500 | 1500 | 1500 | 2400 |
| Minimum bending radius mm | 50 | 50 | 50 | 50 | 75 | 115 |
| Compressive strength N | 3000 | | | | | |
| Operational temperature range °C | -20 to 70 °C | | | | | |

Construction


Cable build with up to 24 fibres. The buffer is the ES9 LSHF easily strippable buffer. A layer of glass yarns gives the cable sufficient tensile strength. A FireBur™ LSHF sheath completes the cable.

Application

Typical application areas include indoor medium range connections, often in cases where field installable connectors are preferred.

UC^{FIBRE} I/O ST D DA LSHF 5.0kN

N05a



Selected properties

| Number of fibres | Up to 72 | 96 | 120 | 144 - 216 |
|----------------------------------|-----------|-----|-----|-----------|
| Cable diameter mm | 11 | 13 | 14 | 15.5 |
| Weight kg/km | 130 | 165 | 200 | 240 |
| Installation tensile strength N | 5000 | | | |
| Minimum bending radius mm | 150 | 180 | 200 | 220 |
| Compressive strength N | 3000 | | | |
| Operational temperature range °C | -40 to 70 | | | |

Construction

Stranded loose tube cable with LSHF sheath. The tubes are colour coded with a pilot-marker system. A layer of coated glass yarns gives the cable a high tensile strength and some rodent resistance. A blue FireBur™ flame retardant sheathing completes the cable. The cable is longitudinal water blocked.

Application

The application is medium to long distance LAN backbones where there is a need for higher fibre count. The cable can be installed in cable trays, ducts and tunnels.

UC^{FIBRE} I/O DI N LSHF-FR ES9

D15a



Selected properties

| Number of fibres | 2 | 4 | 6 | 8 | 12 | 24 |
|----------------------------------|-----------|-----|-----|-----|-----|------|
| Cable diameter mm | 5 | 5 | 5.5 | 6 | 6.5 | 8 |
| Weight kg/km | 21 | 26 | 27 | 35 | 45 | 65 |
| Installation tensile strength N | 325 | 440 | 440 | 680 | 900 | 1400 |
| Minimum bending radius mm | 50 | 50 | 50 | 50 | 50 | 60 |
| Compressive strength N | 2000 | | | | | |
| Operational temperature range °C | -40 to 70 | | | | | |


Construction

The buffer is the ES9 LSHF easily strippable buffer. A watertight layer of coated glass yarns gives the cable sufficient tensile strength. A LSHF-FR sheath with the colour following the fibre type as for indoor cables completes the cable.

Application

The application of this cable is LAN backbones, horizontal cabling and any kind of cabling where there is a need for a robust and easy to terminate cable. Installation includes cable trays, ducts and tunnels.

Outdoor cables

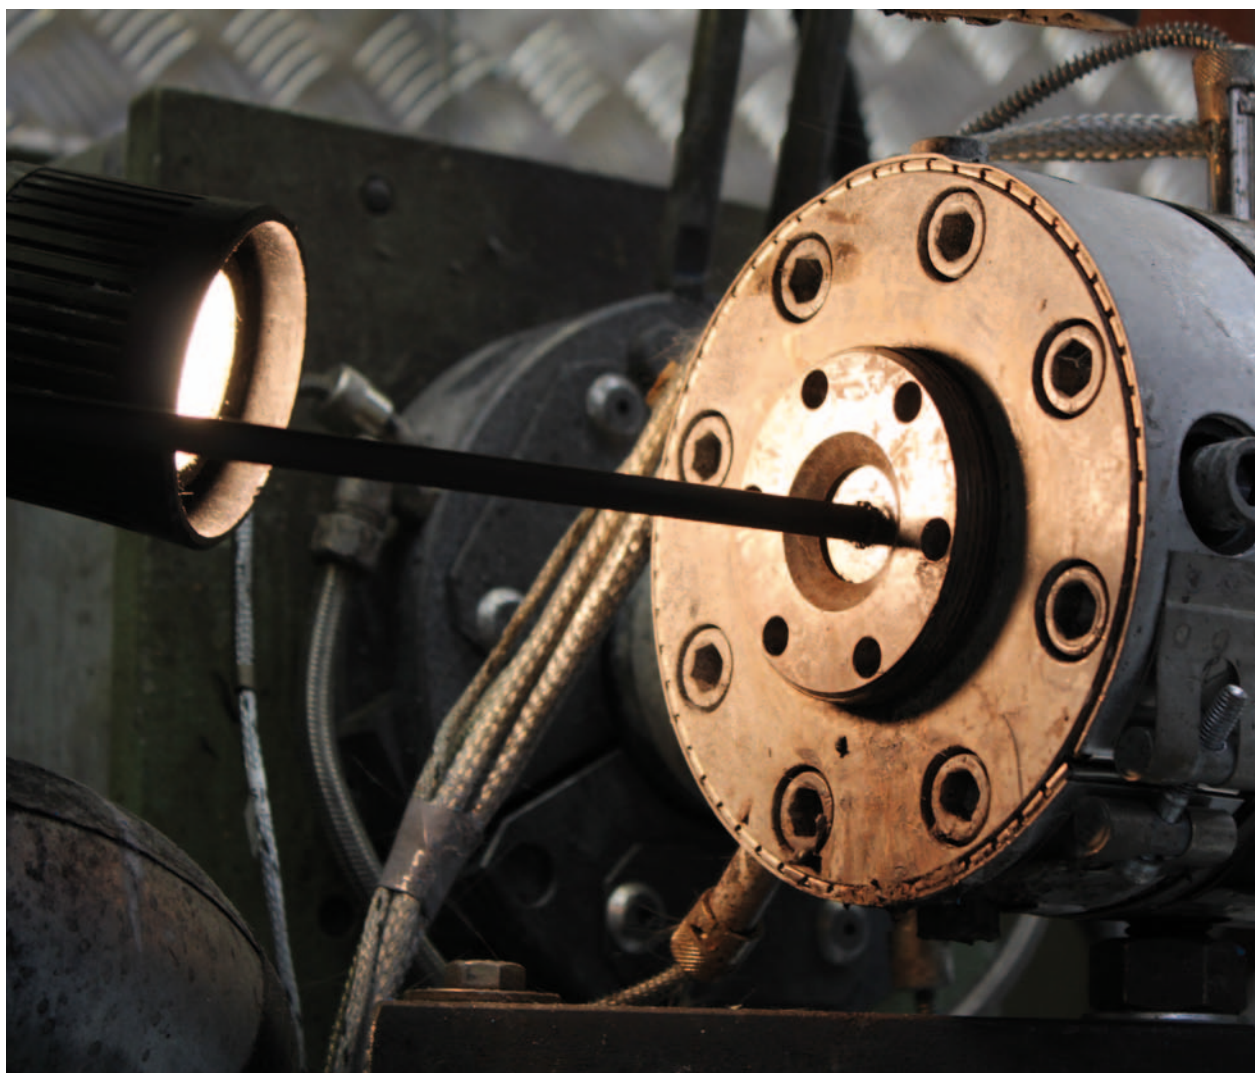


The UC^{FIBRE} cables for outdoor installation consist of central tube cables and stranded loose tube. The cables are intended for installation in ducts and/or for direct burial. The cables are UV-resistant, armoured (metallic and non-metallic), resistant to rodents, longitudinal watertight and have a very high tensile strength. The cable sheathing is of black polyethylene PE, which ensures a superior stability in an outdoor environment. The cables

are designed for 25 years of operation being directly in the sun or buried in the ground.

The central tube cables have a capacity of up to 24 fibres, and the stranded loose tube cables have a capacity of up to 216 fibres or more. For special applications, engineered versions with up to 864 fibres are possible.

UC^{FIBRE} O CT D DA PE 1.0kN

E16a



Selected properties

| Number of fibres | 4, 6, 8, 12 | 24 |
|----------------------------------|-------------|-----|
| Cable diameter mm | 6.0 | 6.5 |
| Weight kg/km | 40 | 45 |
| Installation tensile strength N | 1000 | |
| Minimum bending radius mm | 60 | |
| Compressive strength N | 1500 | |
| Operational temperature range °C | -20 to 60 | |

Construction

A central loose tube Ø2,8 or 3,5 mm with up to 24 fibres. Coated glass yarns ensure a sufficient tensile strength and a nominal rodent resistance. A black PE sheath completes the cable.

Application

The application is medium to long distance LAN backbones where the requirement is for having a small and compact cable. The cable can be installed in ducts and tunnels.

UC^{FIBRE} O CT N MA PE 1.0kN

E06a



Selected properties

| Number of fibres | 4, 6, 8, 12 | 24 |
|----------------------------------|-------------|-----|
| Cable diameter mm | 8.5 | 8.5 |
| Weight kg/km | 75 | 80 |
| Installation tensile strength N | 1000 | |
| Minimum bending radius mm | 55 | |
| Compressive strength N | 2000 | |
| Operational temperature range °C | -40 to 70 | |

Construction

A Uni-tube cable build with a capacity of up to 24 fibres. A corrugated steel tape armouring make the cable rodent proof. A black PE sheathing completes the cable.

Application

The application is medium to long distance LAN backbones, as well as surveillance and SCADA systems, where the main requirement is for having a tough and robust rodent proof cable.

UC^{FIBRE} O CT D DA PE 1.5kN

E08a



Selected properties

| Number of fibres | 4, 6, 8, 12 | 24 |
|----------------------------------|-------------|-----|
| Cable diameter mm | 6.5 | 7.0 |
| Weight kg/km | 40 | 45 |
| Installation tensile strength N | 1500 | |
| Minimum bending radius mm | 60 | |
| Compressive strength N | 2000 | |
| Operational temperature range °C | -30 to 60 | |

Construction

A central loose tube Ø2,8 or 3,5 mm with up to 24 fibres. Coated glass yarns ensure a sufficient tensile strength and a nominal rodent resistance. A black PE sheath completes the cable.

Application

The application is medium to long distance LAN backbones where the requirement is for having a robust medium strength and still compact cable. The cable can be installed in ducts and tunnels.

UC^{FIBRE} O ST D DA PE 5.0kN

H08a



Selected properties

| Number of fibres | Up to 72 | 96 | 120 | 144 - 216 |
|----------------------------------|-----------|-----|-----|-----------|
| Cable diameter mm | 11 | 13 | 14 | 16 |
| Weight kg/km | 105 | 140 | 170 | 200 |
| Installation tensile strength N | 5000 | | | |
| Minimum bending radius mm | 150 | 175 | 190 | 220 |
| Compressive strength N | 3000 | | | |
| Operational temperature range °C | -40 to 70 | | | |

Construction

A stranded loose tube cable, each loose tube contains 12 fibres, The core is surrounded by a layer of coated glass yarns giving the cable a high tensile strength and some rodent resistance.

Application

The application is medium to long distance LAN backbones where there is a need for higher fibre count as can be obtained with the central tube constructions. The cable can be installed in ducts and tunnels.

Data centre cables

Under this heading we are introducing a series of dedicated cables use inside a data centre. The cables are a subset of the UC^{FUTURE} portfolio of cables for data centres.

UC^{FUTURE}

The future is here now in the form of the newly published IEEE 802.3 standards for 40 GbE and 100 GbE Ethernet transmission standards. The UC^{FUTURE} line of products is highly specialised copper and fibre products for use inside data centres. They are compact multi-way cables for high density cabling. The ever increasing demand for transmission of data inside a data centre requires more cable and more fibre. Space is always in limited supply so the cables need to be compact and easy to install.

The fibre cables in the UC^{FUTURE} product line are dedicated for this environment.

The UC^{FUTURE} cables come, in a colour showing the fibre type inside the cable as follows

| | | |
|-------------------------|--------|----------|
| Single mode OS1 and OS2 | Yellow | RAL 1021 |
| Multimode OM1 62.5/125 | Grey | RAL 7037 |
| Multimode OM2 50/125 | Orange | RAL 2003 |
| Multimode OM3 and OM4 | Aqua | RAL 6027 |

Note: The RAL numbers indicate the nearest RAL color as per DIN/VDE 60304

UC^{FUTURE} FO I RIP DI N LSHF-FR 12

M01



Selected properties

| | |
|----------------------------------|--------------|
| Number of fibres | 12 |
| Cable diameter mm | 2.0 x 4.5 mm |
| Weight kg/km | 9 |
| Installation tensile strength N | 200 |
| Minimum bending radius mm | 7.5 |
| Compressive strength N | 1000 |
| Operational temperature range °C | 0 to 50 |

Construction

The cable core is an encapsulated ribbon 0.3 mm x 3.1 mm. The core is surrounded by aramid yarns and a LSHF-FR sheath.

Application

The application is as patch cord in data centres for fitting of MPO/MPT style connectors.

UC^{FUTURE} FO I LBP DI N LSHF-FR 12

M02



Selected properties

| | |
|----------------------------------|---------|
| Number of fibres | 12 |
| Cable diameter mm | 3.0 |
| Weight kg/km | 9 |
| Installation tensile strength N | 220 |
| Minimum bending radius mm | 15 |
| Compressive strength N | 500 |
| Operational temperature range °C | 0 to 50 |

Construction

The core of the cable consists of 12 optical fibres and a number of aramid yarns as strain relief. The core is surrounded by a LSHF-FR sheath.

Application

The application is as patch cord in data centres for fitting of a MPO/MPT style 12 fibres connector.

UC^{FUTURE} FO I LBP DI N LSHF-FR 24

M03



Selected properties

| | |
|----------------------------------|---------|
| Number of fibres | 24 |
| Cable diameter mm | 3.6 |
| Weight kg/km | 11 |
| Installation tensile strength N | 220 |
| Minimum bending radius mm | 15 |
| Compressive strength N | 500 |
| Operational temperature range °C | 0 to 60 |

Construction


The core of the cable consists of 24 optical fibres arranged in two bundles of 12 fibres each. A number of aramid yarns and a LSHF-FR sheath complete the cable.

Application

The application is as patch cord in data centres for fitting of a MPO/ MPT style 24 fibres connector.

UC^{FUTURE} FO I FS LSHF-FR

M05



Selected properties

| | | | | |
|----------------------------------|---------|--------|---------|-----|
| Number of fibres | 36 | 48, 72 | 96, 108 | 144 |
| Cable diameter mm | 7.5 | 8.0 | 8.5 | 9.0 |
| Weight kg/km | 45 | 55 | 60 | 70 |
| Installation tensile strength N | 1000 | | | |
| Minimum bending radius mm | 50 | 50 | 50 | 60 |
| Compressive strength N | 2000 | | | |
| Operational temperature range °C | 0 to 70 | | | |

Construction

This cable has a core with a number of 12 fibre dry Flextubes®, each containing 12 optical fibres. A number of aramid yarns and a LSHF-FR sheath complete the cable.

Application

The application is as distribution cable inside data centres and central offices of telecommunication systems. With an appropriate fan-out design, this cable fits 12 fibre MPO/MTP connectors.

UC^{FUTURE} FO I LBP DI N LSHF-FR 2 x 12

M04



Selected properties

| | |
|----------------------------------|-----------|
| Number of fibres | 12 |
| Cable diameter mm | 3.0 x 6.2 |
| Weight kg/km | 18 |
| Installation tensile strength N | 440 |
| Minimum bending radius mm | 20 |
| Compressive strength N | 400 |
| Operational temperature range °C | 0 to 50 |

Construction

This is a zip-cord design with two legs, each consisting of 12 optical fibres and a layer of aramid yarns as strain relief. The core is surrounded by a LSHF-FR sheath.

Application

The application is as patch cord in data centres for fitting of 2 MPO/MPT style 12 fibres connectors.

UC^{FUTURE} FO I B3S LSHF-FR

M06



Selected properties

| | | | | | |
|----------------------------------|-----------|-----|-----|------|------|
| Number of fibres | 24 | 36 | 48 | 72 | 96 |
| Cable diameter mm | 10 | 10 | 10 | 11.5 | 13.5 |
| Weight kg/km | 103 | 100 | 95 | 110 | 160 |
| Installation tensile strength N | 600 | 600 | 600 | 1100 | 1100 |
| Minimum bending radius mm | 125 | 125 | 125 | 150 | 175 |
| Compressive strength N | 2000 | | | | |
| Operational temperature range °C | -10 to 70 | | | | |

Construction

This cable has a core with a number of 12 fibre, ø3.0 mm dry fibre units. Multiple sub-units are stranded together with a central strength member. A LSHF-FR sheath completes the cable.

Application

The application is as distribution cable inside data centres and central offices of telecommunication systems. Each of the fibre units fits a 12 fibre MPO/MTP connector.

Optical fibre data assembly cables

Single- and two fibre cables for patch cords, jumpers and pigtails.

The cables are as standard made with 900 micron buffered fibres, aramid yarns are used as strength member, and the sheath is LSHF-FR material. The cables may also be used for indoor subscriber connections for FTTH systems.

The cables are halogen free, low smoke and features an IEC 60332-3-24 fire rating. The single and two fibre cables come in several dimensions and with two main buffer types: With Draka's ES9 easily strippable tight buffer for general application. The ES9 easily strippable tight buffer is indented for general use and is ideal for field mountable connectors.


The LS9 dry semi-tight buffer is for applications where the exposure of a long length of the primary coated fibre is essential. The LS9 buffer may be stripped 1 meter to the coating, and is ideal for pigtails.

Presented here is single fibre cable and zip-cord style two fibre cable, but also flat (figure 0) and round two fibre cables are available. Dimensions range from 1.2 mm to 3.0 mm



UC^{FIBRE} I S LSHF-FR ES9 2.0

D10d/D10e

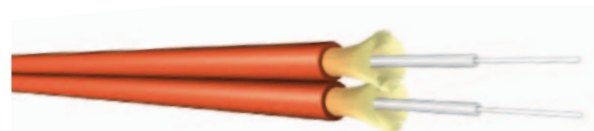

Selected properties

| Number of fibres | 1 | 2 |
|----------------------------------|-----------|-----------|
| Cable diameter mm | 2.0 | 2.0 x 4.2 |
| Weight kg/km | 4.5 | 9.0 |
| Installation tensile strength N | 120 | 240 |
| Minimum bending radius mm | 7.5 | 7.5 |
| Compressive strength N | 2000 | 2000 |
| Operational temperature range °C | -40 to 70 | -40 to 70 |

Construction


The cables are build with 1 or 2 ES9 dry tight buffered fibres, aramid strain relief and an outer FireRes™ sheathing.

Application

Patch cords and jumpers, especially such with connectors using small form factor 1.25 mm ferrules like LC connectors.

UC^{FIBRE} I S LSHF-FR ES9 2.8

D04c/D01c

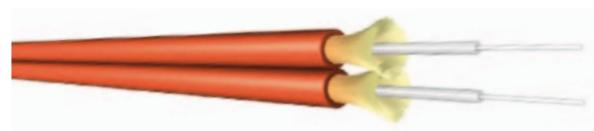

Selected properties

| Number of fibres | 1 | 2 |
|----------------------------------|-----------|-----------|
| Cable diameter mm | 2.8 | 2.8 x 5.7 |
| Weight kg/km | 9 | 16 |
| Installation tensile strength N | 300 | 600 |
| Minimum bending radius mm | 7.5 | 7.5 |
| Compressive strength N | 3000 | 3000 |
| Operational temperature range °C | -40 to 70 | -40 to 70 |

Construction

The cables are build with 1 or 2 ES9 dry tight buffered fibres, aramid strain relief and an outer FireRes™ sheathing.

Application

Patch cords and jumpers, especially such with connectors using Ø2.5 mm ferrules, like SC, St or FC/PC. Can also be used for indoor fixed point-to-point connections.

Special optical cables

Special cables for special applications

Fire resistant cable for use in security systems, railway systems or car tunnels is one of our offerings. Others are cables for heavy industrial applications, for studio and broadcast systems and for military tactical use. Many other applications can be served.

We supply cables for the world's tallest buildings, for wind turbine towers, for the offshore industry, geo-physical research and many more applications.

We present but 2 cables: A Firetuf^{FIBRE} fire resistant cable fulfilling IEC 60331 and EN 50200 and a cable for heavy industrial applications.



Firetuf^{FIBRE} I/O ST MA LSHF-FR 1.8 kN I10b



Selected properties

| | |
|----------------------------------|-----------|
| Number of fibres | Up to 96 |
| Cable diameter mm | 15.5 |
| Weight kg/km | 290 |
| Installation tensile strength N | 1800 |
| Minimum bending radius mm | 290 |
| Compressive strength N | 3000 |
| Operational temperature range °C | -60 to 70 |

Construction

The core is with stranded loose tubes and with swellable tapes. Steel tape armoring and two FireResTM LSHF-FR sheaths complete the cable.

Application

Security and railway systems, where there is a need for a fire resistant cable passing IEC 60331 or EN 50200. The cable can be installed on trays, in ducts and in tunnels.

UCFIBRE I/O B D DA LSHF LS9 2.7 D22a



Selected properties

| | | |
|----------------------------------|-----------|-----|
| Number of fibres | Up 6 | 8 |
| Cable diameter mm | 12 | 14 |
| Weight kg/km | 120 | 225 |
| Installation tensile strength N | 4500 | |
| Minimum bending radius mm | 75 | |
| Compressive strength N | 3000 | |
| Operational temperature range °C | -20 to 70 | |

Construction

This is a full breakout cable with ø2.7 mm single fibre units and LS9 dry semi-tight buffer. A yarn layer and a heavy FireBurTM LSHF sheath completes the cable.

Application

The application includes industrial automation and LAN connections for industrial sites. Intended termination is by splicing of pigtails. The cable may be installed by most methods including direct burial.

We make communication technology work, by serving you in every way to realize your leading edge network solution

We have our offices and production facilities all over the world. To get in touch with us and find out how we can help you build your network, visit our website at www.draka.com/communications or contact us.

Austria*

Lemböckgasse 47A
A-1230 Vienna
Phone: +43 1 294 0095 16
Telefax: +43 1 294 0095 97
martina.horak@draka.com
* including: Hungary, Czech Republic, Slovakia, Slovenia, Albania, Macedonia, Romania and Bulgaria.

Denmark

Priorparken 833,
DK-2605 Broendby
Phone: +45 6039 2600
Telefax: +45 4343 7617
br.info@draka.com

Finland*

Metsänneidonkuja 8
FI-02130 Espoo
Phone: +358 10 56 61
Telefax: +358 10 56 63 394
fi-info@draka.com
* including: The Baltic States

France

Le Sophocle - Parc de Algorithmes
9, Avenue du Marais
95100 Argenteuil
Phone: +33 1 34 34 41 30
Telefax: +33 1 30 76 40 12
dcf.sales@drakacomteq.com

Germany

Friedrichshagener Str. 29-36
D - 12555 Berlin
Phone: +49 30 65 485 760
Telefax: +49 30 65 485 602
berlin.info@draka.com

Germany*

Piccoloministr 2
D-51063 Cologne
Phone: +49 221 67 70
Telefax: +49 221 67 73 890
koeln.info@draka.com
* including: Switzerland

Italy

Prysmian Cables and Systems
Viale Sarca 222
20126 Milano
Phone: +39 02 64493201
Telefax: +39 02 64495060
www.prysmian.com

Netherlands

Draka Kabel B.V.
Hamerstraat 2-4
1021 JV Amsterdam
Tel. +31 20 637 9911
Fax +31 20 637 9363
kdn-info@draka.com
www.draka.nl

Netherlands*

Zuidelijk Halfrond 11
NL-2801 DD Gouda
Phone: +31 182 59 21 00
Telefax: +31 182 59 22 00
nl.dct.info@draka.com
* including: Belgium and Luxembourg

Norway*

Kjerraten 16
3013 Drammen
Phone: +47 32 24 90 00
Telefax: +47 32 24 91 16
* including: Sweden and Iceland

Russia

Neva Cables Ltd.
8th Verkhny pereulok, 10,
Industrial Zone PARNAS
RUS-St. Petersburg, 194292
Phone: +7 812 6006671
Telefax: +7 812 6006683
office@nevacables.ru

Spain*

Can Vinyalets núm. 2
E-08130 Sta. Perpetua de Mogoda
Barcelona
Phone: +34 935 74 83 83
Telefax: +34 935 60 13 42
* including: Portugal and Italy

Turkey*

Haktan Is Merkezi No:39 Kat 2
setustu Kabatas
34427 Istanbul
Phone: +90 216 682 80 01
Telefax: +90 216 537 66 73
mea-info@draka.com
* including: All other countries in Africa and Middle East

United Kingdom*

Crowther Road,
Crowther Industrial Estate,
Washington, Tyne and Wear,
NE38 0AQ
Phone: +44 191 415 50 00
Telefax: +44 191 415 82 78
comtequk@draka.com
* including: Ireland

Our European Production Centres:

Denmark

Broendby

Germany

Berlin
Nuremberg

Finland

Oulu

France

Calais Cedex
Haisnes Cedex

Netherlands

Eindhoven
Delfzijl

Russia

St. Petersburg

Slovakia

Presov

Spain

Santander

United Kingdom

Washington, Tyne and Wear



A brand of the

Prysmian
Group