

11/2008

PERFORMANCE CEILINGS
More scope for innovation



CEILING SYSTEMS CATALOGUE
PROGRAMME PART 1

COMPANY

Innovation and Aesthetics	3
Site and Sales Organisations	4
Partners and Associates	5
News	6
Products	8

PRODUCT RANGE

Fire protection	10
Acoustics	12
Health & Hygiene	14
Sound, Light & E-Tech	16
Material & Design	18

DESIGN OPTIONS

Overview	20
Smooth surfaces	22
Textured and micro-perforated surfaces	24
Fissured surfaces	27

SYSTEM SOLUTIONS

Overview	30
SYSTEM C	32
SYSTEM F	36
SYSTEM I	40
SYSTEM A	44

SERVICE

General Advice	48
References	50
Service / Environment	60
Technical terms	66
Contacts	72

INDEX

This catalogue contains the complete AMF range of suspended ceilings illustrating the mineral face patterns as well as basic information about special systems for fire protection, acoustics, hygiene, integrated high tech and material and design. For detailed information about these special products complete the fax-back form at the end of the catalogue or download from www.amfceilings.com



AMF advances the
concept of integration



■ INNOVATION AND AESTHETICS

Knauf AMF has developed performance ceilings for universal applications. New technical standards ensure their increased use to benefit the safety and comfort of human beings. At the same time these ceiling systems are also an integrated part of the architecture of spaces. Knauf AMF is committed to the advancement of integration between function and aesthetics.



■ SITE AND SALES ORGANISATIONS

A commitment to high quality levels is central to the AMF manufacturing plant located in the heart of the Bavarian forest. This in turn ensures adherence to the strict environmental standards required in producing materials. The central logistic functions ensure efficient supply chains.

To ensure excellent service and support standards, Knauf AMF now has sales subsidiaries in the following countries:

- | | | | |
|-----------------|------------------|------------|------------------------|
| ■ Australia | ■ Czech Republic | ■ Italy | ■ Taiwan |
| ■ Austria | ■ Egypt | ■ Poland | ■ Turkey |
| ■ Baltic states | ■ France | ■ Rumania | ■ Ukraine |
| ■ Benelux | ■ Germany | ■ Russia | ■ United Arab Emirates |
| ■ Brazil | ■ Greece | ■ Serbia | ■ United Kingdom |
| ■ Bulgaria | ■ Hungary | ■ Slovakia | |
| ■ China | ■ India | ■ Slovenia | |
| ■ Croatia | ■ Iran | ■ Spain | |



■ PARTNERS AND ASSOCIATES

Knauf AMF is a company in the Knauf group. This gives the strength and security needed to realise new ideas and implement appropriate strategies. New manufacturing investment creates more space for new products. Development of these ranges takes place in close cooperation with leading technology and research organisations, including the Fraunhofer Institute, Technical University of Munich, Mueller BBM and many others.

The Class A acoustic mineral ceiling tile $\alpha_w = 0.90$



THERMATEX Alpha

THERMATEX Alpha is a newly developed mineral acoustic ceiling tile with a tissue facing. In addition to its Class A sound absorption THERMATEX Alpha also offers both fire protection and the options of hygienic treatment. As a wet-felt mineral tile it has excellent physical properties, assisting handling and installation.

- Sound absorption Class A as per EN ISO 11654
- Sound Absorption $\alpha_w = 0.90$ as per EN ISO 11654
- Sound Attenuation $D_{n,c,w} = 26$ dB as per BS EN 20140-9 (thickness 19 mm)





TO HEAR BUT NOT SEE.



AMF Soundmosaic – simple. aesthetic. efficient.

The newly developed AMF SOUNDMOSAIC is a flat-panel (membrane) loudspeaker in modular ceiling format and working on the principle of wave conversion. As such, the mineral fibre ceiling tile itself is the loudspeaker, the stimulation (oscillation) is effected by a module on the reverse of the tile which therefore does not differ optically from the rest of the AMF ceiling. AMF SOUNDMOSAIC is available in all classic THERMATEX surfaces.

The wave converter as the source of oscillation constitutes a significant part of the loud speaker system. To optimize the effect of the surface-emitted sound, the adjoining tiles are integrated and linked to each other by ceiling tile clips. The low weight of the assembly allows for the system to be installed in new-build but also in retro-fit or refurbishments without needing to alter the ceiling grid.



AMF THERMATEX



High quality product range

■ EDGE HARDENING

By using a special coating method AMF THERMATEX ceiling tiles with recessed edges (VT) are hardened as standard and square edged tiles (SK) on request. This added durability provides protection against damage.

The fine chamfered edge gives a better visual appearance with clean, crisp lines.

■ MINERAL

THERMATEX ceiling tiles are made from new generation bio-soluble mineral wool, clay and starch and are therefore based on natural raw materials. Mineral wool offers excellent fire resistance and acoustic performance.

■ SUSPENSION SYSTEMS

AMF offers a range of suspension systems and tiles to satisfy different design requirements.

Ceiling systems are tested and certified for fire protection and acoustic performance.

With its wide choice of ceilings AMF can offer the best solutions for a variety of applications.



AMF THERMATEX

■ AMF THERMATEX

THERMATEX is a long-established international brand that stands for high quality and technical performance.

■ AMF THERMATEX Comfort

From the AMF THERMATEX range the Comfort tile combines good acoustic performance with fire protection.

■ AMF THERMATEX Comfort dB

An even greater improvement in sound insulation and fire resistance can be achieved with the enhanced Comfort dB tile.

■ For more face pattern options please see the individual product descriptions.

FIRE PROTECTION

Request your copy of the AMF Fire Protection catalogue

- Download at www.amfceilings.com
- by telephone hotline on +49 (0) 8552 / 422 - 0
- using the reply card form on page 77



Structural safety

There can be no compromise with risks to the life and health of people. Equipment and machinery must also be protected against fire. AMF fire protection systems have been developed by experts for use in areas such as airports, hotels, schools, conference rooms, laboratories and other buildings where security is a key factor.



Download the pdf file from
www.amfceilings.com




SYSTEM F30 Uno

System F30 Uno provides fire protection from above and below. Dual panels are prefabricated, making installation fast and easy.

FIRE RESISTANT LIGHT BOX

Providing fire protection for luminaires, downlighters, loudspeakers etc.

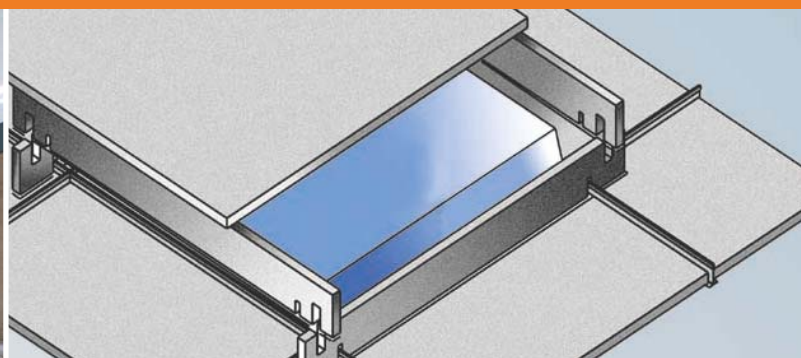

INDEPENDENT FIRE-RESISTANT PANELS

Independent fire protection from above and below.

- F30 Uno / + metal
- F30 Dual + metal
- F30 Mono

STRUCTURAL FIRE PROTECTION

Intelligently constructed fire prevention ceilings from AMF satisfy multi-functional needs. Safeguarding life and property is the most important of them. Special AMF systems respond to advanced requirements such as protection against fire from the ceiling void and in rooms underneath.

- Up to 90 minutes to steel beams
- 60 minutes to timber joists / mezzanine floors

ACOUSTICS

Request your copy of the AMF Acoustics catalogue

- Download at www.amfceilings.com
- by telephone hotline on +49 (0) 8552 / 422 - 0
- using the reply card form on page 77




Individual sound solutions

The construction process increasingly requires the creation of balanced room acoustics. Depending on the usage of the room there can be a wide range of demands on the ceiling. The combination of excellent performance in both sound absorption and attenuation from the new AMF Acoustic Ceilings range enables specifiers to meet these demands.



Download the pdf file from
www.amfceilings.com

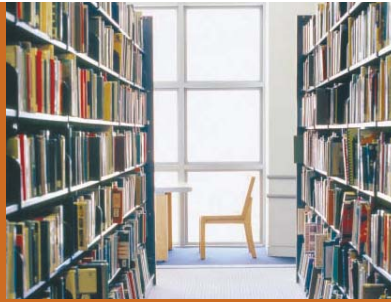

THERMATEX Acoustic / THERMATEX dB Acoustic

A high-performance acoustic mineral ceiling tile faced with a durable acoustic felt offering excellent sound absorption and sound attenuation with an elegant and uniform surface.

THERMATEX Kombimetall

The combination of a metal facing with a mineral core creates a ceiling plank with excellent technical values.



■ SOUND ATTENUATION

■ SOUND ABSORPTION

AMF Ceiling Systems maximise the technical combination of sound absorption and attenuation to regulate room acoustics. This benefits the working performance and health of the occupants of the room.

- THERMATEX Alpha
- THERMATEX Acoustic
- THERMATEX dB Acoustic
- THERMATEX Thermofon
- THERMATEX Silence dB
- THERMATEX Kombimetall
- THERMATEX Comfort

HEALTH & HYGIENE

Request your copy of the AMF Health & Hygiene catalogue

- Download at www.amfceilings.com
- by telephone hotline on +49 (0) 8552 / 422 - 0
- using the reply card form on page 77



A safe working environment

AMF Health & Hygiene ceilings control harmful substances in spaces. Cleanactive reduces harmful airborne substances; Hygena protects against bacteria and inhibits fungal growth; and Clean Room helps in controlling dust particles in rooms.



Download the pdf file from www.amfceilings.com



THERMATEX Cleanactive

Ceiling tiles which absorb harmful substances and odours.

THERMATEX Thermaclean S

A washable, high density mineral ceiling tile for a range of hygiene applications.



■ CLEANACTIVE

Cleanactive absorbs harmful substances and odours. These include formaldehyde from furniture, cleaning agents containing TVOC, dodecene in carpets, ammonia from fermentation and cigarette smoke.

■ CLEAN ROOM

Clean Room provides effective control over the number of dust particles in a room, essential for meeting clean room standards.

■ HYGENA

The special bactericidal and fungistatic treatment of Hygena prevents the spread of germs, with resultant benefits not only for healthcare facilities and food preparation areas but also open-plan offices.

SOUND, LIGHT & E-TECH

Request your copy of the AMF Sound, Light & E-Tech catalogue

- Download at www.amfceilings.com
- by telephone hotline on +49 (0) 8552 / 422 - 0
- using the reply card form on page 77



New ceiling technology

Sound, Light & E-Tech comprises new functional ceiling solutions from Knauf AMF. The integration of lighting and communications technology within the ceiling makes a great contribution to the aesthetics of the room.



Download the
pdf file from
www.amfceilings.com



Soundmosaic

A flat panel loudspeaker working on the principle of wave conversion with HiFi-Quality and 180° sound emission.



Beamex System

Electrically operated and remote controlled ceiling panel invisibly integrating projectors within the ceiling.



■ SOUNDMOSAIC

The new AMF Soundmosaic ceiling tile is a flat panel loudspeaker in ceiling module size that works on the principle of wave conversion. The tile itself acts as the loudspeaker and blends in with the rest of the AMF ceiling. The resulting sound produces Hi-Fi Quality for both speech and music transmission.

■ CRISTALLO

Light affects our well - being and ability to concentrate. Light sources are significant elements in the interior design process. The Cristallo tile stylishly integrates lighting into the suspended ceiling.

■ BEAMEX SYSTEM

An electrically operated ceiling tile, created to safely shelter slide, video and LCD projectors within the ceiling void.

MATERIAL & DESIGN

Request your copy of the AMF Material & Design catalogue

- Download at www.amfceilings.com
- by telephone hotline on +49 (0) 8552 / 422 - 0
- using the reply card form on page 77



Innovative ceiling design

Design alternatives to the classic mineral ceilings from AMF.
Freedom of design created by the opportunity to combine different
materials that offer innovative choices.



Download the
pdf file from
www.amfceilings.com




THERMATEX Symetra

A choice in hole patterns in combination with a variety of edge details leave ample room for the architect or specifier for contemporary ceiling design.

GYPSUM Symetra Livada

Crisp geometric square patterns from a gypsum tile.

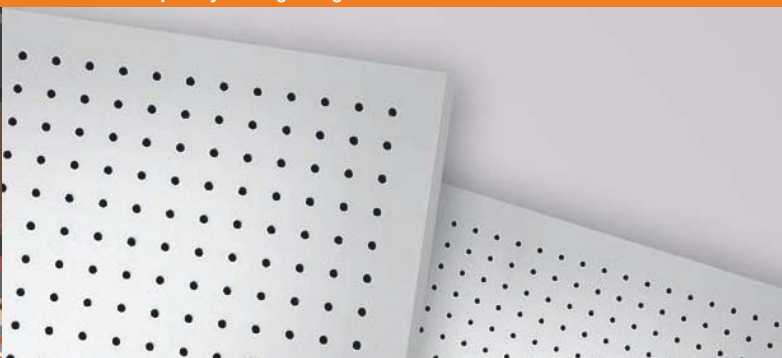

■ MATERIAL

The right material for a range of different ceiling designs. Modern functional metal, the timeless elegance of gypsum, the durability of wood fibre and the warmth of wood veneer.

■ DESIGN

Innovation from the Symetra range with regularly spaced round or square perforations, or the Seventies retro - look with THERMATEX net.4 open cell tiles.


CLASSIC DESIGNS



Aesthetic ceiling design

A wide variety of face patterns is available for every ceiling system. The design not only greatly influences the appearance of the ceiling but also affects its technical performance in terms of acoustics, humidity resistance or hygiene.

For more face pattern options please see programme parts 2 - 6.

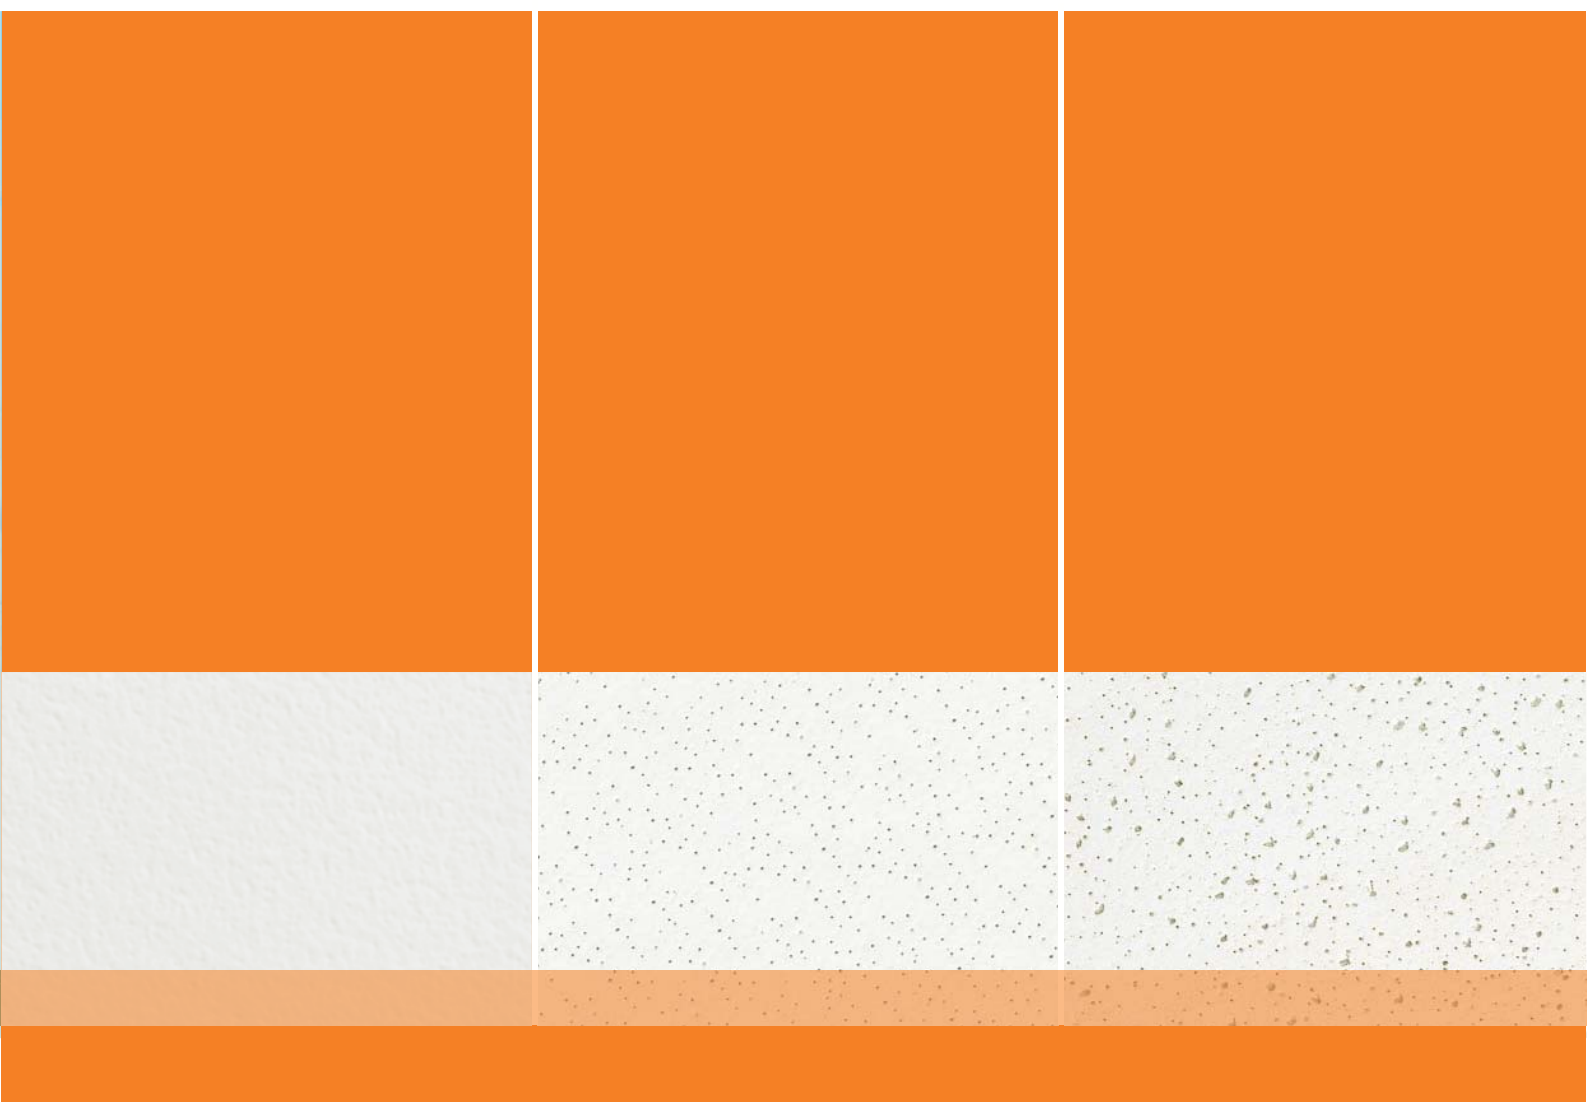

■ **SMOOTH SURFACES**

Smooth or lightly textured face patterns create a contemporary ceiling design with sound reflection.

Page 22

■ **TEXTURED AND MICROPERFORATED SURFACES**

Well-proportioned ceilings featuring micro-perforated surfaces offering very good sound absorption.

Page 24

■ **FISSURED SURFACES**

Multi-directional fissured ceilings creating interesting contrasts and good sound absorption.

Page 27

CLASSIC DESIGNS



Smooth THERMATEX surfaces

The tile is plain finished or finely textured, creating a calm ceiling blending into the background. Smooth surfaces reflect sound and have low absorption.



THERMATEX Plain

SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ T Bandrastrer system, concealed cross sections¹ A Concealed system, panels demountable AW/GN / not demountable GN¹
Building material class	■ A2-s1, d0 as per EN 13501-1
Fire	■ up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	■ EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.25 0.20 0.10 0.05 0.05 0.10
	$\alpha_w = 0.10$ (L) as per EN ISO 11654, NRC = 0.10 as per ASTM C 423
Sound attenuation	■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	■ up to 95% RH
Light reflectance	■ up to 92%
Thermal conductivity	■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	■ For sizes as well as supply categories please consult the price list.
Thickness / Weight	■ 15 mm (c. 4.5 kg/m ²) / 19 mm (c. 5.7 kg/m ²)
Colours	■ white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

Hygiene ■ Clean Room, Hygena (part 4)

¹ For details please see systems solutions. For technical regulations please refer to pages 48-49.



THERMATEX Fine Stratos

SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ I Bandraaster system, concealed cross sections¹ A Concealed system, panels demountable AW/GN / not demountable GN¹
Building material class	■ A2-s1, d0 as per EN 13501-1
Fire	■ up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	■ EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.30 0.25 0.10 0.10 0.10 0.10
	$\alpha_w = 0.10$ (L) as per EN ISO 11654, NRC = 0.15 as per ASTM C 423
Sound attenuation	■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	■ up to 95% RH
Light reflectance	■ up to 88%
Thermal conductivity	■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	■ For sizes as well as supply categories please consult the price list.
Thickness / Weight	■ 15 mm (c. 4.5 kg/m ²) / 19 mm (c. 5.7 kg/m ²)
Colours	■ white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

Self-supporting fire protection systems	■ F30 uno, F30 mono (part 2)
Acoustics	■ Silence dB, Thermatex Comfort (part 3)
Hygiene	■ Cleanactive, Hygena (part 4)

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.



THERMATEX Laguna

SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹
Building material class	■ A2-s1, d0 as per EN 13501-1
Fire	■ up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	■ EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.35 0.20 0.10 0.05 0.05 0.05
	$\alpha_w = 0.10$ (L) as per EN ISO 11654, NRC = 0.10 as per ASTM C 423
Sound attenuation	■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	■ up to 90% RH
Light reflectance	■ up to 88%
Thermal conductivity	■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	■ For sizes as well as supply categories please consult the price list.
Thickness / Weight	■ 15 mm (c. 4.5 kg/m ²)
Colours	■ white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.

CLASSIC DESIGNS



Textured and micro perforated THERMATEX surfaces

Finely textured surfaces and micro-perforations provide an elegant ceiling with good sound absorption.




THERMATEX Fine Stratos micro

SYSTEM	<ul style="list-style-type: none"> E Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ I Bandraster system, concealed cross sections¹ A Concealed system, panels demountable AW/GN / not demountable GN¹
Building material class	■ A2-s1, d0 as per EN 13501-1
Fire	■ up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	■ EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.40 0.40 0.55 0.70 0.60 0.45
	$\alpha_w = 0.60$ as per EN ISO 11654, NRC = 0.55 as per ASTM C 423
Sound attenuation	■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	■ up to 95% RH
Light reflectance	■ up to 88%
Thermal conductivity	■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	■ For sizes as well as supply categories please consult the price list.
Thickness / Weight	■ 15 mm (c. 4.5kg/m ²) / 19 mm (c. 5.7kg/m ²) / 40 mm (c. 12kg/m ²)
Colours	■ white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

Self-supporting fire protection systems	■ F30 uno, F30 mono (part 2)
Acoustics	■ Silence dB, Thermatex Comfort (part 3)
Hygiene	■ Cleanactive, Hygena (part 4)

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.

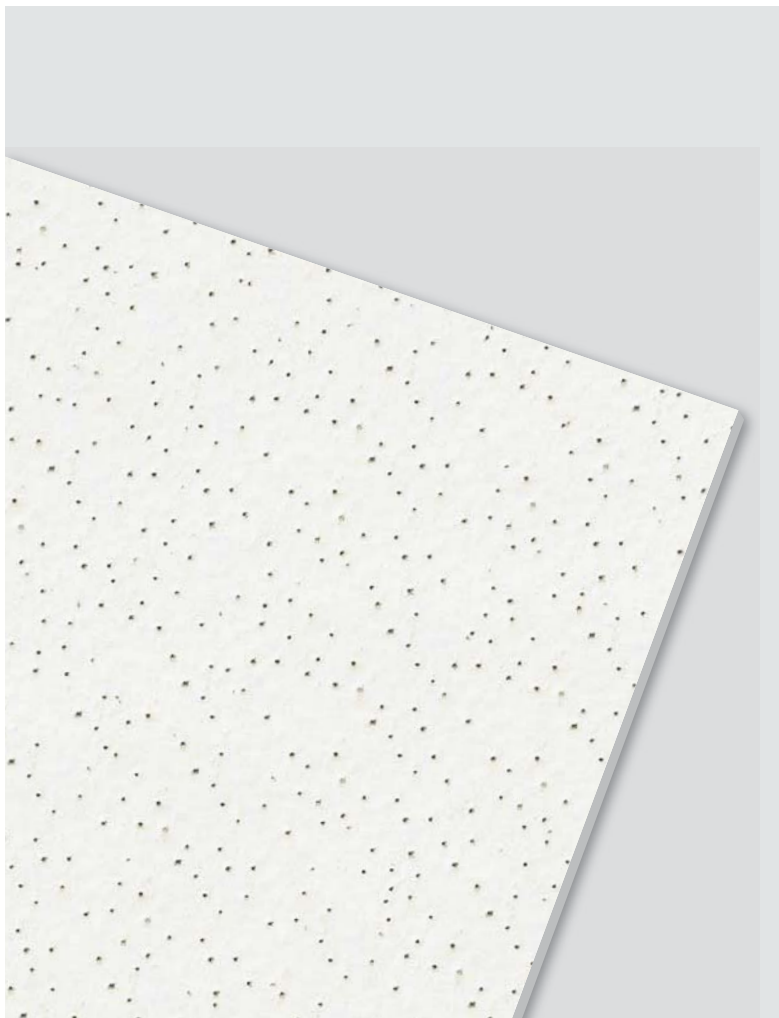

THERMATEx Laguna micro

THERMATEx Star

SYSTEM	<ul style="list-style-type: none"> ■ Exposed system, demountable ceiling¹ 						
Building material class	<ul style="list-style-type: none"> ■ A2-s1, d0 as per EN 13501-1 						
Fire	<ul style="list-style-type: none"> ■ up to 60 minutes as per BS 476: parts 20-23. 						
Sound absorption	<ul style="list-style-type: none"> ■ EN ISO 354 						
Frequency F in Hz	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td> </tr> </table>	125	250	500	1000	2000	4000
125	250	500	1000	2000	4000		
Sound absorption α_p	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>0.35</td><td>0.35</td><td>0.60</td><td>0.75</td><td>0.70</td><td>0.45</td> </tr> </table>	0.35	0.35	0.60	0.75	0.70	0.45
0.35	0.35	0.60	0.75	0.70	0.45		
	<ul style="list-style-type: none"> $\alpha_w = 0.60$ as per EN ISO 11654, NRC = 0.60 as per ASTM C 423 						
Sound attenuation	<ul style="list-style-type: none"> ■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness) 						
Humidity	<ul style="list-style-type: none"> ■ up to 90% RH 						
Light reflectance	<ul style="list-style-type: none"> ■ up to 88% 						
Thermal conductivity	<ul style="list-style-type: none"> ■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612 						
Dimensions	<ul style="list-style-type: none"> ■ For sizes as well as supply categories please consult the price list. 						
Thickness / Weight	<ul style="list-style-type: none"> ■ 15 mm (c. 4.5kg/m²) 						
Colours	<ul style="list-style-type: none"> ■ white similar to RAL 9010, other colours available to order 						

SYSTEM	<ul style="list-style-type: none"> ■ Exposed system, demountable ceiling¹ ■ Free span system, with exposed or concealed suspension¹ ■ Bandraster system, concealed cross sections¹ ■ Concealed system, panels demountable AW/GN / not demountable GN¹ 						
Building material class	<ul style="list-style-type: none"> ■ A2-s1, d0 as per EN 13501-1 						
Fire	<ul style="list-style-type: none"> ■ up to 60 minutes as per BS 476: parts 20-23. 						
Sound absorption	<ul style="list-style-type: none"> ■ EN ISO 354 						
Frequency F in Hz	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td> </tr> </table>	125	250	500	1000	2000	4000
125	250	500	1000	2000	4000		
Sound absorption α_p	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td>0.50</td><td>0.40</td><td>0.55</td><td>0.70</td><td>0.65</td><td>0.45</td> </tr> </table>	0.50	0.40	0.55	0.70	0.65	0.45
0.50	0.40	0.55	0.70	0.65	0.45		
	<ul style="list-style-type: none"> $\alpha_w = 0.60$ as per EN ISO 11654, NRC = 0.60 as per ASTM C 423 						
Sound attenuation	<ul style="list-style-type: none"> ■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness) 						
Humidity	<ul style="list-style-type: none"> ■ up to 95% RH 						
Light reflectance	<ul style="list-style-type: none"> ■ up to 90% 						
Thermal conductivity	<ul style="list-style-type: none"> ■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612 						
Dimensions	<ul style="list-style-type: none"> ■ For sizes as well as supply categories please consult the price list. 						
Thickness / Weight	<ul style="list-style-type: none"> ■ 15 mm (c. 4.5kg/m²) / 19 mm (c. 5.7kg/m²) / 40 mm (c. 12kg/m²) 						
Colours	<ul style="list-style-type: none"> ■ white similar to RAL 9010, other colours available to order 						

Extra options available - please see additional catalogues 2-6


Extra options available - please see additional catalogues 2-6

Self-supporting fire protection systems	<ul style="list-style-type: none"> ■ F30 uno, F30 mono (part 2)
Acoustics	<ul style="list-style-type: none"> ■ Silence dB, Thermatex Comfort (part 3)
Hygiene	<ul style="list-style-type: none"> ■ Cleanactive, Hygena (part 4)

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.

CLASSIC DESIGNS

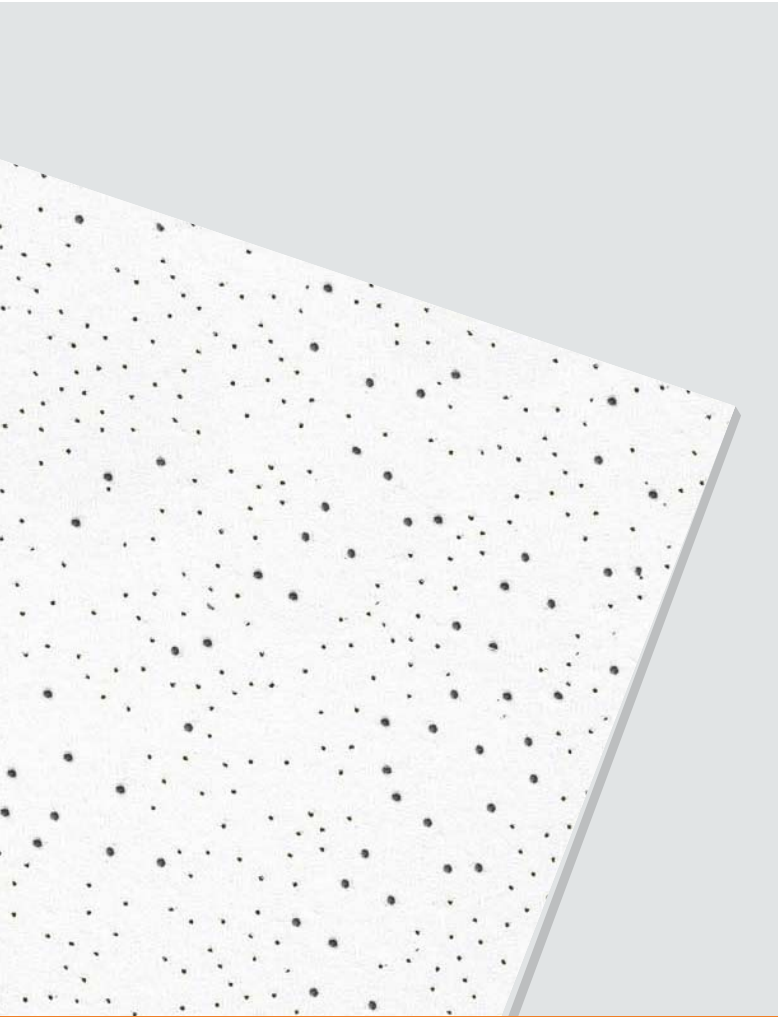

THERMATEX Pinhole



SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ I Bandrastrer system, concealed cross sections¹ A Concealed system, panels demountable AW/GN / not demountable GN¹
Building material class	■ A2-s1, d0 as per EN 13501-1
Fire	■ up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	■ EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.40 0.35 0.50 0.70 0.75 0.60
	$\alpha_w = 0.55$ as per EN ISO 11654, NRC = 0.60 as per ASTM C 423
Sound attenuation	■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	■ up to 95% RH
Light reflectance	■ up to 88%
Thermal conductivity	■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	■ For sizes as well as supply categories please consult the price list.
Thickness / Weight	■ 15 mm (c. 4.5 kg/m ²) / 19 mm (c. 5.7 kg/m ²)
Colours	■ white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

Self-supporting fire protection systems	■ F30 uno (part 2)
---	--------------------

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.



Fissured THERMATEX surfaces

Defined perforations give the ceiling an individual character, with a consequent increase in sound absorption.



THERMATEX Mercure


SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ I Bandrastrer system, concealed cross sections¹ A Concealed system, panels demountable AW/GN / not demountable GN¹
Building material class	■ A2-s1, d0 as per EN 13501-1
Fire	■ up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	■ EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.45 0.40 0.50 0.70 0.70 0.65
	$\alpha_w = 0.60$ as per EN ISO 11654, NRC = 0.60 as per ASTM C 423
Sound attenuation	■ $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	■ up to 90% RH
Light reflectance	■ up to 88%
Thermal conductivity	■ $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	■ For sizes as well as supply categories please consult the price list.
Thickness / Weight	■ 15 mm (c. 4.5 kg/m ²) / 19 mm (c. 5.7 kg/m ²)
Colours	■ white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

Acoustics	■ Thermatex Comfort (part 3)
Hygiene	■ Cleanactive (part 4)

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.

CLASSIC DESIGNS

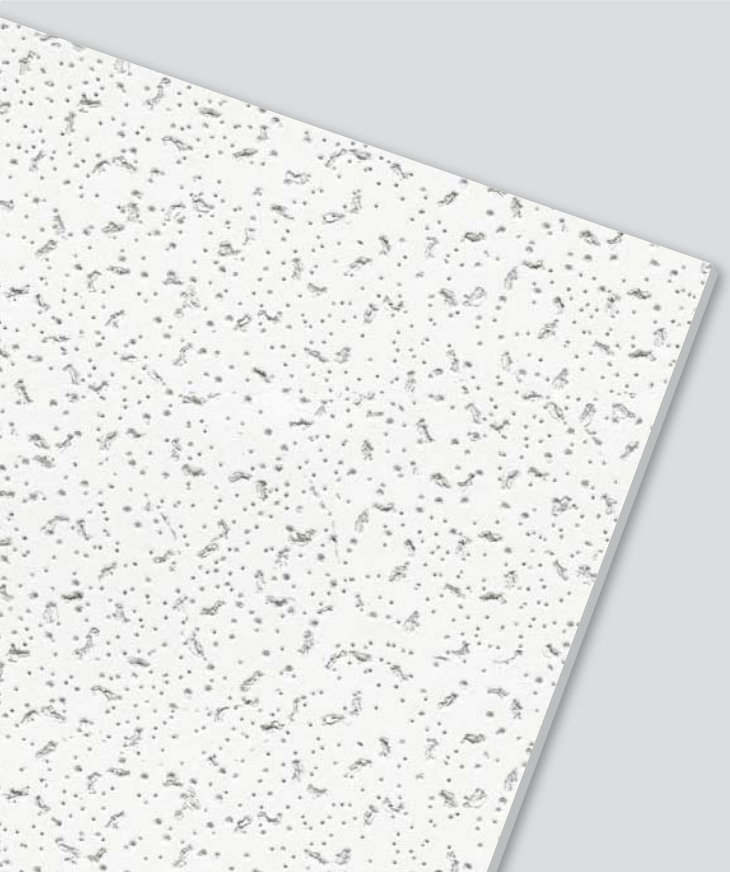


THERMATEX Fine Fresko-Saturn

SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ I Bandraester system, concealed cross sections¹
Building material class	<ul style="list-style-type: none"> A2-s1, d0 as per EN 13501-1
Fire	<ul style="list-style-type: none"> up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	<ul style="list-style-type: none"> EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.45 0.40 0.50 0.70 0.80 0.75
	$\alpha_w = 0.60$ (H) as per EN ISO 11654, NRC = 0.60 as per ASTM C 423
Sound attenuation	<ul style="list-style-type: none"> $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	<ul style="list-style-type: none"> up to 90% RH
Light reflectance	<ul style="list-style-type: none"> up to 87%
Thermal conductivity	<ul style="list-style-type: none"> $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	<ul style="list-style-type: none"> For sizes as well as supply categories please consult the price list.
Thickness / Weight	<ul style="list-style-type: none"> 15 mm (c. 4.5 kg/m²) / 19 mm (c. 5.7 kg/m²) / 40 mm (c. 12 kg/m²)
Colours	<ul style="list-style-type: none"> white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

Self-supporting fire protection systems	<ul style="list-style-type: none"> F30 mono (part 2)
Acoustics	<ul style="list-style-type: none"> Silence dB, Thermatex Comfort (part 3)

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.

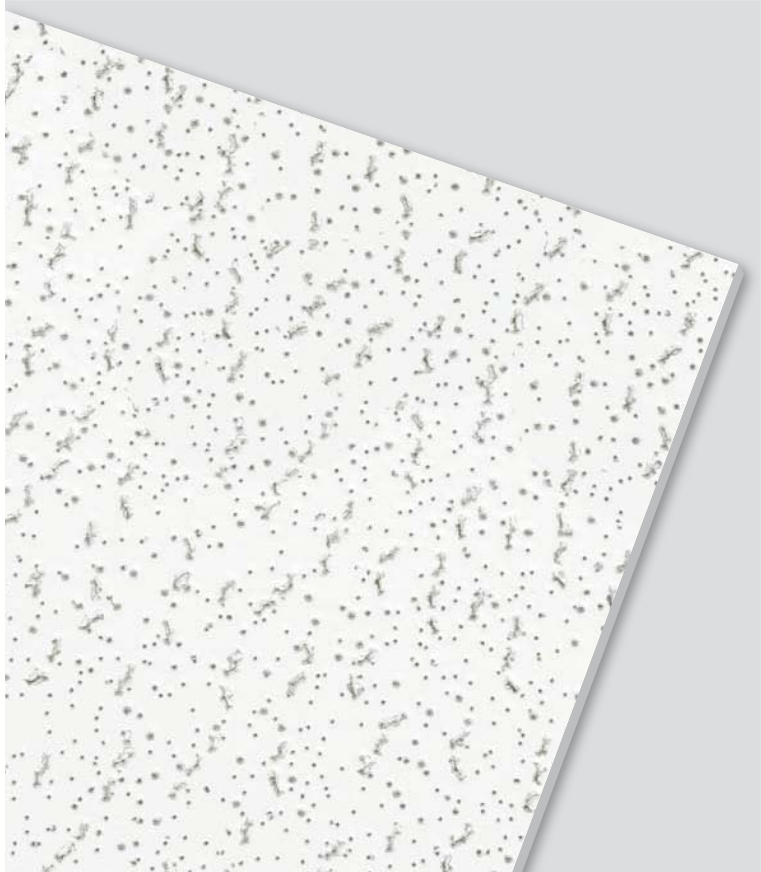

THERMATEX Fresko

SYSTEM	<ul style="list-style-type: none"> C Exposed system, demountable ceiling¹ F Free span system, with exposed or concealed suspension¹ I Bandraester system, concealed cross sections¹
Building material class	<ul style="list-style-type: none"> A2-s1, d0 as per EN 13501-1
Fire	<ul style="list-style-type: none"> up to 60 minutes as per BS 476: parts 20-23.
Sound absorption	<ul style="list-style-type: none"> EN ISO 354
Frequency F in Hz	125 250 500 1000 2000 4000
Sound absorption α_p	0.45 0.40 0.50 0.70 0.80 0.75
	$\alpha_w = 0.60$ (H) as per EN ISO 11654, NRC = 0.60 as per ASTM C 423
Sound attenuation	<ul style="list-style-type: none"> $D_{n,c,w} = 34$ dB as per EN 20140-9 (15 mm thickness)
Humidity	<ul style="list-style-type: none"> up to 90% RH
Light reflectance	<ul style="list-style-type: none"> up to 87%
Thermal conductivity	<ul style="list-style-type: none"> $\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Dimensions	<ul style="list-style-type: none"> For sizes as well as supply categories please consult the price list.
Thickness / Weight	<ul style="list-style-type: none"> 15 mm (c. 4.5 kg/m²) / 19 mm (c. 5.7 kg/m²)
Colours	<ul style="list-style-type: none"> white similar to RAL 9010, other colours available to order

Extra options available - please see additional catalogues 2-6

¹ For details please see systems solutions.
For technical regulations please refer to pages 48-49.




SYSTEM SOLUTIONS



Efficiency through technical expertise

Modern buildings have different functional needs where the correct choice of ceiling system is required. AMF offers a wide range of versatile grid systems that meet these requirements. The technology behind these systems offers exceptional performance in terms of fire protection, acoustics and hygiene. Troublefree installation beneath different types of soffit, together with ease of maintenance, provides efficient ceiling solutions for the buildings of today.



■ **EXPOSED GRID SYSTEM**
SYSTEM C

Exposed grid system for 24 or 15 mm tee sections. Fully accessible tiles

Page 32

■ **FREE SPAN SYSTEM**
SYSTEM F

Free Span system for planks with cross tees exposed or concealed.

Page 36

■ **BANDRASTER SYSTEM**
SYSTEM I

Parallel Bandraster sections 50 to 150 mm wide, with cross tees exposed or concealed.


Page 40

■ **CONCEALED GRID SYSTEM**
SYSTEM A

Concealed system with demountable tiles (AW) or non-accessible (GN).

Page 44

SYSTEM **C** EXPOSED GRID SYSTEM

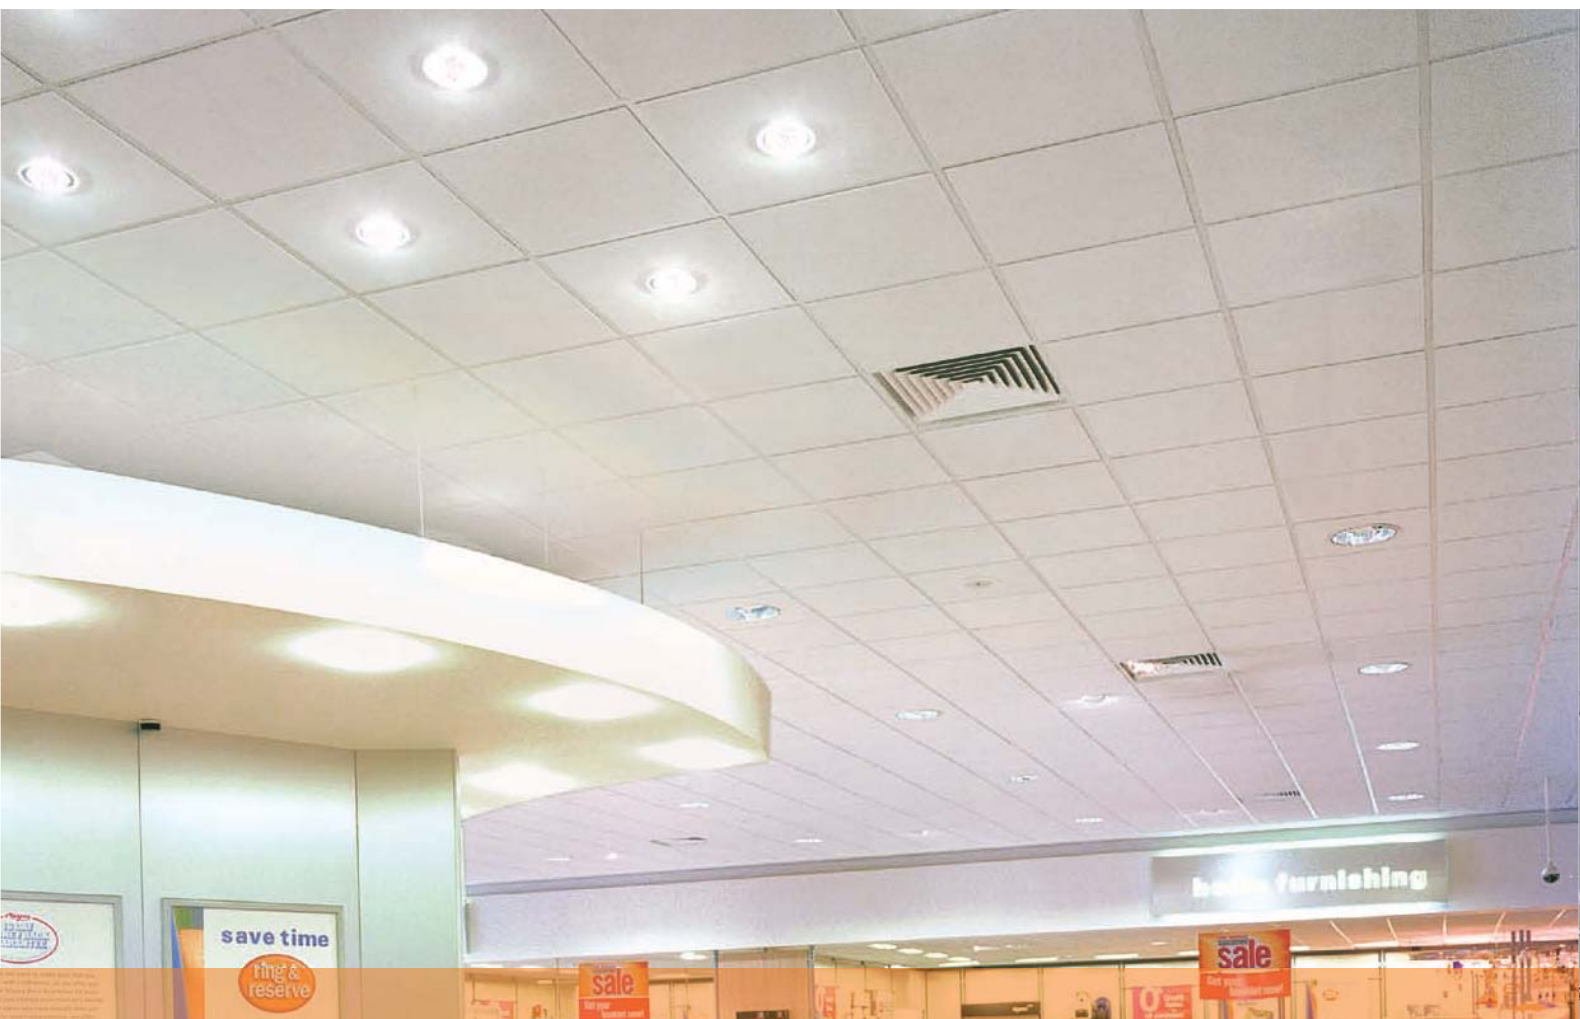

System C utilises the popular exposed suspension grid as a proactive element in ceiling design. Square edged (SK) ceiling panels are laid into the grid and give a flush visual appearance. Tiles with recessed edges (VT) allow greater creative design options with both 24 and 15 mm wide tee sections. System C is quick and easy to install, and simple to access for maintenance in the ceiling void. Worldwide test reports and certificates demonstrate that AMF System C is an exceptional ceiling construction.


FACE PATTERNS

THERMATEX


- Plain
- Fine Stratos
- Laguna
- Fine Stratos micro
- Laguna micro
- Star
- Pinhole
- Mercure
- Fine Fresko-Saturn
- Fresko

See page 80 for illustrations




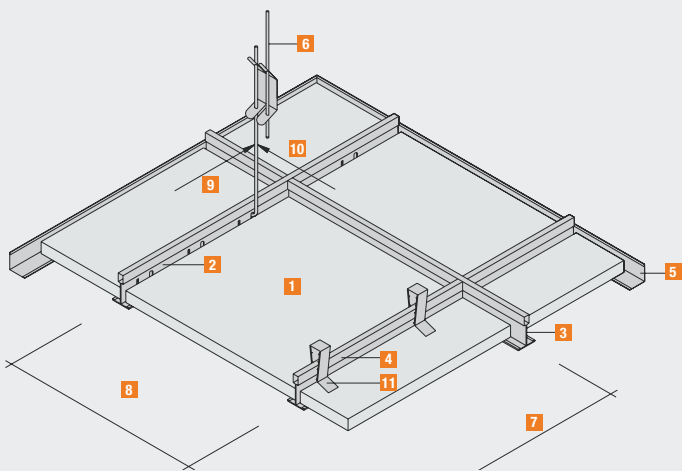


Edge details




SK 15 / 24




VT 15 / 24




VT-S-15 F




JS - 15
Outer mitre for RWL 24 / 24



JS - 17
Inner mitre for RWL 24 / 24




JS - 24
Outer mitre for SRW 15/B




JS - 28
Inner mitre for SRW 15/B

Other wall angles and accessories are available on request.


Wall angle C-RWL 24 / 24




Shadow trim C-SRW 20 / 20 / 20 / 20



Shadow trim C-SRW 25 / 15 / 8 / 15



For VT edge



VT Filler piece

FUE - 15 / 24







Exposed System

Wall angle

Grid sizes in mm		8	Y	600 x 600	625 x 625	600 x 1200	625 x 1250	300 x 1200	312,5 x 1250	400 x 1200
		7	X							
AMF-Mineral ceiling panels	1	pcs		2.78	2.56	1.39	1.28	2.78	2.56	2.09
Main runner C - PH 375	2	lin.m		-	0.80	-	0.80	-	0.80	-
Main runner C - PH 360	2	lin.m		0.84	-	0.84	-	0.84	-	0.84
C - PQ 120 or C - PQ 125 cross tee	3	lin.m		1.67	1.60	1.67	1.60	3.34	3.20	2.50
Hold down clip (optional) for fire protection requirements	11	pcs		5.56	5.12	2.78	2.56	5.56	5.12	4.16
C - PQ 60 or C - PQ 62.5 cross tee	4	lin.m		0.84	0.80	-	-	-	-	-
C - RWL edge trim or A-RWU edge runner for metal	5	lin.m		0.60	0.60	0.60	0.60	0.60	0.60	0.60
C - DOS hanger or alternatives	6	pcs		0.67	0.67	0.67	0.67	0.67	0.67	0.67
Distance between hangers	9	m		1.25	1.20	1.25	1.20	1.25	1.20	1.25
Distance between main runners	10	m		1.20	1.25	1.20	1.25	1.20	1.25	1.20

Fire Resistant Light-Boxes to protect light fittings

Grid: 600 x 600 mm / 625 x 625 mm / 1200 x 600 mm
 300 x 1200 mm / 312.5 x 1250 mm
 Panel thickness: 19 or 40 mm
 Height: 100 mm or 80 mm, respectively
 Further sizes and heights are available on request.

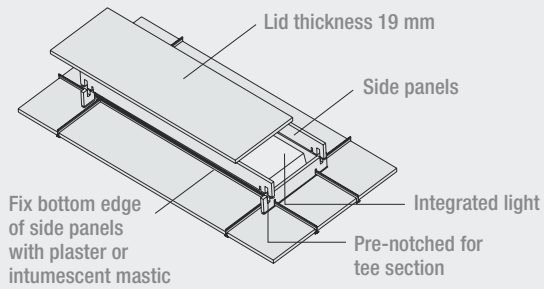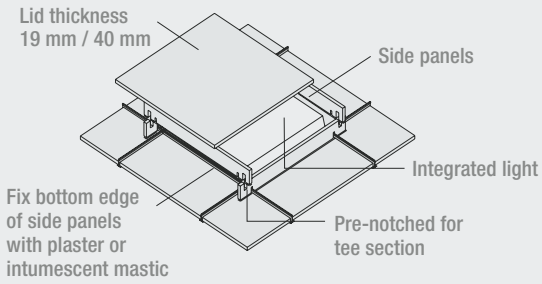

Fire Resistant Light Box

Hangers



SYSTEM **F** FREE SPAN SYSTEM



System F is a free span ceiling system that is ideal for corridors. Ceiling planks are supported on their short edges by perimeter trim and can span up to 2500 mm. The finished ceiling has a smooth, monolithic appearance and is easy to install and maintain. Depending on the type of construction required the planks can be demountable, allowing full access to the ceiling void; or non-accessible.

FACE PATTERNS

THERMATEX


- Plain
- Fine Stratos
- Fine Stratos micro
- Star
- Pinhole
- Mercure
- Fine Fresko-Saturn
- Fresko

See page 80 for illustrations




SYSTEM F

Free Span Type F1

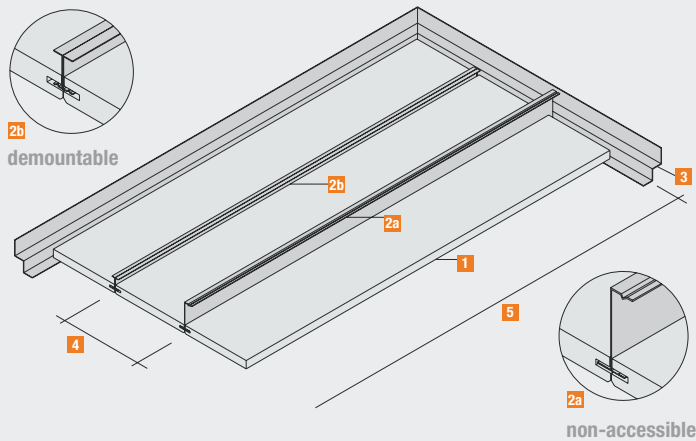


Free Span Type F2

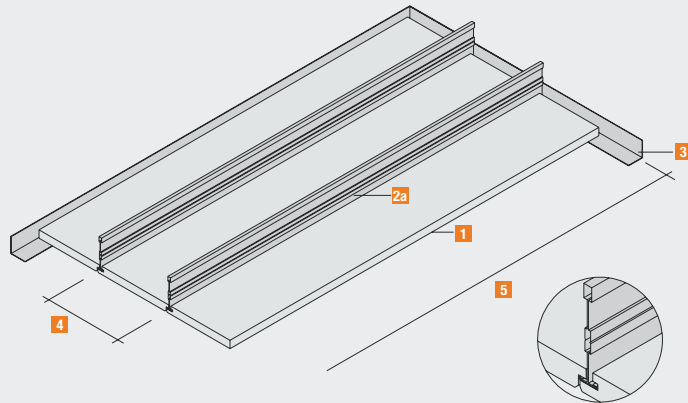

Edge Details

non-accessible



Z section, long edge concealed GN




Short edge square SK



Short edge recessed VT

demountable



Alternative: C section, long edge concealed GN




Short edge square SK



Short edge recessed VT

Edge Details



T section, long edge shiplap AW



Short edge square SK



Short edge recessed VT


Long edge concealed GN / short edge square SK or recessed VT demountable / non-accessible

Long edge shiplap AW / short edge square SK or recessed VT demountable


Grid size in mm		5	y											
		4	300 x 1600	300 x 1800	300 x 2000	300 x 2500	312.5 x 1600	312.5 x 1800	312.5 x 2000	312.5 x 2500	400 x 1600	400 x 1800	400 x 2000	400 x 2500
AMF-Mineral panel	1	pcs	2.08	2.00	1.85	1.78	1.67	1.60	1.34	1.28	1.56	1.39	1.25	1.00
Main runner F-PQT and F-PQZ for types F1, F2, F3	2a	lin.m	3.34	3.20	3.34	3.20	3.34	3.20	3.34	3.20	2.50	2.50	2.50	2.50
Alternative main runner F-PQU for type F1	2b	lin.m	6.68	6.40	6.68	6.40	6.68	6.40	6.68	6.40	5.00	5.00	5.00	5.00
Wall angle	3	lin.m	1.46	1.30	1.17	0.93	1.43	1.27	1.13	0.91	1.41	1.25	1.13	0.90

To choose the correct long edge section for the panel size, please consult the profile span table. The table is applicable to construction types F1 to F3.


Free Span Type F3

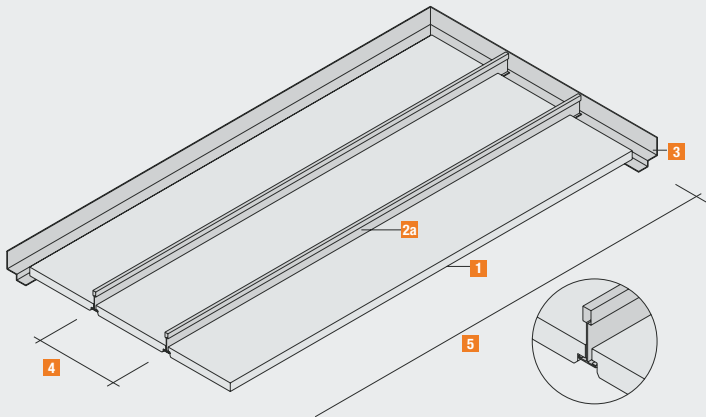

Edge Details



T section, long edge recessed VT



T section, long edge square SK



Short edge square SK








Short edge recessed VT




Short edge square SK

Accessories




For type F3



Filler piece AMF FUE - 15 / 24

Fire-resistant light box for integrated luminaires.
Test reports should be followed. Light fittings to be independently suspended.

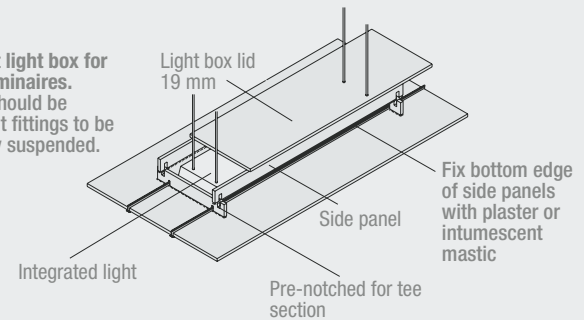

Long edge recessed VT or square SK / short edge recessed VT or square SK demountable

Wall angle / Filler piece / Fire-Resistant Light Box

	Tile width (mm)				300		312.5		400		
	Tile thickness (mm)				15	19	15	19	15	19	
	Profile	Height (mm)	Thickness (mm)	Weight (kg/lin.m.)	max.span (mm)		max.span (mm)		max.span (mm)		
Type 1	PQU 12 / 38		38	1.0	0.42	2000	1800	2000	1800	1800	1600
	PQU 10 / 50 / 17		50	0.6	0.37	2400	2300	2400	2300	2300	2200
Type 2	PQZ 19 / 50		50	0.5	0.46	2100	2000	2100	2000	1900	1800
	PQZ 19 / 70		70	0.5	0.56	2500	2300	2300	2200	2300	2200
Type 3	PQT 24 / 38		38	0.4	0.35	1800	1700	1800	1700	1700	1600
	PQT 75 / 24		75	0.5	0.75	2500	2500	2500	2500	2500	2500
Perimeter trim		Thickness (mm)	Suitable for spanning up to:			Shadow trim		Thickness (mm)	Suitable for spanning up to:		
RWL 31 / 31		1.0 mm	2500 mm			ST-RWL 25 / 15 / 10 / 15		1.0 mm	15 mm mineral plank 2000 mm 19 mm mineral plank 1800 mm Kombimetall 1400 mm		
RWL 40 / 30		1.0 mm	2500 mm			ST-RWL 20 / 20 / 20 / 20		0.7 mm			
						ST-RWL 42 / 20 / 23 / 24		1.5 mm	2500 mm		

SYSTEM I BANDRASTER SYSTEM



By using Bandraster grid System I offers parallel suspension sections that can be adapted to the architecture of the building. Lightweight partitions can be installed under the Bandraster sections. Lateral bracing is achieved with either exposed or concealed sections. Ceiling planks can be made either demountable or non-accessible.

FACE PATTERNS

THERMATEX



- Plain
- Fine Stratos
- Fine Stratos micro
- Star
- Pinhole
- Mercure
- Fine Fresko-Saturn
- Fresko

See page 80 for illustrations




SYSTEM I Parallel Bandraster Construction Type I1

Parallel Bandraster Construction Type I2

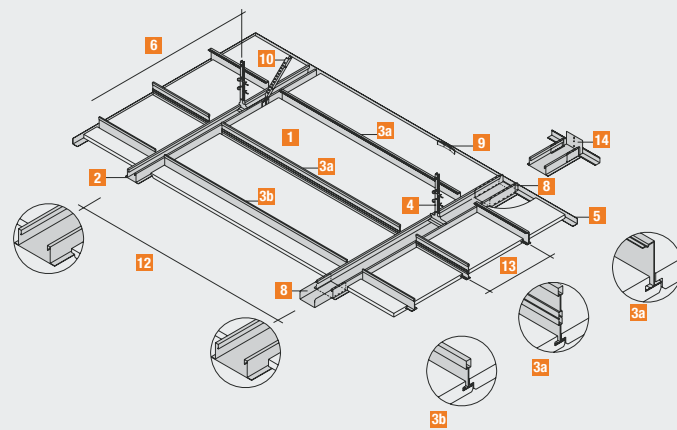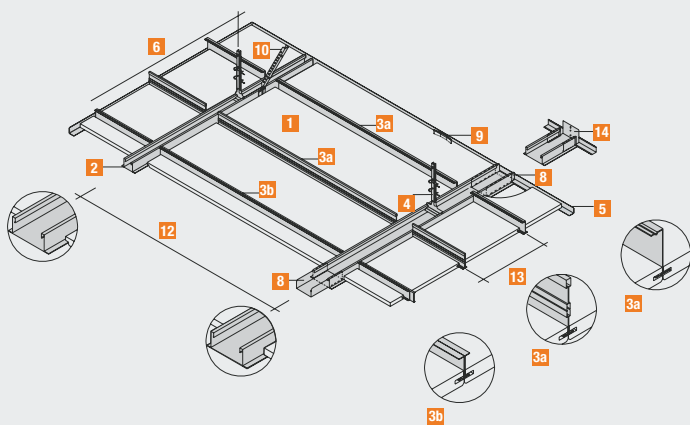

Edge Details

non-accessible




Z section,
long edge concealed GN



Short edge square SK Short edge recessed VT

demountable




C section,
long edge concealed GN




Short edge square SK Short edge recessed VT

Edge Details



T section,
long edge shiplap AW



Short edge square SK Short edge recessed VT

Long edge concealed GN / short edge square SK or recessed VT demountable / non-accessible


Long edge shiplap AW / short edge square SK or recessed VT demountable

Grid size mm	12	y	300 x 1800	300 x 2000	300 x 2500	312.5 x 1800	312.5 x 2000	312.5 x 2500	400 x 2000	400 x 2500
	13	x								
AMF Mineral panel	1	pcs	1.85	1.67	1.33	1.78	1.60	1.28	1.25	1.00
I-PH Bandraster 24 / 35 / 50 / 100 / 150	2	lin.m.	0.56	0.50	0.40	0.56	0.50	0.40	0.50	0.40
PQT / Z cross tee (one piece)	3a	lin.m.	3.33	3.33	3.33	3.20	3.20	3.20	2.50	2.50
PQU two part cross tee	3b	lin.m.	6.67	6.67	6.67	6.40	6.40	6.40	5.00	5.00
Nonius hanger or alternative	4	pcs	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.67
I-RWL perimeter trim	5	lin.m.	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60
I-RF perimeter wedge	9	pcs	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Distance of suspension to DIN 18168	6	m	0.83	0.75	0.60	0.83	0.75	0.60	0.75	0.60
Main runner centres	12	mm	1800	2000	2500	1800	2000	2500	2000	2500
Tile width	13	mm	300	300	300	312.5	312.5	312.5	400	400
options (depending on types of suspension and systems)										
Spacer bar DI	7	pcs	0.50	0.50	0.50	0.50	0.50	0.50	0.56	0.56
PRB Bandraster wall fixing	14	pcs	0.24	0.14	0.12	0.23	0.14	0.12	0.14	0.12
Nonius angled hanger	10	pcs	0.28	0.20	0.16	0.27	0.20	0.16	0.20	0.16
PHV Bandraster connector	8	pcs	0.24	0.14	0.12	0.23	0.14	0.12	0.14	0.12


To choose the correct long edge section for the panel size, please consult the table above. If the Nonius hangers are used, 2 no. Sti security pins are required for hanger. The table is applicable to construction types I1 to I3.

SK: square edge, VT: recessed, GN: concealed, AW: shiplap. For installation guidelines please see page 48 - 49. For further tile sizes please see the price list. Additional accessories are also itemised in the price list.

Parallel Bandrastrer Construction Type I3

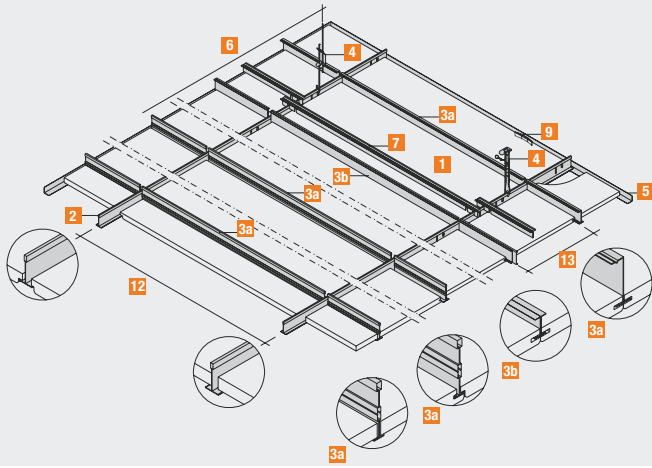

Edge Details




T section,
long edge recessed VT



Short edge
square SK



Short edge
recessed VT




T section,
long edge square SK




Short edge
square SK

Long edge shiplap AW or concealed GN or square SK or recessed VT, short edge square SK / demountable / non-accessible


Accessories




I-ST-RWL
42 x 20 x 23 x 24 mm




I-SRW
25 x 15 x 10 x 15 mm




I-RWL
31 x 31 mm



AMF - Wall angle




JS-28
Inner mitre for
SRW-15/B




JS-24
Outer mitre for
SRW-15/B

For Type I3 edge detail VT




Filler pieces FUE - 15 / 24


Fire-resistant light box for integrated luminaires. Test reports should be followed. Light fittings to be independently suspended.

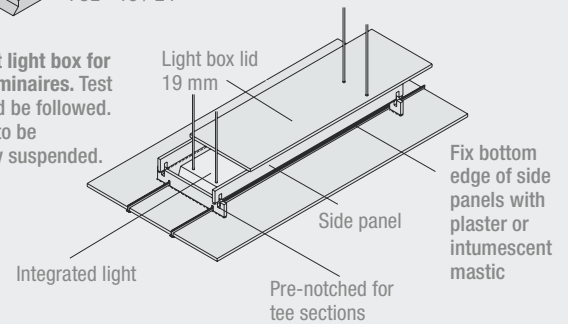

Wall angle / Filler piece /
Fire-Resistant Light Box

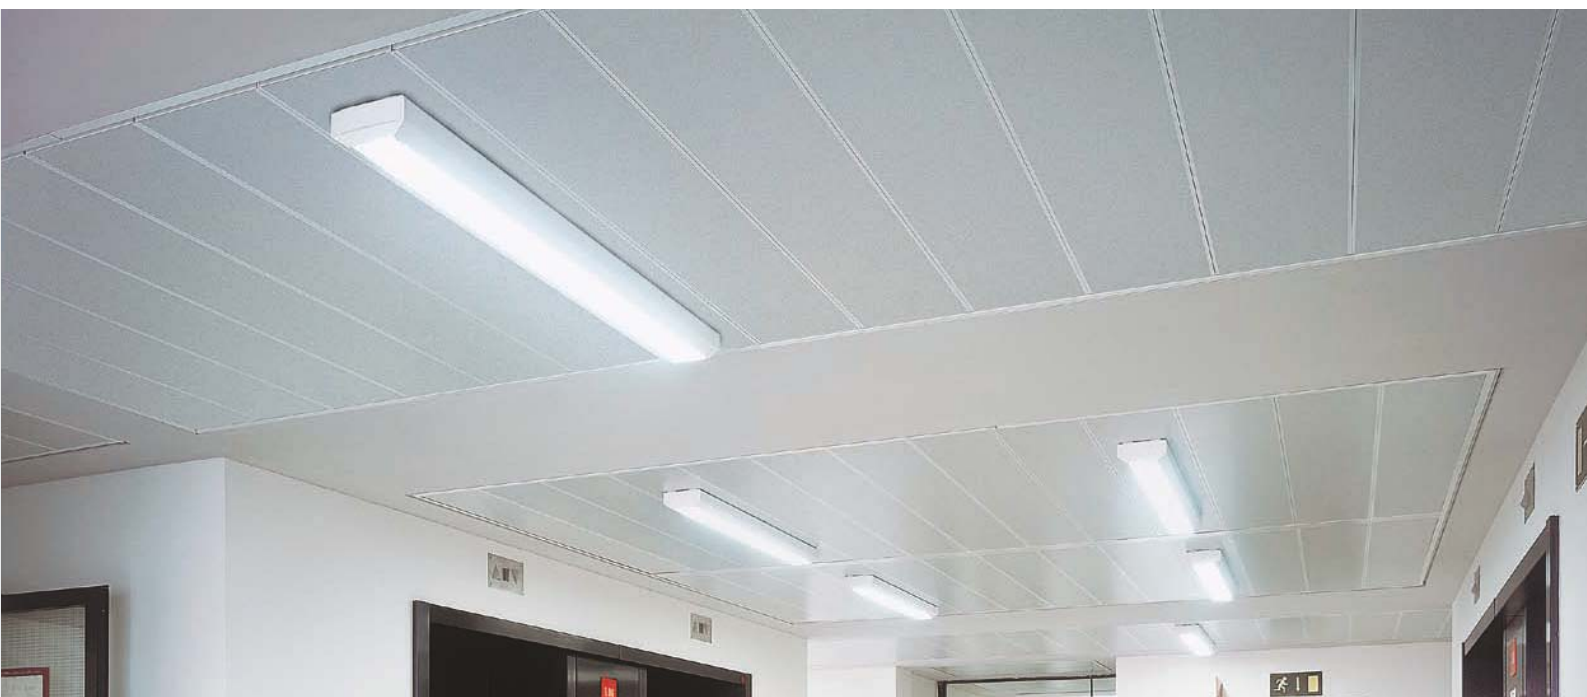

SYSTEM **A** CONCEALED SYSTEM

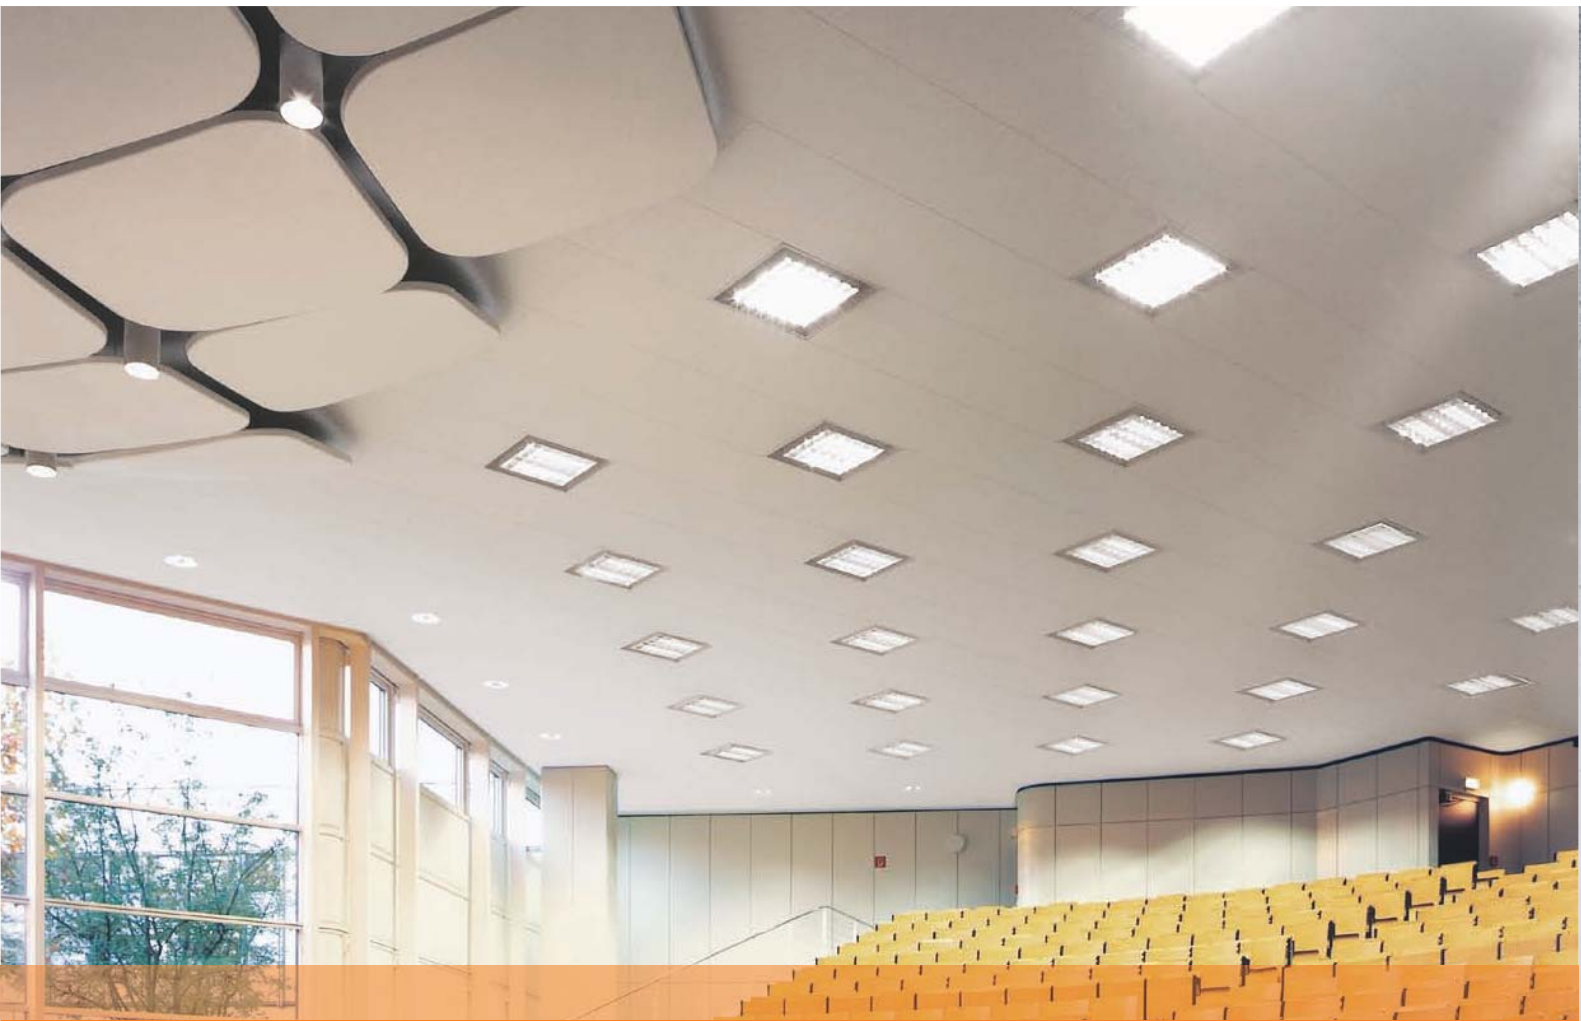

System A creates a smooth monolithic appearance that is achieved by concealing the metal suspension components. Ceiling tiles can be either demountable or non-accessible depending on requirements.

FACE PATTERNS

THERMATEX

- Plain
- Fine Stratos
- Fine Stratos micro
- Star
- Pinhole
- Mercure



See page 80 for illustrations






SYSTEM A

Concealed Grid Construction Type A1

Concealed Grid Construction Type A2

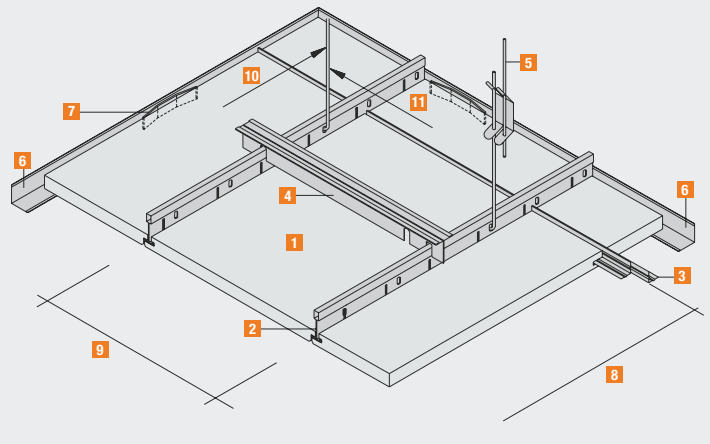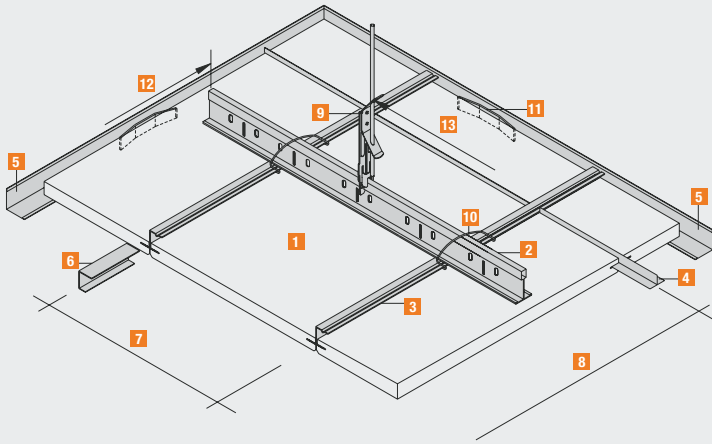




Edge Details

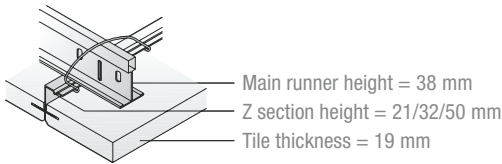

Edge GN/GN non-accessible

Grid size in mm	8	y	600 x 600	625 x 625	300 x 1200	312.5 x 1250
	7	x				
AMF-Mineral panel	1	pcs	2.78	2.56	2.78	2.56
Main runner A - PH 375	2	lin.m	0.80	0.80	0.80	0.80
Z section A - PH 400	3	lin.m	1.67	1.60	3.34	3.20
T profile A - PQT 600 or 625	4	pcs	2.78	2.56	-	-
Spline A-PQF 300 or 312.5 wedge		pcs	-	-	2.78	2.56
Z connector PH 400	6	pcs	0.42	0.40	0.84	0.80
Adjustable hanger BS 10	9	pcs	0.67	0.67	0.67	0.67
Wire clip A - UK TL	10	pcs	1.38	1.34	2.78	2.67
Perimeter trim A - RWL / L	5	lin.m	0.60	0.60	0.60	0.60
Perimeter wedge A - RF	11	pcs	0.60	0.60	0.60	0.60
Main runner centres	12	m	1.20	1.20	1.20	1.20
Suspension distance max.	13	m	1.20	1.25	1.20	1.25

Edge Details

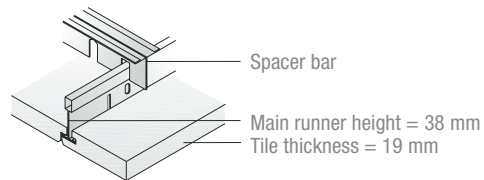


Edge AW/GN demountable


Grid size in mm	8	y	600 x 600	625 x 625	300 x 1200	312.5 x 1250
	9	x				
AMF-Mineral panel	1	pcs	2.78	2.56	2.78	2.56
Main runner A - PH 375	2	lin.m	1.67	1.60	3.34	3.20
L sections A - PQL 600 / 625 or PQL 300 / 312.5	3	lin.m	3.34	3.20	1.67	1.60
Spacer bar A - DI 600 / 625 or 300 / 312.5 *	4	pcs	1.39	1.28	1.39	1.28
Adjustable hanger A-SoS or SoH	5	pcs	1.34	1.28	2.67	2.56
Perimeter trim A - RWL / L	6	lin.m	0.60	0.60	0.60	0.60
Perimeter wedge A - RF	7	pcs	0.60	0.60	0.60	0.60
Suspension distance is	10	dependent on module size and construction				
Main runner centres	11	m	0.60	0.625	0.60	0.625

*Spacer bar every 2 tiles


Concealed Grid Construction Type A3

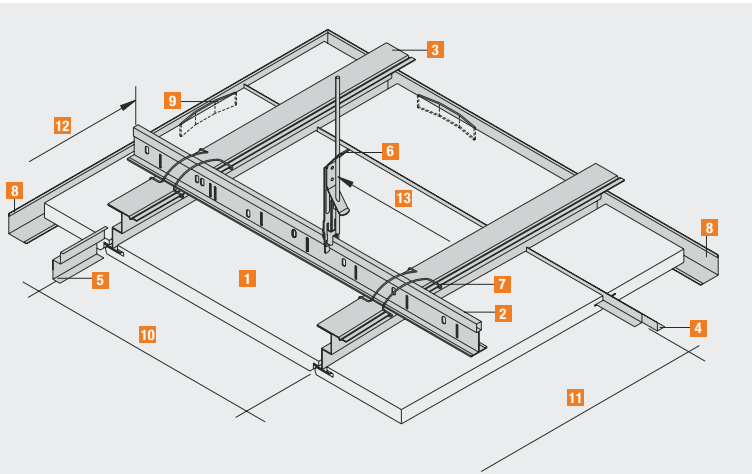


Edge Details



Deep offset Z section 57 mm
Tile thickness = 19 mm







Deep offset Z section,
long edge shiplap AW




L section,
short edge concealed GN

Accessories

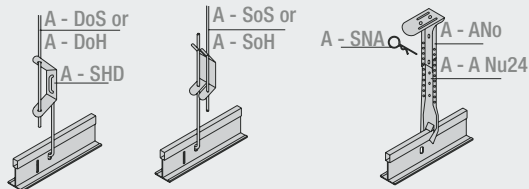

Fire-resistant light box for integrated luminaires.
Grid: 600 x 600 mm / 625 x 625 mm /
300 x 1200 mm / 312.5 x 1250 mm
Panel thickness: 19 mm
Height: 100 mm
Further sizes and heights are available on request.

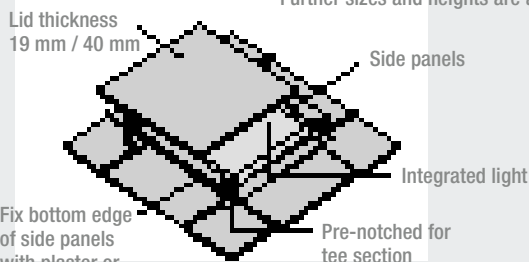



Fix bottom edge
of side panels
with plaster or
intumescent mastic

Suspension / Wall angle / Fire-Resistant Light Box

Edge AW/GN demountable

Grid size in mm			Grid size in mm			
			11 y	10 x	600 x 600	625 x 625
AMF-Mineral ceiling panel	1	pcs	2.78	2.56	2.78	2.56
Main runner A - PH 375	2	lin.m	0.84	0.84	0.84	0.84
Deep offset Z section A - ZP	3	lin.m	1.67	1.60	3.34	3.20
L section A - PQL 600 / 625 or PQL 300 / 312,5	4	lin.m	3.34	3.20	1.67	1.60
Z connector ZPV	5	pcs	0.42	0.40	0.84	0.80
Adjustable hanger BS 10	6	pcs	0.67	0.67	0.67	0.67
Wire clip A - UK TL	7	pcs	2.78	2.67	5.56	5.34
Perimeter trim A - RWL / L	8	lin.m	0.60	0.60	0.60	0.60
Perimeter wedge A - RF	9	pcs	0.60	0.60	0.60	0.60
Main runner centres	12	m	1.20	1.20	1.20	1.20
Suspension distance at max.	13	m	1.20	1.25	1.20	1.25

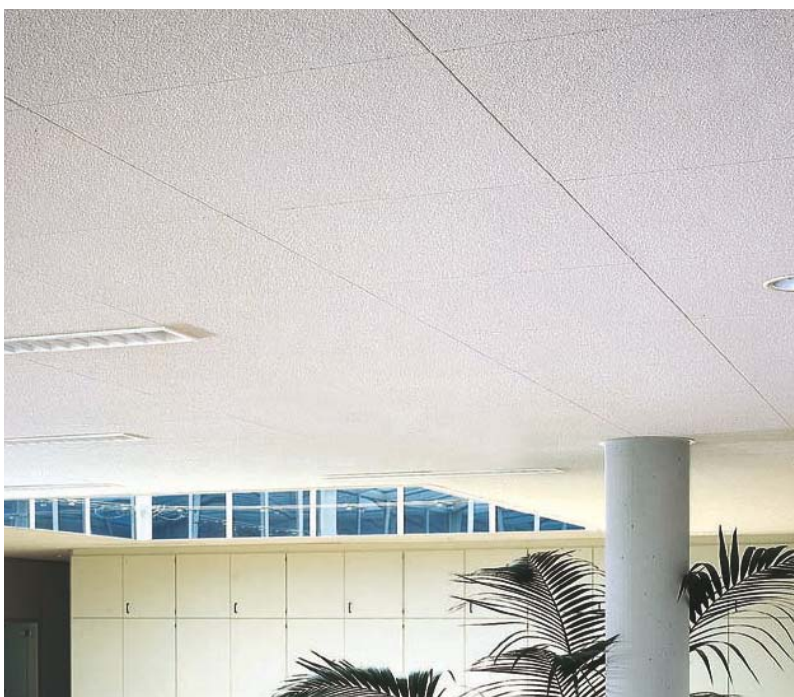

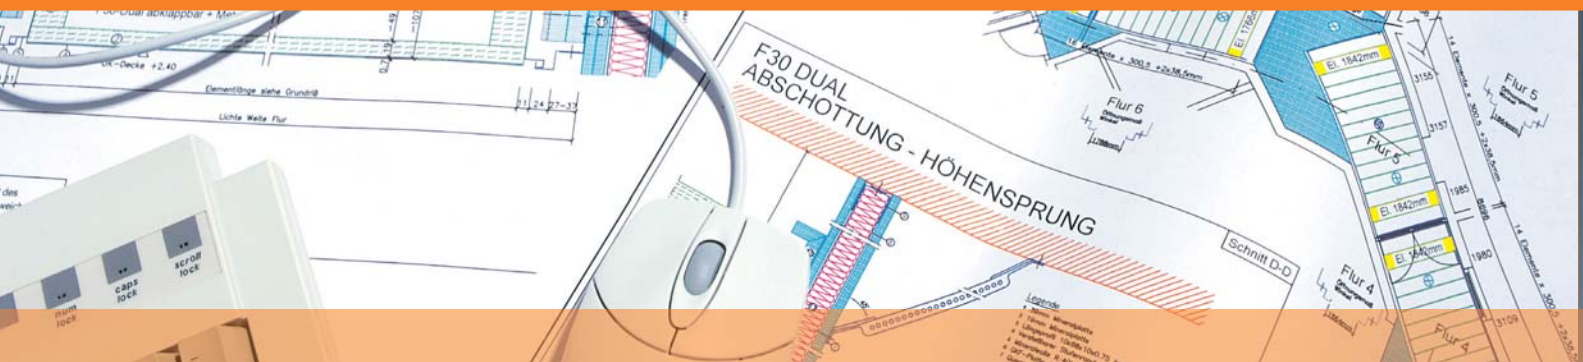

■ DRAFT SPECIFICATIONS AND TECHNICAL INFORMATION

For copies of draft specifications please

telephone +49 (0) 1805 - 54 22 00,
fax +49 (0) 1805 - 54 22 55,
email ATE@amf-grafenau.de

Full technical information, assessments,
test reports, samples etc. are available
on request.

We recommend you consult AMF staff for
all AMF systems subject to authoritative
approval.

■ MATERIAL CALCULATION

Note: Material Calculations

The specified quantities are guideline figures
only excluding wastage. Variable amounts
will be required for different room sizes.
Any additional weight from light fittings,
insulation etc. must also be calculated.

The depth and thickness of the main runners
and wall angles are dependent on the span,
panel thickness and panel size.
Contact the technical department for further
information.

■ INSTALLATION GUIDELINES

Installation should not start until the building is
weathertight with windows glazed, all wet trades
completed and dried out and the building suitably
heated. AMF Ceiling Panels are intended for
interior use within a temperature range of 15-30
degrees C. All warranties are as per our Conditions
of Sale.

■ PLEASE ASK FOR FREE AMF
INSTALLATION GUIDELINES.



■ IMPORTANT ADVICE

Due to reproduction processes colours shown in this catalogue may differ from the actual product colour.

Product selection should always be made from AMF samples. All details and technical information stated in this brochure or other publicity material referring to AMF ceiling systems are based on test reports obtained under laboratory conditions. All system details conform with current technology and are based on the use and compatibility of AMF products and system components used in both internal and external tests.

AMF accepts no liability or responsibility for use of third party components, or for any variations to conditions stipulated in test data.

We recommend not to mix production batches on jobs.

All technical data is subject to change without prior notice and is governed by AMF Terms and Conditions of Sale.

This catalogue supersedes all previous editions.

Errors and omissions excepted.

Printing errors excepted.

AMF PROJECTS

GERMANY



SIEMENS TMC, ERLANGEN

- Project ■ Siemens TMC, Erlangen, Germany
- AMF-Product ■ System I / THERMATEX Acoustic / AW / SK
- Size ■ 2,500 m²



GERMANY



ADIDAS BRAND CENTER, HERZOGENAURACH

Project	■ Adidas Brand Center, Herzogenaurach, Germany
Architect	■ Querkraft, Vienna
AMF-Product	■ System I / THERMATEX Acoustic / AW / SK
Size	■ 5,000 m ²




AMF PROJECTS

BELGIUM



EUROBLOC II, BRUSSELS

Project	■ Eurobloc II, Brussels, Belgium
Architect	■ L'Atelier S.A., Brussels
AMF-Product	■ System I / THERMATEX Fine Stratos micro / AW / SK
Size	■ 71,000 m ²

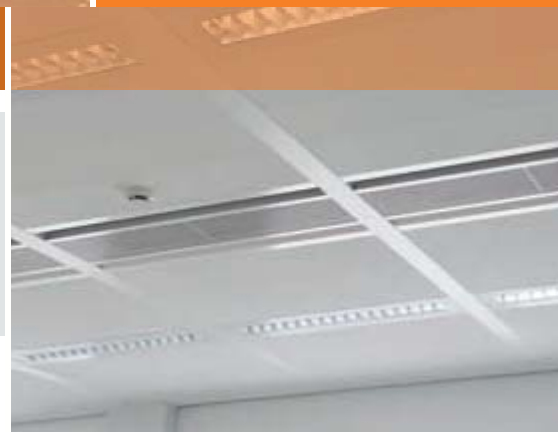

AUSTRIA



ERDBERGERLÄNDE, VIENNA

Project	■ Erdbergerlände, Vienna, Austria
AMF-Product	■ System C / THERMATEX Star / SK
Size	■ 18,500 m ²

AMF PROJECTS

FRANCE



LE DELAGE, GENEVILLIERS

Project	■ Le Delage, Genevilliers, France
Architect	■ Conceptua, Paris
AMF-Product	■ System C / THERMATEX Acoustic / VT-S15F System I / THERMATEX Kombimetall / AW/SK
Size	■ 38,000 m ²

UNITED KINGDOM



FOREST HILL SCHOOL, LONDON

- Project ■ Forest Hill School, London, United Kingdom
- AMF-Product ■ System C / THERMATEX Fine Stratos micro / THERMATEX Thermofon / THERMATEX Alpha / SK / VT-24 / 600 x 600 mm
- Size ■ 10,000 m²



AMF PROJECTS

DUBAI



DUBAI AIRPORT (DAFZA), DUBAI

Project	■ Dubai Airport Free Zone Authorities (DAFZA), Dubai
AMF-Product	■ System C / THERMATEX Acoustic / VT-15 / 600 x 600 mm
Size	■ 10,000 m ²





SHOPPING CENTRE GALERIA KRAKOWSKA, KRAKOW

Project	■ Shopping Centre Galeria Krakowska, Krakow, Poland
Architect	■ IMB Asymetria, Krakow
AMF-Product	■ System C / THERMATEX Fine Stratos / SK
Size	■ 10,000 m ²

AMF PROJECTS

HUNGARY



VERTES CENTER, TATABÁNYA

Project	■ Vertes Center, Tatabánya, Hungary
AMF-Product	■ System C / THERMATEX Star / SK
Size	■ 2,350 m ²

RUSSIA




SHOPPING CENTRE / CINEMA MEGA, MOSKOW

- Project ■ Shopping Centre / Cinema MEGA, Moscow, Russia
- AMF-Product ■ System C / THERMATEX Thermofon / SK
- Size ■ 4,000 m²



SERVICE

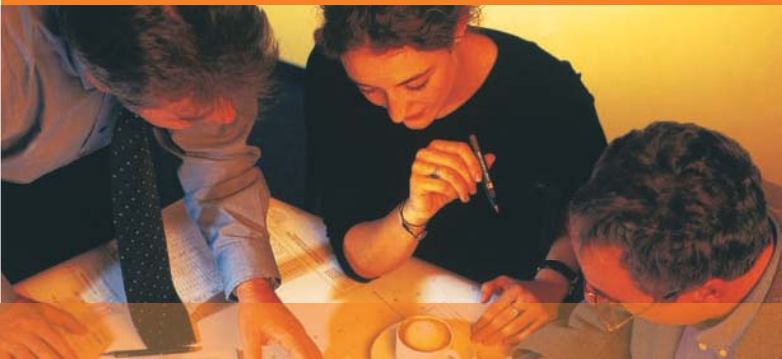

Advice and planning

AMF supports you in the planning phase for a project through:

- Sales offices world-wide with trained technical staff to give individual advice
- Expert advice either by telephone or on site.
- Assistance with complex questions through an office located near you or through the parent company in Grafenau.
- Design and installation proposals with the appropriate calculations.



Product development and support

We define service as starting before the order is placed and finishing once the ceiling has been successfully installed.

- Development of new products in cooperation with customers and with a creative network of system partners, test institutes and in-house development team.
- Monitoring of the despatch of goods from the factory to their punctual arrival.
- Support for complex projects from our sales managers



Training

On-going product improvements and new developments create the need for training. In the new AMF FORUM we offer:

- Fire protection and acoustics seminars for architects
- Training for contractors and technicians
- Workshops for government bodies

Additional training takes place locally and abroad.



Information / Internet

Answers to many technical problems and creative proposals can be found on our website

www.amfceilings.com

You can find all documents as pdf-files under the literature section

- Product folders for the complete product range
- Architectural file with all catalogues and technical data
- Price list for the complete product range
- Technical documents
- Test certificates for different countries
- Sample boxes
- CD-ROM with draft specifications

QUALITY STANDARDS



CE marking



The abbreviation stands for European Conformity and CE marking harmonises individual country regulations and technical norms. Within the European domestic market trade restraints are diminished and a mutual acceptance of universal guidelines by member states.

The fundamental requirements for these guidelines are health (for example, asbestos and formaldehyde content); security (for example, fire protection, corrosion resistance, humidity stability); and protection of both property and the environment.

The main criteria for the CE marking of ceiling products and ceiling systems are the Construction Products Directive 89/106/EEC and European Standard EN 13964.



Quality assurance as per ISO 9001



Product quality has always been central for AMF. To reach even higher standards the decision was taken in 1996 to introduce a Quality Management System in accordance with ISO 9001, certification being provided by an external testing authority.

The aim of product quality improvement was to increase customer satisfaction. Quality management means AMF can enhance the effectiveness of its production processes, personnel interfaces and operational management.



RAL - seal of approval



The RAL Seal of Approval guarantees the quality and safety of mineral wool products. Materials with the RAL designation are strictly tested, independently monitored and subject to in-depth research. The RAL Seal guarantees adherence to both European and German guidelines and regulations for bio-soluble mineral wool fibres.

ENVIRONMENT AND RECYCLING



Environmental safety standard ISO 14001




In 2002 the decision was made to increase the scope for our Quality Management certification and to adopt ISO 14001, the standard governing the management of environmental systems.

The location of AMF in the natural surrounding of the Bavarian Forest commits the company to environmental improvement. Reductions in emissions, lowering energy consumption and taking positive steps to input environmentally friendly resources are central to AMF. The environmental management system commits the company to comply with - and where possible exceed - applicable legal requirements.



Environment and recycling



Environmental protection starts with the manufacturing process. By selecting the right raw materials we can maximise efficient manufacture of the product for its life cycle. Setting the standard in production procedures and improvements in machinery and technology contribute to crucial reductions in energy use and minimal emissions of pollutants.

The closed production cycle means that water used in the process is recycled several times while dust, off cuts and waste material are reused in the manufacturing operation.

Eliminating unnecessary packaging and reducing waste is a vital part of the business. To reduce pollution as much as possible, AMF uses only untreated wood for making pallets, waste paper for cardboard packing and pure PE foil for shrink-wrapping.

In spite of the product's long life cycle AMF tiles are able to be recycled. Printing on the back of the tile ensures that the raw materials used can be identified.

TECHNICAL TERMS



Acoustics

Correct room acoustics comprise of two key issues: sound insulation and sound absorption.

Sound absorption

Sound absorption is defined as the loss of sound energy when striking the perimeter surfaces of a room or objects within that space. This loss is primarily due to conversion of the sound energy into heat and partly through transmission.

Sound Insulation

Sound insulation is a general term describing the ability of a structure to impede the transmission of sound energy from one space to another. Between internal rooms the sound attenuation is measured as the weighted normalised level difference $D_{n,c,w}$.

An overview of the acoustic values of our classic ceiling systems can be found on pages 68 and 69.






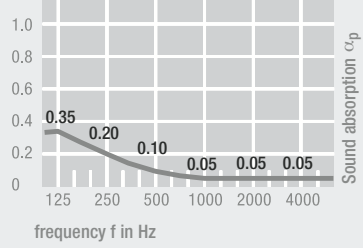

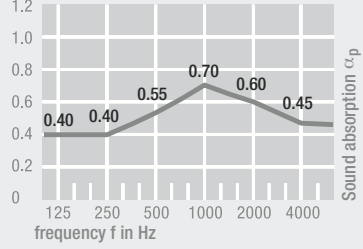

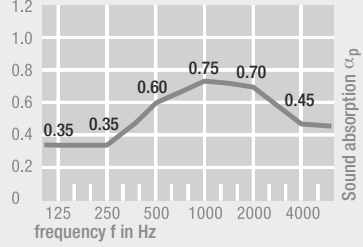

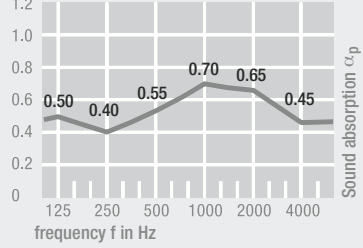


Fire protection

To safeguard both people and property AMF Ceiling systems are tested to international standards including BS 476: Parts 20 to 23. Ceilings are tested as independent membranes as well as under floors and structural ceilings. Fittings such as luminaires and loudspeakers are incorporated within the test procedure. Depending on the type of test AMF ceilings can reach up to 120 minutes fire protection.

We have put a list of the most important test results for our classic ceiling systems on pages 70 and 71.

ACOUSTIC VALUES

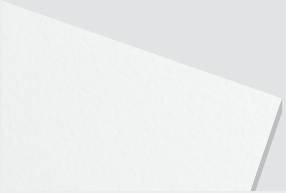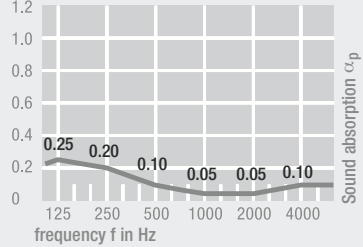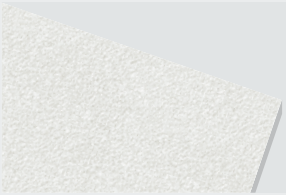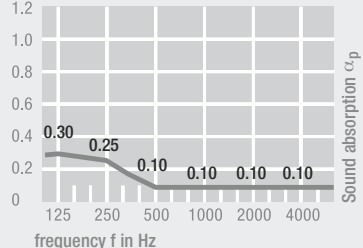Product	thickness in mm	D _{n,c,w} (BS EN 20140-9)	α _w (ISO 11654)	NRC (ASTM C 423-02a)	Suspension height in mm	Sound Absorption class (ISO 11654)	Sound Absorption														
Plain THERMATEX surfaces																					
 Schlicht	15.0	34	0.10 (L)	0.10	200	n.k.	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Schlicht</caption> <tr><th>f (Hz)</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>α_p</th><td>0.25</td><td>0.20</td><td>0.10</td><td>0.05</td><td>0.05</td><td>0.10</td></tr> </table>	f (Hz)	125	250	500	1000	2000	4000	α _p	0.25	0.20	0.10	0.05	0.05	0.10
f (Hz)	125	250	500	1000	2000	4000															
α _p	0.25	0.20	0.10	0.05	0.05	0.10															
 Fine Stratos	15.0	34	0.10 (L)	0.15	200	n.k.	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Fine Stratos</caption> <tr><th>f (Hz)</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>α_p</th><td>0.30</td><td>0.25</td><td>0.10</td><td>0.10</td><td>0.10</td><td>0.10</td></tr> </table>	f (Hz)	125	250	500	1000	2000	4000	α _p	0.30	0.25	0.10	0.10	0.10	0.10
f (Hz)	125	250	500	1000	2000	4000															
α _p	0.30	0.25	0.10	0.10	0.10	0.10															
 Laguna	15.0	34	0.10 (L)	0.10	200	n.k.	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Laguna</caption> <tr><th>f (Hz)</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>α_p</th><td>0.35</td><td>0.20</td><td>0.10</td><td>0.05</td><td>0.05</td><td>0.05</td></tr> </table>	f (Hz)	125	250	500	1000	2000	4000	α _p	0.35	0.20	0.10	0.05	0.05	0.05
f (Hz)	125	250	500	1000	2000	4000															
α _p	0.35	0.20	0.10	0.05	0.05	0.05															
Textured and micro perforated THERMATEX surfaces																					
 Fine Stratos micro	15.0	34	0.60	0.55	200	C	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Fine Stratos micro</caption> <tr><th>f (Hz)</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>α_p</th><td>0.40</td><td>0.40</td><td>0.55</td><td>0.70</td><td>0.60</td><td>0.45</td></tr> </table>	f (Hz)	125	250	500	1000	2000	4000	α _p	0.40	0.40	0.55	0.70	0.60	0.45
f (Hz)	125	250	500	1000	2000	4000															
α _p	0.40	0.40	0.55	0.70	0.60	0.45															
 Laguna micro	15.0	34	0.60	0.60	200	C	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Laguna micro</caption> <tr><th>f (Hz)</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>α_p</th><td>0.35</td><td>0.35</td><td>0.60</td><td>0.75</td><td>0.70</td><td>0.45</td></tr> </table>	f (Hz)	125	250	500	1000	2000	4000	α _p	0.35	0.35	0.60	0.75	0.70	0.45
f (Hz)	125	250	500	1000	2000	4000															
α _p	0.35	0.35	0.60	0.75	0.70	0.45															
 Star	15.0	34	0.60	0.60	400	C	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Star</caption> <tr><th>f (Hz)</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>α_p</th><td>0.50</td><td>0.40</td><td>0.55</td><td>0.70</td><td>0.65</td><td>0.45</td></tr> </table>	f (Hz)	125	250	500	1000	2000	4000	α _p	0.50	0.40	0.55	0.70	0.65	0.45
f (Hz)	125	250	500	1000	2000	4000															
α _p	0.50	0.40	0.55	0.70	0.65	0.45															

Product	thickness in mm	D _{n,c,w} (BS EN 20140-9)	α _w (ISO 11654)	NRC (ASTM C 423-02a)	Suspension height in mm	Sound Absorption class (ISO 11654)	Sound Absorption														
Textured and micro perforated THERMATEX surfaces																					
 Pinhole	15.0	34	0.55	0.60	200	D	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Pinhole surface</caption> <tr><th>frequency f in Hz</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>Sound absorption α_p</th><td>0.40</td><td>0.35</td><td>0.50</td><td>0.70</td><td>0.75</td><td>0.60</td></tr> </table>	frequency f in Hz	125	250	500	1000	2000	4000	Sound absorption α _p	0.40	0.35	0.50	0.70	0.75	0.60
frequency f in Hz	125	250	500	1000	2000	4000															
Sound absorption α _p	0.40	0.35	0.50	0.70	0.75	0.60															
Fissured THERMATEX surfaces																					
 Mercure	15.0	34	0.60	0.60	400	C	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Mercure surface</caption> <tr><th>frequency f in Hz</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>Sound absorption α_p</th><td>0.45</td><td>0.40</td><td>0.50</td><td>0.70</td><td>0.70</td><td>0.65</td></tr> </table>	frequency f in Hz	125	250	500	1000	2000	4000	Sound absorption α _p	0.45	0.40	0.50	0.70	0.70	0.65
frequency f in Hz	125	250	500	1000	2000	4000															
Sound absorption α _p	0.45	0.40	0.50	0.70	0.70	0.65															
 Fine Fresko-Saturn	15.0	34	0.60 (H)	0.60	200	C	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Fine Fresko-Saturn surface</caption> <tr><th>frequency f in Hz</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>Sound absorption α_p</th><td>0.45</td><td>0.40</td><td>0.50</td><td>0.70</td><td>0.80</td><td>0.75</td></tr> </table>	frequency f in Hz	125	250	500	1000	2000	4000	Sound absorption α _p	0.45	0.40	0.50	0.70	0.80	0.75
frequency f in Hz	125	250	500	1000	2000	4000															
Sound absorption α _p	0.45	0.40	0.50	0.70	0.80	0.75															
 Fresko	15.0	34	0.60 (H)	0.60	200	C	 <table border="1"> <caption>Sound absorption α_p vs frequency f in Hz for Fresko surface</caption> <tr><th>frequency f in Hz</th><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr> <tr><th>Sound absorption α_p</th><td>0.45</td><td>0.40</td><td>0.50</td><td>0.70</td><td>0.80</td><td>0.75</td></tr> </table>	frequency f in Hz	125	250	500	1000	2000	4000	Sound absorption α _p	0.45	0.40	0.50	0.70	0.80	0.75
frequency f in Hz	125	250	500	1000	2000	4000															
Sound absorption α _p	0.45	0.40	0.50	0.70	0.80	0.75															

FIRE PROTECTION: BRITISH STANDARDS

British Standards and British Building Regulations set out requirements for the fire behaviour of building materials in accordance with the following main criteria:

- Reaction to Fire
- Structural Fire Protection
- Special Fire Resistant Elements

Fire Protection includes passive and active measures. Passive fire control provisions are specified to enable the building to withstand a fire for a given time period. The levels of passive fire control depend on both reaction to fire and structural fire protection.

AMF ceiling tiles provide a high standard of fire protection within buildings. This performance is both in control of the development and spread of fire as well as structural fire resistance. AMF ceiling tiles have been tested in accordance with different parts of BS476 and national fire regulations of other European countries.

FIRE PROTECTION TO MEZZANINE FLOOR ASSEMBLY

A mezzanine floor assembly protected by AMF THERMATEX mineral ceiling tiles in a fire-rated exposed grid system was subjected to a fire resistance test in accordance with BS476:Part 21, Clause 7. The specimen satisfied the performance criteria for the following periods:

Loadbearing capacity:	Integrity:	Insulation:
90 minutes	89 minutes	89 minutes

Warrington Fire Research Centre Report No. 102642 dated 20 July 1998

- AMF THERMATEX mineral wool ceiling tiles size 600 x 600 x 15 mm with a square (SK) edge detail were used in the test.
- The AMF ceiling was suspended 350 mm below the underside of the chipboard flooring panels and 150 mm below the underside of the supporting mild steel joists.
- All tiles were installed in the fire-rated exposed grid system without hold-down clips.
- AMF fire-rated grid was installed with main runners at 1200 mm centres which were then generally suspended from the steel joists at 1200 mm centres.
- A 600 x 600 mm light fitting was incorporated into the ceiling and protected by an AMF FIRE-RESISTANT LIGHT BOX.
- Warrington Fire Research Centre Report No. C120024 provides assessments for the use of AMF recessed (VT) edge detail tiles to give 60 minutes fire protection to the mezzanine floor assembly.

FIRE PROTECTION TO TIMBER FLOOR ASSEMBLY

A timber floor assembly protected by AMF THERMATEX mineral ceiling subjected to a fire resistance test in accordance with BS 476: Part 21: Clause 7. The specimen satisfied the performance criteria for the following periods:

Loadbearing capacity:	Integrity:	Insulation:
72 minutes	72 minutes	72 minutes

Warrington Fire Research Centre Report No.117523 dated 16 July 2001

- The timber floor assembly comprised 19 mm thick softwood floor boards with a 3 mm hardboard covering nailed to softwood joists size 225 x 47 mm.
- The ceiling tiles used were AMF THERMATEX mineral wool size 600 x 600 x 15 mm with a recessed edge (VT) detail.
- All tiles were installed in the fire-rated exposed grid system without hold-down clips.
- The fire-rated grid was installed with main runners at 1200 mm centres which were then generally suspended from the timber joists at 1200 mm centres.
- A 600 x 600 mm light fitting was incorporated into the ceiling and protected by an AMF FIRE-RESISTANT LIGHT BOX.

SURFACE DESIGNS

The AMF THERMATEX range of mineral wool ceiling tiles offers a wide choice of face patterns and designs. All provide 60 minutes fire protection to mezzanine floors, timber joists and steel beams in accordance with BS476:Parts 20 to 23.

IMPORTANT

The test results stated above relate only to the specimen tested. Installation must be carried out in accordance with the test report data, as any variation from these conditions may affect the fire protection capabilities of the ceiling system. For comprehensive description of tests and test specimens, reference must be made to the appropriate full document.



Plain



Fine Stratos micro



Laguna micro



Star



Pinhole




Mercure



Fine Fresko-Saturn






Fresko




Thermaclean S -white


FIRE PROTECTION: BRITISH STANDARDS

System diagram	Soffit type to British Standard 476			AMF panels			Test certificate
	 Timber joists BS476:Part21:Clause7	 Steel beams BS476:Part23	 Mezzanine floor BS476:Part21:Clause7	Reaction to Fire	Thickness	Ceiling grid size	Test Report No. Copies of test reports are available from AMF technical department on Tel: +44 (0) 20 88 92 32 16 or +49 (0) 8552-422 53
	Fire resistance class				mm	mm	


SYSTEM C - exposed grid

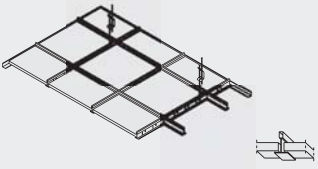	90 min			Class 0 / A2-s1,d0	19	600 x 1200	WFR. NO 55481 BS 476: Part 23.
	90 min				19		


SYSTEM C - exposed grid

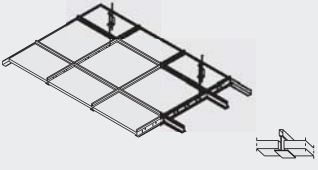	60 min		60 min	Class 0 / A2-s1,d0	15	1200 x 600 600 x 600	WFR. NO C120024+ 102642 BS 476: Part 21: Clause 7.
	60 min		60 min		15		


SYSTEM C - exposed grid

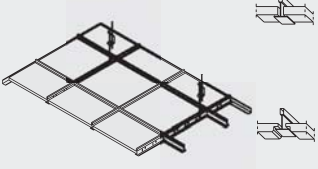	60 min			Class 0 / A2-s1,d0	15	600 x 1200	WFR. NO C120025 BS 476: Part 23.
	60 min				15		

SYSTEM C - exposed grid

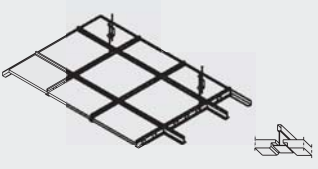	60 min			Class 0 / A2-s1,d0	15	600 x 600	WFR. NO 117523 BS 476: Part 21: Clause 7.
	60 min				15		

SYSTEM C - exposed grid

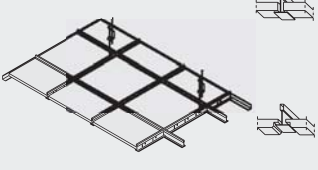	60 min			Class 0 / A2-s1,d0	15	600 x 600	WFR. NO 102765 / 107637 BS 476: Part 23.
	60 min				15		

KNAUF AMF SALES ORGANISATION

Knauf AMF GmbH & Co. KG
Postal address: Postfach 1263, D-94476 Grafenau
Business address: Elsenthal 15, D-94481 Grafenau

Knauf AMF - Head Office Grafenau

Sales	Code +49
-------	----------

Central Sales Region

(Southern Germany, Austria, Switzerland)

Fritz Schneck Mobil: (0) 171 - 6 12 95 92
Eduard Schönberger Tel.: (0) 85 52 - 422 26
Roland Biebl Tel.: (0) 85 52 - 422 14
Olga Eibl Tel.: (0) 85 52 - 422 972
Michael Lentner Tel.: (0) 85 52 - 422 925

Northern Sales Region

(Northern Germany, Benelux, Scandinavia)

Karl-Heinz Kuhn Mobil: (0) 171 - 6 12 36 30
Thomas Moser Tel.: (0) 85 52 - 422 78
Sandra Stockinger Tel.: (0) 85 52 - 422 56
Jakob Reitberger Tel.: (0) 85 52 - 422 57

Western Sales Region

(Western Europe, America, Middle East, Africa)

Katharina Sigl Mobil: (0) 170 - 8 31 52 75
Martin Riedl Tel.: (0) 85 52 - 422 981
Klaus Scholz Tel.: (0) 85 52 - 422 19
Georg Laudi Tel.: (0) 85 52 - 422 66
Marion Sammer Tel.: (0) 85 52 - 422 967
Tamara Eder Tel.: (0) 85 52 - 422 941
Johanna Hartl Tel.: (0) 85 52 - 422 901
Martin Zeitner Tel.: (0) 85 52 - 422 966

Eastern Sales Region

(East Europe, Northern Asia, Far East)

Karl Wenig Mobil: (0) 171 - 9 35 49 60
Christoph Cieply Tel.: (0) 85 52 - 422 21
Silvia Raab Tel.: (0) 85 52 - 422 67
Nataliya Eberl-Tsvyk Tel.: (0) 85 52 - 422 64
Andreas Riedl Tel.: (0) 85 52 - 422 17
Sergej Kalina Tel.: (0) 85 52 - 422 65
Gennadi Marksitzer Tel.: (0) 85 52 - 422 62
Stefan Blöchl Tel.: (0) 85 52 - 422 73
Karin Urbaneck Tel.: (0) 85 52 - 422 995

Marketing / Advertising

Marlene Egginger Tel.: (0) 85 52 - 422 994
Carina Stemplinger Tel.: (0) 85 52 - 422 988

Consignment / Dispatch

Michael Winter Tel.: (0) 85 52 - 422 16
Thomas Kliemsch Tel.: (0) 85 52 - 422 22
Christina Weber Tel.: (0) 85 52 - 422 902
Erich Fürst Tel.: (0) 85 52 - 422 957
Stefanie König Tel.: (0) 85 52 - 422 909

Product Management / Technical Support

Andreas Schiedeck Tel.: (0) 85 52 - 422 982
Andreas Niermann Tel.: (0) 85 52 - 422 977
Wilhelm Holzinger Tel.: (0) 85 52 - 422 53
Stefan Schmid Tel.: (0) 85 52 - 422 74
Markus Mück Tel.: (0) 85 52 - 422 976

Internat. Communication / Standard nature

Alexander Mayer Tel.: (0) 85 52 - 422 54

Knauf AMF Technical Offices

Central / Northern Sales

Knauf AMF Germany	Code +49
-------------------	----------

Knauf AMF - Office Hamburg

Hans Stach Tel.: (0) 42 63 - 41 36
Helvesieker Weg 71 Mobil: (0) 171 - 617 30 83
27383 Scheeßel Fax: (0) 42 63 - 37 01
e-mail: stach.amf-n@t-online.de

Knauf AMF - Office Bremen / Oldenburg

Stefan Seehafer Mobil: (0) 160 - 96 88 73 54
Claus-Immen-Weg 1a Fax: (0) 91 31 - 5 40 42
27607 Langen e-mail: seehafer.stefan@amf-grafenau.de

Knauf AMF - Office Hannover

Antonius Sprenger-Pieper Tel.: (0) 29 53 - 96 48 55
Springsweg 1 Mobil: (0) 170 - 438 59 71
33181 Bad Wünnenberg Fax: (0) 29 53 - 96 48 56
e-mail: sprenger-pieper.amf@t-online.de

Knauf AMF - Office Berlin

Martin Bierhoff Tel.: (0) 3 32 08 - 204 88
Fahrländer Str. 3 Mobil: (0) 175 - 578 93 84
14476 Potsdam-Marquardt Fax: (0) 3 32 08 - 204 89
e-mail: bierhoff.martin@amf-grafenau.de

Knauf AMF - Office Düsseldorf

Manuel Schons Tel.: (0) 211 - 40 07 67
Niederrheinstraße 292 Mobil: (0) 171 - 315 45 40
40489 Düsseldorf Fax: (0) 211 - 40 00 32
e-mail: info@mshschons.de

Knauf AMF - Office Leipzig

Axel List Tel.: (0) 341 - 3 38 64 57
Bernhard-Göring-Straße 73 Mobil: (0) 171 - 612 03 36
04275 Leipzig Fax: (0) 341 - 3 38 64 59
e-mail: list.amf-o@t-online.de

Knauf AMF - Office Frankfurt

Fridolin Helfenbein Tel.: (0) 60 55 - 8 38 50
Adolf-Amberg-Straße 18 Mobil: (0) 171 - 612 03 53
63579 Freigericht / Neuses Fax: (0) 60 55 - 8 38 59
e-mail: helfenbein.amf-w@t-online.de

Knauf AMF - Office Mannheim

Ivo Bährle Tel.: (0) 62 02 - 60 70 388
Werderstraße 8 Mobil: (0) 171 - 30 22 652
68775 Ketsch Fax: (0) 62 02 - 60 50 867
e-mail: baehrle.ivo@amf-grafenau.de

Knauf AMF - Office Nürnberg

Christian Veith Tel.: (0) 91 31 - 5 40 61
Löhestr. 45 a Mobil: (0) 171 - 45 865 77
91054 Erlangen Fax: (0) 91 31 - 5 40 42
e-mail: veith.christian@amf-grafenau.de

Knauf AMF - Office Karlsruhe

Stefan Lemler Tel.: (0) 78 51 - 48 14 00
Höllstraße 4 Mobil: (0) 171 - 613 36 49
77694 Kehl Fax: (0) 78 51 - 48 33 22
e-mail: lemmler.amf-sw@t-online.de

Knauf AMF - Office Stuttgart

Marcus Kaufmann-Bertsche Tel.: (0) 74 85 - 98 37 162
Lerchenstr. 16 Mobil: (0) 160 - 90 98 6463
72186 Empfingen Fax: (0) 74 85 - 98 37 163
e-mail: kaufmann.marcus@amf-grafenau.de

Knauf AMF - Office München

Bernhard Jähnel Tel.: (0) 89 - 28 675 458
Barer Straße 32 Mobil: (0) 151 - 17 41 05 73
80333 München Fax: (0) 89 - 28 675 789
e-mail: jaehnel.amf@t-online.de

Knauf AMF Austria	Code +43
-------------------	----------

Norbert Schiffauer Tel.: (0) 1 - 41 68 584
Bergmillergasse 3 Mobil: (0) 664 - 344 53 50
A - 1140 Wien Fax: (0) 1 - 41 68 780
e-mail: schiffauer.amf@aon.at

Knauf AMF Switzerland	Code +49
-----------------------	----------

Eduard Schönberger Tel.: (0) 85 52 - 422 26
Fax: (0) 85 52 - 422 30

Knauf AMF Benelux	Code +32
-------------------	----------

Knauf AMF Plafonds bvba Tel.: (0) 3 - 887 85 48
Marc Peeters Mobil: (0) 476 - 22 76 94
Antwerpsesteenweg 124 Fax: (0) 3 887 - 95 12
B- 2630 Aartselaar/België e-mail: amfplafonds@skynet.be

Knauf AMF Netherlands		Code +31
■ Koen van de Pol	Tel.:	(0) 13 - 50 30 335
	Mobil:	(0) 6 - 100 35789
Postbus 1	Fax:	(0) 13 - 50 30 500
NL - 5070 AA Udenhout	e-mail:	knauf-amfplafonds@home.nl

Knauf AMF Scandinavia		Code +49
■ Thomas Moser	Tel.:	(0) 85 52 - 422 78
	e-mail:	moser@amf-grafenau.de

Sales West

Knauf AMF Italy		Code +39
■ Knauf AMF Italia Controsoffitti S.r.l.	Tel.:	0 172 - 42 51 69
Giorgio Marengo	Mobil:	348 - 41 12 099
B.go San Martino 18/d	Fax:	0 172 - 43 00 57
I - 12042 Bra (CN)	e-mail:	info@amf-italia.it

■ Sviluppo Vendite Nord-Centro		
Tommaso Di Bernardo	Mobil:	340 - 40 01 319
	e-mail:	amf.dibernardo@alice.it

■ Ufficio Italia Ovest		
Fabrizio Chiesa	Mobil:	340 - 40 01 342
	e-mail:	amf.chiesa@virgilio.it

■ Ufficio Italia Sud	Mobil:	348 - 93 44 185
----------------------	--------	-----------------

■ Ufficio Italia Centro		
Massimiliano Cesetti	Mobil:	340 - 40 01 312
	e-mail:	amf.cesetti@alice.it

■ Ufficio Italia Nord-Est		
Giovanna Toniolo	Mobil:	331 - 57 44 314
	e-mail:	amf.toniolo@alice.it

Knauf AMF France		Code +33
------------------	--	----------

■ AMF France SARL		
Plafonds et Systèmes	Tel.:	(0) 1 - 64 67 60 80
Z.I. Mityr Compans	Fax:	(0) 1 - 64 67 60 81
1, rue Becquerel, BP 222	e-mail:	info@amf-france.fr
F-77292 Mityr Mory Cedex		

■ Directeur des Ventes		
Jean-Christophe Cornu	Tel.:	(0) 1 - 64 67 60 82
	Mobil:	(0) 6 - 16 31 94 66
	Fax:	(0) 1 - 64 67 60 81
	e-mail:	jccornu@amf-france.fr

■ Bureau Sud-Est et Export		
Développement & Communication	Tel.:	(0) 4 - 90 68 16 00
Philippe Paillart	Mobil:	(0) 6 - 09 86 04 86
	Fax:	(0) 4 - 90 68 35 22
	e-mail:	ppaillart@amf-france.fr

■ Bureau Nord / Normandie		
Olivier Lecourt	Tel.:	(0) 3 - 28 20 31 65
	Mobil:	(0) 6 - 08 00 39 13
	Fax:	(0) 3 - 28 20 31 65
	e-mail:	olecourt@amf-france.fr

■ Bureau Est		
Gilles Lescoffier	Tel.:	(0) 3 - 83 52 35 38
	Mobil:	(0) 6 - 27 32 21 03
	Fax:	(0) 3 - 83 52 35 38
	e-mail:	glescoffier@amf-france.fr

■ Bureau Ile de France		
Patrice Cordon	Tel.:	(0) 1 - 64 42 34 95
	Mobil:	(0) 6 - 15 04 93 18
	Fax:	(0) 1 - 64 42 34 95
	e-mail:	pcordon@amf-france.fr

■ Bureau Sud / Sud-Ouest		
Pierre Laxalde	Tel.:	(0) 1 - 64 67 60 80
	Mobil:	(0) 6 - 09 03 89 71
	Fax:	(0) 1 - 64 67 60 81
	e-mail:	plaxalde@amf-france.fr

■ Bureau Ouest / Centre		
Christian Kernevez	Tel.:	(0) 2 - 40 25 52 36
	Mobil:	(0) 6 - 24 29 24 61
	Fax:	(0) 2 - 40 25 55 47
	e-mail:	ckernevez@amf-france.fr

■ Prescripteur		
Stéphane Cavrero	Tel.:	(0) 1 - 60 25 38 72
	Mobil:	(0) 6 - 34 61 57 19
	Fax:	(0) 1 - 60 25 38 72
	e-mail:	scavrero@amf-france.fr

■ Rhône-Alpes / Auvergne		
Christophe Alignol	Tel.:	(0) 4 - 72 07 62 32
	Mobil:	(0) 6 - 16 01 90 51
	Fax:	(0) 4 - 72 07 62 32
	e-mail:	calignol@amf-france.fr

Knauf AMF Greece		Code +30
■ Knauf AMF Hellas EPE		
Aggelos Sinodinos	Tel.:	210 - 36 156 45
Xarilaou Trikoypi 18	Mobil:	697 - 286 9796
GR - 10682 Athen	Fax:	210 - 36 156 45
	e-mail:	asinodinos@amfhellas.gr

Knauf AMF UK		Code +44
--------------	--	----------

■ Knauf AMF Ceilings Ltd.		
Thames House,	Tel.:	020 - 8892 3216
6 Church Street,	Fax:	020 - 8892 6866
Twickenham,	e-mail:	sales@amfceilings.co.uk
Middlesex TW1 3NJ		

■ National Sales Manager		
Peter Harris	Mobil:	07798 825817
	e-mail:	sales@amfceilings.co.uk

■ Business Development Executive - Midlands		
Peter Symons	Mobil:	07876 025841
	e-mail:	psymons@amfceilings.co.uk

■ Midlands and West of England		
Alan Davidson	Mobil:	07780 970000
	e-mail:	adavidson@amfceilings.co.uk

■ South and East of England		
Vince Saunders	Mobil:	07789 865837
	e-mail:	vsauanders@amfceilings.co.uk

■ Scotland / Northern Ireland		
Henry Niven	Mobil:	07795 415185
	e-mail:	hniven@amfceilings.co.uk

■ Business Development Executive - Midlands		
Suzanne Waters	Mobil:	07917 469108
	e-mail:	swaters@amfceilings.co.uk

■ North West England		
Elaine Barker	Mobil:	(0) 7789 - 007 610
	e-mail:	ebarker@amfceilings.co.uk

■ North East England		
Jeff Hall	Mobil:	(0) 7876 - 050 903
	e-mail:	jhall@amfceilings.co.uk

■ Republic of Ireland		
Jason Kenny	Mobil:	+353 872 - 701 767
	e-mail:	jkenny@amfceilings.co.uk

Knauf AMF Spain / Portugal		Code +34
----------------------------	--	----------

■ Knauf AMF Sistemas de Techos S.L.		
Luis Cabañero Moreno	Tel.:	91 - 541 34 20
Gran Via 43, 2° E	Mobil:	609 - 51 29 28
E - 28013 Madrid	Fax:	91 - 542 10 05
	e-mail:	info@amfsistemasdetechos.com

■ Zona Este		
Fernando Valdivia	Mobil:	609 - 70 02 22
	e-mail:	fernando@amfsistemasdetechos.com

■ Zona Centro		
Daniel López	Mobil:	690 - 61 51 56
	e-mail:	daniel@amfsistemasdetechos.com

■ Zona Norte		
Miguel Fernández	Mobil:	609 - 00 66 39
	e-mail:	miguel@amfsistemasdetechos.com

Knauf AMF Middle East		Code +971
-----------------------	--	-----------

■ Nigel Nambiar		
Office # 847, Block 5E	Tel.:	(4) 609 180 5
Dubai Airport Free Zone	Fax:	(4) 609 180 6
PO Box 293713	Mobil:	50 6407172
	e-mail:	amfdubai@gmail.com

Knauf AMF Turkey	Code +90
------------------	----------

- Knauf AMF**
Asma Tavan Sistemleri Ltd Sti Tel.: 312 426 1709
İlhan Yasar Mobil: 533 430 8768
Kenedy Cad. Fax: 312 426 1759
TR - 126/ 14 G.O.P Ankara e-mail: ilhanyasar@amf-turkiye.com.tr
- Burak Oncu** Mobil: 533 - 332 9195
e-mail: burakoncu@amf-turkiye.com.tr
- Yasin Donmez** Mobil: 533 - 332 9196
e-mail: yasindonmez@amf-turkiye.com.tr

Knauf AMF Iran	Code +98
----------------	----------

- Martin Riedl** Tel.: +49 (0) 85 52 - 422 981
Mobil: +49 (0) 175 - 46 71 174
Fax: +49 (0) 85 52 - 422 - 938
e-mail: martin.riedl@amf-grafenau.de
- Saeed Mirali Akbar** Mobil: 912 - 45 85 301
Valiye Asr Str., Nr. 3007 Tel.: 21 88 55 30 23
Sepehr e Sae Building Fax: 21 88 70 44 26
8th Floor, Appt. 808 e-mail: s.miraliakbar@amf-iran.com
Teheran
- Abbas Hashemi** Mobil: 912 - 59 32 099
e-mail: hashemi@amf-iran.com

Knauf AMF Africa	Code +20
------------------	----------

- East Africa Technical & Sales Support**
Wael El-Gamel Tel.: 18 21 535 21
Villa no. 86 Andalus Elsherouk Mobil: 18 21 535 21
El-Shourouk City Fax: 10 15 97 194
Cairo, Egypt e-mail: amfceilingscairobranch@gmail.com

Knauf AMF Brazil	Code +55
------------------	----------

- Knauf AMF Forros do Brasil Ltda.** Tel.: 11 3539 - 3930
Eng° Fábio Miceli Teixeira Mobil: 11 9203 - 6605
Rua Princesa Isabel, 94 Sala 84 Fax: 11 3539 - 3930
Brooklin Paulista - e-mail: info@amf-brasil.com.br
São Paulo-SP
CEP 04621-000 - Brasil
- Arq. Paula Omizzolo** Mobil: 11 9296 - 6461
e-mail: paula@amf-brasil.com.br
- Ing. Renata Caputo Cardoso** Mobil: 11 9296 - 0826
e-mail: renata@amf-brasil.com.br
- Atención al Cliente**
Viviana Barbagelata Del Carpio Mobil: 11 9173 - 6941
e-mail: viviana@amf-brasil.com.br

Knauf AMF Northern / South America	Code +49
------------------------------------	----------

- Georg Laudi** Tel.: (0) 85 52 - 422 66
Mobil: (0) 170 - 89 19 019
Fax: (0) 85 52 - 422 866
e-mail: laudi@amf-grafenau.de

Sales East

Knauf AMF Czech Republic	Code +420
--------------------------	-----------

- Knauf AMF s.r.o.** Tel.: 222 247 413
Tel.: 266 790 130
Petr Fitzner Mobil: 602 227 613
Chlumčanského 5/497 Fax: 222 246 981
Fax: 266 790 143
CZ - 180 21 Praha 8 e-mail: amfcz@bon.cz
- Knauf AMF s.r.o.** Tel.: 577 635 145
Libor Holub Mobil: 602 650 938
Malenovice 910 Fax: 577 635 145
CZ - 763 02 Zlín 4 e-mail: amfcz-morava@avonet.cz
- Petra Ostra** Mobil: 602 553 930
e-mail: petra.ostra@amf-cz.cz

Knauf AMF Slovakia	Code +420
--------------------	-----------

- Knauf AMF s.r.o.** Tel.: 222 247 413
Tel.: 266 790 130
Petr Fitzner Mobil: 602 227 613
Libor Holub Mobil: 602 650 938
P.O.BOX 108 Fax: 222 246 981
Fax: 266 790 143
SK - 814 99 Bratislava 1 e-mail: amfsk@amf-sk.sk

Knauf AMF Poland	Code +48
------------------	----------

- Knauf AMF Sp.z.o.o.**
Office Zentral Polen Tel.: (0) 22 - 873 37 05
Krzysztof Szczepaniak Mobil: (0) 602 592 706
Al. Jerozolimskie 195b Fax: (0) 22 - 571 08 18
PL - 02-222 Warszawa e-mail: waw@amf-polska.pl
- Office Südwest Polen**
Krzysztof Szczepaniak Tel.: (0) 71 - 339 98 98 wew. 324
Wietrzna 10 Mobil: (0) 602 592 706
PL - 53 - 024 Wrocław Fax: (0) 71 - 339 98 98 wew. 324
e-mail: wro@amf-polska.pl
- Office Südost Polen**
Mariusz Czynciel Tel.: (0) 12 - 421 43 90
ul. Sw. Gertrudy 5 Mobil: (0) 602 212 772
PL - 31 - 046 Kraków Fax: (0) 12 - 421 43 90
e-mail: krak@amf-polska.pl
- Office Nord Polen**
Michał Czachor Tel.: (0) 61 811 6858
ul. Polna 1a, Mobil: (0) 602 575 077
PL-62-001 Gołęczewo/Poznan Fax: (0) 61 811 6858
e-mail: czachor@amf-polska.pl
- Office Nordost Polen**
Wojciech Krzyzowski Tel.: (0) 22 - 873 37 04
Al. Jerozolimskie 195 b Mobil: (0) 602 551 510
02-222 Warszawa Fax: (0) 22 - 873 40 86
e-mail: krzyzowski@amf-polska.pl

Knauf AMF Latvia / Estonia	Code +371
----------------------------	-----------

- SIA Knauf AMF** Tel.: (0) 78 - 16 118
Ivars Šmalcs Mobil: (0) 291 - 32 227
Brīvības gatve 224 Fax: (0) 78 - 16 119
Rīga LV - 1039, Latvija e-mail: info@amf-baltikum.lv

Knauf AMF Lithuania	Code +370
---------------------	-----------

- Knauf AMF SIA Atstovybė** Tel.: (0) 37 40 01 84
Virginijus Šiugžda Mobil: (0) 61 22 12 21
Taikos pr. 135A Fax: (0) 37 40 01 85
Kaunas, LT-51130 e-mail: amf_lietuva@yahoo.com
Lietuva

Knauf AMF Belarus	Code +375
-------------------	-----------

- Yuri Truchanow** Mobil: (0) 29 602 23 81
Doroschewitscha Str. 4/34 e-mail: info@amf.by
BY - 220000 Minsk

Knauf AMF Hungary	Code +36
-------------------	----------

- AMF Mineralplatten Kft.** Tel.: 1 - 204 53 50
Miklós Laczka Mobil: 20 - 460 39 02
László Mohai Mobil: 20 - 264 18 70
Budafoki út 111. Fax: 1 - 204 53 51
H - 1117 Budapest e-mail: info@amf-almennyezetek.hu
e-mail: mohai.laszlo@amf-almennyezetek.hu

Knauf AMF Slovenia / Bosnia	Code +386
-----------------------------	-----------

- Knauf AMF d.o.o.** Tel.: (0) 1 - 75 57 480
Aleš Gabrovšek Mobil: (0) 41 - 650 443
Turnovše 44 Fax: (0) 1 - 75 57 485
SI - 1360 Vrhnika e-mail: gabrovsek@amf-slo.si

Knauf AMF Serbia and Montenegro	Code +381
---------------------------------	-----------

- Knauf AMF d.o.o.** Tel.: (0) 11 - 344 16 13
Dejan Popović, dig. Mobil: (0) 63 - 634 515
Bul.kralja Aleksandra 296/1 Fax: (0) 11 - 344 16 20
SRB - 11000 Belgrad e-mail: popovic@amf-yu.co.yu

Knauf AMF Croatia	Code +385
-------------------	-----------

Knauf AMF d.o.o.
 Tehnički ured Tel.: (0) 1 - 626 37 89
 Igor Cvek Mobil: (0) 91 - 638 14 22
 Zagrebačka 119 Fax: (0) 1 - 626 37 90
 HR - 10410 Velika Gorica e-mail: amf-zagreb@inet.hr

Knauf AMF Bulgaria / Macedonia	Code +359
--------------------------------	-----------

Knauf AMF EOOD Tel.: (0) 2 - 988 71 75 / 76
 Jawor Otaschlijski Mobil: (0) 888 - 21 99 79
 Kiril Gyuzelev Mobil: (0) 887 - 56 28 57
 Universitetska Str. 2 Fax: (0) 2 - 96 33 236
 BG - 1164 Sofia e-mail: otaschlijski@amf.bg
 e-mail: gyuzelev@amf.bg

Knauf AMF Romania / Moldavia	Code +40
------------------------------	----------

AMF Mineralplatten Tel.: (0) 21 - 312 86 55
 Trajan-Florin Vujdea Mobil: (0) 744 - 303 600
 Monica Minoiu Mobil: (0) 745 - 944 611
 Bd. Iancu de Hunedoara Nr. 2, Fax: (0) 21 - 312 86 56
 Bl. H6, Sc.1, e-mail: vujdea@amf.ro
 Etj.2, Ap.8, Sector 1 e-mail office: minoiu@amf.ro
 RO - 011741 Bukarest

Florian Ilie Dragomir Tel.: (0) 269 - 233 252
 Str. Miraslau Nr. 36, Mobil: (0) 745 - 669 942
 SC. A, ET. 4, AP. 17 Fax: (0) 269 - 233 710
 RO - 550357 Sibiu e-mail: dragomir@amf.ro

Knauf AMF Russia	Code +7
------------------	---------

000 Knauf AMF Tel.: 495 - 933 36 54
 Alexey Prokhorov Mobil: (8) 910 - 465 83 58
 Novoaleksejevskaja Str. 21 Geb. 1 e-mail: amfmoskau@gmail.com
 RUS - 129626 Moskau Fax: 495 - 933 36 54

Alexander Gnezdilov Mobil: (8) 916 424 45 04
 e-mail: amf-gnezdilov@hotmail.ru

Office St. Petersburg
 Evgeni Pavlov Tel.: 812 - 708 49 49
 Mobil: (8) 911 - 734 74 74
 Fax: 812 - 708 49 49
 e-mail: amf-spb@mail.ru

Office Tjumen Tel.: 3452 - 37 06 09
 Sergej Rakov Mobil: (8) 912 - 997 22 22
 Fax: 3452 - 37 06 09
 e-mail: amf-tjumenj@mail.ru

Oksana Geraschenko Mobil: (8) 988 - 510 33 35
 e-mail: amfrostov@gmail.com

Knauf AMF Ukraine	Code +380
-------------------	-----------

Knauf AMF Verwaltungsgesellschaft mbH
 Office Zentral Ukraine Tel.: (0) 44 - 501 9282
 Maria Bokun Mobil: (0) 44 - 203 1618
 Garmatna Straße 8 Fax: (0) 44 - 501 9293
 UA - 03067 Kiev e-mail: amf-ukr@i.kiev.ua

Yuri Zimin Mobil: (0) 50 - 331 8687
 e-mail: y_zimin@ukr.net

Knauf AMF China	Code +86
-----------------	----------

Knauf AMF Verwaltungsges.mbH
 Shanghai Office Tel.: 21 62 49 97 87
 Liu Xin Mobil: 1 38 17 69 75 28
 Room 2009, 129 Yan'An West Road Fax: 21 62 49 90 55
 Overseas Chinese Mansion e-mail: amfchina@126.com
 Shanghai 200040.P.R. China

Knauf AMF South East Asia	Code +886
---------------------------	-----------

Hugo Chang Tel.: 2 23 51 51 92
 3F-B., 251, Sec. 2, Sinyi Rd Mobil: 9 32 15 60 66
 Jhong-Jheng District, Fax: 2 23 51 51 72
 Taipei City 106 e-mail: hugo.chang@amfceilings.com.tw
 Taiwan (R.O.C.)

Knauf AMF Near East / Asia / Pacific	Code +49
--------------------------------------	----------

Andreas Riedl Tel.: (0) 85 52 - 422 979
 Mobil: (0) 175 - 4 66 21 50
 Fax: (0) 85 52 - 422 30
 e-mail: riedl@amf-grafenau.de

Knauf AMF India	Code +91
-----------------	----------


Knauf AMF India Pvt Ltd.
 Mumbai Office Tel.: (022) 329 440 32
 A 101/102 Navkar Chambers Fax: (022) 667 565 85
 Opp S M Centre, A K Road, e-mail: sales@amfceilings.co.in
 Andheri East
 Mumbai - 400 059

All India Sales Head
 Teddy Dsouza Mobil: (0) 9867 1565 64
 e-mail: teddy.dsouza@amfceilings.co.in

North & East India
 Chandra Panchani Mobil: (0) 9818 5851 82
 e-mail: chandra.panchani@amfceilings.co.in

South & West India
 Dipankar Shome Tel.: (080) 329 528 96
 Mobil: (0) 9343 5163 11
 Fax.: (080) 411 228 96
 e-mail: dipankar.shome@amfceilings.co.in


AMF PROGRAMME

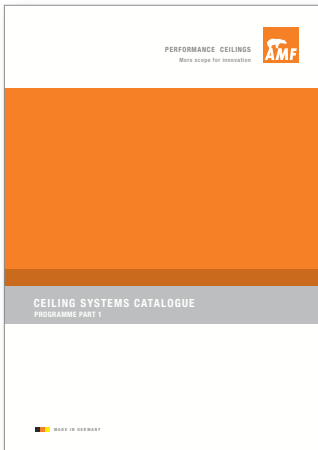


Part 1




Part 2

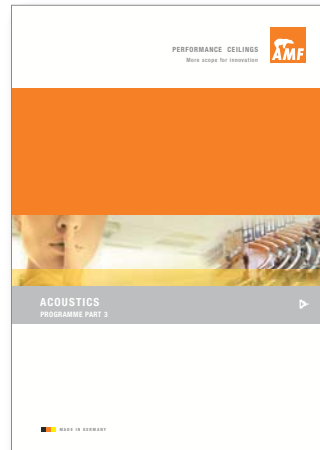

Part 3

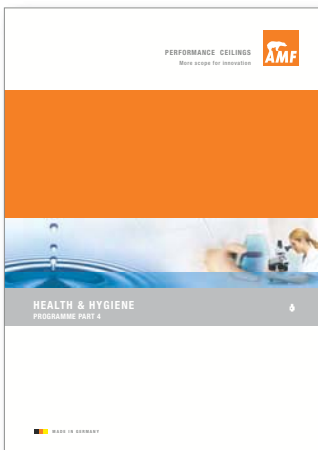

Part 4

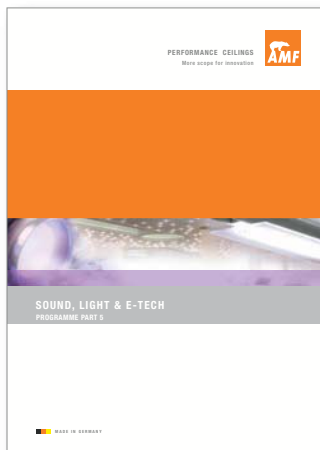


Part 5



Part 6

AMF APPLICATIONS

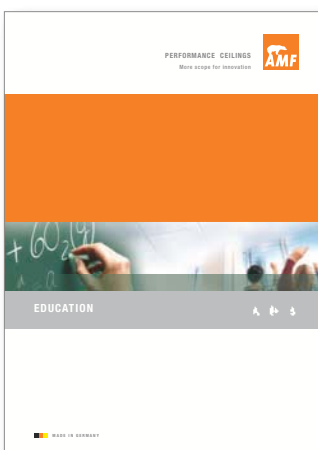

Part 1

All Programme catalogues can be obtained by sending in the fax reply card or by download from www.amfceilings.com



Knauf AMF GmbH & Co. KG
Elsenthal 15
D-94481 Grafenau
Germany

REPLY CARD

FAX NO.: +49 (0) 85 52 / 422 - 32

Please send me information on:

- Part 1 **CEILING SYSTEMS CATALOGUE**
- Part 2 **FIRE PROTECTION**
- Part 3 **ACOUSTICS**
- Part 4 **HEALTH & HYGIENE**
- Part 5 **SOUND, LIGHT & E-TECH**
- Part 6 **MATERIAL & DESIGN**

Please send me information on:

- EDUCATION**

Please send me:

- AMF PRICE LIST**

Name

Position

Company

Address

Town & Post Code

Telephone

E-mail

Enter the world of ceilings



WWW.AMFCEILINGS.COM

Are you looking for specific information for your project?

- Education
- Healthcare
- Commercial

Whatever your project - the AMF website will find you a variety of solutions to match your requirements.

Do you need information quickly?

Click **LITERATURE** to gain immediate access to AMF data.

For ongoing projects:

- Test reports
- Draft specifications
- Technical Information, brochures and downloadable data sheets

We offer you a user-friendly menu, a wide choice of designs and performance options.


For Industry news ■ Latest events, ■ New products, ■ Projects and AMF company information.

■ And if you require further assistance just click on **CONTACT US** to communicate with our local Area Manager.

PRODUCT	AMF PROGRAMME	PRODUCT	AMF PROGRAMME
B		P	
Bandraster System I	Part 1 Ceiling Systems Catalogue	Pinhole	Part 1 Ceiling Systems Catalogue
Beamex System	Part 5 Sound,Light&E-tech	Plain	Part 1 Ceiling Systems Catalogue
C		R	
Cleanactive	Part 4 Health&Hygiene	Ranura	Part 6 Material&Design
Clean Room	Part 4 Health&Hygiene	Rilievo	Part 6 Material&Design
Concealed System	Part 1 Ceiling Systems Catalogue	Rogada	Part 6 Material&Design
D		S	
Dual F30	Part 2 Fire Protection	Silence dB	Part 3 Acoustics
E		Sky.dot	Part 6 Material & Design
Exposed System	Part 1 Ceiling Systems Catalogue	Soundmosaic	Part 5 Sound,Light & E-tech
F		Star	Part 1 Ceiling Systems Catalogue
Fibrafutura	Part 6 Material&Design	Stellada	Part 6 Material & Design
Fire resistance: steal beams	Part 2 Fire Protection	Symetra	Part 6 Material & Design
Fine Fresko-Saturn	Part 1 Ceiling Systems Catalogue	System A	Part 1 Ceiling Systems Catalogue
Fine Stratos / -micro	Part 1 Ceiling Systems Catalogue	System C	Part 1 Ceiling Systems Catalogue
Fire resistance: timber joists	Part 2 Fire Protection	System F	Part 1 Ceiling Systems Catalogue
Fire resistance: mezzanine floors	Part 2 Fire Protection	System I	Part 1 Ceiling Systems Catalogue
Free Span System F	Part 1 Ceiling Systems Catalogue	T	
Fresko	Part 1 Ceiling Systems Catalogue	THERMATEX Acoustic	Part 3 Acoustics
G		THERMATEX Alpha	Part 3 Acoustics
Gypsum	Part 6 Material&Design	THERMATEX Comfort	Part 3 Acoustics
H		THERMATEX Comfort dB	Part 3 Acoustics
Hygena	Part 4 Health&Hygiene	THERMATEX dB Acoustic	Part 3 Acoustics
K		THERMATEX Thermaclean S	Part 4 Health&Hygiene
Kombimetall	Part 3 Acoustics	THERMATEX Thermofoon	Part 3 Acoustics
L		U	
Laguna / -micro	Part 1 Ceiling Systems Catalogue	Uno F30	Part 2 Fire Protection
Light Ceilings	Part 5 Sound,Light&E-tech		
Livada	Part 6 Material&Design		
M			
Mercure	Part 1 Ceiling Systems Catalogue		
Metall	Part 6 Material&Design		
Mono F30	Part 2 Fire Protection		
N			
Net 4/8	Part 6 Material&Design		
Nevada	Part 6 Material&Design		

Part 1 CEILING SYSTEMS CATALOGUE

CLASSIC FACES



THERMATEX Schlicht

THERMATEX Feinstratos

THERMATEX Laguna

THERMATEX Feinstratos micro

THERMATEX Laguna micro



THERMATEX Star

THERMATEX Feingelocht


THERMATEX Mercure

THERMATEX Fine Fresko-Saturn


THERMATEX Fresko

EDGE DETAILS


SK 15 / 24




VT 15 / 24




VT - S 15 F



GN



AW



AMF - SPECIAL PROGRAMME

Part 3 ACOUSTICS



THERMATEX Acoustic

THERMATEX dB Acoustic

THERMATEX Alpha

THERMATEX Thermofon

THERMATEX Kombimetall white similar to RAL 9010 perforated


Part 4 HEALTH & HYGIENE



THERMATEX Thermaclean S white

THERMATEX Kombimetall white similar to RAL 9010 plain

Part 6 MATERIAL & DESIGN



GYPSUM Symetra Stellada Round perforation of \varnothing 4 mm

GYPSUM Symetra Rogada Round perforation of \varnothing 8 mm

GYPSUM Symetra Livada Square perforations of 9 x 9 mm

METALL Symetra white similar to RAL 9010 plain



METALL Symetra white similar to RAL 9010 perforated

THERMATEX Sky.dot

THERMATEX net.4

THERMATEX net.8

THERMATEX Ranura Quadrat (rilled)



FIBRAFUTURA nature

FIBRAFUTURA white

FIBRAFUTURA grey

FIBRAFUTURA black

FIBRAFUTURA mirage copper

FIBRAFUTURA cracked glaze blue

A/B		M/N	
Acoustics	12	Material&Design	18-19
AMF	3	Mercure	27
Bandraster Profiles	42-43	Micro perforated surfaces	24
Bandraster System I	40	Mineral	8
		News	6-7
C/D		O/P	
CE Marking	62	Parallel System I	40
Clean Room	14	Pinhole	26
Cross tees	34, 42, 46	Plain	22
Concealed System A	44		
Design	14-15	Q/R	
Draft Specifications	48	RAL	63
		Recycling	65
E/F		References	50-59
Edge design	78	S/T	
Edge hardening	8	Semi - concealed System	40
Embossed surfaces	65	Service	60-61
Environment	64-65	Soffit types	71
E-tech	16-17	Sound absorption	68-69
Exposed Grid System C	32	Sound insulation	12, 66, 68-69
Filler piece	35,39,41	Sound, Light & E-Tech	16-17
Fine Fresko-Saturn	28	Spanning Profiles	39
Fine Stratos	23	Spans	39
Fine Stratos micro	24	Subsidiaries	4
Fire Protection	10, 65, 68-69	Surface designs	20-29 , 80
Fire Resistant Light Box	35,39,43,47	Suspension	35
Free Span System F	36	Star	25
Fresko	29	System A	44
		System C	32
G/H		System F	36
Gypsum	18	System I	40
Hygiene	14	Thermatex Comfort / -dB	9
		U/V/W	
I/J		Wall angles	34, 39, 43, 47
Inner corners	34,39,43		
Installation guidelines	48-49		
ISO Certification	63		
K/L			
Laguna	23		
Laguna micro	25		
Light ceilings	16-17		



AMF PROGRAMME:

Part 1 **CEILING SYSTEMS CATALOGUE**

Part 2 **FIRE PROTECTION**

Part 3 **ACOUSTICS**

Part 4 **HEALTH & HYGIENE**

Part 5 **SOUND, LIGHT & E - TECH**

Part 6 **MATERIAL & DESIGN**

AMF APPLICATIONS:

Part 1 **EDUCATION**

Knauf AMF GmbH & Co. KG

Elsenthal 15

D-94481 Grafenau

Germany

Tel.: +49 (0) 85 52 / 422 - 0

Fax: +49 (0) 85 52 / 422 - 32

e-mail: info@amf-grafenau.de

<http://www.amfceilings.com>