

CEILING & WALL GUIDE

Armstrong
CEILINGS



1270 CASCADE™ (CEILING)

Contact Armstrong Ceilings:

- 1-877-ARMSTRONG (276-7876)
- Email Techline: techline@armstrongceilings.com
- Website: ceilings.com



NOTE: Due to printing limitations, colors pictured cannot be guaranteed to match actual ceiling materials. Trademarks are property of AWI Licensing LLC or affiliates, or their respective owners.
©2019 AWI Licensing LLC.
Printed in the United States of America

COVER PHOTO: 5424234NLS METALLAIRE™ MEDALLION—NAIL-UP (SURFACE MOUNT), LACQUERED STEEL (CEILING)



Armstrong
CEILINGS

TOOLS YOU CAN USE

WEBSITE: For the most up-to-date information and instructions, visit ceilings.com

WEB TOOLS:  **Ceiling Project Estimator**
ceilings.com/projectestimator

 **Drop Ceiling Calculator**
ceilings.com/calculator

 **Ceiling Replacement Finder**
ceilings.com/IDMyCeiling

INSPIRATION: **Photo Gallery**
ceilings.com/photos

Look Book
ceilings.com/lookbook

Getting Started Videos
ceilings.com/videos

INSTALLATION AND VIDEOS: ceilings.com/installation



 ceilings.com/videos

WARRANTIES: ceilings.com/warranty or contact
techline@armstrongceilings.com

TECHLINE: 1-877-ARMSTRONG (276-7876)
techline@armstrongceilings.com

GETTING STARTED WITH CEILINGS

1 HOW IT INSTALLS

Attachment Method	Benefits	Installation Method	Sizes Available
Suspended (Drop)	 Get access behind panels	Metal grid system and hanging hardware	24-in x 24-in 24-in x 48-in
Surface Mount (Direct Apply)	 Maximize ceiling height	Easy Up® installation system or adhesive	12-in x 12-in 24-in x 48-in 6-in x 48-in 5-in x 84-in



1276 WOODHAVEN™ DRIFTWOOD GRAY (CEILING)

2 CHOOSE A LOOK


DESIGNER



Wood Look



Tin/Metal



PVC Plastic


SUSPENDED (DROP) CEILINGS



Decorative Look




Smooth Look



Textured Look

SURFACE MOUNT (DIRECT APPLY) CEILINGS



12-in x 12-in Surface Mount (Direct Apply)

Edge detail impacts overall look



tongue & groove



square edge



tegular edge

3 CONSIDER PERFORMANCE FEATURES



Sag/Humidity Resistance: Products with this icon have superior performance and maintain a flat, attractive ceiling surface in areas of up to 90% humidity; use in spaces that are not climate controlled

Standard Performance: appropriate for climate controlled spaces

Superior Performance: appropriate for non-climate controlled interior spaces



Mold/Mildew Resistance: Products with this icon have superior performance and resist the growth of mold and mildew on the treated surface

Standard Performance: appropriate for climate controlled spaces

Superior Performance: appropriate for non-climate controlled interior spaces



Noise Reducing: Products with this icon reduce noise within a room or traveling from room to room

NRC: reduces noise within a room, the higher the number, the better the performance

CAC: blocks sound between rooms, the higher the number, the better the performance



Fire Resistance: Products with this icon meet building codes for commercial and residential spaces, based on E-84 testing



1264 WOODHAVEN™ RUSTIC PINE (CEILING)

WoodHaven™

CEILING & WALL PLANKS

Our 5-in x 84-in WoodHaven™ ceiling planks offer a range of finishes for every room, are made of MDF (medium density fiberboard) and can be installed in three different ways.

New finishes 1138 Woven White and 1139 Woven Charcoal Gray have a linen-like texture, while 1275 Coastal White and 1276 Driftwood Gray have a vintage-inspired rustic look.

FEATURES & BENEFITS

- Prefinished; no sanding, staining or sealing
- Great for covering damaged drywall, plaster or popcorn ceilings
- Three ways to install: with WoodHaven Clips & Screws; with Easy Up® Tracks & Clips; over existing basement ceiling grid
- Update the look of your ceiling without losing ceiling height
- Items #1138, 1139, 1140, 1148, and 1149 can be used for wainscoting or walls
- Items #1148 and 1149 are paintable
- Beveled tongue and groove edge minimizes the appearance of gaps during normal expansion and contraction
- Staggered installation means minimal waste
- Easy to clean; wipe with a damp cloth
- Class C Fire Performance for residential spaces, based on E-84 testing

INSTALL IN THREE DIFFERENT WAYS


See page 41 for details.




CEILING FINISHES




1140 CLASSIC WHITE



1148 PAINTED WHITE



1149 BEADBOARD




1138 WOVEN WHITE



1275 COASTAL WHITE



1139 WOVEN CHARCOAL GRAY



1276 DRIFTWOOD GRAY



1273 WEATHERED



1265 WHITE WASH



1261 NATURAL MAPLE



1262 CLASSIC MAPLE




1263 NEW APPLE



1271 BAMBOO



1260 KNOTTY PINE



1268 NATURAL CHERRY



1264 RUSTIC PINE



1148 WOODHAVEN™ PAINTED WHITE (WALL)



1138 WOODHAVEN™ WOVEN WHITE (WALL)

WoodHaven™

CEILING & WALL PLANKS

WOODHAVEN™ PLANKS ON WALLS

Consider the expanded range of decorating options with WoodHaven™ planks used on walls. Choose from five design finishes — 1140 Classic White, 1148 Painted White, 1149 Beadboard, 1138 Woven White and 1139 Woven Charcoal Gray.

FEATURES & BENEFITS

- Easy installation on walls: Vertically with construction adhesive or horizontally with included clips
- Durable, easy to clean surfaces
- Items #1148 and 1149 are paintable to match your interior

INSTALLATION OPTIONS

With either option, finish with a trim of your choice.

1. Install vertically on a wall using construction adhesive. Follow the adhesive manufacturer's recommendations for surface preparation and application rate. Use painter's tape if necessary to hold planks in place until the adhesive sets up.
2. Install horizontally on a wall using clips included in the WoodHaven plank carton.


 For installation videos, please visit ceilings.com/videos

For installation instructions, please visit ceilings.com/installwoodwalls


WALL FINISHES




1140 CLASSIC WHITE



1148 PAINTED WHITE



1138 WOVEN WHITE



1149 BEADBOARD



1139 WOVEN CHARCOAL GRAY



1149 WOODHAVEN™ BEADBOARD (WALL)



480 COUNTRY CLASSIC™ PLANK (CEILING)



5424504NLS METALLAIRE™ BEAD—NAIL-UP, LACQUERED STEEL (CEILING)

COUNTRY CLASSIC™ PLANK

The visual of our 6-in x 48-in Country Classic™ Plank provides a beautiful country rustic look as a cost-effective alternative to real wood planks. These easy-to-install mineral fiber ceiling planks are lightweight and easily cut with a utility knife.




480 COUNTRY CLASSIC™ PLANK

FEATURES & BENEFITS

- Made of mineral fiber (similar material to standard ceiling products)
- Real wood-grain appearance at an affordable price
- Paintable or stainable to match any décor
- Great for covering damaged drywall, plaster or popcorn ceilings

INSTALLATION SYSTEM

- Tongue & groove products have no visible grid
- Easy Up® installation system or adhesive



For installation instructions, please visit ceilings.com/installcountryclassic

Metallaire™

DECORATIVE CEILINGS
WALLS & BACKSPLASHES

FEATURES & BENEFITS

- Beautiful 19th Century historical patterns
- Real metal, coated to protect from rust
- Available in 5 finishes, 12 patterns, and 2 sizes: 24-in x 24-in suspended panels or 24-in x 48-in surface mount panels
- Sag, mold and mildew resistance
- Ideal for accent wall applications—use stainless steel backsplash panels for kitchen or bathroom applications
- Coordinating accessories are available—grid kits, cornices, cone head nails and filler panels

CEILING INSTALLATION OPTIONS



24-in x 24-in Suspended (Drop)


Coordinating 15/16-in grid kits* for Metallaire™ ceilings are available for suspended installation.

*Sold separately



24-in x 48-in Nail-up (Surface Mount)

Apply directly to your ceiling using cone head nails* in a coordinating finish.




For help with planning your Metallaire ceiling, visit ceilings.com/metallaireplanning


For detailed installation instructions, please visit ceilings.com/installmetallaire

Metallaire™ panels are produced from steel or aluminum yet they are designed to emulate an antique-type visual. Periodic "wrinkles" or dents may cause the panel to appear not to be flat; these characteristics add to the antique effect and are not considered manufacturing defects.


CEILING STYLES




SMALL PANELS
24-in x 24-in SUSPENDED
5422204L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424204N




FANS
24-in x 24-in SUSPENDED
5422207L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424207N



SMALL FLORAL CIRCLE
24-in x 24-in SUSPENDED
5422209L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424209N



VINE
24-in x 24-in SUSPENDED
5422210L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424210N



MEDALLION
24-in x 24-in SUSPENDED
5422234L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424234N



HAMMERED TREFOIL
24-in x 24-in SUSPENDED
5422321L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424321N



HAMMERED BORDER
24-in x 24-in SUSPENDED
5422509L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424509N



LARGE PANEL
24-in x 24-in SUSPENDED
5422503L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424503N



LARGE FLORAL CIRCLE
24-in x 24-in SUSPENDED
5422309L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424309N



MEDIUM PANELS
24-in x 24-in SUSPENDED
5422320L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424320N



WREATH
24-in x 24-in SUSPENDED
5422503L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424503N



BEAD
24-in x 24-in SUSPENDED
5422504L
24-in x 48-in
NAIL-UP (SURFACE MOUNT)
5424504N

FINISHES



WH—WHITE



AM—CHROME



LS—LACQUERED
STEEL



AR—BRASS



CP—COPPER



5424234NLS METALLAIRE™ MEDALLION—NAIL-UP, LACQUERED STEEL (CEILING)

ACCESSORIES (Sold separately)



FILLER PANELS

5422235L—24-in x 24-in Suspended (Drop)
5424235N—24-in x 48-in Nail-up (Surface Mount)
Add color suffix letters to product numbers

Filler panels are used around the edge of the room when less than full panels are needed.

Filler panels are available in matching finishes. Available in Chrome (AM); Lacquered Steel (LS); Brass (AR); Copper (CP); White (WH).

SUSPENDED ACCESSORIES



COORDINATING GRID KITS 5400G

Grid kits include all components to install 64 square feet of ceiling panels per carton.

Add NEW color suffix found below

Grid kits are available for 24-in x 24-in lay-in suspended installation; now with QuickHang™ hooks and brackets (see page 34 for additional information). Colors available to coordinate with all finishes for Metallaire™ ceilings: available in Chrome/Lacquered Steel (AM1); Brass (AR1); Copper (CP1); White (WH1).

Kits Include:

- 3 – NEW 72-in Prelude® Main Beams
- 9 – 48-in Cross Tees
- 9 – 24-in Cross Tees
- 6 – 72-in Wall Moldings
- 6 – NEW QuickHang™ Hooks
- 6 – NEW Joist Brackets
- 40 – Nails

NOTE: The metallic finish of the ceiling panels will have a different finish than the painted grid.



HOLD DOWN CLIPS 5400HDC

Hold Down Clips will hold panels flat and stop movement when air flow or vibration is a factor. Each carton contains enough clips to hold down 200 square feet of Metallaire suspended ceiling panels.

NOTE: Panel removal may be more difficult when using clips.



5424207NCP METALLAIRE™ FANS—NAIL-UP, COPPER (CEILING)

For tips on how to install a Metallaire ceiling accent cloud, please visit ceilings.com/accentcloud



5424509NWH METALLAIRE™ HAMMERED BORDER – NAIL-UP, WHITE (CEILING)


SURFACE MOUNT ACCESSORIES




CONE HEAD NAILS 5400N—add color suffix letters. Cone head nails are available in coordinating finishes to install a 24-in x 48-in nail up (surface mount) ceiling. Available in Chrome/Lacquered Steel (AM); Brass (AR); Copper (CP); White (WH). Each carton of nails installs 200 square feet of ceiling panels.

CORNICES


A cornice is the finishing detail that can complement and accentuate the exquisite detail of your Metallaire™ ceiling. Cornices are available in all 5 finishes, 6 patterns and are 48-in length. Add the color suffix Chrome (AM); Lacquered Steel (LS); Brass (AR); Copper (CP); White (WH) to the item number below.




FLORAL 540070M




TREFOIL 5400807M




GIRDER NOSING 5400800M



SMALL EGG & DART 5400810M



LARGE EGG & DART 5400802M



TORCH 5400705M



LARGE FLORAL CIRCLE 5424309NCP – NAIL-UP, COPPER (CEILING)



5400210BNA METALLAIRE™ VINE—STAINLESS STEEL (BACKSPASH)

End result might not appear as shown due to varying cabinet heights



5424204NWH METALLAIRE™ SMALL PANELS—WHITE (BACKSPASH)

End result might not appear as shown due to varying cabinet heights

Metallaire™


DECORATIVE CEILINGS
WALLS & BACKSPASHES

METALLAIRE™ BACKSPASH AND ACCENT WALL APPLICATIONS


Stainless steel Metallaire™ panels are the best option to add or update a backsplash. The material is naturally resistant to rust, and the 18 1/2-in x 48 1/2-in panel size is appropriate for typical applications.

Metallaire surface mount panels can also be used as accent wall panels or possibly as a backsplash in certain applications. The larger, 24-in x 48-in panels are made of real metal and, while coated to protect from rust, it's important to avoid nicks, abrasive cleaners, and prolonged exposure to steam or water to maintain the product's appearance and performance.


BACKSPASH STYLES




SMALL PANELS
5400204BNA




FANS
5400207BNA



SMALL FLORAL CIRCLE
5400209BNA



VINE
5400210BNA



MEDALLION
5400234BNA

FEATURES & BENEFITS

- Beautiful 19th Century historical patterns
- Made of stainless steel, the best backsplash option
- Mold and mildew resistance
- Pre-cut at 18 1/2-in x 48 1/2-in to fit most standard kitchens
- Also ideal for other accent walls

BACKSPASH OR WALL INSTALLATION



Use adhesive to attach the panels to the wall. If wall is uneven or damaged, backer material is recommended to create a smooth, stable mounting surface. Use just enough cone head nails to secure the panels to the wall while the adhesive sets up. (Do not remove nails.)



For backsplash/wall installation instructions and videos, please visit ceilings.com/installmetalwalls and ceilings.com/videos



5400209BNA METALLAIRE™ SMALL FLORAL CIRCLE—STAINLESS STEEL (BACKSPASH)



1280BXA EASY ELEGANCE™ DEEP COFFER WHITE (CEILING)



1282BLBXA EASY ELEGANCE™ SHALLOW COFFER BLACK (CEILING)

EasyElegance™

PVC PLASTIC CEILING PANELS



1280BXA EASY ELEGANCE
DEEP COFFER WHITE



1280BLBXA EASY ELEGANCE
DEEP COFFER BLACK



1282BXA EASY ELEGANCE
SHALLOW COFFER WHITE



1282BLBXA EASY ELEGANCE
SHALLOW COFFER BLACK



FEATURES & BENEFITS

- 24-in x 24-in lightweight PVC (plastic) panel
- Sophisticated coffer look at a fraction of the cost of custom work
- Sag resistance
- Drywall perimeter border recommended for a high-end finished look
- Easy Elegance™ Flat White panels can also be used as a perimeter border; see page 19 for panel details
- Class A Fire Performance: for residential use only
- Easy installation system provides access to pipes, ducts and wiring

INSTALLATION SYSTEM



- Tegular edge products minimize grid look
- Prelude® 15/16-in suspension system



For installation instructions, please visit ceilings.com/installation

For additional details about perimeter borders, visit ceilings.com/coffersfaq



1280BXA EASY ELEGANCE™ DEEP COFFER WHITE WITH 1278 FLAT WHITE BORDER (CEILING)



1278 EASY ELEGANCE™ FLAT WHITE (CEILING)



1279 EASY ELEGANCE™ FLAT WHITE (CEILING)

EasyElegance™


PVC PLASTIC CEILING PANELS



1278 EASY ELEGANCE™
FLAT WHITE



SHOWING
SQUARE
EDGE
DETAIL

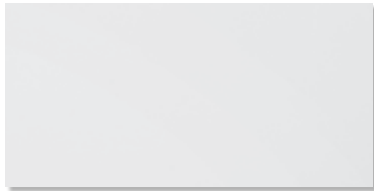

1279 EASY ELEGANCE FLAT WHITE

FEATURES & BENEFITS

- Rigid PVC Plastic
- Bright white, satin finish
- Easy to clean—washable
- Durable—impact resistant
- Mold, mildew, and sag resistance
- Stain resistant
- Will not discolor
- Lightweight—easy to cut and install in 15/16-in standard grid
- Paintable
- Class A Fire Performance: for residential use only

INSTALLATION SYSTEM

- Square edge products have a visible grid
- Prelude® 15/16-in suspension system



For installation instructions, please visit ceilings.com/installation

DESIGN CONSIDERATIONS

Clearance: You will need to have approximately 6-in of clearance above the grid face to install 1280BXA Deep Coffered panels and 3-in above 1282BXA Shallow Coffered panels and only 2.5-in above for 1278 Flat White, 1279 Flat White Panels.

Lighting: Easy Elegance™ panels work with most modern light fixtures. Leave 1/8-in gap between recessed light housing and panel.

Cutting Panels for Border/Perimeter: For a clean aesthetic look, cutting the Easy Elegance Coffers is not recommended. Two border solutions are recommended: Using 1278 and 1279 Flat White for all border cuts, or finishing off your perimeter with drywall using our MBAC and DWAC clips installed on your 15/16-in grid.

Heat Source: Do not install Easy Elegance™ panels in direct contact with open flame or a heat source that can exceed 130 degrees Fahrenheit. Most recessed lighting options will meet this requirement, especially modern CFL (Compact Fluorescent Lighting) and LED lights.



1310BX, 1311BX, 1312BX STYLESTIX™ WITH SAHARA™ 273 PANELS (CEILING)



1205 SINGLE RAISED PANEL (CEILING)

STYLESTIX™ SUSPENDED CEILING GRID MOLDINGS



1310BX STYLESTIX 6-ft GRID COVER
1312BX STYLESTIX 2-ft GRID COVER




1311BX STYLESTIX 6-ft
WALL MOLDING COVER

FEATURES & BENEFITS

- Stylishly detailed moldings that cover industrial looking and aged ceiling grid
- Paintable to match any décor
- Mold and mildew resistance
- Easy snap-on installation creates a coffered look at a fraction of the cost of custom work
- A complete ceiling makeover requires all three components

INSTALLATION

Snaps onto a 24-in x 24-in suspension system (15/16-in grid face)

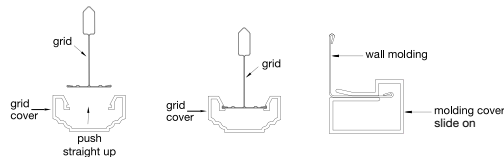

For details, please visit ceilings.com/stylestix

DecorativeLook

24-in x 24-in DECORATIVE CEILINGS



1201 RAISED PANEL™



1202 SCALLOPED



1203 FLUTED



1205 SINGLE RAISED PANEL
1210 SINGLE RAISED PANEL



1206 TANGO



1270 CASCADE™



8008 TINCRAFT™
CIRCLES



8009 TINCRAFT™
SQUARES



8009 TINCRAFT™ SQUARES (CEILING)

Pictured: 8009 TinCraft™ Squares in narrow 9/16-in Suprafine® grid

FEATURES & BENEFITS

- Variety of decorative styles to enhance any décor
- Grid-blending design masks the industrial look of metal grid
- For a narrow grid look, 8009 and 1210 install on 9/16-in Suprafine® grid
- Easy installation system provides access to pipes, ducts and wiring

INSTALLATION SYSTEM

- Tegular edge products minimize grid look
- Prelude® 15/16-in suspension system
- Suprafine® 9/16-in suspension system (1210 and 8009 only)



For installation instructions, please visit ceilings.com/installation




8008 TINCRAFT™ CIRCLES (CEILING)




271 SAHARA™ (CEILING)

SmoothLook

24-in x 24-in SMOOTH LOOK CEILINGS




269 SAND PEBBLE™




271 SAHARA™
273 SAHARA
276 SAHARA



490 YUMA WHITE™
492 YUMA WHITE



973 LUMAWASH®



1231 BRIGHTEX™ WITH
AIRGUARD™

FEATURES & BENEFITS

- Ideal for basements and home theaters
- Mold and mildew resistance
- Sag resistance
- Acoustical; most absorb >50% of noise (except 973)
- Easy installation system provides access to pipes, ducts and wiring
- For a narrow grid look, 276 and 1231 install on 9/16-in Suprafine® grid
- 973 meets USDA guidelines for use in food processing areas




9769 SAHARA™ SCORED I (CEILING)



280 PLAIN WHITE (CEILING)

SmoothLook


24-in x 48-in SMOOTH LOOK CEILINGS




280 PLAIN WHITE



491 YUMA WHITE™
493 YUMA WHITE



972 LUMAWASH®



9768 SAHARA™
SCORED II



9769 SAHARA™
SCORED I







FEATURES & BENEFITS

- Great for new, replacement and matching ceilings
- Easy installation system provides access to pipes, ducts and wiring
- 972 meets USDA guidelines for use in food processing areas
- 9768 and 9769 are scored to give a 2-ft x 2-ft or a 1-ft x 1-ft visual on a 2-ft x 4-ft panel

INSTALLATION SYSTEM




- Tegular edge products minimize grid look
- Square edge products have a visible grid
- Prelude® 15/16-in suspension system
- Suprafine® 9/16-in suspension system (276 and 1231 only)

 minimizes grid look	 visible grid	 sag resistance	 mold resistance	 fire resistance	 noise reducing
269 271 276 492 493 1231 9768 9769	273 280 490 491 972 973	ALL EXCEPT 280	ALL EXCEPT 280	ALL	ALL

For installation instructions, please visit ceilings.com/installation



269 SAND PEBBLE™ (CEILING)

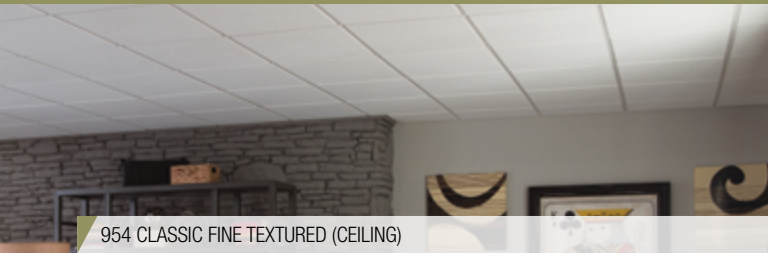


954 CLASSIC FINE TEXTURED (CEILING)




933 RANDOM TEXTURED (CEILING)

TexturedLook


24-in x 24-in TEXTURED LOOK CEILINGS



241 SUPERTUFF™



266 BRIGHTON™




928 FINE FISSURED™
932 FINE FISSURED



934 RANDOM TEXTURED
935 RANDOM TEXTURED



949 TEXTURED



954 CLASSIC FINE
TEXTURED




1728BL FINE FISSURED™
BLACK


FEATURES & BENEFITS

- Ideal for basements and home theaters
- Acoustical; most absorb >50% of noise (except 266)
- Easy installation system provides access to pipes, ducts and wiring
- 241, 928, 932, 954 and 1728BL offers economical high performance (sag, mold, and mildew resistance) and a range of visuals


24-in x 48-in TEXTURED LOOK CEILINGS




297 GRENOBLE™




915 TEXTURED FIRE
GUARD™



922 FINE FISSURED™



933 RANDOM
TEXTURED



942 TEXTURED



9767 SCORED



922 FINE FISSURED™ (CEILING)



403 ESPRIT® FIBERGLASS (CEILING)

FEATURES & BENEFITS

- Great for new, replacement and matching ceilings
- Many are acoustical; reduce noise 55%
- Non-directional image reduces labor and scrap (922, 933 and 9767)
- Easy installation system provides access to pipes, ducts and wiring
- 915 must be installed in a Fire Guard™ grid to achieve fire resistant UL ratings
- 922 offers economical high performance (sag, mold and mildew resistance) and a more subtle textured visual

INSTALLATION SYSTEM


- Tegular edge products minimize grid look
- Square edge products have a visible grid
- Prelude® 15/16-in suspension system




minimizes grid look	visible grid	sag resistance	mold resistance	fire resistance	noise reducing
241 266 932 934 954 9767	297 915 922 928 932 933 935 942 949 1728BL	241 922 928 932 954 1728BL	241 266 922 928 932 954 1728BL	ALL	ALL

For installation instructions, please visit ceilings.com/installation

24-in x 48-in FIBERGLASS CEILINGS



403 ESPRIT® FIBERGLASS



410 SONOFLEX™ RANDOM FISSURED™ FIBERGLASS



416 SONOFLEX™ ETCHED FIBERGLASS

FEATURES & BENEFITS

- Great for new, replacement and matching commercial applications
- Easy installation system provides access to pipes, ducts and wiring
- Acoustical; reduce noise >50%
- Superior sag, mold, and mildew resistance
- Offers a lightweight, easy to handle alternative to traditional mineral fiber ceiling options

INSTALLATION SYSTEM

- Square edge products have a visible grid
- Prelude® 15/16-in suspension system



For installation instructions, please visit ceilings.com/installation



46 WELLINGTON™ (CEILING)



231 WASHABLE WHITE (CEILING)

TinLook™

PAINTABLE CEILINGS

12-in x 12-in TINLOOK CEILINGS



46 WELLINGTON™



1240 TINTILE™




1244 CIRCLES

FEATURES & BENEFITS

- Made of mineral fiber (similar material to standard ceiling products)
- Vintage tin ceiling look at an affordable price
- Paintable to match any décor
- Great for covering damaged drywall, plaster or popcorn ceilings

INSTALLATION SYSTEM


- Tongue & groove products have no visible grid
- Easy Up® installation system or adhesive



For installation instructions, please visit ceilings.com/installation

Painting will void warranty


12-in x12-in Ceilings



231 WASHABLE WHITE



250 PINEHURST™




258 GRENOBLE™

FEATURES & BENEFITS

- Paintable to match any décor
- Great for covering damaged drywall, plaster or popcorn ceilings

INSTALLATION SYSTEM

- Tongue & groove products have no visible grid
- Easy Up® installation system or adhesive



For installation instructions, please visit ceilings.com/installation

Painting will void warranty

SUSPENDED (DROP) CEILING INSTALLATION

- Need access above your ceiling?
- Have 3-in of headroom to spare?


WHY USE AN ARMSTRONG® SUSPENDED (DROP) CEILING VS DRYWALL?

- Accessibility to pipes, duct work and wiring
- Faster and cleaner installation
- May reduce noise and resist mold/mildew
- Broad selection of visuals
- Easy to repair and replace damaged or stained panels

INSTALLATION STEPS




1 Install wall molding



2 Suspend main beams with hanger wire or **NEW** QuickHang™ hardware* (shown above: QuickHang hooks and brackets)



3 Install cross tees



4 Install ceiling panels

*For residential use only

NEW QUICKHANG™ GRID HOOK AND INSTALLATION KITS

QUICKHANG GRID HOOK KITS

QuickHang™ hooks and brackets offer a new way to install a basement drop ceiling system directly to joists more quickly and easily than with hanger wire. The QuickHang system is available in two new accessory kits with different length hooks.

PRODUCT SPECIFICATIONS

Item #	Product Name	Length (Inches)	Components/Kit	SF Per Kit*
6367	QuickHang™ 6" Grid Hook Kit	6" Hook	6 Hooks 6 Brackets 20 Nails	(160 per individual kit)
6369	QuickHang™ 12" Grid Hook Kit	12" Hook	6 Hooks 6 Brackets 20 Nails	(160 per individual kit)

*Based on a 10' x 16' room; for residential use only


BENEFITS

- Works with any metal grid system that has hanger holes
- Fast and easy to install without the hassle of hanger wire
- Saves head room—only 2 1/2-in of drop needed
- Joist-mounted brackets allow you to easily level grid
- Flexible height system enables you to work around obstructions such as ductwork, pipes or cables




QUICKHANG HARDWARE


INSTALLATION STEPS




1 Attach bracket to joist using hammer tabs & nails*



2 Insert hook into bracket



3 Hang grid main beam on hook



4 Level grid by squeezing tabs & moving hook up or down

*Brackets can also be attached to the joist with a #5 Wood Screw through the center hole (screws sold separately.)



For an installation guide and video, visit ceilings.com/quickhang

QUICKHANG INSTALLATION KITS

The new QuickHang™ installation kits have everything you need to install 64 sq. ft. of a 2' x 2' or 2' x 4' drop ceiling. These kits include the new residential QuickHang hooks and brackets.


NOTE: Not compatible with 6357WH, 6357BL, 6355WH

- **6362WH**—2' x 2' QuickHang Installation Kit (White)
- **6362BL**—2' x 2' QuickHang Installation Kit (Black)
- **6364WH**—2' x 4' QuickHang Installation Kit (White)


BENEFITS

- Easy, DIY-friendly way to install a drop ceiling for professional-looking results
- Convenient, all-in-one kits include everything you need to install a drop ceiling
- Single person installation with lightweight, easy to handle 6' main beams


INSTALL YOUR GRID SYSTEM IN 4 EASY STEPS




1 Install wall molding



2 Attach QuickHang™ bracket to joist and insert hook



3 Hang main beams on hooks



4 Install cross tees and level by adjusting hooks

For kit contents, see page 37

Please visit ceilings.com/projectestimator to access our online material estimator for ceiling panels

For a QuickHang installation kit estimating guide, please visit ceilings.com/quickhangguide

ALL-IN-ONE KIT:
QUICKHANG HARDWARE AND
GRID COMPONENTS



SUSPENDED (DROP) CEILING PRELUDE® 15/16-in INSTALLATION SYSTEM

Prelude® Item#	Product Name	Color
7301WH	12-ft Heavy Duty Main Beam	White
7301BL	12-ft Heavy Duty Main Beam	Black
ML7343WH	4-ft Hook Cross Tee	White
ML7343BL	4-ft Hook Cross Tee	Black
ML7323WH	2-ft Hook Cross Tee	White
ML7323BL	2-ft Hook Cross Tee	Black
XL7342BL	4-ft Stab Cross Tee	Black
XL7348RWH	4-ft Stab Cross Tee	White
XL7328RWH	2-ft Stab Cross Tee	White
XL7328BL	2-ft Stab Cross Tee	Black
7800RWH	12-ft Wall Molding	White
7800BL	12-ft Wall Molding	Black

SUSPENDED (DROP) CEILING FIRE GUARD™ 15/16-in INSTALLATION SYSTEM

Prelude Fire Guard Item#	Product Name	Color
8300XRWH	Fire Guard™ 12-ft Intermediate Duty Main Beam	White
8300BL	Fire Guard™ 12-ft Intermediate Duty Main Beam	Black
XL8340RWH	4-ft Stab Cross Tee	White
XL8340BL	4-ft Stab Cross Tee	Black
XL8323RWH	2-ft Stab Cross Tee	White
XL8323BL	2-ft Stab Cross Tee	Black

SUSPENDED (DROP) CEILING SUPRAFINE® 9/16-in INSTALLATION SYSTEM

Suprafine® Item#	Product Name	Color
7500RWH	12-ft Intermediate Duty Main Beam	White
XL7540RWH	4-ft Stab Cross Tee	White
XL7520RWH	2-ft Stab Cross Tee	White
7804RWH	12-ft Wall Molding	White

SUSPENDED (DROP) CEILING INSTALLATION ACCESSORIES

Accessories Item#	Accessories Name
7891	12 Gauge Hanger Wire
6367	QuickHang™ 6" Grid Hook Kit
6369	QuickHang™ 12" Grid Hook Kit
UHDCA	Universal Hold Down Clip
UTCA	Up Tight Clip (to attach to wood joist)
BERC2	Beam End Retaining Clip

NEW! QUICKHANG™ INSTALLATION KITS

Kit Item#	Kit Name	Color
6362WH	2' x 2' QuickHang™ Installation Kit	White
6362BL	2' x 2' QuickHang™ Installation Kit	Black
6364WH	2' x 4' QuickHang™ Installation Kit	White

Kits Include: **NEW** 72-in Prelude® Main Beams, 48-in Cross Tees, 24-in Cross Tees (except Kit 6364WH), 72-in Wall Moldings, **NEW** QuickHang™ Hooks, **NEW** Joist Brackets and 40 Nails. Everything you need to install 64 square feet of ceiling panels.

NOTE: Ceiling panels are sold separately

SURFACE MOUNT (DIRECT APPLY) CEILING INSTALLATION

- Want to hide stains or an ugly popcorn ceiling?
- Want to maximize your ceiling height?
- Don't like the look of grid?

Armstrong® surface mount ceiling tiles and planks can be installed to an existing ceiling to save valuable inches of ceiling height. There are several installation methods available:

1 EASY UP® INSTALLATION SYSTEM

Armstrong ceiling tiles can be installed with a simple track and clip system applied to joists or an existing ceiling.

Item

- 1190 – Easy Up Tracks (20 tracks per carton)
- 1191 – Easy Up Clips (360 clips per carton)
- 1191SC – Easy Up Clips (135 clips per carton)

INSTALLATION STEPS




1 Attach tracks (1190)



2 Snap on clips (1191 or 1191SC)



3 Position tile or plank; slide and secure clip



NOTE: Both track products and clip accessories are required for a complete Easy Up system and must be used together. Items are sold separately.

2 ADHESIVE

Surface Mount (Direct Apply) products can also be installed with adhesive such as Henry® 237 AcoustiGum™ Acoustical Ceiling Tile Adhesive. Follow adhesive manufacturer's instructions for application and usage.

Henry and AcoustiGum are trademarks of W.W. Henry Company or its Affiliates

EASY UP® INSTALLATION SYSTEM

FOR DIRECT APPLY CEILING TILES AND PLANKS

- Provides greater dimensional stability and strength versus wood furring
- Eliminates tile lipping caused by warping wood furring
- Easy Up® clips provide superior holding versus traditional staples
- Easy Up clips may be able to be used on an existing 15/16-in grid ceiling to install WoodHaven™ planks
- Best method for installing planks over popcorn ceilings

CALCULATE TRACKS AND CLIPS NEEDED

How to use the chart:		Example:
1	Find your ceiling product on the chart below	12-in x 12-in Tile
2	Calculate the square footage of your room	10-ft wide x 12-ft long room = 120 sf
3	Find the Track Ratio listed for your ceiling product on the chart	1.10 lf of Track/sf
4	Multiply the sf by the ratio	120 sf x 1.10 = 132 lf
5	Divide the result by 8-ft for total number of tracks required. Round up if necessary	132 lf/8-ft = 16.5 (17 Tracks) (each track = 8-ft length)
6	Find the Clip Ratio listed for your ceiling product on the chart	1.3 Clips/sf
7	Multiply the sf from step 2 by the ratio	120 sf x 1.3 = 156 Clips
8	Round up if necessary for total number of clips required	156 Clips

NOTE: Table averages values of room combinations from 10-ft x 10-ft to 30-ft x 30-ft. It is possible that these values could leave you slightly short, as it is an average. Values assume butting Track joints, end to end, with no overlap.

Ceiling product	Track spacing	Ratio of lf of Track/sf of room	Ratio of Clips/sf of room
12-in x 12-in Tile	12-in oc	1.10	1.30
Country Classic™ Plank	12-in oc	1.10	1.25
WoodHaven™ Planks	24-in oc	0.65	1.20

oc = on center, lf = linear feet, sf = square feet

Please visit ceilings.com/projectestimator to access our online material estimator

Download a copy of the Easy Up® Installation System Estimating Guide at ceilings.com/estimateeasyup

ESTIMATING HOW MANY CARTONS YOU'LL NEED

With Armstrong® Ceilings estimating how much ceiling product you need is also a snap.

1. Measure the length and width of your room. Round up to the next whole number of feet.
2. Multiply the length of the room in feet by the width of the room in feet and divide by the number of square feet of ceiling in each carton.
3. Round your answer to the next whole number to determine how many cartons you'll need.

Please visit ceilings.com/projectestimator to access our online material estimator.

TOOLS YOU MAY NEED

SUSPENDED (DROP) CEILING PANELS

String
Dust mask
Chalk line
Drill
Safety glasses
Utility knife
Pencil
Hammer
Snips
Pliers
Tape measure
Hack saw
4-ft level (laser level saves time)
Gloves
Straight edge

SURFACE MOUNT (DIRECT APPLY) TILES AND PLANKS

String
Dust mask
Chalk line
Drill
Safety glasses
Utility knife
Pencil
Hammer
Snips
Pliers
Tape measure
Stud finder
Hack saw
4-ft level (laser level saves time)
Gloves
Straight edge
Drywall screws

WOODHAVEN™ PLANK INSTALLATION OPTIONS

INSTALL ON CEILINGS IN THREE DIFFERENT WAYS

Before starting your project, review complete installation instructions at ceilings.com/installwoodhaven for important design and installation considerations.

1 WOODHAVEN™ CLIPS AND SCREWS



Installation clips & screws are included in the plank package and install directly to furring strips (not included.) This installation method is suitable for non-flat surfaces. Please contact Techline at 1-877-ARMSTRONG (276-7876) for guidance on how to install planks on a sloped ceiling.



2 EASY UP® TRACKS AND CLIPS

The Easy Up® installation system is fast and easy with snap-on (vs. screw-in) clips, and is the recommended method to install planks over drywall, plaster or popcorn ceilings.

Item #1190 (20 tracks per carton)
 Item #1191 (360 clips per carton) or
 Item #1191SC (135 clips per carton)


NOTE: Both track products and clip accessories are required for a complete Easy Up system and must be used together. Items are sold separately.

3 INSTALLATION STEPS TO COVER BASEMENT GRID

Transform an existing 15/16-in suspended (drop) ceiling using Easy Up® clips and WoodHaven™ planks.



Remove panels



Snap on Easy Up clips



Position planks; slide and secure clips

NOTE: Existing grid must be 15/16-in. Easy Up clips (sold separately) must be used for the retrofit installation. Screws and clips included in the WoodHaven package are only used where grid intersections interfere with the installation of an Easy Up clip.

Visit ceilings.com to order a sample Easy Up clip to test your grid for a snug fit.



Visit ceilings.com/videos to view WoodHaven installation videos for ceiling and wall applications

DESIGN/SPACE CONSIDERATIONS

- Material needs 2-3 days to acclimate to room conditions
- In ceiling applications, do not attach planks directly to roof structures, molding or walls
- Long runs of 21-ft or more require expansion joints



1264 WOODHAVEN™ RUSTIC PINE (CEILING)