

Continental 
The Future in Motion



Commercial Vehicle Tires

Technical Data Book

Our concept for your lowest overall driving costs

We know that cost efficiency is the key. And this is precisely why Continental Truck Tires pay in the long-term, as their performance benefits extend beyond a tire's normal lifespan to be repeated again and again, thanks to the ContiLifeCycle.

The durability of Continental Truck Tires begins with the new tire and is considerably extended by options including professional regrooving, intelligent casing management (ContiCasingManagement) and our premium retread. The mutually harmonized components of the ContiLifeCycle make a considerable contribution to the reduction of tire costs and thus achieving the lowest overall driving costs.



New Continental tires

They are long-lasting, fuel-saving, retreadable and a key cornerstone for the lowest overall driving costs.



Regrooving

Provides tires with up to 25 percent extra mileage and saves fuel through lower rolling resistance.



Retreading

The cost-effective, eco-friendly and premium quality solution to prolong the life of your Continental tires.



Casing management

ContiCasingManagement turns intact Continental casings into cash, managed comfortably through the online ContiCasingBank.



Contents

General hints	
Safety remarks	4
Operating instructions (DIN 7804/7805 and ECE-R 54)	5
Tire designations	6
Units of measurement and definitions (DIN 70020)	9
Sidewall designations	10
Load capacities for various maximum design speeds	12
Air pressure multiplier for increased load capacity due to maximum design speed	14
Load capacities of tires in special cases (DIN 7804/7805)	15
Truck chassis with crane superstructure (mobile crane)	16
Bus tire fitment	17
Wheels and rims	18
Commercial Vehicle Tires	
Customer Segments Goods People Construction	20
Tread pattern overview Goods People Construction	22
M+S and Three Peak Mountain Snow Flake (3PMSF) Designation	30
Commercial Vehicle Tires 17.5", 19.5", 22.5"	
Specifications and load capacities	34
Regrooving recommendations	68
Commercial Vehicle Tires 15", 16", 20", 24"	
Specifications and load capacities	134
Regrooving recommendations	138
Maintenance and care	148

Safety remarks

The extensive technical data and other information relating to tires and accessories on the following pages have been compiled to reflect as accurately and completely as possible the current state of development.

If this "Technical Data Book" is to be used as a basis for particularly important decisions, further data covering relevant standards such as ETRTO ¹⁾, DIN ²⁾ and WdK ³⁾ can also be used. Special information can, of course, also be obtained from us at the following address:

Continental Reifen Deutschland GmbH
P.O. Box 169
30001 Hannover
Germany

This service brochure is for information purposes only. All liability is excluded, whether for damage or for other legal reasons (see also page 2).

All designs are in compliance with DOT ⁴⁾ regulations and are marked accordingly.

Since 1982 all tires have been standardized in accordance with ECE ⁵⁾ directive 54 and thus also in accordance with the current EU ⁶⁾ tire directives.

The data provided in this guide is based on average operating conditions as normally found in central Europe.

Please contact us with respect to operating conditions differing from the above, e.g. for uses outside Central Europe.

The tire sizes given in this guide are not always identical to the ones available in the size range.

Lower inflation pressure, greater loads or higher speeds than those recommended by the vehicle or tire manufacturer shorten the service life of the tire.

These instructions must be followed if vehicle safety - and that of those fitting tires - is to be guaranteed. This applies above all to instructions regarding tire pressure.

Failure to comply with these instructions could result in tire damage that may even lead to tire blow-outs under certain circumstances. This, in turn, could cause traffic accidents involving damage to property and/or personal injury (see also page 5).

1) ETRTO - The European Tire and Rim Technical Organisation, Brussels
2) DIN - Deutsches Institut für Normung, Berlin (German Institute for Standardization)
3) WdK - Wirtschaftsverband der deutschen Kautschuk-Industrie, Frankfurt/Main
4) DOT - Department of Transportation
5) ECE - Economic Commission for Europe (UN institution in Geneva)
6) EU - European Union, previously EEC

Operating instructions

(DIN 7804/7805 and ECE-R 54)

Load capacity and speed

When determining the minimum tire size necessary for the axle of a vehicle, the authorized weight and the maximum design speed of the vehicle should always be used as a basis. Trailers first coming into service on or after January 1, 1990 must be equipped with tires suited for maximum speeds of at least 100 km/h, unless the trailer is clearly marked for a lower speed. The so-called "tolerance catalogue" must also be taken into consideration here. Nominal load capacity = 100% load, as the load index also indicates*.

Reference speed

This is the speed assigned as per nominal load capacity of the tire. The load capacity can be exceeded when the vehicle, due to its construction, has a lower maximum speed and vice versa (see the tables on page 12 and 13).

Inflation pressure

The inflation pressures indicated in the tables are minimum values given for reference purposes. All inflation pressures apply to the "cold" tire, i.e. the state in which the tire is in after having stood outdoors for several hours, not exposed to intense sunlight.

M+S tires

May be fitted on commercial vehicles whose construction allows for a higher maximum speed than approved for the tire if the tire's lower approved speed is clearly posted in the vehicle in the driver's field of vision (e.g. sticker on the instrument panel).

Free Rolling Tires (FRT)

Trailer tires marked as Free Rolling Tires (FRT) are tires specifically designed for the equipment of trailers (non driven/ trailing axles). This is the axle position where they will deliver their best performance.

Mixed fitment

(radial/crossply) While it is permissible for a vehicle weighing more than 2.8 t to be fitted axlewise with tires of different construction, it is recommended that tires of the same type be fitted in all wheel positions.

Rims

Only the specified rims may be mounted on new commercial vehicles series. Tapered bead seat rims with a diameter of 16" or less should be equipped with safety shoulders (e.g. round hump) if tubeless radial tires are fitted on them. The rim sizes printed in bold type in the table on page 34 are optimal Continental sizes with respect to service life, wear pattern and durability.

Wheels

The load capacity must be adequate in all cases.

* See table on page 6

Tire designations

Load indices (LI)

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
19	77.5	50	190	81	462	112	1120	143	2725	174	6700
20	80	51	195	82	475	113	1150	144	2800	175	6900
21	82.5	52	200	83	487	114	1180	145	2900	176	7100
22	85	53	206	84	500	115	1215	146	3000	177	7300
23	87.5	54	212	85	515	116	1250	147	3075	178	7500
24	90	55	218	86	530	117	1285	148	3150	179	7750
25	92.5	56	224	87	545	118	1320	149	3250	180	8000
26	95	57	230	88	560	119	1360	150	3350	181	8250
27	97.5	58	236	89	580	120	1400	151	3450	182	8500
28	100	59	243	90	600	121	1450	152	3550	183	8750
29	103	60	250	91	615	122	1500	153	3650	184	9000
30	106	61	257	92	630	123	1550	154	3750	185	9250
31	109	62	265	93	650	124	1600	155	3875	186	9500
32	112	63	272	94	670	125	1650	156	4000	187	9750
33	115	64	280	95	690	126	1700	157	4125	188	10000
34	118	65	290	96	710	127	1750	158	4250	189	10300
35	121	66	300	97	730	128	1800	159	4375	190	10600
36	125	67	307	98	750	129	1850	160	4500	191	10900
37	128	68	315	99	775	130	1900	161	4625	192	11200
38	132	69	325	100	800	131	1950	162	4750	193	11500
39	136	70	335	101	825	132	2000	163	4875	194	11800
40	140	71	345	102	850	133	2060	164	5000	195	12150
41	145	72	355	103	875	134	2120	165	5150	196	12500
42	150	73	365	104	900	135	2180	166	5300	197	12850
43	155	74	375	105	925	136	2240	167	5450	198	13200
44	160	75	387	106	950	137	2300	168	5600	199	13600
45	165	76	400	107	975	138	2360	169	5800	200	14000
46	170	77	412	108	1000	139	2430	170	6000	201	14500
47	175	78	425	109	1030	140	2500	171	6150	202	15000
48	180	79	437	110	1060	141	2575	172	6300	203	15500
49	185	80	450	111	1090	142	2650	173	6500	204	16000

Tire designations

In the past the tire load capacity category was indicated solely by a PR number.

Now a numerical code – the load index (LI) – is used to exactly indicate the tire’s load carrying capacity. See also page 6 and 8.

A speed symbol (SI) is used to designate the speed rating of the tire, as shown in the representation below.

The use of the LI and SI was prompted by the introduction of ECE * regulation no. 54 and the EU tire directive for Europe (in force as of January 1, 1993), according to which pneumatic tires intended for road use at speeds in excess of 80 km/h must carry an operational designation comprising LI (single/dual) and SI. Alongside the nominal operational designation a tire may also bear an additional operational designation, e.g. with a lower LI and an SI for higher speeds. These specifications have to be included.

Example:
315/70 R 22.5 152/148 L



An uncoded maximum load-capacity and tire-pressure data in lbs (1 lbs = 0.454 kg) and psi (pounds per square inch - 1 bar = 14.5 psi) may also be moulded into the tire.


These specifications form part of the designation according to US Safety Regulation FMVSS 119 **, which covers all new pneumatic tires for light trucks, trucks, buses and trailers intended for use on public highways as well as motorcycle tires. Canada and Israel also use this specification.

Date of manufacture

The last 4 digits of the DOT ID no. indicate the week and year of manufacture.




Speed symbols (SI)

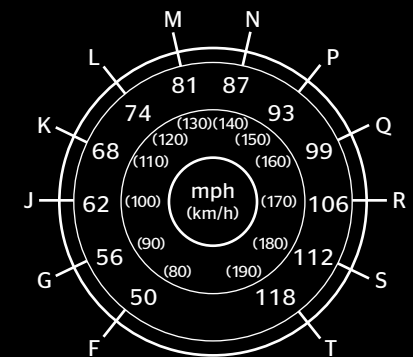

* ECE = ECONOMIC COMMISSION FOR EUROPE, UN institution in Geneva
 ** FMVSS = Federal Motor Vehicle Safety Standard

Tire designations

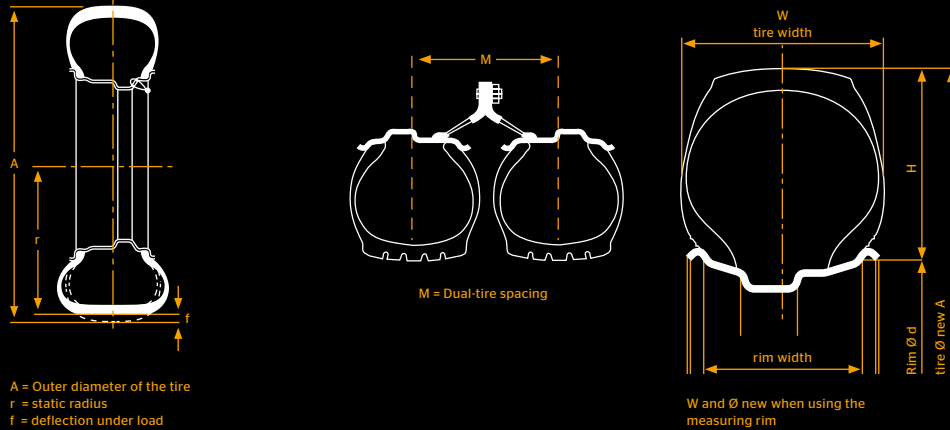

Vehicle tire group	Example of designation		Example comprises details of		
	Tire size ¹⁾	Service description ²⁾	Tire width W	H:W %	Rim dia code d
Light truck	185 R 14 C	102/100 N	185 mm	- 90	14
	195/75 R 16 C	107/105 N	195 mm	75	16
Truck	12 R 22.5	152/148 L	300 mm	- 90	22.5
	315/80 R 22.5	156/150 L (154/150 M) ³⁾	315 mm	80	22.5
	12.00 R 20	154/150 K	300 mm	100	20
Trailer	365/80 R 20	160/- K	365 mm	80	20
	385/65 R 22.5	160/- K	385 mm	65	22.5
Bus	275/70 R 22.5	148/145 J	275 mm	70	22.5
	295/80 R 22.5	152/148 M	295 mm	80	22.5

1) "R" = radial design
"C" = light truck (van) tire with LI for single tires = 121 and below, see also page 5
2) Service description = load index for single/dual tires plus speed symbol (see also tables on following pages)
3) Supplementary service description

Units of measurement and definitions

(DIN 70020)

As a matter of principle, the technical data in the tables always complies with the international standards as specified by ISO and the ETRTO. Further details such as other tire sizes or designs, plus the static radius and the rolling circumference comply with DIN/WdK Guidelines.

Lengths
are given in millimetres (mm).

Rim width
The linear distance between the flanges of the rim.

Cross-section
Half the difference between the overall diameter and the nominal rim diameter.

Tire width
The section width of an inflated tire mounted on its theoretical rim and indicated in the tire size designation.

Outer diameter
The diameter of an inflated tire at the outermost surface of the tread.

Nominal rim diameter
It is a size code figure for reference purposes only, as indicated in the tire and rim size designation.

Inflation pressure
Tire inflation pressure is given in bar based on cold tires.

Outer diameter New *
is a nominal size which refers to the tread center.

Max. outer diameter in service
is the maximum diameter permitted in the tread center as a result of permanent growth during tire use. Dynamic deformations are not included.

Cross-section width New *
is a nominal size which refers to the smooth tire wall.

* Construction size

Max. operational width
is the maximum permitted width. This includes scuff ribs, decorative ribs, lettering and permanent growth during use. Dynamic deformations are not included.

Static radius
is the distance from the tire center to the ground level. Measurements are checked on fitted-tires inflated to the inflation pressure specified in DIN 70020 Part 5.


Rolling circumference
is the distance covered by each revolution of the tire.

Load capacities
are given in kgs (weight in the sense of mass)

Dual-tire spacing
Maintaining the minimum spacing distance ensures that the two tires in a dual fitment arrangement function without any infringement of the ETRTO standards providing the tires are not fitted with chains. In the course of development, a variety of designations for tire dimensions have been introduced, some of which are used concurrently. The following combination is most frequently used: tire width in mm, then H : W (height : width) in % and finally the codes for the tire construction - for example R for "radial" and "-" for "crossply" - and the nominal rim diameter as code. When planning vehicle wheel space, automotive designers must proceed on the basis of the maximum values for tire width and outer diameter, taking into account the tire's static and dynamic deformation. In this way they ensure that all standardly approved tires will fit in all cases. If this is not possible in exceptional cases, appropriate measures are to be taken to exclude any possible risk to safety.

Sidewall designations

The tire designation markings satisfy both the US standard (FMVSS 119) and the European standard (ECE-R 54).

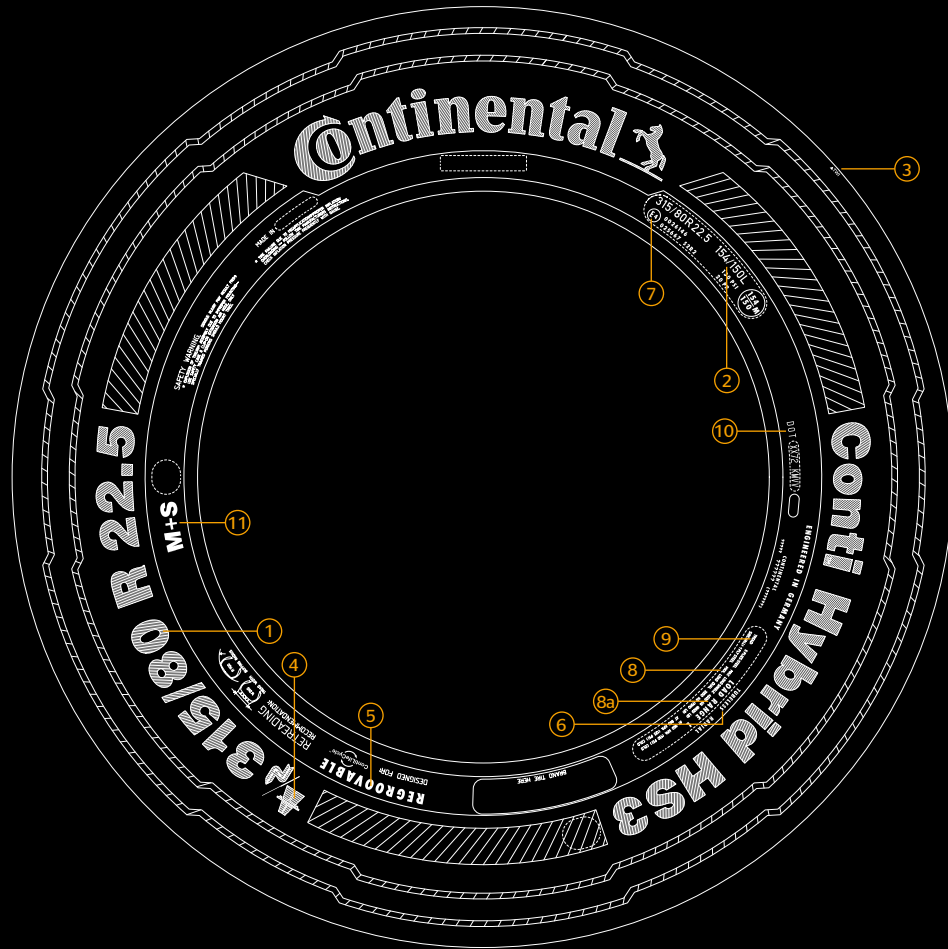

- 1** **Size designation**
315 = tire width in mm
80 = aspect ratio (section height to section width) = 80%
R = radial construction
22.5 = rim diameter (code)
- 2** **Service description**
Consisting of
154 = load index for single fitment
150 = load index for dual fitment
L = code letter for speed rating
- 3** **TWI**
Tread Wear Indicator
- 4** **Recommended use**
only Continental Truck Tires
- 5** **Regroovable**
The manufacturer has designed the tire for regrooving
- 6** **Tubeless Tube Type**
- 7** **E** = tires complies with value set out in ECE-R 54
4 = country code for the country in which the approval number was issued (here: 4 = Netherlands)
- 8** **US load designation**
For single/dual fitment and indication of max. inflation pressure in psi (1 bar = 14.5 psi)
- 8a** **Load range**
In accordance with US standard
- 9** Data as per US safety standard on inner construction or number of plies, in this case
Tread: under the tread there are five steel cord plies (including casing)
Sidewall: viewed from the side there is one steel cord ply (in this case the casing ply)
- 10** **DOT**
= U.S. Department of Transportation (responsible for tire safety standards)
- 11** **M+S**
Designation for winter use suitability (Mud & Snow)
- 12** **Rotation**
(not valid for shown Conti Hybrid HS3)
Recommended direction of rotation
- 13** **Single Point**
(not valid for shown Conti Hybrid HS3)
Alternative load and speed

Explanation

DOT = Department of Transportation

ECE = Economic Commission for Europe (UN Institution in Geneva)

ETRTO = The European Tire and Rim Technical Organisation, Brussels

FMVSS = Federal Motor Vehicle Safety Standard

Load capacities

for various maximum design speeds

Maximum speed in km/h (determined by vehicle design)	C-tires with load index 121 (1450 kg) or less as single fitments Approved load capacity in % of the nominal load capacity ²⁾ equals the load index for reference speed				
	L (120)	M (130)	N (140)	P (150)	Q-T (160-190)
160	-	-	-	-	100
155	-	-	-	-	100
150	-	-	-	100	100
140	-	-	100	100	100
138	-	-	100	100	100
136	-	-	100	100	100
134	-	-	100	100	100
132	-	-	100	100	100
130	-	100	100	100	100
128	-	↑	100	100	100
126	-	↑	100	100	100
124	-	↑	100	100	100
122	-	↑	100	100	100
120	100	↑	100	100	100
118	↑	↑	100.5	↑	↑
116	↑	↑	101	↑	↑
114	↑	↑	101.5	↑	↑
112	↑	↑	102	↑	↑
110	↑	↑	102.5	↑	↑
108	↑	↑	103	↑	↑
106	↑	↑	103.5	↑	↑
104	↑	↑	104	↑	↑
102	↑	↑	104.5	↑	↑
100	↑	↑	105	↑	↑
95	↑	↑	106.5	↑	↑
90	see column N	see column N	107.5	see column N	see column N
85	↑	↑	108.5	↑	↑
80	↑	↑	110	↑	↑
75	↑	↑	111	↑	↑
70	↑	↑	112.5	↑	↑
65	↑	↑	113.5	↑	↑
60	↑	↑	115	↑	↑
55	↑	↑	117.5	↑	↑
50	↑	↑	120	↑	↑
45	↑	↑	122	↑	↑
40 ¹⁾	↑	↑	125	↑	↑
35 ¹⁾	↑	↑	129	↑	↑
30 ¹⁾	↑	↑	135	↑	↑
25 ¹⁾	↑	↑	142	↑	↑
20 ¹⁾	↑	↑	150	↑	↑
15 ¹⁾	↑	↑	160	↑	↑
Application restricted speed	↑	↑	↑	↑	↑
10 ¹⁾	↑	↑	175	↑	↑
5 ¹⁾	↑	↑	190	↑	↑
Stationary ¹⁾	↑	↑	210	↑	↑

Load capacities

for various maximum design speeds

Maximum speed in km/h (determined by vehicle design)	Tires with load index 122 (1500 kg) or more as single fitments Approved load capacity in % of the nominal load capacity ²⁾ equals the load index for reference speed						
	D (65)	F (80)	G (90)	J (100)	K (110)	L (120)	M (130)
130	-	-	-	-	-	-	100
127.5	-	-	-	-	-	-	100
125	-	-	-	-	-	-	100
122.5	-	-	-	-	-	-	100
120	-	-	-	-	-	100	100
117.5	-	-	-	-	-	↑	100
115	-	-	-	-	-	↑	100
112.5	-	-	-	-	-	↑	100
110	-	-	-	-	100	↑	100
107.5	-	-	-	-	↑	↑	100
105	-	-	-	-	↑	↑	100
102.5	-	-	-	-	↑	↑	100
100	-	-	-	100	↑	↑	100
95	-	-	-	↑	↑	↑	101
90	-	-	100	↑	↑	↑	102
85	-	-	102	↑	↑	↑	103
80	-	100	↑	↑	↑	↑	104
75	-	102.5	↑	↑	↑	↑	105.5
70	-	105	↑	↑	↑	↑	107
65	100	107.5	↑	↑	↑	↑	108.5
60	100	↑	↑	↑	↑	↑	110
55	-	↑	↑	↑	↑	↑	111
50	102	↑	↑	↑	↑	↑	112
45	-	↑	↑	↑	↑	↑	113
40 ¹⁾	107	↑	↑	↑	↑	↑	115
35 ¹⁾	-	see column M	see column M	see column M	see column M	see column M	119
30 ¹⁾	116	↑	↑	↑	↑	↑	125
25 ¹⁾	-	↑	↑	↑	↑	↑	135
20 ¹⁾	140	↑	↑	↑	↑	↑	150
15 ¹⁾	150	↑	↑	↑	↑	↑	165
Application restricted speed	↑	↑	↑	↑	↑	↑	↑
10 ^{1) 3)}	165	↑	↑	↑	↑	↑	180
5 ^{1) 3)}	190	↑	↑	↑	↑	↑	210
Stationary ^{1) 3)}	225	↑	↑	↑	↑	↑	250

1) Dual-tires = 2 x single load capacity
 2) A sign indicating the max speed must be attached to trailers restricted to speeds below 100 km/h (62 mph).
 3) Ask the tire manufacturer about these applications.

Tires with SI ratings P and Q under full load at speeds of over 140 km/h should be inflated an extra 0.1 bar for every excess 10 km/h. No excess loads are applicable over 65 km/h for tires on heavy trailers (with laden weight > 3.5 t). The load/speed variation given on this page do not apply to the additional service description (the so called Single Point).

See general notes on page 5.

This table is only applicable in conjunction with air pressure multiplier on page 14. If applied please check dual spacing (dual tire contact) and rim status.

Air pressure multiplier

for increased load capacity due to maximum design speed

Maximum speed in km/h (determined by vehicle type)	Air pressure multiplier for reference speed (speed index) of tire	
	G, J, K, L, M 90 km/h - 130 km/h	N, P, Q, R, S 140 km/h - 180 km/h
140		1
135		1
130	1	1
125	1	1
120	1	1
115	1	1.01
110	1	1.02
105	1	1.06
100	1	1.06
95	1	1.08
90	1	1.09
85	1	1.10
80	1	1.12
75	1.01	1.14
70	1.02	1.15
65	1.04	1.15
60	1.06	1.18
55	1.07	1.22
50	1.08	1.25
45	1.09	1.28
40	1.10	1.30
35	1.11	1.30
30	1.13	1.30
25	1.17	1.30
20	1.21	1.30
15	1.25	1.30
10	1.30	1.35
5	1.40	1.35
0	1.40	1.40

The multipliers cited are to be used for an operating pressure of up to 10 bar.

Example: In the case of a K-rated tire (110 km/h) and nominal inflated pressure of 7.5 bar, the inflation pressure can be increased to 8.85 bar if the vehicle's maximum design speed is set at 40 km/h (1.1 x 7.5 bar) to exploit an increased load capacity of 115% of nominal load capacity.

Load capacities of tires in special cases

(DIN 7804/7805)

Case	Type of service	Approved load capacity as % of the nominal load capacity in the tables
1	Special-service vehicles: Fire brigade vehicles with special superstructures, road flushers, road sweepers, garbage trucks, cherry-pickers, municipal service vehicles of a similar nature and other public utility vehicles.	110
2	Commercial vehicles: With special superstructures (concrete mixers, aircraft refuellers) used in local service with maximum service speeds not in excess of 60 km/h.	110
3	Regular-service buses (M 3-Class II): In urban service, with maximum service-related speeds of up to 60 km/h.	110
4	Regular-service buses (M 3-Class I): (see also DIN 7805) In urban and suburban service, if average speed does not exceed 40 km/h.	115
5	Tires on the front axle of trucks with facilities for snow removal (front-end snow plough/rotary snow plough and the like) at service-related speeds of 50 km/h 62 km/h	120 115
6	For internal use on aircraft refuellers at speeds of up to 30 km/h (inflation pressure + 15%, no reduction for dual fitment).	135
7	Caravans and other passenger-car trailers (only for C tires, see also WdK directive 195) for speeds of up to 100 km/h.	105

Please note: This chart is not applicable in conjunction with the charts on pages 12 or 13 in correspondence with the chart on page 14.

Truck chassis with crane superstructure (mobile crane)

Tire size	PR	Single/ dual fitment	Load capacity (kg) per axle and speed (km/h)								Tire pres- sure ²⁾ bar (psi)
			Statio- nary ¹⁾	10	20	50	65	70	75	80	
10.00 R 20	16	S	16500	12000	10000	7700	7200	7000	6800	6700	9.0 (131)
11 R 22.5		D	33000	24000	20000	14000	13000	12800	12400	12000	
11.00 R 20	16	S	17900	13000	10800	8300	7800	7600	7400	7200	10.0 (145)
12 R 22.5		D	35800	26000	21600	14800	14000	13600	13200	12800	
12.00 R 20	18	S	20500	14750	12300	9200	8700	8550	8400	8250	10.0 (145)
13 R 22.5		D	41000	29500	24600	16600	15700	15400	15200	14800	
14.00 R 20	18	S	22500	16200	13500	10080	9675	9450	9225	9000	8.0 (116)
		D	45000	32400	27000	18100	17400	17000	16600	16500	
12.00 R 24	20	S	25000	18000	15000	11450	10675	10450	10280	10000	10.0 (145)
		D	48700	35000	29200	20000	18700	18300	18000	17500	

1) When boom is swung out in unfavourable position


2) For inflation pressure of 8.0 bar (116 psi) and over use valve slit cover plate

Bus tire fitment

Recommended inflation pressures for tires on town and country buses
for various axle loads

Tire size	Ope- rating code	Load index	Single/ dual fitment	Max. permitted axle weight (kg) for inflation pressure (bar) (psi) including +10% extra as per German Transport Association (DIN 7805) +15% extra as per German Transport Association (DIN 7805)									
				4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)
10.00 R 20	146/143	146 143	S D	3960 7195	4310 7830	4650 8450	4985 9060	5315 9660	5640 10250	5960 10830	6275 11405	6590 11970	6900 12535
385/55 R 22.5	160/ -	160	S	5940	6465	6975	7480	7975	8460	8945	9415	9885	10350
275/70 R 22.5	148/145	148 145	S D	4160 7660	4525 8335	4885 8995	5235 9640	5580 10280	5925 10910	6260 11525	6590 12140	6920 12740	7245 13340
305/70 R 22.5	150/148	150 148	S D	4425 8320	4810 9050	5195 9770	5570 10475	5935 11165	6300 11850	6655 12520	7010 13185	7360 13840	7705 14490
295/80 R 22.5	152/148	152 148	S D	4685 8320	5100 9050	5505 9770	5900 10475	6290 11165	6675 11850	7055 12520	7430 13185	7800 13840	8165 14490
11 R 22.5	148/145	148 145	S D	4160 7660	4525 8335	4885 8995	5235 9640	5580 10280	5925 10910	6260 11525	6590 12140	6920 12740	7245 13340

Wheels and rims

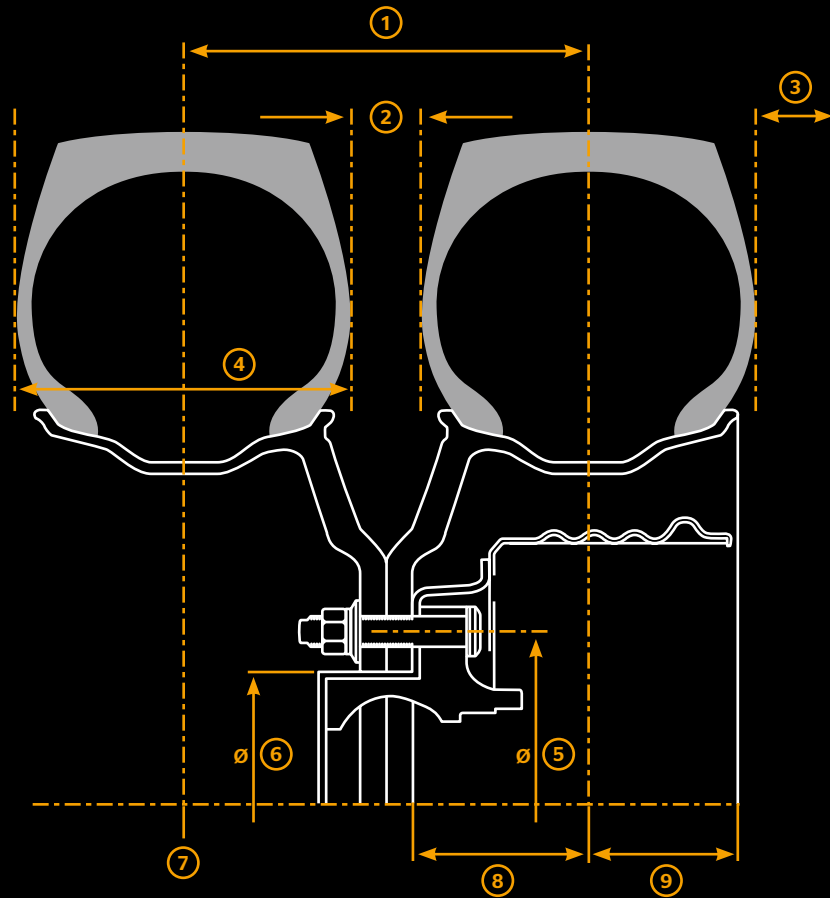


- ① dual spacing
- ② tire clearance
- ③ vehicle clearance
- ④ tire section width
- ⑤ bolt circle diameter
- ⑥ center hole diameter
- ⑦ tire center line
- ⑧ offset
- ⑨ backspace

Offset


The offset is the distance from the center of the wheel to the inside surface of the wheel disk on the hub. The wheel insertion depth can be positive, negative or zero.

The insertion depth not only ensures adequate space for the brake drums, it also determines drive characteristics, tracking width, steering swivel, pin offset and wheel bearing guidance. In the case of dual tire fitment, the insertion depth also influences the distance between centers.

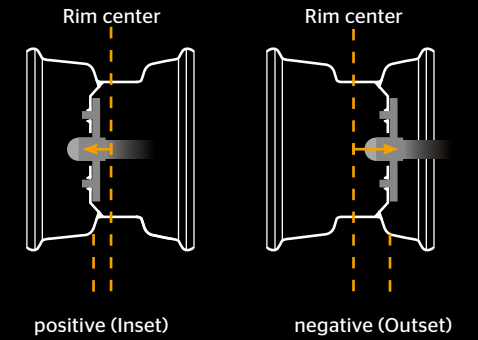


There are three main types of rim for commercial vehicle tires:

One-piece well base rims for tubeless tires




Standard and low-profile light trucks 14"-17"




Standard and low-profile 17.5", 19.5", 22.5"

Multi-part flat base rims for tubeless tires



80-series tires 20"


Multi-part flat base rims for tires with inner tubes




High profile ratio mainly 20"

Please contact rim manufacturers for detailed information regarding available rim sizes and variants.

Customer Segment Goods

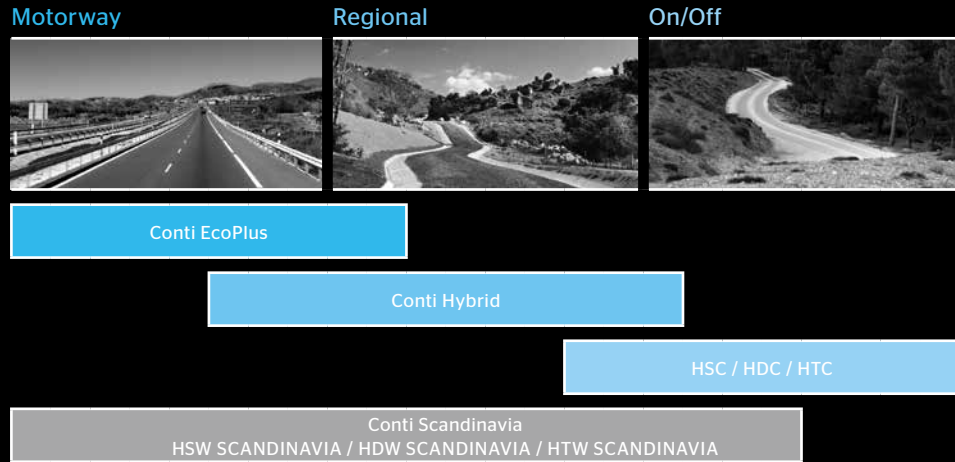


Customer Segment People

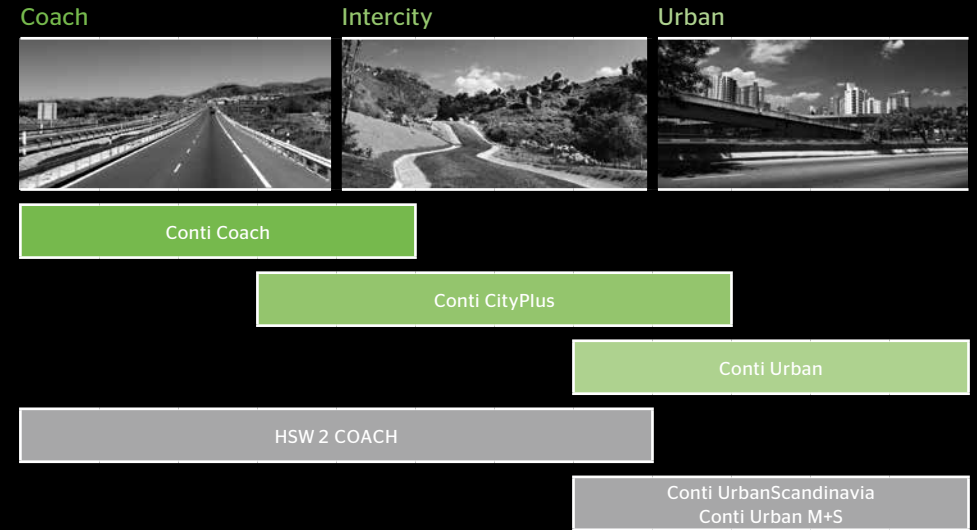

Commercial Vehicle Tires

Customer Segment Construction

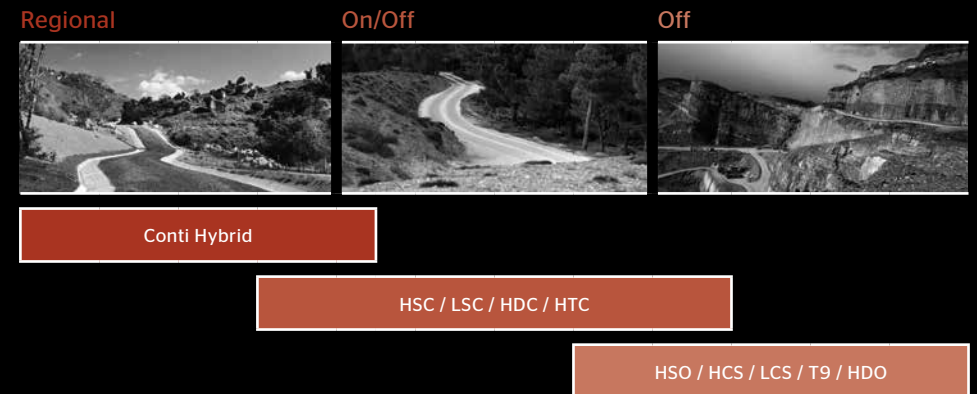

Tread pattern overview Goods

Steer




Conti EcoPlus HS3



Conti EcoPlus HS3
50 / 55 series



HSL 2+ ECO-PLUS



Conti Hybrid HS3



Conti Hybrid HS3
65 serie



Conti Hybrid HS3
19.5



HSR 1
22.5



HSR 1
19.5



HSR
9 R, 10 R, 13 R 22.5



HSR
11 R, 12 R 22.5



HSR
20 / 22 / 24

Motorway

Regional

Drive



Conti EcoPlus HD3
also as ContiRe*



HD HYBRID
only as ContiRe



Conti Hybrid HD3
22.5
also as ContiRe*



Conti Hybrid HD3
19.5
also as ContiRe*



HD HYBRID
only as ContiRe



HDR 2
only as ContiRe



HDR
22.5



HDR
20


Trailer



Conti EcoPlus HT3
also as ContiRe




HTL 2 ECO-PLUS
17.5



HTL 1 ECO-PLUS
19.5
only as ContiRe



Conti Hybrid HT3
22.5
also as ContiRe*



Conti Hybrid HT3
19.5



Conti Hybrid HT3
445/45 R 19.5
435/50 R 19.5



Conti Hybrid HT3
19.5



HTR 2



HTR 2
17.5

Motorway

Regional

Commercial
Vehicle Tires

* in preparation

Tread pattern overview Goods

Steer



Conti Hybrid LS3
17.5



LSR 1+



LSR 1



LSR 1
9.5 R 17.5, 10 R 17.5



HSC 1



HSC 1
11 R, 12 R, 13 R 22.5



HSC
20



ContiRe CityService HA3



Conti Scandinavia HS3
19.5



Conti Scandinavia LS3
17.5



HSW 2 SCANDINAVIA



HSW 2 SCANDINAVIA
55 / 65 series

Drive



Conti Hybrid LD3
17.5



LDR 1+



LDR 1
17.5



HDC 1
also as ContiRe



HDC
20



HDC
55 / 65 series



ContiRe CityService HD3



Conti Scandinavia HD3
19.5



Conti Scandinavia LD3
17.5



HDW 2 SCANDINAVIA
also as ContiRe



HDW

Trailer



HTC 1



HTC
22.5



Conti Scandinavia HT3
19.5



Conti Scandinavia HT3
17.5



HTW 2 SCANDINAVIA



HTW 2 SCANDINAVIA
19.5

Regional

On/Off

Urban

Winter

Regional







On/Off

Urban



Winter

Tread pattern overview People

All axles


Coach		Conti Coach HA3
Intercity		Conti CityPlus HA3
Urban		Conti Urban HA3
		Conti Urban HA3 M+S also as ContiRe
Urban		Conti Urban HA3 M+S 19.5
		HSU
Winter		HSU 1 M+S only as ContiRe
		Conti Urban Scandinavia HA3
		HSW 2 COACH also as ContiRe

Drive

Coach		
Intercity		
Urban		HDU 1 55 series
		Conti Urban Scandinavia HD3 also as ContiRe
Winter		

Tread pattern overview Construction

Steer



Conti Hybrid HS3



Conti Hybrid HS3
65 serie



HSR 1
22.5



HSR 1
19.5



HSR
9 R, 10 R, 13 R 22.5



HSR
11 R, 12 R 22.5



HSR
20 / 22 / 24



HSC 1



HSC 1
11 R, 12 R, 13 R 22.5



HSC
20



LSC



T9



T9+



HSO SAND



HCS



HSO



LCS

Regional

On/Off

Off

Drive



Conti Hybrid HD3
22.5



HDR 2
only as ContiRe



HDR
20



HDC 1
also as ContiRe



HDC



HDC
55 / 65 series



HDO

Commercial Vehicle Tires

Regional

On/Off

Off

Trailer



Conti Hybrid HT3
22.5



Conti Hybrid HT3
19.5



HTR 2



HTC 1



HTC
22.5


Commercial Vehicle Tires

Regional

On/Off

Off

M+S and Three Peak Mountain Snow Flake (3PMSF) Designation

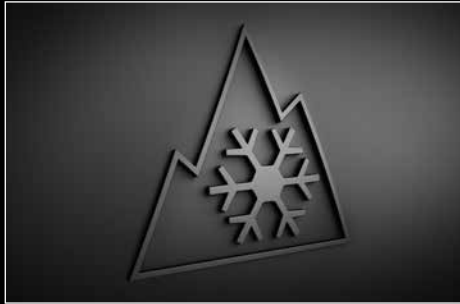

All Continental drive axle tires carry the M+S designation. In addition, some special steering axle and trailer tires are marked M+S. The best performance on mud, snow and ice is provided by tires showing the Three Peak Mountain Snowflake (3PMSF) symbol. All tires suitable for winter and marked M+S and/or 3PMSF are listed below.

“‘Snow tire’ means a tire [...] designed to achieve in snow conditions a performance better than a normal tire [...]”

Source: Economic Commission for Europe of the United Nations (UN/ECE), R117

Steer

Tire size	M+S	3PMSF	Tread Pattern
245/70 R 17.5	•		Conti Hybrid LS3
265/70 R 17.5	•		Conti Hybrid LS3
			LCS
205/75 R 17.5	•		Conti Hybrid LS3
215/75 R 17.5	•		Conti Hybrid LS3
		•	Conti Scandinavia LS3
225/75 R 17.5	•		Conti Hybrid LS3
235/75 R 17.5	•		Conti Hybrid LS3
		•	Conti Scandinavia LS3
9.5 R 17.5	•		LSC


Tire size	M+S	3PMSF	Tread Pattern
245/70 R 19.5	•		Conti Hybrid HS3
265/70 R 19.5	•		Conti Hybrid HS3
		•	Conti Scandinavia HS3
			Conti Urban HA3 M+S
285/70 R 19.5	•		Conti Hybrid HS3
		•	Conti Scandinavia HS3
305/70 R 19.5	•		Conti Hybrid HS3


Steer

Tire size	M+S	3PMSF	Tread Pattern
355/50 R 22.5	•	•	HSW 2 SCAN
385/55 R 22.5	•	•	Conti Hybrid HS3
		•	HSW 2 SCAN
315/60 R 22.5	•	•	HSW 2 SCAN
			Conti Urban HA3 M+S
385/65 R 22.5	•	•	Conti Hybrid HS3
		•	HSW 2 SCAN
			HSC 1
445/65 R 22.5	•		HCS
275/70 R 22.5	•	•	Conti Hybrid HS3
			Conti Urban HA3 M+S
		•	Conti UrbanScan HA3
305/70 R 22.5	•		Conti Urban HA3 M+S
315/70 R 22.5	•	•	Conti Hybrid HS3
		•	HSW 2 SCAN
365/70 R 22.5	•		HSC
295/80 R 22.5	•	•	Conti Hybrid HS3
		•	HSW 2 SCAN
			Conti Coach HA3
			Conti CityPlus HA3
		•	HSW 2 Coach
			HSC 1
315/80 R 22.5	•	•	Conti Hybrid HS3
		•	HSW 2 SCAN
			Conti Coach HA3
		•	HSW 2 Coach
			HSC 1
10 R 22.5	•		T9
12 R 22.5	•	•	Conti Hybrid HS3
			HSC 1
13 R 22.5	•		HSC 1
			HSO


Tire size	M+S	3PMSF	Tread Pattern
7.50 R 16	•		HSO + SAND
365/85 R 20	•		HCS
395/85 R 20	•		HCS
12.00 R 20	•		HSC
			HSO SAND
14.00 R 20	•		HSO SAND
			HCS
325/95 R 24 (12.00 R 24)	•		HSC 1
			HCS

Drive




Tire size	M+S		Tread Pattern
245/70 R 17.5	•	•	Conti Hybrid LD3
265/70 R 17.5	•	•	Conti Hybrid LD3
205/75 R 17.5	•	•	Conti Hybrid LD3
215/75 R 17.5	•	•	Conti Hybrid LD3
	•	•	Conti Scandinavia LD3
225/75 R 17.5	•	•	Conti Hybrid LD3
235/75 R 17.5	•	•	Conti Hybrid LD3
	•	•	Conti Scandinavia LD3
245/75 R 17.5	•		LDR
8 R 17.5	•		LDR
8.5 R 17.5	•		LDR 1+
9.5 R 17.5	•		LDR 1
10 R 17.5	•		LDR 1
245/70 R 19.5	•	•	Conti Hybrid HD3
265/70 R 19.5	•	•	Conti Hybrid HD3
	•	•	Conti Scandinavia HD3
285/70 R 19.5	•	•	Conti Hybrid HD3
	•	•	Conti Scandinavia HD3
305/70 R 19.5	•	•	Conti Hybrid HD3
315/45 R 22.5	•	•	Conti EcoPlus HD3
295/55 R 22.5	•	•	Conti EcoPlus HD3
385/55 R 22.5	•		H DU 1
	•		HDC
295/60 R 22.5	•	•	Conti EcoPlus HD3
	•	•	Conti Hybrid HD3
	•	•	HDW 2 SCAN
315/60 R 22.5	•	•	Conti EcoPlus HD3
	•	•	Conti Hybrid HD3
	•	•	HDW 2 SCAN
385/65 R 22.5	•		HDC

Tire size	M+S		Tread Pattern
255/70 R 22.5	•		HDR
275/70 R 22.5	•	•	Conti Hybrid HD3
	•	•	HDW 2 SCAN
	•	•	Conti UrbanScan HD3
305/70 R 22.5	•		HDR
315/70 R 22.5	•	•	Conti EcoPlus HD3
	•	•	Conti Hybrid HD3
	•	•	HDW 2 SCAN
295/80 R 22.5	•		HDL 1
	•	•	Conti Hybrid HD3
	•	•	HDW 2 SCAN
	•		HDC 1
	•	•	HDC 1
315/80 R 22.5	•	•	Conti EcoPlus HD3
	•	•	Conti Hybrid HD3
	•	•	HDW 2 SCAN
	•		HDC 1
	•		HDO
10 R 22.5	•	•	RMS
11 R 22.5	•		HDR
12 R 22.5	•		HDR
	•		HDC 1
13 R 22.5	•	•	HDW
	•		HDC 1
	•		HDO
7.00 R 16	•		LDR +
7.50 R 16	•		LDR +
12.00 R 20	•		HDC
325/95 R 24 (12.00 R 24)	•		HDC 1

Trailer

Tire size	M+S		Tread Pattern
205/65 R 17.5	•		HTR 2
245/70 R 17.5	•		HTL 2
	•		HTR 2
	•	•	Conti Scandinavia HT3
215/75 R 17.5	•		HTL 2
	•		HTR 2
	•	•	Conti Scandinavia HT3
235/75 R 17.5	•		HTL 2
	•		HTR 2
	•	•	Conti Scandinavia HT3
445/45 R 19.5	•		Conti Hybrid HT3
	•	•	HTW 2 SCAN
435/50 R 19.5	•		Conti Hybrid HT3
265/70 R 19.5	•	•	Conti Scandinavia HT3
	•	•	HTW
285/70 R 19.5	•	•	Conti Scandinavia HT3
385/55 R 22.5	•		Conti Hybrid HT3
	•	•	HTW 2 SCAN
385/65 R 22.5	•		Conti Hybrid HT3
	•	•	HTW 2 SCAN
	•		HTC 1
425/65 R 22.5	•		HTR 2
	•		HTC
445/65 R 22.5	•		HTC 1
275/70 R 22.5	•		HTC

Specifications and load capacities

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																									
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾				Rim-width	Min. distance between rim centers	Max. standard value in service	Design value	Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)	9.5 (137)															
245/70 R 17.5	HTL 2	143/141 L (146/146 F)	18	L 120 (F 80)	TL	C	C	↻ 70	6.75 7.50	270 279	250 258	803		240 248	789	364	2406	146 143 146 141	S S D D	3590 3405 7180 6435	3870 3675 7745 6945	4150 3940 8305 7445	4425 4200 8855 7935	4695 4455 9395 8420	4965 4710 9930 8900	5225 4955 10455 9370	5485 5205 10975 9835	5745 5450 11490 10300	6000 12000												
	HTR 2	143/141 L (146/146 F)	18	L 120 (F 80)	TL	C	C	↻ 71																																	
	Conti Scandinavia HT3	143/141 L (146/146 F)	16	L 120 (F 80)	TL	D	C	↻ 72																																	
																				4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)												
205/65 R 17.5	HTR 2	129/127 J (132/132 F)	14	J 100 (F 80)	TL	D	C	↻ 71	6.00	231	213	721		205	711	334	2154	132 129 132 127	S S D D	2495 2310 4995 4370	2695 2495 5390 4720	2890 2675 5780 5060	3080 2850 6165 5395	3270 3025 6540 5725	3455 3195 6910 6045	3640 3365 7280 6370	3820 3530 7640 6685	4000 3700 8000 7000													
									6.75	239	220																														
245/70 R 17.5	Conti Hybrid LS3	136/134 M	14	M 130	TL	C	B	↻ 69	6.75 7.50	270 279	250 258	803		240 248	789	364	2406	136 134	S D	2930 5545	3160 5985	3390 6415	3610 6840	3835 7260	4050 7670	4265 8075	4480 8480														
	LSR 1+	136/134 M	14	M 130	TL	D	B	↻ 70																																	
	Conti Hybrid LD3	136/134 M	14	M 130	TL	D	C	↻ 74																																	
	LDR 1+	136/134 M	14	M 130	TL	E	C	↻ 75																																	
265/70 R 17.5	Conti Hybrid LS3	139/136 M	14	M 130	TL	C	B	↻ 69	6.75 7.50	286 295	264 272	831		254 262	817	376	2492	139 137 136 134	S S D D	3175 3155 5860 5820	3430 3405 6325 6280	3675 3650 6780 6735	3920 3895 7225 7180	4160 4130 7670 7620	4395 4365 8105 8050	4625 4600 8535 8480	4860 8960														
	LSR 1+	139/136 M	12	M 130	TL	D	B	↻ 70																																	
	Conti Hybrid LD3	139/136 M	14	M 130	TL	D	C	↻ 74																																	
	LDR 1+	139/136 M	14	M 130	TL	E	C	↻ 75																																	
	LCS	137/134 L	14	L 120	TL	D	C	↻ 74																																	

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions								Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																			
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	B ⁴⁾	69 ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fitment																			
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)							
205/75 R 17.5	Conti Hybrid LS3	124/122 M	12	M 130	TL	C	B	69	5.25	222	205	765	197	753	353	2297	124	S		2310	2495	2675	2850	3025	3200												
	LSR 1+	124/122 M	12	M 130	TL	D	B	70	6.00	231	213		205				122	D		4335	4680	5015	5350	5675	6000												
	Conti Hybrid LD3	124/122 M	12	M 130	TL	D	C	74	6.75	239	220		212																								
	LDR 1+	124/122 M	12	M 130	TL	E	C	75																													
215/75 R 17.5	HTR 2	135/133 L	18	L 120	TL	C	C	70	6.00	239	220	779	212	767	359	2339	135	S		2720	2940	3150	3360	3565	3765	3965	4165	4360									
	Conti Hybrid LS3	126/124 M	12	M 130	TL	C	B	69	6.75	246	228		219				126	S		2595	2800	3005	3200	3400													
	LSR 1+	126/124 M	12	M 130	TL	D	B	70									133	D		5145	5555	5955	6350	6735	7120	7495	7870	8240									
	Conti Hybrid LD3	126/124 M	12	M 130	TL	D	C	74									124	D		4885	5275	5655	6030	6400													
	LDR 1+	126/124 M	12	M 130	TL	E	C	75																													
	HTR 2	135/133 K	16	K 110	TL	D	C	73																													
	Conti Scandinavia LS3	126/124 M	12	M 130	TL	D	C	73																													
	Conti Scandinavia LD3	126/124 M	12	M 130	TL	D	C	75																													
	Conti Scandinavia HT3	135/133 K	16	K 110	TL	D	C	72																													
225/75 R 17.5	Conti Hybrid LS3	129/127 M	12	M 130	TL	C	B	69	6.00	246	228	797	219	783	366	2388	129	S		2675	2885	3095	3295	3500	3700												
	LSR 1+	129/127 M	12	M 130	TL	D	B	70	6.75	254	235		226				127	D		5060	5460	5855	6240	6620	7000												
	Conti Hybrid LD3	129/127 M	12	M 130	TL	D	C	74																													
	LDR 1+	129/127 M	12	M 130	TL	E	C	75																													

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions				Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																				
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	T ³⁾	C ⁴⁾	S ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment																
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)				
235/75 R 17.5	HTL 2	143/141 L	18	L 120	TL	C	C	↻ 70	6.75	262	242	811		233	797	372	2431	144	S		3495	3775	4045	4315	4580	4835	5095	5345	5600					
	Conti Hybrid LS3	132/130 M	12	M 130	TL	C	B	↻ 69	7.50	271	251			241				143	S		3405	3675	3940	4200	4455	4710	4955	5205	5450					
																			S		2745	2960	3175	3385	3590	3795	4000							
																			D		6995	7550	8095	8630	9160	9675	10190	10695	11200					
																			D		6435	6945	7445	7935	8420	8900	9370	9835	10300					
	LSR 1+	132/130 M	12	M 130	TL	D	B	↻ 70										141	D		6435	6945	7445	7935	8420	8900	9370	9835	10300					
	Conti Hybrid LD3	132/130 M	12	M 130	TL	D	C	↻ 74										130	D		5215	5630	6035	6435	6825	7215	7600							
	LDR 1+	132/130 M	12	M 130	TL	E	C	↻ 75																										
	HTR 2	143/141 K (144/144 F)	16	K 110 (F 80)	TL	C	C	↻ 71																										
Conti Scandinavia LS3	132/130 M	12	M 130	TL	C	C	↻ 73																											
Conti Scandinavia LD3	132/130 M	12	M 130	TL	D	C	↻ 75																											
Conti Scandinavia HT3	143/141 K (144/144 F)	16	K 110 (F 80)	TL	D	C	↻ 72																											
245/75 R 17.5	LSR	134/132 M (136/134 L)	14	M 130 (L 120)	TL	D	C	↻ 70	6.75	270	250	827		240	813	379	2480	136	S		2930	3160	3390	3610	3835	4050	4265	4480						
	LDR	134/132 M (136/134 L)	14	M 130 (L 120)	TL	E	C	↻ 73	7.50	279	258			248				134	S		2910	3140	3365	3590	3810	4025	4240	8480						
8 R 17.5	LSR	117/116 L	10	L 120	TL	F	C	↻ 70	5.25	225	208	799		200	785	367	2394	117	S		2220	2395	2570											
	LDR	117/116 L	8	L 120	TL	F	C	↻ 73	6.00	234	216			208				116	D		4320	4660	5000											
8.5 R 17.5	LSR 1+	121/120 L	12	L 120	TL	E	B	↻ 70	5.25	233	215	817		207	803	375	2449	121	S		2350	2535	2720	2900										
	LDR 1+	121/120 L	12	L 120	TL	F	C	↻ 76	6.00	242	224			215				120	D		4535	4895	5250	5600										


See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions								Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)											
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	E ³⁾	B ⁴⁾	70 ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment											
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)
9.5 R 17.5	LSR 1	129/127 L	14	L 120	TL	E	B	70	6.00	262	242	859		233	843	392	2571	131	S		2675	2885	3095	3300	3500	3700	3900		
	LDR 1	129/127 L	14	L 120	TL	E	C	74	6.75	270	250		240	843	392	2571	129	S		2675	2885	3095	3295	3500	3700				
	LSC	129/127 L (131/128 M)	14	L 120 (M 130)	TL	D	C	70										128	D		4940	5335	5715	6095	6470	6835	7200		
10 R 17.5	LSR 1	134/132 L	16	L 120	TL	E	B	70	6.75	277	256	875		246	859	398	2620	134	S		2910	3140	3365	3590	3810	4025	4240		
	LDR 1	134/132 L	16	L 120	TL	E	C	75	7.50	286	264		254	859	398	2620	132	D		5490	5925	6355	6775	7185	7595	8000			
445/45 R 19.5	HTL 1	160/- J	22	J 100	TL	C	C	73	14.00		453	911		436	895	416	2712	160	S	5165	5620	6065	6505	6935	7360	7775	8190	8595	9000
	HTL 1 ContiRe	160/- J	22	J 100	TL	-	-	-	15.00		464			446															
	Conti Hybrid HT3	160/- J	22	J 100	TL	B	C	72																					
	HTW 2 SCAN	160/- J	22	J 100	TL	C	C	73																					
435/50 R 19.5	Conti Hybrid HT3	160/- J	20	J 100	TL	B	C	72	14.00		456	949		438	931	431	2821	160	S	5165	5620	6065	6505	6935	7360	7775	8190	8595	9000
385/55 R 19.5	Conti EcoPlus HT3	156/- J	16	J 100	TL	B	C	69	11.75		396	935		381	919	426	2785	156	S					6165	6540	6910	7280	7640	8000
245/70 R 19.5	Conti Hybrid HS3	136/134 M	16	M 130	TL	C	B	69	6.75	270	250	853		240	839	389	2559	141	S	3095	3365	3635	3895	4155	4405	4655	4905	5150	
	HSR 1	136/134 M	16	M 130	TL	D	B	70	7.50	279	258		248	839	389	2559	136	S	2690	2930	3160	3390	3610	3835	4050	4265	4480		
	Conti Hybrid HD3	136/134 M	16	M 130	TL	D	C	74										140	D	6010	6540	7055	7565	8065	8560	9045	9525	10000	
	HDR	136/134 M	16	M 130	TL	E	C	73										134	D	5095	5545	5985	6415	6840	7260	7670	8075	8480	
	Conti Hybrid HT3	141/140 K	18	K 110	TL	C	B	73																					
	HTR 1	141/140 K	16	K 110	TL	D	C	70																					

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)													
										Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment												
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	T ³⁾	E ⁴⁾	S ⁵⁾	Rim-width	Min. distance between rim centers	Width	Outer-Ø	Width + 1 %					Outer-Ø ± 1 %	± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)
265/70 R 19.5	Conti Hybrid HS3	140/138 M	16	M 130	TL	C	B	◐ 69	6.75	286	264		254				143	S		3560	3845	4120	4395	4665	4930	5190	5450		
									7.50	295	272	881	262	867	401	2644	140	S	3155	3430	3700	3970	4230	4490	4745	5000			
	HSR 1	140/138 M	16	M 130	TL	D	B	◐ 70	8.25	303	280		269				141	D	5955	6480	7270	7795	8310	8815	9315	9810	10300		
	Conti Hybrid HD3	140/138 M	16	M 130	TL	D	C	◐ 74									138	D		6995	7495	7995	8480	8960	9440				
	ContiRe Hybrid HD3	140/138 M	16	M 130	TL	-	-	-																					
	HDR	140/138 M	16	M 130	TL	E	C	◐ 75																					
	Conti Hybrid HT3	143/141 K	16	K 110	TL	C	B	◐ 73																					
	HTR 1	143/141 J	18	J 100	TL	D	C	◐ 70																					
	Conti Scandinavia HS3	140/138 M	16	M 130	TL	C	C	◐ 73																					
	HSW SCAN	140/138 M	16	M 130	TL	E	C	◐ 73																					
	Conti Scandinavia HD3	140/138 M	16	M 130	TL	D	C	◐ 75																					
	Conti Scandinavia HT3	143/141 K	18	K 110	TL	D	C	◐ 72																					
	HTW	143/141 J	18	J 100	TL	D	C	◐ 73																					
Conti Urban HA3 M+S	140/138 M	16	M 130	TL	C	C	◐ 70																						
285/70 R 19.5	Conti Hybrid HS3	146/144 M	16	M 130	TL	C	B	◐ 69	7.50	311	287		276				150	S		4185	4515	4840	5160	5475	5790	6095	6400	6700	
									8.25	318	294	911	283	895	413	2730	146	S	3445	3745	4045	4335	4620	4905	5185	5460	5730	6000	
	HSR 1	146/144 M	16	M 130	TL	D	B	◐ 70	9.00	327	303		291				145	S	3485	3790	4090	4385	4675	4965	5245	5525	5800		
																		148	D	7870	8495	9105	9710	10305	10885	11465	12035	12600	
	Conti Hybrid HD3	146/144 M	16	M 130	TL	C	C	◐ 74									144	D	6430	6995	7550	8095	8630	9160	9675	10190	10695	11200	
ContiRe Hybrid HD3	146/144 M	16	M 130	TL	-	-	-									143	D	6550	7125	7690	8245	8790	9330	9860	10380	10900			

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions							Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																			
										Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0									
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾		Rim-width	Min. distance between rim centers	Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %	± 1.5 %	± 2 %	(65)			(73)	(80)	(87)	(94)	(102)	(109)	(116)	(123)	(131)										
285/70 R 19.5	HDR	145/143 M	16	M 130	TL	D	C	↻ 75	7.50	311	287	911		276	895	413	2730	150	S																	
	Conti Hybrid HT3	150/148 K	18	K 110	TL	C	B	↻ 73	8.25	318	294			283							146	S	3445	4185	4515	4840	5160	5475	5790	6095	6400	6700				
	HTR 1	150/148 K	18	K 110	TL	C	C	↻ 70	9.00	327	303			291							145	S	3485	3790	4090	4385	4675	4965	5245	5525	5800					
																						148	D		7870	8495	9105	9710	10305	10885	11465	12035	12600			
																						144	D	6430	6995	7550	8095	8630	9160	9675	10190	10695	11200			
																						143	D	6550	7125	7690	8245	8790	9330	9860	10380	10900				
		Conti Scandinavia HS3	145/143 M	16	M 130	TL	D	C	↻ 73																											
	HSW SCAN	145/143 M	16	M 130	TL	D	C	↻ 73																												
	Conti Scandinavia HD3	145/143 M	16	M 130	TL	D	C	↻ 75																												
	Conti Scandinavia HT3	150/148 K	18	K 110	TL	C	C	↻ 72																												
305/70 R 19.5	Conti Hybrid HS3	148/145 M	18	M 130	TL	C	B	↻ 69	8.25	334	309	941		297	923	424	2815	148	S	3785	4120	4445	4765	5080	5390	5695	6000	6300								
	HSR 1	148/145 M	18	M 130	TL	C	B	↻ 70	9.00	343	317			305							145	D	6970	7585	8185	8775	9355	9930	10490	11050	11600					
	Conti Hybrid HD3	148/145 M	18	M 130	TL	C	C	↻ 76																												
315/45 R 22.5	Conti EcoPlus HD3	147/145 L	16	L 120	TL	D	C	↻ 76	9.75	345	319	868		307	856	405	2594	147	S					4740	5025	5315	5595	5875	6150							
																						145	D					8940	9485	10025	10555	11080	11600			
355/50 R 22.5	Conti EcoPlus HS3 XL	156/ - K	18	K 110	TL	C	C	↻ 70	11.75		375	942		361	928	436	2812	156	S	4590	4995	5390	5780	6165	6540	6910	7280	7640	8000							
	HSL 2+ XL	156/ - K	18	K 110	TL	C	B	↻ 70																												
	HSW 2 SCAN XL	156/ - K	18	K 110	TL	C	C	↻ 73																												
295/55 R 22.5	Conti EcoPlus HD3	147/145 K	16	K 110	TL	C	B	↻ 72	9.00	329	304	908		292	896	422	2715	147	S	3530	3840	4145	4445	4740	5025	5315	5595	5875	6150							
	HDL 2+	147/145 K	16	K 110	TL	D	C	↻ 75	9.75	338	312			300							145	D	6660	7245	7820	8385	8940	9485	10025	10555	11080	11600				

Tire size	Operating code				EU tire label			Rim width	Min. distance between rim centers	Tire dimensions				LI ¹⁾	Tire fitment	Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	E ³⁾	S ⁴⁾			R ⁵⁾	Max. standard value in service		Design value			Stat. radius	Rolling circumference	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)					
											Width	Outer-Ø	Width + 1 %															Outer-Ø ± 1 %	± 1.5 %	± 2 %		
385/55 R 22.5	Conti EcoPlus HS3	160/ - K (158/ - L)	20	K 110 (L 120)	TL	B	B	◐ 70	11.75 12.25		396 401	1012		381 386	996	464	3018	160 158	S S	5165 5110	5620 5555	6065 6000	6505 6430	6935 6855	7360 7275	7775 7690	8190 8095	8595 8500	9000			
	HSL 2+	160/ - K (158/ - L)	20	K 110 (L 120)	TL	C	B	◐ 70																								
	Conti EcoPlus HT3	160/ - K (158/ - L)	20	K 110 (L 120)	TL	A	C	◐ 69																								
	ContiRe EcoPlus HT3	160/ - K (158/ - L)	20	K 110 (L 120)	TL	-	-	-																								
	Conti Hybrid HS3	160/ - K (158/ - L)	20	K 110 (L 120)	TL	C	B	◐ 73																								
	HSR 2	160/ - K (158/ - L)	20	K 110 (L 120)	TL	C	C	◐ 73																								
	Conti Hybrid HT3	160/ - K (158/ - L)	20	K 110 (L 120)	TL	B	B	◐ 71																								
	HTR 2	160/ - K (158/ - L)	20	K 110 (L 120)	TL	C	C	◐ 73																								
	HTR 2 ContiRe	160/ - K (158/ - L)	20	K 110 (L 120)	TL	-	-	-																								
	HSW 2 SCAN	160/ - K (158/ - L)	20	K 110 (L 120)	TL	D	C	◐ 73																								
	HTW 2 SCAN	160/ - K (158/ - L)	20	K 110 (L 120)	TL	D	C	◐ 73																								
	HDU 1	160/ - K	20	K 110	TL	C	C	◐ 70																								
HDC	158/ - K (160/ - J)	18	K 110 (J 100)	TL	D	C	◐ 76																									

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions								Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																		
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	B ⁴⁾	⌀ ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment																		
											Width + 1 %	Outer-Ø ± 1 %	± 1.5 %	± 2 %					4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)								
295/60 R 22.5	Conti EcoPlus HS3	150/147 L	18	L 120	TL	C	B	⌀ 69	9.00 9.75	329 338	304 312	940		292 300	926	435	2806	150 147	S D	3845 7060	4185 7685	4515 8290	4840 8890	5160 9480	5475 10055	5790 10630	6095 11190	6400 11750	6700 12300							
	HSL 2+	150/147 L	18	L 120	TL	C	B	⌀ 70																												
	Conti EcoPlus HD3	150/147 L	18	L 120	TL	C	B	⌀ 72																												
	ContiRe EcoPlus HD3	150/147 L	18	L 120	TL	-	-	-																												
	HDL 2+	150/147 L	18	L 120	TL	D	C	⌀ 75																												
	Conti Hybrid HD3	150/147 L	18	L 120	TL	C	B	⌀ 73																												
	HD Hybrid	150/147 L	18	L 120	TL	D	C	⌀ 75																												
	HD Hybrid ContiRe	150/147 L	18	L 120	TL	-	-	-																												
	HTR 2	150/147 L	18	L 120	TL	C	C	⌀ 70																												
	HDW 2 SCAN	150/147 L	18	L 120	TL	D	C	⌀ 75																												
315/60 R 22.5	Conti EcoPlus HS3 XL	154/150 L	20	L 120	TL	B	B	⌀ 70	9.00 9.75	344 352	318 326	966		306 313	950	445	2879	154 152 150 148	S S D D	4305 4075 7695 7235	4685 4435 8370 7870	5055 4785 9035 8495	5420 5130 9685 9105	5780 5470 10325 9710	6130 5805 10955 10305	6480 6135 11580 10885	6825 6460 12195 11465	7160 6780 12800 12035	7500 7100 13400 12600							
	HSL 2+ XL	154/150 L	20	L 120	TL	C	B	⌀ 70																												
	HSL 2+	152/148 L	20	L 120	TL	C	B	⌀ 70																												
	Conti EcoPlus HD3	152/148 L	20	L 120	TL	C	B	⌀ 75																												
	ContiRe EcoPlus HD3	152/148 L	20	L 120	TL	-	-	-																												
	HDL 2+	152/148 L	20	L 120	TL	D	C	⌀ 75																												
	Conti Hybrid HD3	152/148 L	20	L 120	TL	C	B	⌀ 73																												
	HD Hybrid	152/148 L	20	L 120	TL	D	C	⌀ 75																												

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions								Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)															
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	T ³⁾	C ⁴⁾	S ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fitment	Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)														
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)			
315/60 R 22.5	HD Hybrid ContiRe	152/148 L	20	L 120	TL	-	-	-	9.00 9.75	344 352	318 326	966		306 313	950	445	2879	154 152 150 148	S S D D	4305 4075 7695 7235	4685 4435 8370 7870	5055 4785 9035 8495	5420 5130 9685 9105	5780 5470 10325 9710	6130 5805 10955 10305	6480 6135 11580 10885	6825 6460 12195 11465	7160 6780 12800 12035	7500 7100 13400 12600				
	HSW 2 SCAN XL	154/150 L	20	L 120	TL	C	C	↻ 73																									
	HDW 2 SCAN	152/148 L	20	L 120	TL	D	C	↻ 75																									
	Conti Urban HA3 M+S	152/148 J (154/150 E)	16	J 100 (E 70)	TL	C	B	↻ 71																									
385/65 R 22.5	HSL 2+	160/- K (158/- L)	20	K 110 (L 120)	TL	C	B	↻ 70	11.75 12.25		405 410	1092		389 394	1072	496	3248	164 162 158	S S S	5740 5455 5110	6245 5935 5555	6740 6405 6000	7225 6865 6430	7705 7320 6855	8175 7765 7275	8640 8210 7690	9100 8645 8095	9550 9075 8500	10000 9500 9000				
	Conti EcoPlus HT3	160/- K (158/- L)	20	K 110 (L 120)	TL	A	C	↻ 69																									
	ContiRe EcoPlus HT3	160/- K (158/- L)	20	K 110 (L 120)	TL	-	-	-																									
	Conti Hybrid HS3	160/- K (158/- L)	20	K 110 (L 120)	TL	C	B	↻ 73																									
	HSR 2 XL	164/- K	20	K 110	TL	C	C	↻ 73																									
	HSR 2	160/- K (158/- L)	20	K 110 (L 120)	TL	C	C	↻ 73																									
	Conti Hybrid HT3	160/- K (158/- L)	20	K 110 (L 120)	TL	B	B	↻ 73																									
	HTR 2 XL	164/- K	20	K 110	TL	B	C	↻ 71																									
	HTR 2	160/- K (158/- L)	20	K 110 (L 120)	TL	C	C	↻ 73																									
	HTR 2 ED	160/- K (158/- L)	20	K 110 (L 120)	TL	B	C	↻ 71																									
	HTR 2 ContiRe	160/- K (158/- L)	20	K 110 (L 120)	TL	-	-	-																									
	HSW 2 SCAN	160/- K (158/- L)	20	K 110 (L 120)	TL	D	C	↻ 73																									
	HTW 2 SCAN	160/- K (158/- L)	20	K 110 (L 120)	TL	D	C	↻ 73																									

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions				Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																	
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	C ⁴⁾	C ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment	Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)												
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)	
385/65 R 22.5	HSC 1 XL	164/ - K	20	K 110	TL	C	C	↻ 73	11.75		405	1092		389	1072	496	3248	164	S	5740	6245	6740	7225	7705	8175	8640	9100	9550	10000		
	HSC 1	160/ - K (158/ - L)	20	K 110 (L 120)	TL	C	C	↻ 73	12.25		410			394				162	S	5455	5935	6405	6865	7320	7765	8210	8645	9075	9500		
	HDC	162/ - K (164/ - J)	20	K 110 (J 100)	TL	D	C	↻ 73										160	S	5165	5620	6065	6505	6935	7360	7775	8190	8595	9000		
	HTC 1	160/ - K	20	K 110	TL	D	C	↻ 73										158	S	5110	5555	6000	6430	6855	7275	7690	8095	8500			
	HTC 1 ED	160/ - K	20	K 110	TL	D	B	↻ 73																							
	HTC 1 ContiRe	160/ - K	20	K 110	TL	-	-	-																							
425/65 R 22.5	HTR 2	165/ - K	20	K 110	TL	B	C	↻ 73	12.25		439			422				165	S	6190	6735	7270	7795	8310	8815	9315	9810	10300			
	HTC	165/ - K	16	K 110	TL	C	C	↻ 74	13.00		447	1146		430	1124	518	3406														
445/65 R 22.5	HTR 2	169/ - K	20	K 110	TL	C	C	↻ 73	13.00		462	1174		444	1150	529	3485	169	S	6660	7245	7820	8385	8940	9485	10025	10555	11080	11600		
	HTC 1	169/ - K	20	K 110	TL	C	C	↻ 74	14.00		472			454																	
	HCS	169/ - K	20	K 110	TL	D	C	↻ 78																							
255/70 R 22.5	HSR 2 SA	140/137 M (142/140 L)	16	M 130 (L 120)	TL	C	C	↻ 69	6.75	278	257	944		247	930	434	2837	142	S	3185	3465	3740	4010	4275	4535	4795	5045	5300			
	HDR	140/137 M (142/140 L)	16	M 130 (L 120)	TL	E	C	↻ 75	7.50	287	265			255				140	S	3155	3430	3700	3970	4230	4490	4745	5000				
275/70 R 22.5	Conti Hybrid HS3	148/145 M	18	M 130	TL	C	B	↻ 69	7.50	303	280	974		269	958	445	2922	152	S	4075	4435	4785	5130	5470	5805	6135	6460	6780	7100		
	HSR 1	148/145 M	18	M 130	TL	D	B	↻ 70	8.25	311	287			276				150	S	3845	4185	4515	4840	5160	5475	5790	6095	6400	6700		
	Conti Hybrid HD3	148/145 M	16	M 130	TL	D	B	↻ 73										148	S	3615	3935	4245	4550	4855	5150	5440	5730	6015	6300		
	HDW 2 SCAN	148/145 M	16	M 130	TL	E	C	↻ 75										148	D	7235	7870	8495	9105	9710	10305	10885	11465	12035	12600		
	Conti Urban HA3	150/145 J (152/148 E)	16	J 100 (E 70)	TL	C	B	↻ 70											145	D	6660	7245	7820	8385	8940	9485	10025	10555	11080	11600	
	Conti Urban HA3 M+S	150/145 J (152/148 E)	16	J 100 (E 70)	TL	D	B	↻ 70																							

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions				Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																									
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	T ³⁾	C ⁴⁾	S ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment																					
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)									
275/70 R 22.5	ContiRe Urban HA3 M+S	150/145 J (152/148 E)	16	J 100 (E 70)	TL	-	-	-	7.50 8.25	303 311	280 287	974		269 276	958	445	2922	152 150 148 148 145	S S S D D	4075 3845 3615 7235 6660	4435 4185 3935 7870 7245	4785 4515 4245 8495 7820	5130 4840 4550 9105 8385	5470 5160 4855 9710 8940	5805 5475 5150 10305 9485	6135 5790 5440 10885 10025	6460 6095 5730 11465 10555	6780 6400 6015 12035 11080	7100 6700 6300 12600 11600										
	HSU 1 ContiRe	148/145 J (152/148 E)	16	J 100 (E 70)	TL	-	-	-																															
	HSU 1 M+S ContiRe	148/145 J (152/148 E)	16	J 100 (E 70)	TL	-	-	-																															
	Conti Urban-Scan HA3	150/145 J (152/148 E)	16	J 100 (E 70)	TL	D	C	↻ 73																															
	Conti Urban-Scan HD3	150/145 J (152/148 E)	16	J 100 (E 70)	TL	D	C	↻ 75																															
	ContiRe UrbanScan HD3	150/145 J (152/148 E)	16	J 100 (E 70)	TL	-	-	-																															
	HTC	148/145 J	16	J 100	TL	E	C	↻ 74																															
305/70 R 22.5	HSR 1	152/148 L (150/148 M)	18	L 120 (M 130)	TL	C	B	↻ 70	8.25 9.00	334 343	309 317	1018		297 305	1000	463	3050	154 152 150 150 148	S S S D D	4305 4075 4025 7695 7575	4685 4435 4380 8370 8240	5055 4785 4725 9035 8890	5420 5130 5070 9685 9535	5780 5470 5405 10325 10165	6130 5805 5735 10955 10785	6480 6135 6060 11580 11395	6825 6460 6380 12195 12000	7160 6780 6700 12800 12600	7500 7100 13400										
	HDR	150/148 M	16	M 130	TL	D	C	↻ 76																															
	Conti Urban HA3 M+S	152/148 K (154/150 E)	20	K 110 (E 70)	TL	C	B	↻ 70																															
	HSU 1	150/148 J (154/150 E)	18	J 100 (E 70)	TL	D	C	↻ 70																															
315/70 R 22.5	Conti EcoPlus HS3 XL	156/150 L (154/150 M)	18	L 120 (M 130)	TL	B	B	↻ 69	9.00 9.75	351 360	318 326	1032		312 320	1014	468	3093	156 154 152 150 148	S S S D D	4590 4305 4265 7695 7575	4995 4685 4640 8370 8240	5390 5055 5010 9035 8890	5780 5420 5370 9685 9535	6165 5780 5725 10325 10165	6540 6130 6075 10955 10785	6910 6480 6420 11580 11395	7280 6825 6760 12195 12000	7640 7160 7100 12800 12600	8000 7500 13400										
	HSL 2+	154/150 L (152/148 M)	18	L 120 (M 130)	TL	C	B	↻ 70																															
	Conti EcoPlus HD3	154/150 L (152/148 M)	18	L 120 (M 130)	TL	B	B	↻ 72																															
	ContiRe EcoPlus HD3	154/150 L (152/148 M)	18	L 120 (M 130)	TL	-	-	-																															
	HDL 2+	154/150 L (152/148 M)	18	L 120 (M 130)	TL	C	C	↻ 75																															

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																				
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	B ⁴⁾	70 ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment																		
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)						
315/70 R 22.5	Conti Hybrid HS3 XL	156/150 L (154/150 M)	18	L 120 (M 130)	TL	C	B	70	9.00	351	318	1032		312	1014	468	3093	156	S	4590	4995	5390	5780	6165	6540	6910	7280	7640	8000							
									9.75	360	326			320				154	S	4305	4685	5055	5420	5780	6130	6480	6825	7160	7500							
	Conti Hybrid HS3	154/150 L (152/148 M)	18	L 120 (M 130)	TL	C	B	70										152	S	4265	4640	5010	5370	5725	6075	6420	6760	7100								
																			150	D	7695	8370	9035	9685	10325	10955	11580	12195	12800	13400						
	HSR 2 XL	156/150 L (154/150 M)	18	L 120 (M 130)	TL	C	C	73											148	D	7575	8240	8890	9535	10165	10785	11395	12000	12600							
	HSR 2	154/150 L (152/148 M)	18	L 120 (M 130)	TL	C	C	73																												
	Conti Hybrid HD3	154/150 L (152/148 M)	18	L 120 (M 130)	TL	C	B	73																												
	HDR 2+	154/150 L (152/148 M)	18	L 120 (M 130)	TL	D	C	76																												
HD Hybrid	154/150 L (152/148 M)	18	L 120 (M 130)	TL	D	C	75																													
HD Hybrid ContiRe	154/150 L (152/148 M)	18	L 120 (M 130)	TL	-	-	-																													
HDR 2 ContiRe	154/150 L (152/148 M)	18	L 120 (M 130)	TL	-	-	-																													
HSW 2 SCAN XL	156/150 L (154/150 M)	18	L 120 (M 130)	TL	D	C	73																													
HSW 2 SCAN	154/150 L (152/148 M)	18	L 120 (M 130)	TL	D	C	73																													
HDW 2 SCAN	154/150 L (152/148 M)	18	L 120 (M 130)	TL	D	C	75																													
HDW 2 SCAN ContiRe	152/148 M (154/150 L)	16	M 130 (L 120)	TL	-	-	-																													
365/70 R 22.5	HSC	162/ - K	16	K 110	TL	D	C	76	11.75		390	1104		375	1084	497	3306	162	S	5455	5935	6405	6865	7320	7765	8210	8645	9075	9500							

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	B ⁴⁾	70 ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fitment	Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)													
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)		
295/80 R 22.5	HSL 2+ XL	154/148 M	16	M 130	TL	C	B	70	8.25	326	302	1062		290	1044	487	3184	154	S	4505	4905	5290	5675	6050	6420	6785	7140	7500				
	HSL 2+	152/148 M	16	M 130	TL	C	B	70	9.00	335	310			298				152	S	4265	4640	5010	5370	5725	6075	6420	6760	7100				
	HDL 1	152/148 M	18	M 130	TL	D	C	74										150	D	8455	9200	9925	10645	11345	12040	12725	13400					
	HDL 1	152/148 M	18	M 130	TL	D	C	74											149	D	7815	8500	9175	9835	10485	11125	11760	12380	13000			
	HDL 1	152/148 M	18	M 130	TL	D	C	74											148	D	7575	8240	8890	9535	10165	10785	11395	12000	12600			
	Conti Hybrid HS3	152/148 M	16	M 130	TL	C	B	69																								
	HSR 2	152/148 M	16	M 130	TL	C	C	73																								
	Conti Hybrid HD3	152/148 M	16	M 130	TL	D	B	73																								
	HDR 2+	152/148 M	16	M 130	TL	E	C	76																								
	HDR 2+ ED	152/148 M	16	M 130	TL	E	C	76																								
	HD Hybrid	152/148 M	16	M 130	TL	D	C	75																								
	HD Hybrid ContiRe	152/148 M	16	M 130	TL	-	-	-																								
	HDR 2 ContiRe	152/148 M	16	M 130	TL	-	-	-																								
	ContiRe CityService HA3	152/148 M	18	M 130	TL	-	-	-																								
	ContiRe CityService HD3	152/148 M	16	M 130	TL	-	-	-																								
HSW 2 SCAN	152/148 M	16	M 130	TL	D	C	73																									
HDW 2 SCAN	152/148 M	16	M 130	TL	E	C	75																									
HDW 2 SCAN ContiRe	152/148 M	16	M 130	TL	-	-	-																									
Conti Coach HA3	154/149 M	16	M 130	TL	B	A	70																									
Conti Coach HA3 ED	154/149 M	16	M 130	TL	C	B	70																									

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Tire fitment		Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																						
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	T ³⁾	A ⁴⁾	S ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fitment																						
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)										
295/80 R 22.5	Conti Coach HA3 AC	154/149 M	16	M 130	TL	-	-	-	8.25 9.00	326 335	302 310	1062		290 298	1044	487	3184	154 152 150 149 148	S S D D D	4505 4265 8455 7815 7575	4905 4640 9200 8500 8240	5290 5010 9925 9175 8890	5675 5370 10645 9835 9535	6050 5725 11345 10485 10165	6420 6075 12040 11125 10785	6785 6420 12725 11760 11395	7140 6760 12380 12380 12000	7500 7100 13400 13000 12600	8000											
	Conti CityPlus HA3	154/149 M	16	M 130	TL	C	A	↻ 69																																
	HSU	152/148 J	16	J 100	TL	D	C	↻ 70																																
	HSW 2 Coach XL	154/149 M	16	M 130	TL	D	C	↻ 73																																
	HSW 2 Coach	152/148 M	16	M 130	TL	D	C	↻ 73																																
	HSW 2 Coach ContiRe	152/148 M	16	M 130	TL	-	-	-																																
	HSC 1	152/148 K	20	K 110	TL	D	C	↻ 73																																
	HDC 1	152/148 K	16	K 110	TL	D	C	↻ 74																																
	HDC 1 ContiRe	152/148 K	16	K 110	TL	-	-	-																																
315/80 R 22.5	Conti EcoPlus HS3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	B	B	↻ 69	9.00 9.75	351 360	318 326	1096		312 320	1076	500	3282	156 154 150	S S D	4590 4505 8055	4995 4905 8760	5390 5290 9455	5780 5675 10140	6165 6050 10810	6540 6420 11470	6910 6785 12120	7280 7140 12765	7640 7500 13400	8000											
	HSL 2+ AC	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																																
	HSL 2+	156/150 L (154/150 M)	20	L 120 (M 130)	TL	C	B	↻ 70																																
	Conti EcoPlus HD3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	B	B	↻ 72																																
	ContiRe EcoPlus HD3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																																
	HDL 2+	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	↻ 75																																
	Conti Hybrid HS3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	C	B	↻ 69																																

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions				Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)																			
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	C ⁴⁾	C ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0					
											(65)	(73)	(80)	(87)					(94)	(102)	(109)	(116)	(123)	(131)									
315/80 R 22.5	HSR 2	156/150 L (154/150 M)	20	L 120 (M 130)	TL	C	C	↻) 73	9.00	351	318	1096		312	1076	500	3282	156	S	4590	4995	5390	5780	6165	6540	6910	7280	7640	8000				
									9.75	360	326			320				154	S	4505	4905	5290	5675	6050	6420	6785	7140	7500					
	HSR 2 ED	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	↻) 73										150	D	8055	8760	9455	10140	10810	11470	12120	12765	13400					
	Conti Hybrid HD3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	B	↻) 73																									
	HDR 2+	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	↻) 76																									
	HDR 2+ ED	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	↻) 76																									
	HD Hybrid	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	↻) 75																									
	HD Hybrid ContiRe	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																									
	HDR 2 ContiRe	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																									
	HTR	156/150 K	18	K 110	TL	C	C	↻) 70																									
	ContiRe CityService HA3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																									
	ContiRe CityService HD3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																									
	HSW 2 SCAN	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	↻) 73																									
	HDW 2 SCAN	156/150 L (154/150 M)	20	L 120 (M 130)	TL	E	C	↻) 75																									
HDW 2 SCAN ContiRe	156/150 L (154/150 M)	20	L 120 (M 130)	TL	-	-	-																										
HDW ContiRe	154/150 M (156/150 L)		M 130 (L 120)	TL	-	-	-																										

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)														
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾	E ³⁾	S ⁴⁾	R ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment												
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)
315/80 R 22.5	Conti Coach HA3	156/150 L (154/150 M)	20	L 120 (M 130)	TL	B	A	71	9.00	351	318	1096		312	1076	500	3282	156	S	4590	4995	5390	5780	6165	6540	6910	7280	7640	8000	
									9.75	360	326			320				154	S	4505	4905	5290	5675	6050	6420	6785	7140	7500		
	HSW 2 Coach	156/150 L (154/150 M)	20	L 120 (M 130)	TL	D	C	73										150	D	8055	8760	9455	10140	10810	11470	12120	12765	13400		
	HSC 1	156/150 K	18	K 110	TL	D	C	73																						
	HSC 1 ED	156/150 K	18	K 110	TL	E	C	73																						
	HDC 1	156/150 K	16	K 110	TL	D	C	74																						
	HDC 1 ED	156/150 K	18	K 110	TL	E	C	74																						
	HDC 1 ContiRe	156/150 K	14	K 110	TL	-	-	-																						
HDO	156/150 G	18	G 90	TL	-	-	-																							
9 R 22.5	HSR	133/131 L	12	L 120	TL	D	C	70	6.00	250	231	986		222	970	455	2959	133	S	2890	3145	3395	3640	3880	4120					
									6.75	259	239			230				131	D	5475	5955	6430	6895	7350	7800					
10 R 22.5	RMS	144/142 K	14	K 110	TL	E	C	73	6.75	277	256	1038		246	1020	474	3091	144	S	3530	3840	4145	4445	4740	5030	5315	5600			
									7.50	286	264			254				140	S	3320	3610	3900	4180	4455	4730	5000				
	HSR	144/142 K	14	K 110	TL	D	C	70										142	D	6685	7275	7850	8420	8975	9525	10065	10600			
T9	140/138 K	14	K 110	TL	-	-	-											138	D	6270	6820	7365	7895	8415	8930	9440				
11 R 22.5	HSR	148/145 L	16	L 120	TL	C	C	70	7.50	306	283	1070		272	1050	489	3203	148	S	3785	4120	4445	4765	5080	5390	5695	6000	6300		
									8.25	314	290			279				145	D	6970	7585	8185	8775	9355	9930	10490	11050	11600		
	HDR	148/145 L	16	L 120	TL	E	C	75																						
	HTR	148/145 L	16	L 120	TL	C	C	70																						
HSU 1	148/145 J	16	J 100	TL	E	C	70																							

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)														
																Load capacity (kg) per axle at inflation pressure ⁶⁾ (bar) (psi)														
	Pattern	LI/SI ¹⁾	PR	Speed index and ref. speed (km/h)	TT/TL ²⁾		Rim-width	Min. distance between rim centers	Max. standard value in service	Design value	Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)						
12 R 22.5	Conti Hybrid H53	152/148 L (150/148 M)	16	L 120 (M 130)	TL	C B	70	8.25	329	304	1104		292	1084	504	3306	152	S	4265	4640	5010	5370	5725	6075	6420	6760	7100			
	HSR 1 ED	152/148 L (150/148 M)	16	L 120 (M 130)	TL	D C	70	9.00	338	312			300				150	S	4225	4600	4960	5320	5670	6020	6360	6700				
	HSR	152/148 L (150/148 M)	16	L 120 (M 130)	TL	C C	70										148	D	7575	8240	8890	9535	10165	10785	11395	12000				
	HDR 1 ED	152/148 L	16	L 120	TL	F C	75																							
	HDR	152/148 L	16	L 120	TL	E C	75																							
	Conti CityPlus HA3	152/148 L (150/148 M)	16	L 120 (M 130)	TL	C C	71																							
	HSU	152/148 J	16	J 100	TL	D C	70																							
	HSC 1	152/148 K	16	K 110	TL	D C	73																							
	HSC 1 ED	152/148 K	16	K 110	TL	D C	73																							
	HDC 1	152/148 K	16	K 110	TL	E C	74																							
HDC 1 ED	152/148 K	16	K 110	TL	E C	74																								
13 R 22.5	HSR	154/150 L (156/150 K)	18	L 120 (K 110)	TL	D C	70	9.00	352	319	1146		313	1124	521	3428	156	S	4590	4995	5390	5780	6165	6540	6910	7280	7640	8000		
	HDW	154/150 K	16	K 110	TL	E C	73	9.75	360	326			320				154	S	4505	4905	5290	5675	6050	6420	6785	7140	7500			
	HSC 1	156/150 K	18	K 110	TL	D C	73										149	S	4315	4695	5070	5435	5795	6150	6500					
	HSC 1 ED	156/154 K	18	K 110	TL	D C	73											154	D	8615	9370	10115	10840	11560	12265	12960	13650	14325		
	HDC 1	156/150 K	18	K 110	TL	E C	74											150	D	8055	8760	9455	10140	10810	11470	12120	12765	13400		
	HDC 1 ContiRe	154/150 K (156/150 G)	20	K 110 (G 90)	TL	- -	-											146	D	7970	8675	9360	10035	10700	11355	12000				
	HSD	149/146 J	18	J 100	TL	- -	-																							
	HDO	154/150 G	16	G 90	TL	- -	-																							

See flap inside back cover for footnotes

Regrooving recommendations

All Continental tires on which regrooving is permitted have on both sidewalls, in accordance with ECE regulation 54, the word

REGROOVABLE


The additional tread depth of up to 4 mm gained by regrooving means a significant increase in performance.

As part of their design, all-steel truck tires have a so-called tread stock between the upper edge of the belt and the tread grooves. This tread stock is intended to prevent stones etc. penetrating into the steel belt and the casing.

Provided it is marked "REGROOVABLE", a commercial vehicle tire may be regrooved down to a residual undertread thickness of 2 mm above the breaker or belt. All additional regulations of the respective country must be met.

Although tires can be retreaded after reaching the legal wear limit, regrooving is not advisable in every case. The tread stock thickness is reduced and stones etc. can more easily penetrate and damage the steel belts, leading to rust formation. This has a decidedly negative effect on the tire's suitability for remolding.

The best time for regrooving is when the tread is worn down to about 3 mm. The tire must then be checked to make sure the wear is even all round. Attention should be paid to local or uneven wear patches.

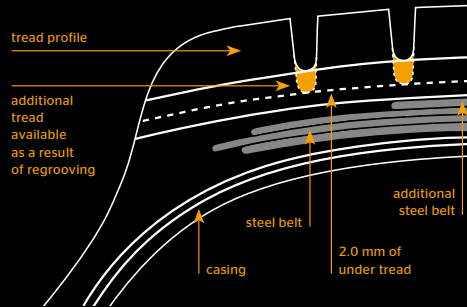

Example:

Tire size	315/80 R 22.5
Original tread depth of new tire	20.0 mm
Additional tread as a result of regrooving	4.0 mm



Regrooving should be carried out by an expert, in order to avoid premature failure as well as any reduction in the tire's suitability for retreading.

In some countries (e.g. Germany for KOM-100 coaches and Austria for coaches) regrooving of front axle tires for coaches is prohibited. In general, regrooving on front axle coach tires is not recommended.

All Continental tires on which regrooving is permitted are marked "regroovable".


Segment Goods

Conti EcoPlus HS3

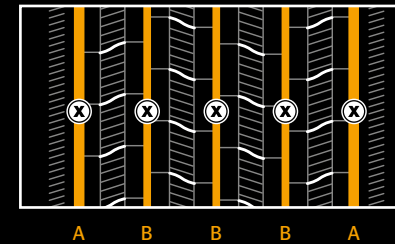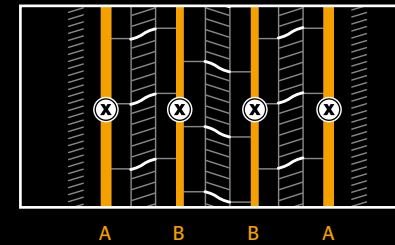


Size	Depth (mm)	Width (mm)
355/50 R 22.5	2.5	A:10 B:8
385/55 R 22.5	3.0	A:10 B:8
315/70 R 22.5	2.5	A:10 B:8
315/80 R 22.5	3.0	A:10 B:8

Conti EcoPlus HS3

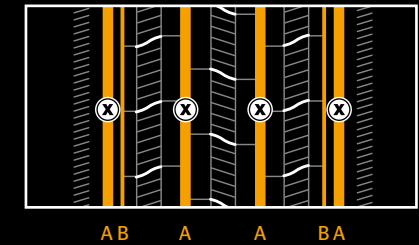


Size	Depth (mm)	Width (mm)
295/60 R 22.5	3.5	A:8 B:4
315/60 R 22.5	4.0	A:8 B:4


Conti EcoPlus HD3 / ContiRe EcoPlus HD3

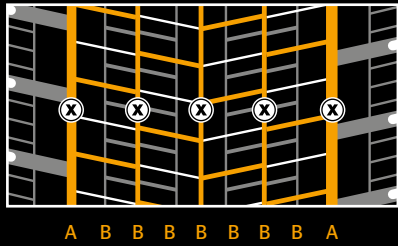

Conti EcoPlus HD3

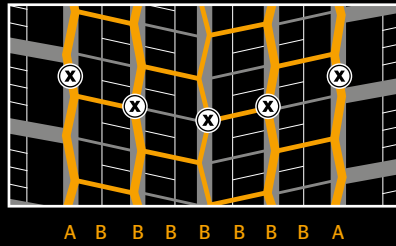

Conti EcoPlus HT3 / ContiRe EcoPlus HT3

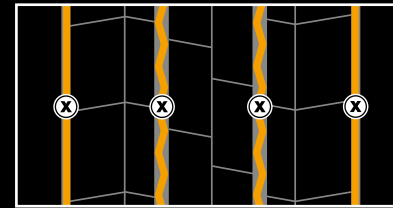


Size	Depth (mm)	Width (mm)
295/55 R 22.5	3.0	A:8 B:5
295/60 R 22.5	2.5	A:7 B:5
315/60 R 22.5	4.0	A:8 B:5
315/70 R 22.5	2.5	A:8 B:5
315/80 R 22.5	3.0	A:8 B:5

Size	Depth (mm)	Width (mm)
315/45 R 22.5	2.5	A:7 B:5


Size	Depth (mm)	Width (mm)
385/55 R 19.5	2.5	6
385/55 R 22.5	2.5	6
385/65 R 22.5	2.5	6

⊗ Tread depth measuring points (§ 36 min. tread depth)

HSL 2+ ECO-PLUS / HSL 2+ XL

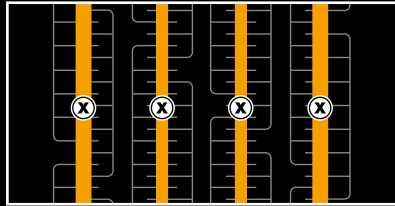



A B B A

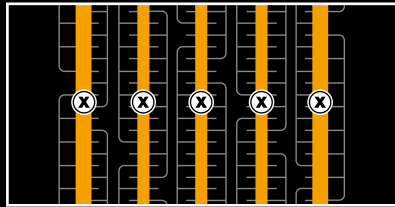

A B B B A


Size	Depth (mm)	Width (mm)
355/50 R 22.5	2.5	A:16 B:12
385/55 R 22.5	3.0	A:16 B:12
295/60 R 22.5	3.5	A:16 B:12
315/60 R 22.5	3.5	A:16 B:12
385/65 R 22.5	3.0	A:16 B:12
315/70 R 22.5	3.0	A:16 B:12
295/80 R 22.5	3.0	A:16 B:12
315/80 R 22.5	3.5	A:16 B:12

HSL 2 ECO-PLUS / HSL 2 XL

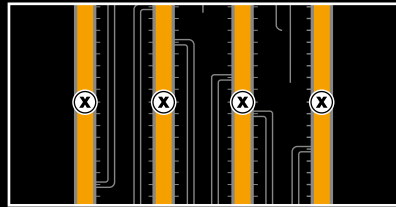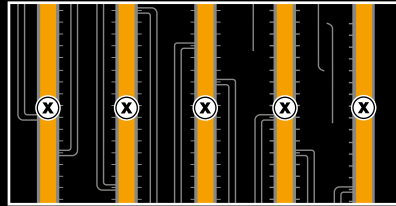


Size	Depth (mm)	Width (mm)
355/50 R 22.5	2.5	10
385/55 R 22.5	3.0	10
315/60 R 22.5	3.5	10
295/60 R 22.5	3.5	10
315/70 R 22.5	3.0	10
295/80 R 22.5	3.0	10
315/80 R 22.5	3.0	10

HSL 1 ECO-PLUS

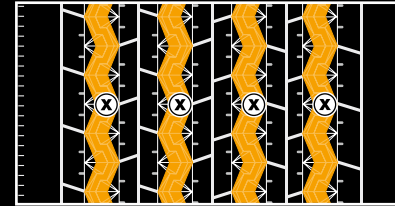

Size	Depth (mm)	Width (mm)
315/70 R 22.5	3.0	12
295/80 R 22.5	3.0	12
315/80 R 22.5	3.0	12


HSL ECO-PLUS

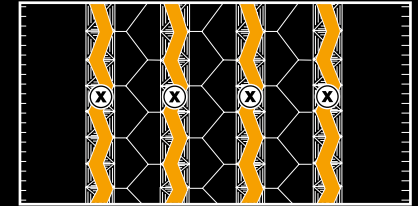


Size	Depth (mm)	Width (mm)
315/70 R 22.5	3.5	8-10
295/80 R 22.5	3.5	8-10
315/80 R 22.5	3.5	8-10

⊗ Tread depth measuring points (≥ 36 min. tread depth)

HDL 2+ ECO-PLUS / HDL 2 ECO-PLUS

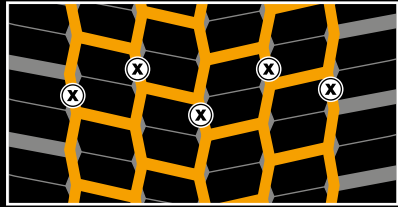


HDL 1 ECO-PLUS

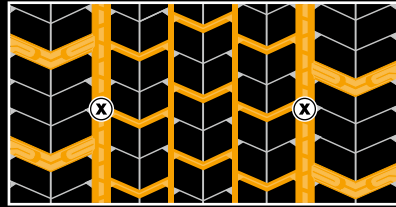

A A B B B B B A A

HDL ECO-PLUS

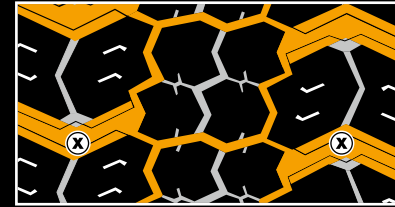

A B B B A


Size	Depth (mm)	Width (mm)
295/55 R 22.5	3.0	8
295/60 R 22.5	3.0	8
315/60 R 22.5	3.0	8
315/70 R 22.5	3.0	8
315/80 R 22.5	3.5	8

Size	Depth (mm)	Width (mm)
315/70 R 22.5	3.0	A:10 B:5-6
295/80 R 22.5	3.0	A:10 B:5-6
315/80 R 22.5	3.0	A:10 B:5-6


Size	Depth (mm)	Width (mm)
315/70 R 22.5	3.5	A:12-14 B:7-8
295/80 R 22.5	3.5	A:12-14 B:7-8
315/80 R 22.5	3.5	A:12-14 B:7-8

⊗ Tread depth measuring points (≥ 36 min. tread depth)

HD HYBRID

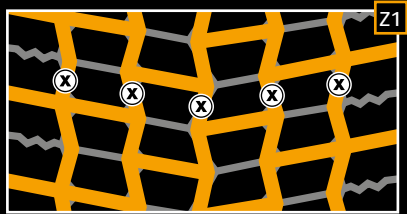


B A B A B A B A B A B

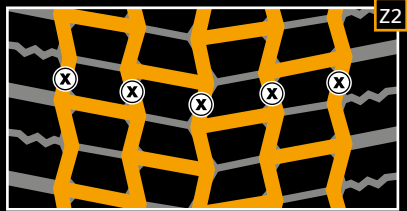


A B A B A B A B A

Size	Depth (mm)	Width (mm)
295/60 R 22.5 ^{Z2}	3.0	A:6 B:10
315/60 R 22.5 ^{Z1}	3.0	A:6 B:10
315/70 R 22.5 ^{Z1}	2.0	A:6 B:10
295/80 R 22.5 ^{Z2}	3.0	A:6 B:10
315/80 R 22.5 ^{Z2}	3.0	A:6 B:10

HD HYBRID ContiRe

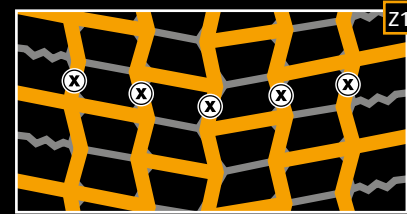

B A B A B A B A B A B


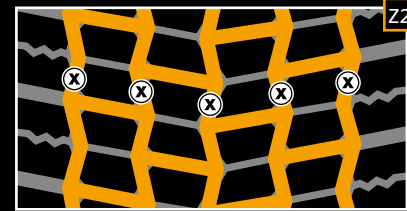


A B A B A B A B A

Size	Depth (mm)	Width (mm)
295/60 R 22.5 ^{Z2}	2.5	A:6 B:10
315/60 R 22.5 ^{Z1}	2.5	A:6 B:10
315/70 R 22.5 ^{Z1}	2.0	A:6 B:10
295/80 R 22.5 ^{Z2}	2.5	A:6 B:10
315/80 R 22.5 ^{Z2}	3.0	A:6 B:10



⊗ Tread depth measuring points (§ 36 min. tread depth)

HTL 2 ECO-PLUS

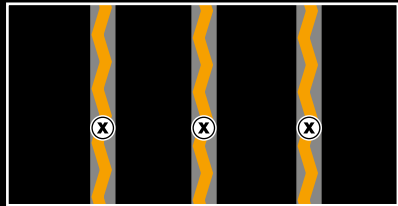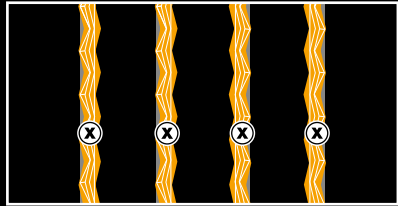



Size	Depth (mm)	Width (mm)
245/70 R 17.5	2.5	8
215/75 R 17.5	2.5	8
235/75 R 17.5	2.5	8
385/65 R 22.5	3.0	12

HTL 1 ECO-PLUS / ContiRe

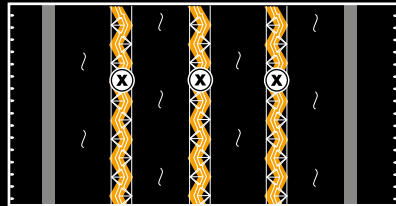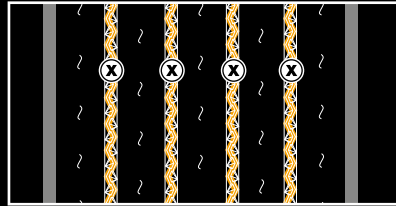



Size	Depth (mm)	Width (mm)
445/45 R 19.5	3.0	13
385/55 R 19.5	3.5	13
385/55 R 22.5	3.5	13

HTL ECO-PLUS

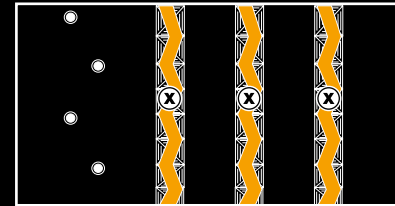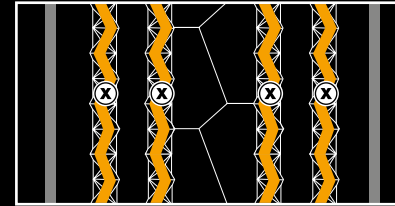


Size	Depth (mm)	Width (mm)
385/55 R 19.5	3.0	8-10
385/65 R 22.5	3.5	12-14

Conti Hybrid HS3 / Conti Hybrid HS3 XL

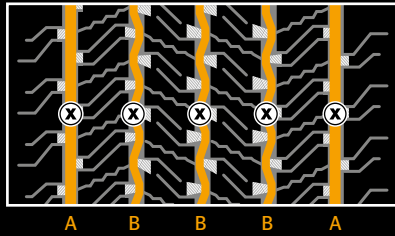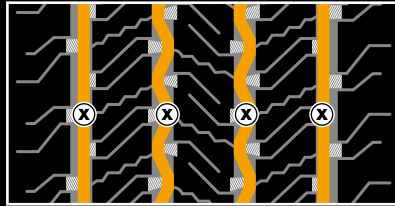

Size	Depth (mm)	Width (mm)
245/70 R 19.5	3.0	8
265/70 R 19.5	3.0	8
285/70 R 19.5	3.0	8
305/70 R 19.5	3.0	8
385/55 R 22.5	3.0	A:10 B:8
385/65 R 22.5	3.0	A:10 B:8
275/70 R 22.5	2.5	8
315/70 R 22.5	2.5	9
295/80 R 22.5	3.0	8
315/80 R 22.5	3.5	9
12 R 22.5	3.0	8


Conti Hybrid LS3

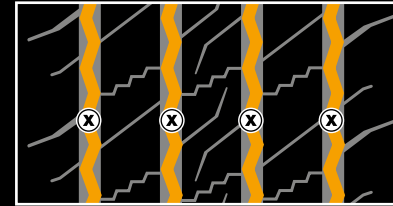

Size	Depth (mm)	Width (mm)
245/70 R 17.5	2.0	5
265/70 R 17.5	2.5	6
205/75 R 17.5	2.5	5
215/75 R 17.5	2.5	6
225/75 R 17.5	2.5	6
235/75 R 17.5	2.5	6


⊗ Tread depth measuring points (§ 36 min. tread depth)

Conti Hybrid HD3

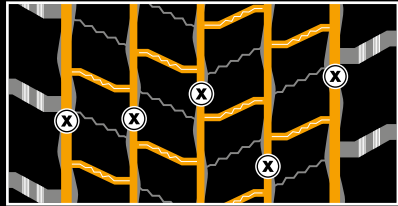


A B B B B B B A

Conti Hybrid HD3 / ContiRe Hybrid HD3

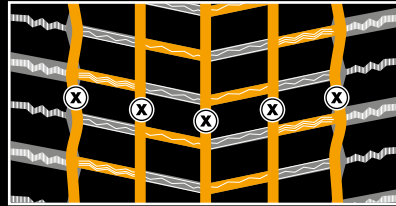

Conti Hybrid LD3

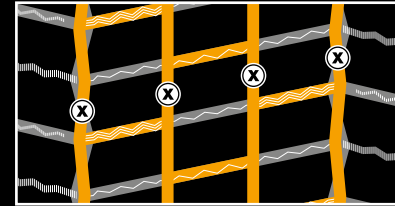


Size	Depth (mm)	Width (mm)
295/60 R 22.5	3.0	A:7 B:6
315/60 R 22.5	3.0	A:7 B:6
275/70 R 22.5	3.0	A:7 B:6
315/70 R 22.5	3.0	A:7 B:6
295/80 R 22.5	3.0	A:7 B:6
315/80 R 22.5	3.0	A:7 B:6

Size	Depth (mm)	Width (mm)
245/70 R 19.5	3.0	5
265/70 R 19.5	3.0	5
285/70 R 19.5	3.0	5
305/70 R 19.5	3.0	5

Size	Depth (mm)	Width (mm)
245/70 R 17.5	2.0	5
265/70 R 17.5	2.5	5
205/75 R 17.5	2.5	5
215/75 R 17.5	2.5	5
225/75 R 17.5	2.5	5
235/75 R 17.5	2.5	5


⊗ Tread depth measuring points (§ 36 min. tread depth)

Conti Hybrid HT3 / ContiRe Hybrid HT3

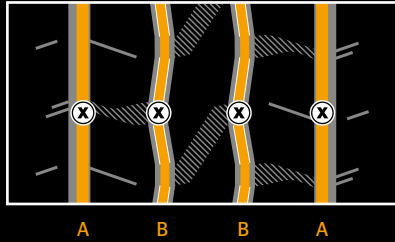

Size	Depth (mm)	Width (mm)
245/70 R 19.5	3.0	A:9 B:7
265/70 R 19.5	3.0	A:9 B:7
285/70 R 19.5	3.0	A:9 B:7
305/70 R 19.5	3.5	A:10 B:8
385/55 R 22.5	3.0	A:10 B:7
385/65 R 22.5	2.5	A:10 B:8



Conti Hybrid HT3

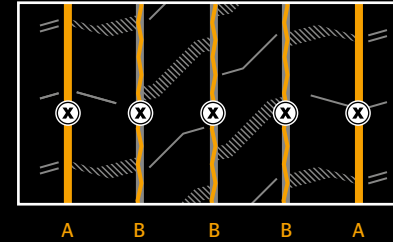

Size	Depth (mm)	Width (mm)
445/45 R 19.5	2.5	A:8 B:6
435/50 R 19.5	2.5	A:8 B:6


⊗ Tread depth measuring points (§ 36 min. tread depth)

HSR 2

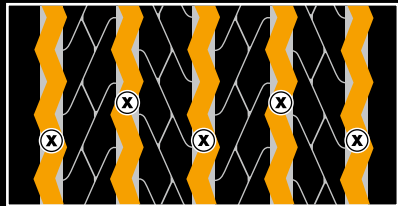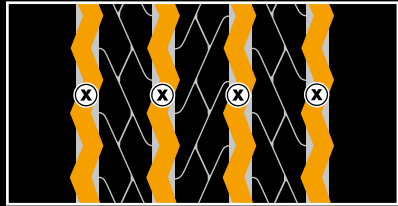


Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.0	10-12
385/65 R 22.5	3.0	10-12
315/70 R 22.5	2.5	10
295/80 R 22.5	3.0	10
315/80 R 22.5	3.5	10

HSR 1

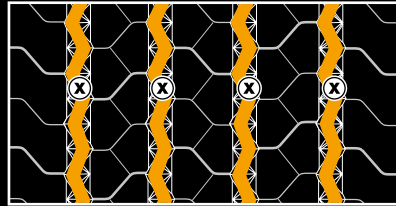


Size	Depth (mm)	Width (mm)
12 R 22.5	3.5	10-12
245/70 R 19.5	3.0	9-11
265/70 R 19.5	3.5	9-11
285/70 R 19.5	3.5	10-12
305/70 R 19.5	3.0	10-12
305/60 R 22.5	3.5	10-12
255/70 R 22.5	3.0	8
275/70 R 22.5	2.5	10-12
305/70 R 22.5	2.5	10-12
315/70 R 22.5	3.0	10-12
295/80 R 22.5	2.5	10-12
315/80 R 22.5	3.0	10-12

HSR 1

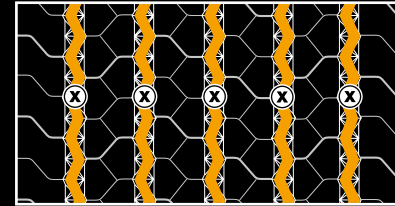

Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.0	10-12
295/60 R 22.5	2.5	10-12
315/60 R 22.5	3.5	10-12
385/65 R 22.5	3.5	10-12



HSR

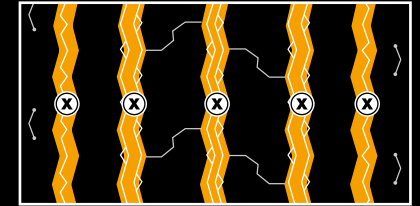



Size	Depth (mm)	Width (mm)
9 R 22.5	3.0	A:10-12 B:4-5
10 R 22.5	3.5	A:10-12 B:4-5
11 R 22.5	3.0	A:10-12 B:4-5
12 R 22.5	3.5	A:10-12 B:4-5
13 R 22.5	2.5	A:10-12 B:4-5

⊗ Tread depth measuring points (≥ 36 min. tread depth)


LSR 1+ / LSR 1

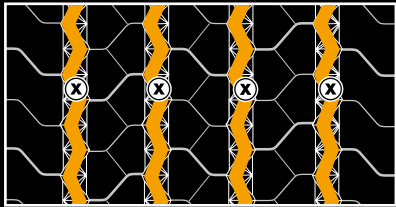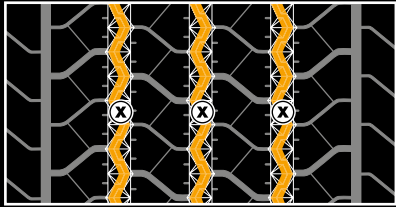


LSR

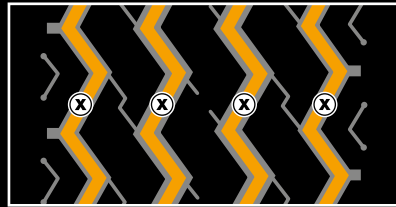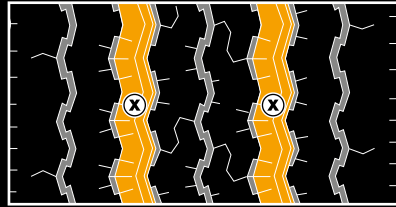

HDR 2+

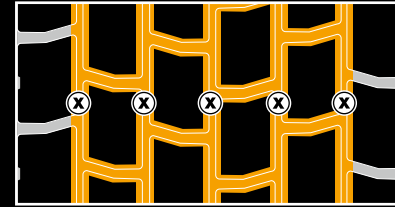

HDR 2+

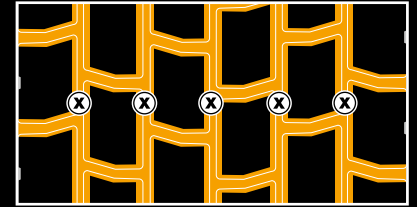

Size	Depth (mm)	Width (mm)
8.5 R 17.5	2.0	7-8
9.5 R 17.5	2.5	7-8
10 R 17.5	2.5	7-8
245/70 R 17.5	2.0	9-11
265/70 R 17.5	2.5	9-11
205/75 R 17.5	2.5	9-11
215/75 R 17.5	2.5	9-11
225/75 R 17.5	2.5	9-11
235/75 R 17.5	2.5	9-11


Size	Depth (mm)	Width (mm)
8 R 17.5 C	2.0	7
8 R 17.5	2.0	7
8.5 R 17.5	2.0	7
205/75 R 17.5	2.5	7-8
215/75 R 17.5	2.5	7-8
225/75 R 17.5	2.5	7-8
235/75 R 17.5	3.0	7-8
245/75 R 17.5	2.5	7-8

Size	Depth (mm)	Width (mm)
315/80 R 22.5	2.0	6-7

Size	Depth (mm)	Width (mm)
315/70 R 22.5	2.0	6-7
295/80 R 22.5	3.0	6-7


⊗ Tread depth measuring points (≥ 36 min. tread depth)

HDR 2+ ED / HDR 2 ED / HDR 2

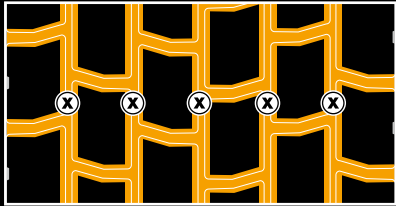


Size	Depth (mm)	Width (mm)
315/70 R 22.5	2.0	6-7
295/80 R 22.5	3.5	6-7
315/80 R 22.5	3.5	6-7

HDR 2

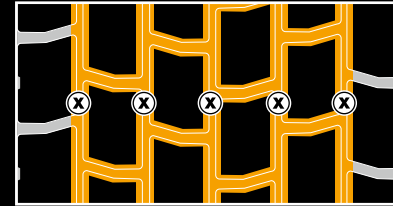

Size	Depth (mm)	Width (mm)
295/80 R 22.5	3.0	6-7
315/80 R 22.5	3.5	6-7


HDR 2 ContiRe

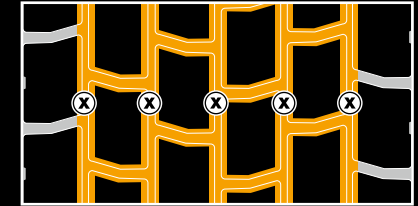

Size	Depth (mm)	Width (mm)
315/80 R 22.5	1.5	6-7


⊗ Tread depth measuring points (≥ 36 min. tread depth)

HDR+ / HDR+ ContiRe / HDR / HDR ContiRe

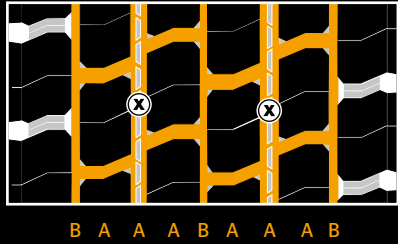

Size	Depth (mm)	Width (mm)
245/70 R 19.5	3.0	A:7-9 B:3-5
265/70 R 19.5	2.5	A:7-9 B:3-5
285/70 R 19.5	3.0	A:7-9 B:3-5
305/70 R 19.5	3.0	A:7-9 B:3-5
295/60 R 22.5	3.0	A:7-9 B:3-5
305/60 R 22.5	3.0	A:7-9 B:3-5
315/60 R 22.5	3.0	A:7-9 B:3-5
275/70 R 22.5	3.0	A:7-9 B:3-5
305/70 R 22.5	4.0	A:7-9 B:3-5
315/70 R 22.5	3.5	A:7-9 B:3-5
295/80 R 22.5	4.0	A:7-9 B:3-5
315/80 R 22.5	4.0	A:7-9 B:3-5


HDR

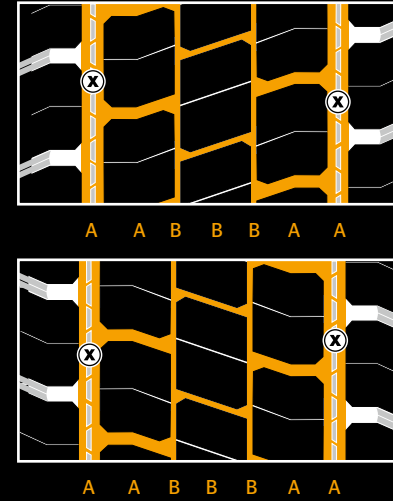


Size	Depth (mm)	Width (mm)
11 R 22.5	3.5	A:10-12 B:5-7
12 R 22.5	4.0	A:10-12 B:5-7
255/70 R 22.5	2.0	A:10-12 B:5-7

⊗ Tread depth measuring points (§ 36 min. tread depth)

LDR 1+ / LDR 1+ ContiRe / LDR 1

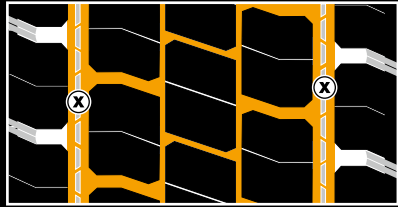



A A B B B A A

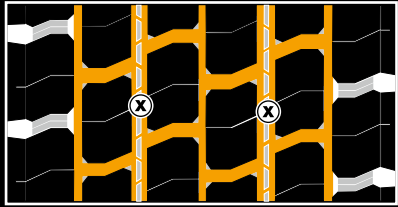

B A A A B A A B

Size	Depth (mm)	Width (mm)
8.5 R 17.5	2.0	A:11 B:5-7
9.5 R 17.5	2.5	A:11 B:5-7
10 R 17.5	2.5	A:11 B:5-7
245/70 R 17.5	2.0	A:9-11 B:5-7
265/70 R 17.5	2.5	A:7-9 B:3-5
205/75 R 17.5	2.5	A:8-10 B:4-6
215/75 R 17.5	2.5	A:8-10 B:4-6
225/75 R 17.5	2.5	A:8-10 B:4-6
235/75 R 17.5	2.5	A:9-11 B:5-7



LDR

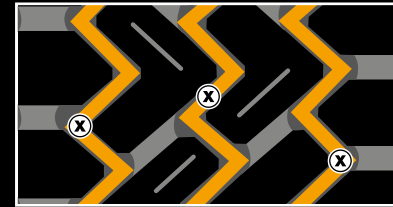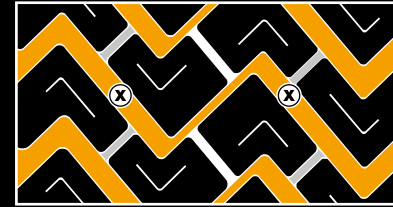

Size	Depth (mm)	Width (mm)
8 R 17.5 C	2.0	7
8.5 R 17.5	2.0	7
205/75 R 17.5	3.0	7-8
215/75 R 17.5	3.0	7-8
225/75 R 17.5	3.0	7-8
235/75 R 17.5	3.0	7-8
245/75 R 17.5	2.5	7-8


⊗ Tread depth measuring points (§ 36 min. tread depth)

HTR 2 / HTR 2 ContiRe

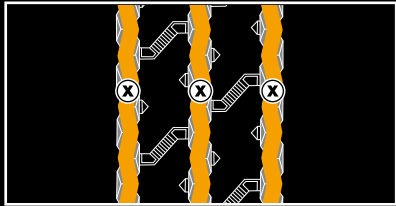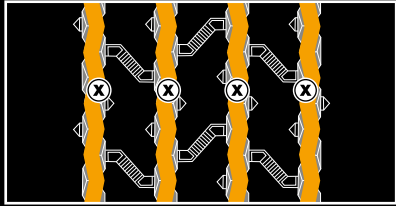



Size	Depth (mm)	Width (mm)
205/65 R 17.5	2.5	7-10
245/70 R 17.5	2.5	7-10
215/75 R 17.5	2.5	7-10
235/75 R 17.5	2.5	7-10
385/55 R 22.5	3.5	8-10
385/65 R 22.5	3.0	11
425/65 R 22.5	3.0	13
445/65 R 22.5	3.5	13

HTR 2 / HTR 2 ContiRe

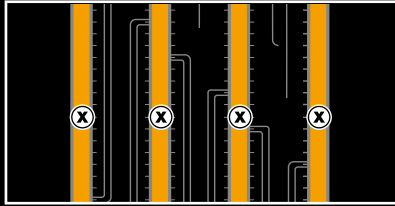

Size	Depth (mm)	Width (mm)
295/60 R 22.5	2.5	10



HTR 1 / HTR 1 ContiRe

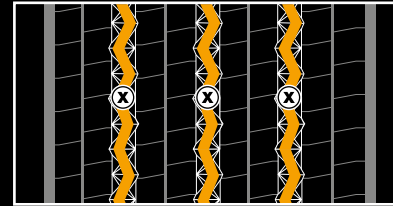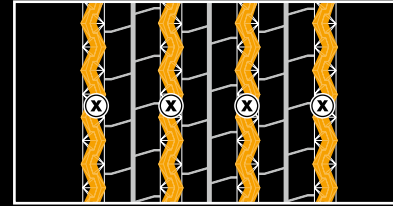

Size	Depth (mm)	Width (mm)
245/70 R 19.5	3.0	8-10
265/70 R 19.5	3.0	8-10
285/70 R 19.5	3.0	8-10
385/55 R 22.5	3.5	10-12


⊗ Tread depth measuring points (≥ 36 min. tread depth)

HTR

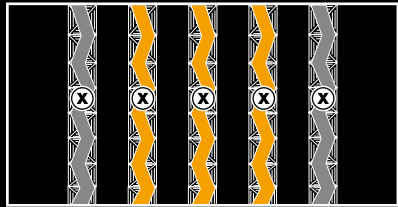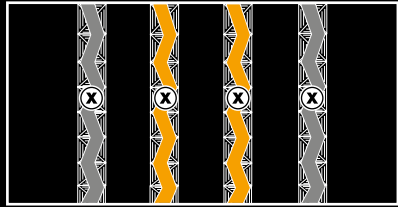



Size	Depth (mm)	Width (mm)
205/65 R 17.5	2.0	7-8
245/70 R 17.5	1.5	7-8
215/75 R 17.5	2.5	7-8
235/75 R 17.5	1.5	7-8
425/65 R 22.5	3.0	10-12
445/65 R 22.5	3.5	10-12

HTR / HTR ContiRe

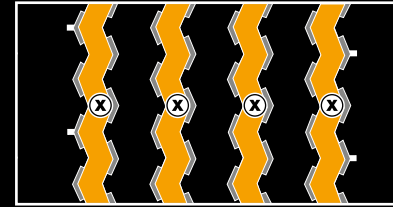

Size	Depth (mm)	Width (mm)
385/65 R 19.5	3.5	7-8
245/70 R 19.5	3.0	7-8
265/70 R 19.5	3.0	7-8
285/70 R 19.5	3.0	7-8
385/65 R 22.5	3.5	7-8



HTR

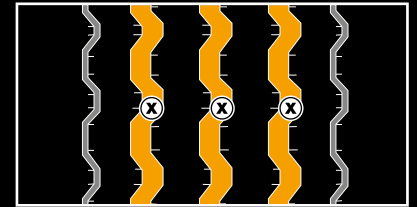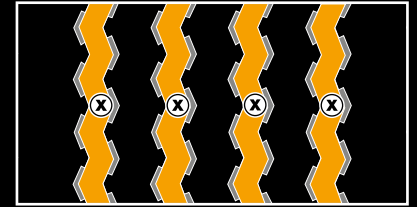

Size	Depth (mm)	Width (mm)
315/80 R 22.5	3.5	7-8
11 R 22.5	3.5	7-8



⊗ Tread depth measuring points (≥ 36 min. tread depth)

HSC 1 / HSC 1 ContiRe / HSC 1 ED

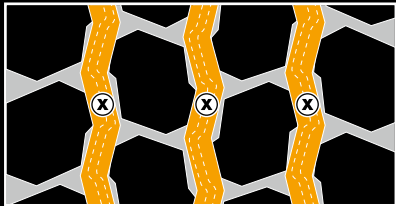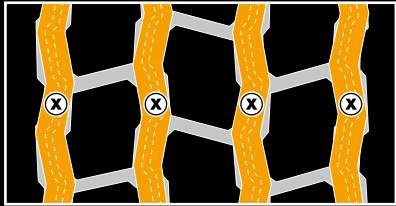

Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.5	12
295/80 R 22.5	3.5	12
315/80 R 22.5	3.0	12
11 R 22.5	3.5	12
12 R 22.5	3.5	12
13 R 22.5	3.5	12



HSC+ / HSC / LSC

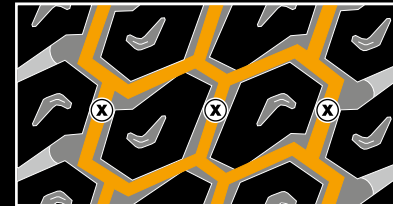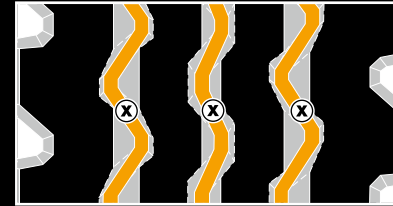

Size	Depth (mm)	Width (mm)
9.5 R 17.5	2.0	10
365/70 R 22.5	3.5	7-8
295/80 R 22.5	3.5	10-12
315/80 R 22.5	3.5	10-12
12 R 22.5	3.5	10-12
13 R 22.5	3.5	10-12


⊗ Tread depth measuring points (≥ 36 min. tread depth)

HDC 1 / HDC 1 ContiRe

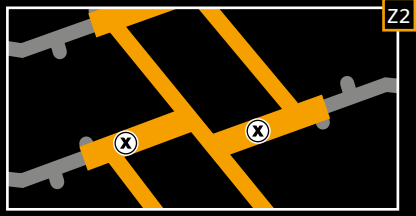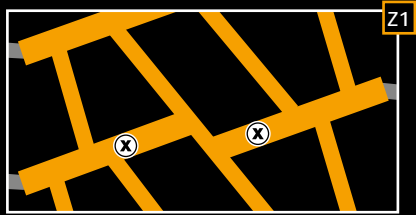



Size	Depth (mm)	Width (mm)
315/80 R 22.5 ^{Z2}	3.5	A:12 B:7
12 R 22.5 ^{Z1}	3.5	A:12 B:7
13 R 22.5 ^{Z1}	3.5	A:12 B:7

HDC 1 ED

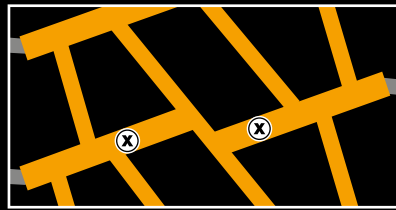

Size	Depth (mm)	Width (mm)
315/80 R 22.5	3.5	A:12 B:7
12 R 22.5	3.5	A:12 B:7
13 R 22.5	3.5	A:12 B:7


HDC / HDC ContiRe

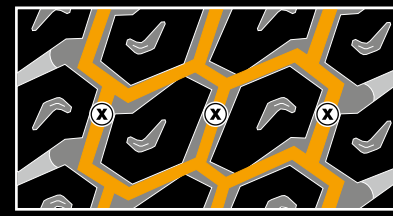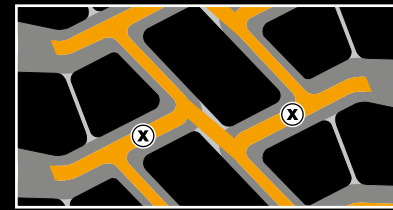

Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.5	10-12
385/65 R 22.5	3.5	10-12
295/80 R 22.5	3.5	10-12
315/80 R 22.5	4.0	10-12
12 R 22.5	2.5	10-12
13 R 22.5	4.0	10-12


⊗ Tread depth measuring points (§ 36 min. tread depth)

HTC 1 / HTC 1 ED

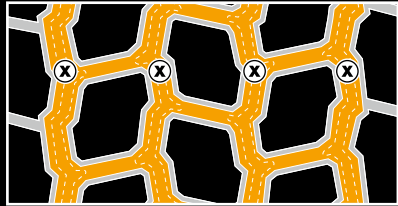


A B A B A B A

HTC 1 ContiRe

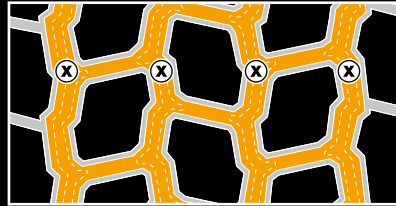

A B A B A B A

HTC

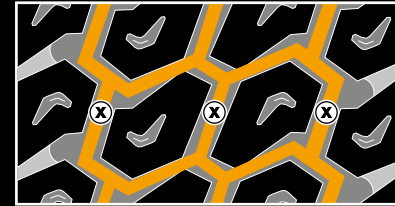


Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.5	A:10 B:7
445/65 R 22.5	3.5	A:10 B:7

Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.0	A:10 B:7

Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.5	10-12
425/65 R 22.5	3.5	10-12
445/65 R 22.5	3.5	10-12
275/70 R 22.5	3.5	10-12


⊗ Tread depth measuring points (§ 36 min. tread depth)

ContiRe CityService HA3

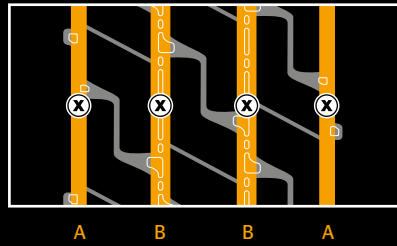


Size	Depth (mm)	Width (mm)
295/80 R 22.5	3.0	A:9 B:11
315/80 R 22.5	3.0	A:9 B:11

ContiRe CityService HD3

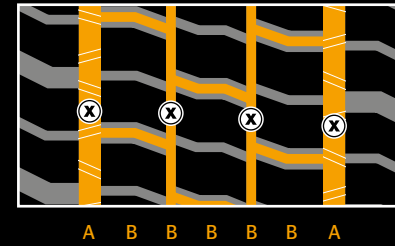


Size	Depth (mm)	Width (mm)
295/80 R 22.5	3.0	A:10 B:6-5
315/80 R 22.5	2.5	A:10 B:6-5

Conti Scandinavia HS3

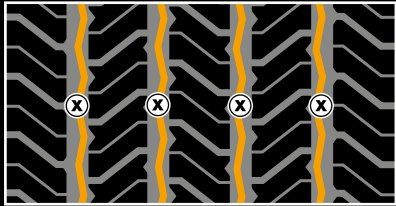


Size	Depth (mm)	Width (mm)
265/70 R 19.5	3.0	7
285/70 R 19.5	3.0	7

Conti Scandinavia LS3

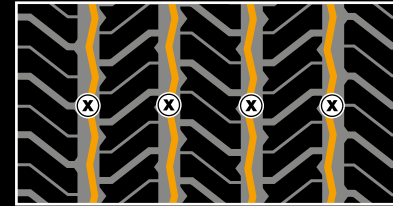


Size	Depth (mm)	Width (mm)
215/75 R 17.5	2.5	5
235/75 R 17.5	2.5	5


Conti Scandinavia HD3

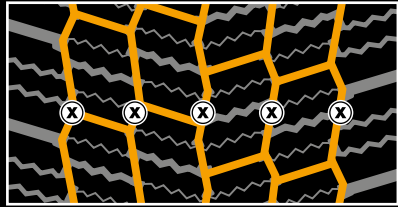


Conti Scandinavia LD3

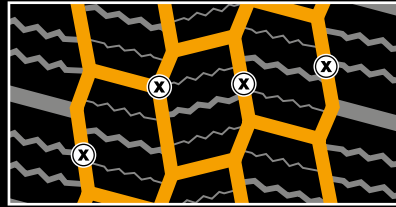

Conti Scandinavia HT3

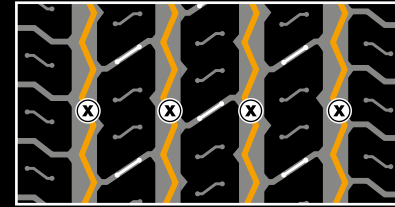

Conti Scandinavia HT3

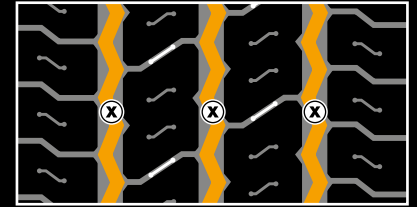

Size	Depth (mm)	Width (mm)
265/70 R 19.5	3.0	6
285/70 R 19.5	3.0	6



Size	Depth (mm)	Width (mm)
215/75 R 17.5	2.5	6
235/75 R 17.5	2.5	6

Size	Depth (mm)	Width (mm)
265/70 R 19.5	3.0	6
285/70 R 19.5	3.0	7

Size	Depth (mm)	Width (mm)
215/75 R 17.5	2.5	6
235/75 R 17.5	2.5	6
245/70 R 17.5	2.5	6


⊗ Tread depth measuring points (§ 36 min. tread depth)

HSW 2 SCANDINAVIA / XL

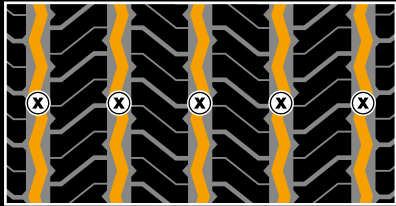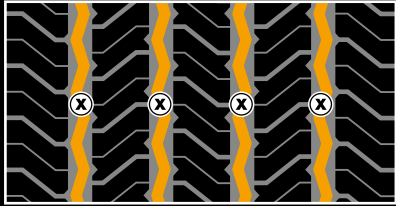

Size	Depth (mm)	Width (mm)
355/50 R 22.5	2.5	10
385/55 R 22.5	3.0	10-12
315/60 R 22.5	3.0	8
385/65 R 22.5	3.5	10-12
315/70 R 22.5	2.5	8
295/80 R 22.5	3.0	8
315/80 R 22.5	3.5	8


HSW SCANDINAVIA / ContiRe

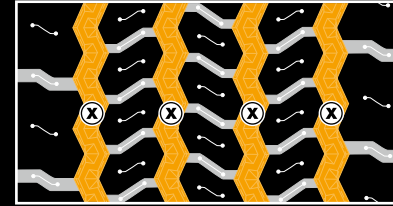

Size	Depth (mm)	Width (mm)
265/70 R 19.5	3.5	11
285/70 R 19.5	3.0	11
385/55 R 22.5 *	3.0	10-12
385/65 R 22.5 *	3.5	10-12
275/70 R 22.5	3.0	10-12
315/70 R 22.5	3.0	10-12
295/80 R 22.5	3.5	10-12
315/80 R 22.5	3.5	10-12


* alternative tread pattern

HDW 2 SCANDINAVIA / ContiRe

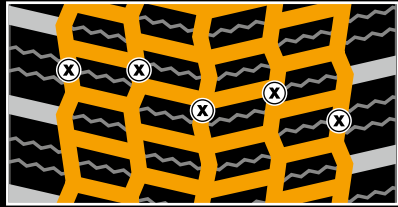



Size	Depth (mm)	Width (mm)
295/60 R 22.5	3.5	6
315/60 R 22.5	4.0	6
275/70 R 22.5	3.0	6
315/70 R 22.5	3.0	6
295/80 R 22.5	3.0	6
315/80 R 22.5	3.5	6-7
13 R 22.5	3.0	6

HDW SCANDINAVIA / ContiRe

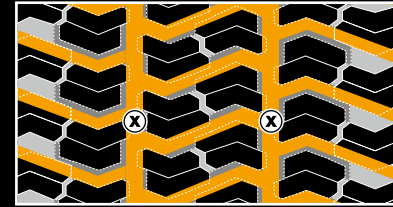

Size	Depth (mm)	Width (mm)
275/70 R 22.5	3.0	8-10
315/70 R 22.5	3.5	8-10
295/80 R 22.5	3.5	8-10
315/80 R 22.5	3.5	8-10

HDW / HDW ContiRe

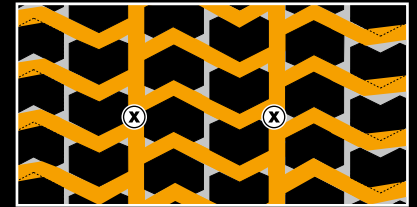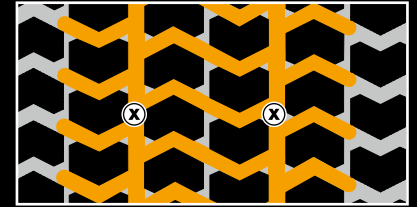


Size	Depth (mm)	Width (mm)
295/80 R 22.5	4.0	8-10
315/80 R 22.5	3.5	8-10
11 R 22.5	3.5	8-10
12 R 22.5	4.0	8-10
13 R 22.5	4.0	8-10

⊗ Tread depth measuring points (§ 36 min. tread depth)

HTW 2 SCANDINAVIA




HTW 2 SCANDINAVIA

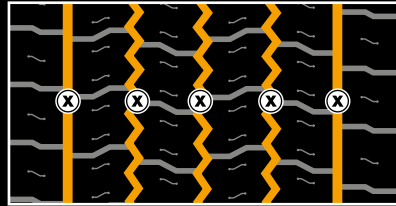

A B B B A

HTW

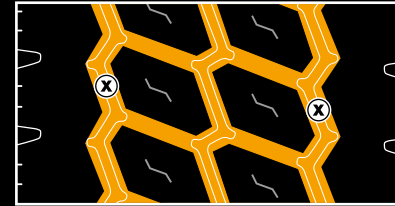

A B A B A


Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.0	10
385/65 R 22.5	3.0	10

Size	Depth (mm)	Width (mm)
445/45 R 19.5	2.0	A:11 B:8


Size	Depth (mm)	Width (mm)
265/70 R 19.5	3.5	A:10-12 B:10

Segment People


Conti Coach HA3

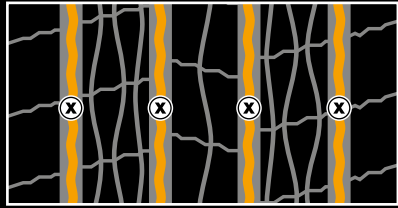


Conti Coach HA3 AC

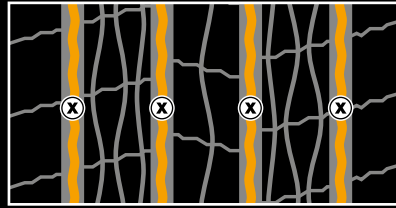

Conti Coach HA3 ED

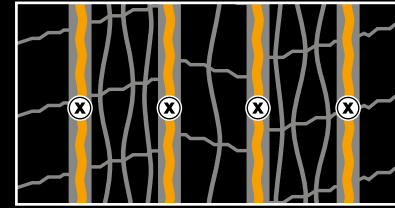

Conti CityPlus HA3

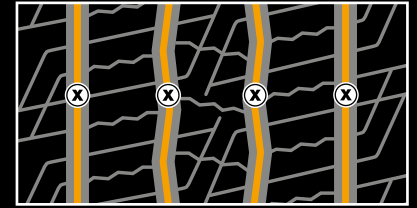

Size	Depth (mm)	Width (mm)
295/80 R 22.5	3.5	6-7
315/80 R 22.5	3.0	6-7


Size	Depth (mm)	Width (mm)
295/80 R 22.5	2.5	6-7

Size	Depth (mm)	Width (mm)
295/80 R 22.5	4.0	6-7



Size	Depth (mm)	Width (mm)
12 R 22.5	3.5	7-8
295/80 R 22.5	3.5	7-8

Tread depth measuring points (≥ 36 min. tread depth)


Conti Urban HA3

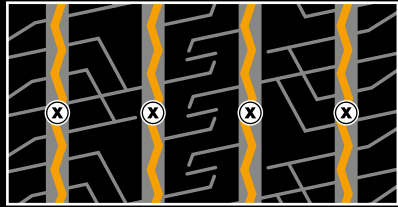


Conti Urban HA3 M+S / ContiRe

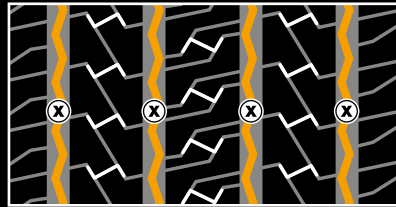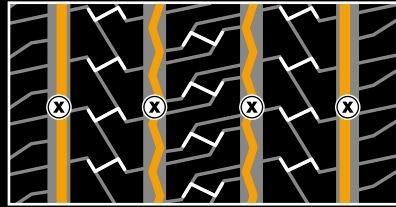

Conti Urban HA3 M+S

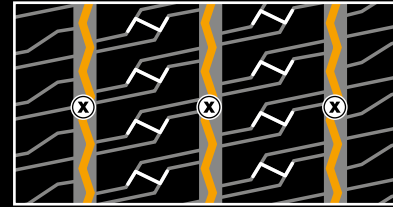

HSU 1 M+S / HSU 1 M+S ContiRe

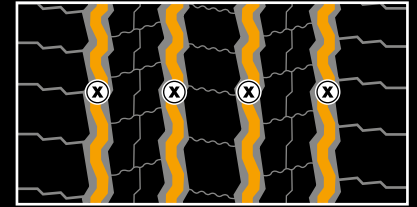

Size	Depth (mm)	Width (mm)
275/70 R 22.5	3.0	6-7


Size	Depth (mm)	Width (mm)
265/70 R 19.5	3.0	6
315/60 R 22.5	3.0	7-8
275/70 R 22.5	3.0	6-7

Size	Depth (mm)	Width (mm)
305/70 R 22.5	2.5	7-8


Size	Depth (mm)	Width (mm)
275/70 R 22.5	3.0	8

⊗ Tread depth measuring points (§ 36 min. tread depth)


HSU 1 / HSU 1 ContiRe

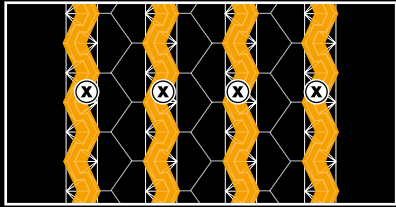


HSU

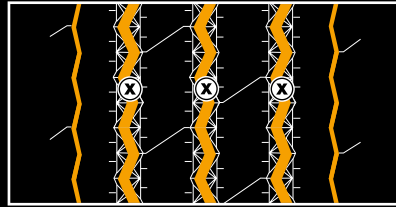


B A A A B

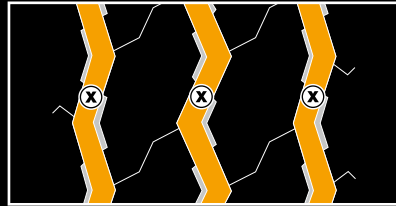

HDU 1

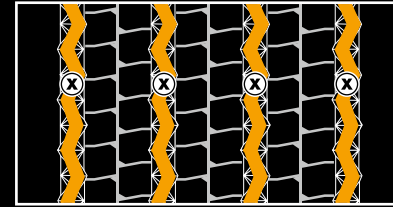

HDU / HDU ContiRe

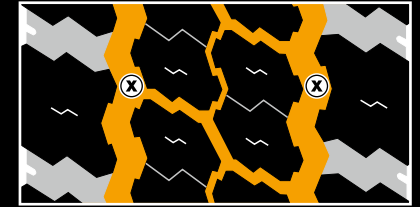

A B B B A

Size	Depth (mm)	Width (mm)
275/70 R 22.5	3.0	10-12
305/70 R 22.5	4.0	10-12
11 R 22.5	2.5	10-12


Size	Depth (mm)	Width (mm)
295/80 R 22.5	4.0	A:8-10 B:3-4
305/70 R 22.5	4.0	8-10
12 R 22.5	3.5	A:8-10 B:3-4

Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.5	10-12

Size	Depth (mm)	Width (mm)
275/70 R 22.5	5.0	A:8-10 B:4-6


⊗ Tread depth measuring points (§ 36 min. tread depth)

HSW 2 COACH / ContiRe / XL

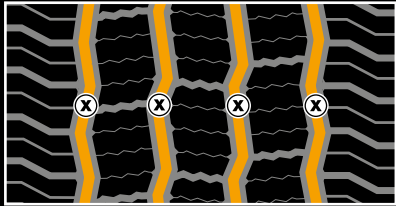


Size	Depth (mm)	Width (mm)
295/80 R 22.5	3.0	10
315/80 R 22.5	3.5	10

Conti UrbanScandinavia HA3

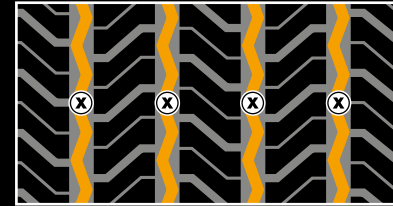

Size	Depth (mm)	Width (mm)
275/70 R 22.5	3.0	7-8

Conti UrbanScandinavia HD3 / ContiRe


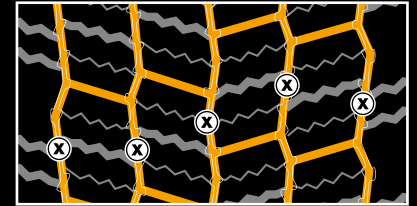


Size	Depth (mm)	Width (mm)
275/70 R 22.5	3.5	6-7

⊗ Tread depth measuring points (≥ 36 min. tread depth)


Segment Construction

Conti Hybrid HS3 / Conti Hybrid HS3 XL

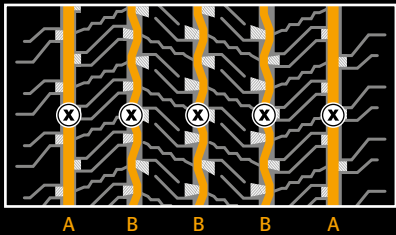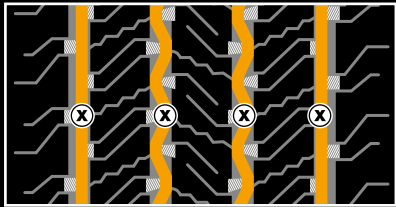

Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.0	A:10 B:8
385/65 R 22.5	3.0	A:10 B:8
275/70 R 22.5	2.5	8
315/70 R 22.5	2.5	9
295/80 R 22.5	3.0	8
315/80 R 22.5	3.5	9
12 R 22.5	3.0	8



Conti Hybrid HD3

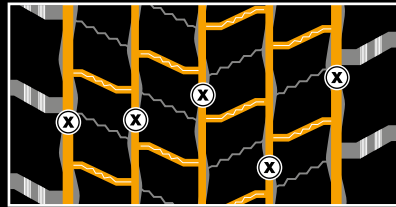

A B B B B B B B A



Size	Depth (mm)	Width (mm)
295/60 R 22.5	3.0	A:7 B:6
315/60 R 22.5	3.0	A:7 B:6
275/70 R 22.5	3.0	A:7 B:6
315/70 R 22.5	3.0	A:7 B:6
295/80 R 22.5	3.0	A:7 B:6
315/80 R 22.5	3.0	A:7 B:6

HSC 1 / HSC 1 ContiRe / HSC 1 ED

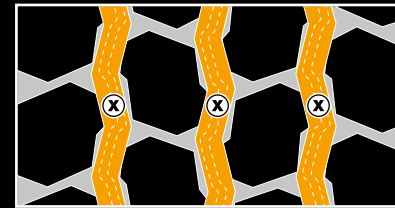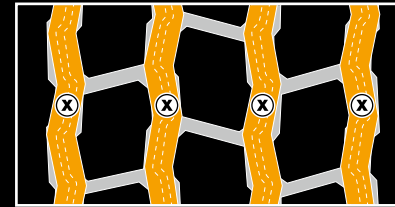

Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.5	12
295/80 R 22.5	3.5	12
315/80 R 22.5	3.0	12
11 R 22.5	3.5	12
12 R 22.5	3.5	12
13 R 22.5	3.5	12



HSC+ / HSC / LSC

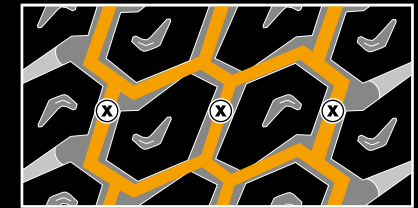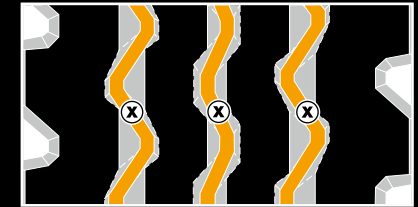

Size	Depth (mm)	Width (mm)
9.5 R 17.5	2.0	10
365/70 R 22.5	3.5	7-8
295/80 R 22.5	3.5	10-12
315/80 R 22.5	3.5	10-12
12 R 22.5	3.5	10-12
13 R 22.5	3.5	10-12


⊗ Tread depth measuring points (§ 36 min. tread depth)

HDC 1 / HDC 1 ContiRe

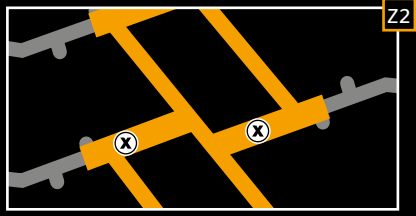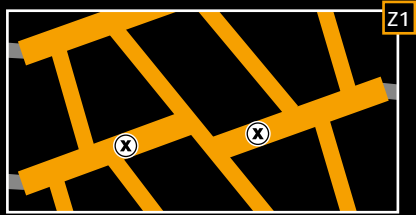



Size	Depth (mm)	Width (mm)
315/80 R 22.5 ^{Z2}	3.5	A:12 B:7
12 R 22.5 ^{Z1}	3.5	A:12 B:7
13 R 22.5 ^{Z1}	3.5	A:12 B:7

HDC 1 ED

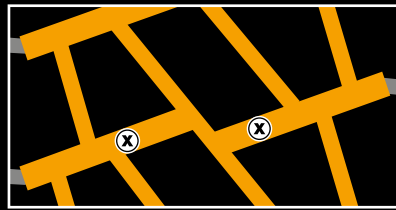

Size	Depth (mm)	Width (mm)
315/80 R 22.5	3.5	A:12 B:7
12 R 22.5	3.5	A:12 B:7
13 R 22.5	3.5	A:12 B:7


HDC / HDC ContiRe

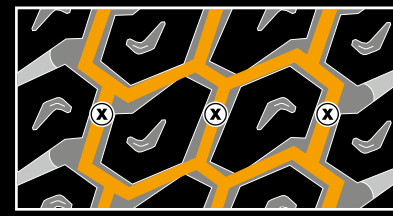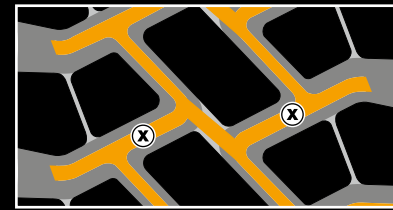

Size	Depth (mm)	Width (mm)
385/55 R 22.5	3.5	10-12
385/65 R 22.5	3.5	10-12
295/80 R 22.5	3.5	10-12
315/80 R 22.5	4.0	10-12
12 R 22.5	2.5	10-12
13 R 22.5	4.0	10-12


⊗ Tread depth measuring points (§ 36 min. tread depth)

HTC 1 / HTC 1 ED

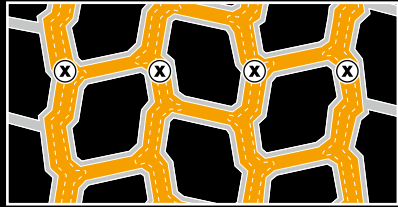


A B A B A B A

HTC 1 ContiRe

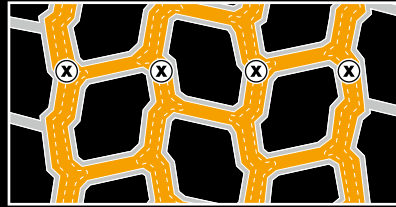

A B A B A B A

HTC

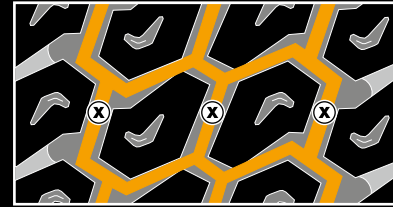


Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.5	A:10 B:7
445/65 R 22.5	3.5	A:10 B:7

Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.0	A:10 B:7


Size	Depth (mm)	Width (mm)
385/65 R 22.5	3.5	10-12
425/65 R 22.5	3.5	10-12
445/65 R 22.5	3.5	10-12
275/70 R 22.5	3.5	10-12

⊗ Tread depth measuring points (§ 36 min. tread depth)


H50

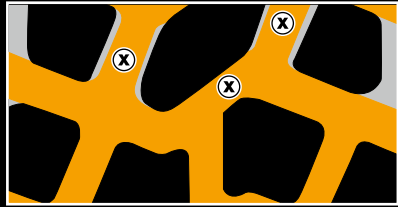

H80

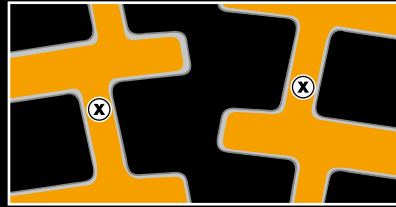

LCS / HCS

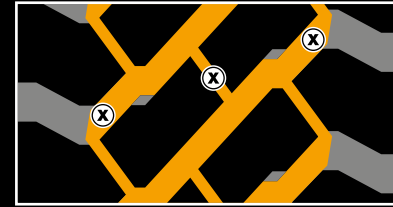

B A B A B

Size	Depth (mm)	Width (mm)
13 R 22.5	3.0	8

Size	Depth (mm)	Width (mm)
315/80 R 22.5	3.5	10-12
13 R 22.5	4.0	10-12

Size	Depth (mm)	Width (mm)
265/70 R 17.5	2.0	A:15 B:6
445/65 R 22.5	3.5	A:25 B:7

⊗ Tread depth measuring points (≥ 36 min. tread depth)

Specifications and load capacities

Tire size	Operating code				EU tire label				Rim		Tire dimensions						Load capacity (kg) per axle at inflation pressure ³⁾ (bar) (psi)																										
	Pattern	LI/SI ¹⁾	PR	Speed Index and ref. speed (km/h)	TT/TL ²⁾	D ³⁾	C ⁴⁾	70 ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fit-ment																									
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %					± 1.5 %	± 2 %	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)													
205/70 R 15	HTR	124/122 K	14	K 110	TT	D	C	70	5.00	228	206	681	198	669	313	2040	124	S		2090	2255	2420	2580	2735	2895	3045	3200																
									5.50	233	211		203															212															
									6.00	240	217		209															214															
									6.50	246	223		214															217															
7.50 R 15	HTR	135/133 G (134/132 K)	16	G 90 (K 110)	TT	D	C	70	5.00	232	212	784	202	773	357	2342	135	S		2850	3075	3295	3515	3730	3940	4150	4360																
									5.50	238	217		207															217															
									6.00	244	223		212															217															
									6.50	250	228		217															217															
8.25 R 15	HTR	143/141 G (141/140 K)	18	G 90 (K 110)	TT	C	C	70	5.50	258	235	848	224	835	383	2530	143	S		3560	3845	4120	4395	4665	4930	5190	5450																
									6.00	263	240		229															240															
									6.50	269	246		234															240															
									7.00	276	252		240															240															
7.00 R 16	LSR+	117/116 L	12	L 120	TT	E	C	70	5.50	228	206	799	198	784	362	2376	117	S		2220	2395	2570																					
	LDR+	117/116 L	12	L 120	TT	F	C	73	6.00	235	212		204															116	D	4320	4660	5000											
7.50 R 16	LSR+	121/120 L	12	L 120	TT	E	C	70	5.00	230	208	818	200	802	369	2430	121	S		2215	2390	2560	2730	2900																			
	LDR+	121/120 L	12	L 120	TT	F	C	73	5.50	236	213		205															120	D	4275	4615	4950	5275	5600									
									6.00	242	218		210															802	369	2430													
									6.50	247	224		215															802	369	2430													
7.50 R 16 C	HSO+ SAND	112/110 N	8	N 140	TT	F	C	76	5.00	230	208	818	200	802	369	2430	112	S		1725	1830	1935	2035	2135	2240																		
									5.50	236	213		205																110	D	3265	3465	3660	3855	4050	4240							
									6.00	242	218		210																														
									6.50	247	224		215																														

See flap inside back cover for footnotes

Tire size	Operating code				EU tire label			Rim		Tire dimensions						Tire fitment		Load capacity (kg) per axle at inflation pressure ³⁾ (bar) (psi)																																	
	Pattern	LI/SI ¹⁾	PR	Speed Index and ref. speed (km/h)	TT/TL ²⁾	C ³⁾	C ⁴⁾	C ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Design value		Stat. radius	Rolling circumference	LI ¹⁾	Tire fitment	4.5 (65)	5.0 (73)	5.5 (80)	6.0 (87)	6.5 (94)	7.0 (102)	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)																							
											Width	Outer-Ø	Width + 1 %	Outer-Ø ± 1 %															± 1.5 %	± 2 %																					
365/80 R 20	HTR	160/ - K	20	K 110	TL	C	C	70	10.00		379	1116		364	1092	502	3331	160	S		5620	6065	6505	6935	7360	7775	8190	8595	9000																						
365/85 R 20	HCS	164/ - J	22	J 100	TL	-	-	-	10.00		379	1152		364	1128	518	3440	164	S		6865	7405	7940	8465	8985	9495	10000																								
395/85 R 20	HCS	168/ - J (166/ - K)	20	J 100 (K 110)	TL	-	-	-	10.00		401	1206		386	1180	540	3599	168 166	S S		7685 7275	8295 7850	8895 8420	9485 8975	10065 9525	10635 10065	11200 10600																								
10.00 R 20	HSR	146/143 K	16	K 110	TT	D	C	73	6.50	305	276	1074		265	1052	485	3209	146 143	S D		4115	4445	4765	5080	5390	5695	6000	10900																							
									7.00	311	281			270																																					
									7.33	314	284			273																																					
									7.50	316	286			275																																					
11.00 R 20	HSR	150/146 K	16	K 110	TT	C	C	73	7.33	321	290	1104		279	1082	498	3300	150 146	S D		4380	4725	5070	5405	5735	6060	6380	6700	12000																						
									7.50	323	292			281																																					
									8.00	329	297			286																																					
									8.50	335	303			291																																					
									9.00	340	308			296																																					
12.00 R 20	HSR	154/150 K	18	K 110	TT	C	C	73	7.33	346	307	1146		301	1122	515	3422	154 151 150 149	S D S D		4905	5290	5675	6050	6420	6785	7140	7500	13400																						
									8.00	353	313			307																																					
									8.50	360	319			313																																					
									9.00	366	324			318																																					
12.00 R 20	HSC	154/151 K	18	K 110	TT	C	C	71	8.50	360	319	1146		301	1122	515	3422	150 149	D D		8760	9455	10140	10810	11470	12120	12765	13400	13000																						
	HDC	154/150 K	18	K 110	TT	E	C	74													8500	9175	9835	10485	11125	11760	12380	13000																							
	HSO SAND	154/149 K	18	K 110	TT	D	C	75													8500	9175	9835	10485	11125	11760	12380	13000																							
																					8500	9175	9835	10485	11125	11760	12380	13000																							
14.00 R 20	HSO SAND	160/157 K	18	K 110	TL	-	-	-	9.00	414	367	1268		360	1238	564	3776	166 164 160 160 157	S S S D D		7275	7850	8420	8975	9525	10065	10600	18000																							
									10.00	426	377			370							1238	564	3776	6875	7420	7955	8480				9000																				
	HCS	164/160 K (166/160 G)	22	K 110 (G 90)	TL	-	-	-	12605	13600	14585			15550							16500																														
325/95 R 24 (12.00 R 24)	HSR 1	162/160 K	20	K 110	TT	C	C	73	8.50	368	326	1252		320	1228	568	3745	162 160	S D		6210	6705	7185	7665	8130	8590	9050	9500	18000																						
									9.00	374	332			325							1228	568	3745	11770	12705	13620	14520	15410				16280	17145																		
									10.00	385	342			335																																					
									HSC 1	162/160 K	20			K 110							TL	D	C	73																											
									HDC 1	162/160 K	20			K 110							TT	D	C	73																											
									HDC 1	162/160 K	20			K 110							TL	C	C	74																											

See flap inside back cover for footnotes

Regrooving recommendations

All Continental tires on which regrooving is permitted have on both sidewalls, in accordance with ECE regulation 54, the word

REGROOVABLE


The additional tread depth of up to 4 mm gained by regrooving means a significant increase in performance.

As part of their design, all-steel truck tires have a so-called tread stock between the upper edge of the belt and the tread grooves. This tread stock is intended to prevent stones etc. penetrating into the steel belt and the casing.

Provided it is marked "REGROOVABLE", a commercial vehicle tire may be regrooved down to a residual undertread thickness of 2 mm above the breaker or belt. All additional regulations of the respective country must be met.

Although tires can be retreaded after reaching the legal wear limit, regrooving is not advisable in every case. The tread stock thickness is reduced and stones etc. can more easily penetrate and damage the steel belts, leading to rust formation. This has a decidedly negative effect on the tire's suitability for remolding.

The best time for regrooving is when the tread is worn down to about 3 mm. The tire must then be checked to make sure the wear is even all round. Attention should be paid to local or uneven wear patches.

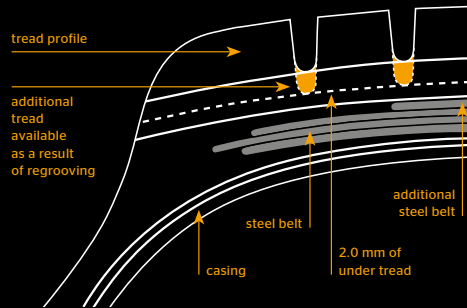

Example:

Tire size	315/80 R 22.5
Original tread depth of new tire	20.0 mm
Additional tread as a result of regrooving	4.0 mm


Regrooving should be carried out by an expert, in order to avoid premature failure as well as any reduction in the tire's suitability for retreading.

In some countries (e.g. Germany for KOM-100 coaches and Austria for coaches) regrooving of front axle tires for coaches is prohibited. In general, regrooving on front axle coach tires is not recommended.


All Continental tires on which regrooving is permitted are marked "regroovable".

Segment Goods

HSR 1

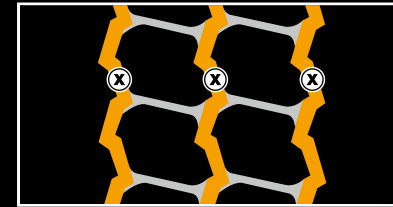

HSR

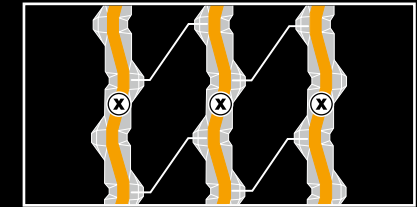


Size	Depth (mm)	Width (mm)
325/95 R 24 *	3.5	7-8



* alternative tread pattern

Size	Depth (mm)	Width (mm)
9.00 R 20	3.5	7-8
10.00 R 20	3.5	7-8
11.00 R 20	3.0	7-8
12.00 R 20	2.5	7-8
12.00 R 24	2.5	7-8


HDR

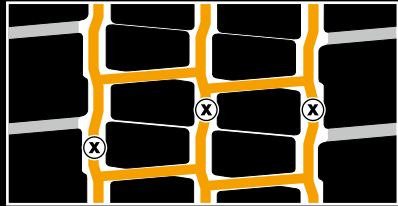


RS 63

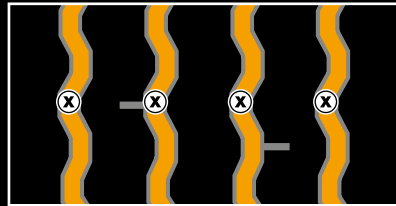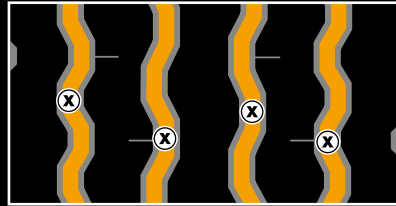

LSR+ / LSR

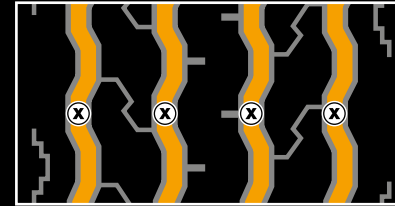

LDR+ / LDR

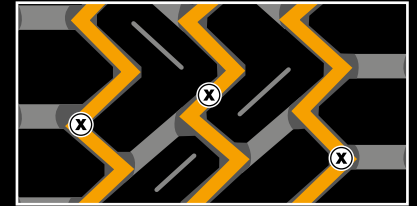

Size	Depth (mm)	Width (mm)
9.00 R 20	4.0	6-7
10.00 R 20	3.0	6-7

Size	Depth (mm)	Width (mm)
7.50 R 20	3.0	7
8.25 R 20	3.0	7


Size	Depth (mm)	Width (mm)
7.00 R 16	1.5	7
7.50 R 16	1.5	7

Size	Depth (mm)	Width (mm)
7.00 R 16	1.5	7


⊗ Tread depth measuring points (§ 36 min. tread depth)

Segment People


HTR

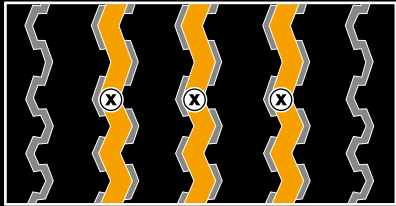

HTR

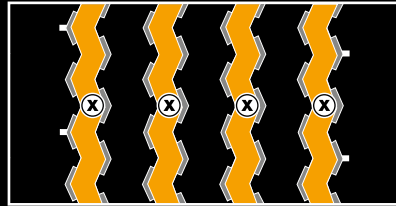

HSU 1

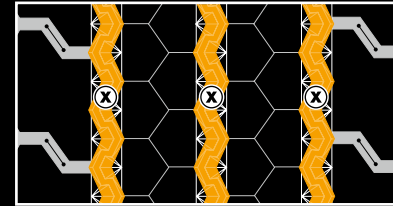



Size	Depth (mm)	Width (mm)
205/70 R 15	1.5	7-8

Size	Depth (mm)	Width (mm)
365/80 R 20	3.5	7-8

Size	Depth (mm)	Width (mm)
10.00 R 20	4.0	10-12

Segment Construction


HSC 1

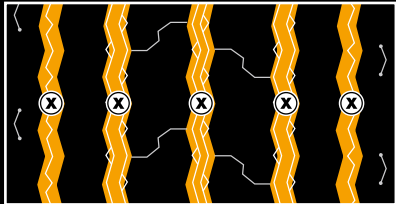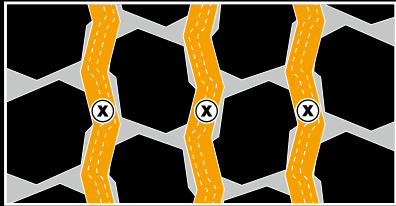

Size	Depth (mm)	Width (mm)
325/95 R 24 *	3.5	10-12
12.00 R 24	3.5	15


* alternative tread pattern

HSC+ / HSC

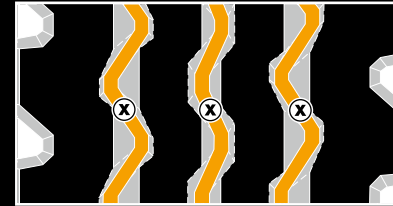


Size	Depth (mm)	Width (mm)
9.00 R 20	4.0	10-12
10.00 R 20	3.5	10-12
11.00 R 20	3.5	10-12
12.00 R 20	3.0	10-12
12.00 R 24	3.5	10-12

HDC 1

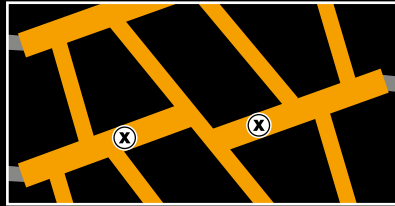


B A B B A B

HDC

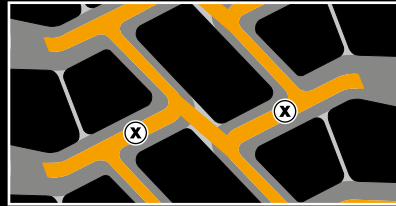


Size	Depth (mm)	Width (mm)
12.00 R 20	3.5	10-12
12.00 R 24	3.0	10-12

HSO+ SAND / HSO SAND

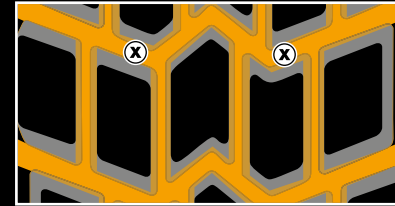

Size	Depth (mm)	Width (mm)
7.5 R 16 C	1.5	5
12.00 R 20	3.0	12-14
14.00 R 20	4.0	12-14

HCS

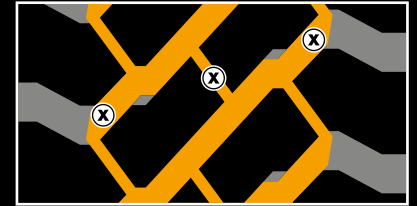

B A B A B

Size	Depth (mm)	Width (mm)
14.00 R 20	4.0	A:18 B:10
365/85 R 20	4.0	A:18 B:10
395/85 R 20	4.0	A:18 B:10
325/95 R 24	3.5	A:17 B:7

Size	Depth (mm)	Width (mm)
12.00 R 24	4.0	A:12 B:7
325/95 R 24	3.5	A:12 B:7

⊗ Tread depth measuring points (≥ 36 min. tread depth)

Maintenance and care

The prerequisite for successful maintenance and care is the correct choice of tire, in accordance with the recommendations of the tire manufacturer. Refer also previous sections on this subject.

Storage

Unused tires should be stored in cool, dry, dark and lightly ventilated rooms. Tires which are not fitted on rims should be stored standing up. Avoid contact with fuel, lubricants, solvents and chemicals.

Should tires, tubes and bead flaps need to be stored temporarily, they may age more quickly and develop cracks if they are exposed to intense sunlight or extreme heat. Effective air circulation accelerates this process.

Inner tubes may be particularly affected if their packaging is damaged.

Fitting the tire

Before taking off a tire, unscrew and remove the valve insert; then wait until all the air has escaped. If a tube-type tire is fitted with an angled valve as per DIN 7786-80 GD 80, unscrew the valve stem and wait until the escaping air ceases to make noise before removing the tire.

Particular care should be taken when fitting the tire. Only rust-free rims of the right size should be used. These should not be damaged or show any signs of wear and tear. The loose flange side should be examined with great care.

Always use new rubber tubeless valves or new inner tubes and flaps on new tires or new seals for tubeless metal valves.

Take special care after tire repairs: inner tubes stretch in use and may form dangerous folds when re-fitted. If in doubt, always fit new inner tubes in order to avoid tube failure.

It is particularly important with large tires that these should already fit on the rim flange with as little inflation pressure as possible. See also WdK-Guideline 104, where detailed fitting recommendations are given.

As a guide:
When fitting, do not exceed 150% of the maximum standard inflation pressure. Under no circumstances must 10 bar be exceeded. Use only recommended fitting tools and equipment.

Should the tire bead be jammed on the rim and the pressure be high, the bead may get damaged or even destroyed.

With tube type tires, check that valves still move freely after the filler nozzle has been removed. This is important for later inflation pressure checks under difficult conditions.

Fast-running wheels should be balanced statically and dynamically to ensure smooth running.

Fitting the wheel on to the vehicle

Vehicle axle data such as toe-in, king pin inclination and castor as well as axle alignment must be checked and if necessary adjusted to within tolerances.

Only then should the wheel be fitted.

When fitting make sure that the axle hub is perfectly centered. Extra care is necessary with large, heavy tires which do not have special centering.

If necessary, re-balance the wheel when it is fitted on the vehicle.

Always remember to check that the valves move freely and are easily accessible. Valve extensions are necessary for dual tires.

Checking the inflation pressure requires the free movement and easy access of the valves, even when they have become dirty during operation.

Valve caps, preferably high pressure type, must be fitted.

On rolling road testers where the vehicle performance is examined, restrictive testing regulations must be observed: depending on the roller diameter only short tests may be carried out and these must always be below maximum speed.

If a vehicle has all the same type of tires e.g. radial tires, this will guarantee optimum driving characteristics and maximum driving stability.

The use of different tire designs on each axle should be a rare exception. Where vehicles are being used on the highway, minimum tread depths as specified in the latest national regulations must be observed. For motor vehicles, trailers or semitrailers it is essential that tires of the same construction are fitted to the same axle.

Minimum tread depth

The legal minimum tread depth is 1.0 mm and must cover the complete width and circumference of the tread. The depth should be measured in the tread groove with the tread wear indicator (the area with the indicator should not be taken).

Vehicle in operation

The inflation pressure must be correct. Otherwise poor vehicle handling and pronounced, irregular tread wear are inevitable.

If pressure is insufficient, the rolling resistance will increase and with it the fuel consumption. Hidden defects in the tire may also occur which later lead to tire failure.

Tire inflation pressures specified by vehicle and tire manufacturers are contained in the vehicle manual and, for example, on the vehicle mud guard. These may vary with different loads and service conditions, and must be adjusted before commencing a journey. Specified inflation pressures always apply to cold tires. An increase in inflation pressure during running is normal and must never be re-adjusted. Do not reduce pressure when the tires are hot.

Never use different inflation pressures for the same axle.

The spare wheel should be inflated to at least the maximum inflation pressure given in the vehicle manual. Remember to always include the spare wheel when checking inflation pressures.

A balanced, even style of driving reduces the strain on the tires. Every hasty reaction on the accelerator, brakes or steering shortens the life of the tires.

The same also applies of course to all other forms of peak strain such as severe scuffing of the tire along the curb or driving over obstacles that may be in the road. These can all result in damage to the tires construction.

Strain on the tire should be avoided. This has the same effect as insufficient pressure.

Do not exceed the tire's permitted maximum speed, otherwise tire damage is inevitable.

Maintenance and care of the vehicle's tires

The high quality standard of the tires and vehicle, which is achieved by the measures and recommendations stated above, can only be ensured by the regular checking of all factors.

For example, pressure checks and external inspections of the tires (including the sidewalls to the inside of the vehicle and between dual tires).

Pressure checking devices and small replacement parts such as valve inserts, caps and extensions should always be close at hand.

Tires age as a result of physical and chemical processes and this may impair their performance.

Tires, which are fitted to mainly stationary vehicles or those which are not used regularly, are particularly prone to premature ageing.

Unfavourable weather conditions also accelerate the ageing process as well as the storage conditions that were covered in the previous section.

An expert should always be called in to make a qualified judgment on the tires.

Regrooving of the tread pattern – usually when there are 2 or 3 millimetres of tread depth left – should be carried out only by qualified experts when the word "REGROOVABLE" is displayed on the tire sidewall.

Tire repairs

Tire damage may initially be just a question of damage to the outer rubber: however, this apparently superficial damage can eventually extend down to, or into, the tire's reinforcing materials (casing/belt). Therefore no time should be lost in taking the tire to a specialist for assessment as soon as any external damage is detected.

Damage to the reinforcing materials, for instance due to a nail puncture or a deep cut, is particularly dangerous because dirt and moisture may penetrate during the time between when the damage occurred and when it was detected. This may even result in more serious damage to the reinforcing materials. Damage to the inside of a tire can also cause a slow puncture.

The tire is then driven underinflated and consequently subjected to excessive strain. All these factors can make a tire non-repairable by the time the damage is finally discovered. If the tire is repaired regardless, even if it is repaired by a reputable tire specialist, it is possible that tire failure can still occur as a result of an overstrained area, other than that originally damaged.

This is why each tire must be carefully inspected by a tire expert before it is repaired. For only a specially trained person can decide whether it is possible to repair the tire and whether the tire will be capable of delivering safe performance after the repair. Repairs must be carried out by an authorized workshop, which is then responsible for inspecting the tire and for doing the job properly.

Repairs to the wheels are forbidden.

Imprint

Technical data manuals for other tire groups:

Tires for passenger cars and vans:

Technical Data Book Car, 4x4, Van Tires

Industrial-tires:

Tire Service Data Industrial Vehicles

Motorcycle tires:

Technical Manual Motorcycle tires

The content of this publication is provided for information only and without responsibility. Continental Reifen Deutschland GmbH makes no representations about the accuracy, reliability, completeness or timeliness of the information in this publication. Continental Reifen Deutschland GmbH may, in its sole discretion, revise the information contained herein at any time without notice. Continental Reifen Deutschland GmbH's obligations and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of these agreements.

This publication does not contain any guarantee or agreed quality of Continental Reifen Deutschland GmbH's products or any warranty of merchantability, fitness for a particular purpose and noninfringement. Continental Reifen Deutschland GmbH may make changes in the products or services described at any time without notice. This publication is provided on an "as is" basis. To the extent permitted by law, Continental Reifen Deutschland GmbH makes no warranty, express or implied, and assumes no liability in connection with the use of the information contained in this publication. Continental Reifen Deutschland GmbH is not liable for any direct, indirect, incidental,

consequential or punitive damages arising out of the use of this publication. Information contained herein is not intended to announce product availability anywhere in the world.

The trademarks, service marks and logos (the Trademarks) displayed in this publication are the property of Continental Reifen Deutschland GmbH and/or its affiliates. Nothing in this publication should be construed as granting any license or right to the Trademarks. Without the express written consent of Continental Reifen Deutschland GmbH the use of the Trademarks is prohibited. All text, images, graphics and other materials in this publication are subject to the copyright and other intellectual property rights of Continental Reifen Deutschland GmbH and/or its affiliates. Continental Reifen Deutschland GmbH owns the copyrights in the selection, coordination and arrangement of the materials in this publication. These materials may not be modified or copied for commercial use or distribution.

Copyright © 2016
Continental Reifen Deutschland GmbH
All rights reserved.

Terms and Explanations

Load/Speed Index

The nominal load carrying capacity of a tire is expressed as the Load Index (LI) and is expressed in kg. In addition to this, a reference speed is also determined in connection with the nominal load carrying capacity (refer to speed symbol and reference speed).

Speed symbol and reference speed (km/h)

Each speed symbol is assigned a reference speed in km/h or mph. The tire speed is assigned the nominal load carrying capacity of the tire.

PR

„Ply-rating“ (also called „PR“), is an international designation for the solidity of the tire casing. In the past, the tire load-carrying class was only expressed by means of a PR number. The exact designation of load carrying capacity is nowadays expressed as a numerical code, namely the Load Index (or LI).

TT/TL

Tubeless – tires without inner tube
Tube Type – tires with inner tube

Minimum distance between rim centers

Adherence to the minimum distance between rim centers ensures the fault-free performance of two tires in accordance with the ETRTO Standard without chains, when mounted dually (refer also to page 5).

Maximum standard value in service

This is the maximum permissible width in accordance with the ETRTO Standard. Dynamic deformations are not included.

Design value

Width and external diameter as provided by the manufacturer

Stat. radius

Distance from the center of the wheel to the road surface

Rolling circumference

The distance covered on each revolution of the tire

Tire fitment

Describes single (S) or dual fitment (D)

Load carrying capacity in kg per axle at an inflation pressure in bar or psi

Axle load carrying capacities with single or dual fitment at an adjusted inflation pressure in bar and psi (1 bar ~ 14.5 psi)

Explanation of footnotes

- Data acc. to DIN 7805/4, WdK Guidelines 134/2, 142/2, 143/14, 143/25
- 1) Load index single/dual wheel fitment and speed symbol
- 2) TT = Tube Type, TL = Tubeless
- 3) Fuel efficiency
- 4) Wet grip

- 5) External rolling noise (db)
- 6) For tire pressures of 8.0 bar (116 psi) or greater, use valve silt cover plate
- * in preparation
- ** Label values in preparation

Product overview

	Generation 3		Previous product line
Goods	Conti EcoPlus	HS3	HSL
	Conti EcoPlus	HD3	HDL
	Conti EcoPlus	HT3	HTL
	Conti Hybrid	HS3	HSR
	Conti Hybrid	HD3	HDR, HD Hybrid
	Conti Hybrid	HT3	HTR
	ContiRe CityService	HA3	-
	ContiRe CityService	HD3	-
	Conti Scandinavia	HS3	HSW
	Conti Scandinavia	HD3	HDW
	Conti Scandinavia	HT3	HTW
People	Conti Coach	HA3	-
	Conti Coach	HD3	-
	Conti CityPlus	HA3	-
	Conti Urban	HA3	HSU, HDU
	Conti CoachScandinavia	HA3	HSW Coach
	Conti CoachScandinavia	HD3	HDW SCAN
	Conti UrbanScandinavia	HA3	-
	Conti UrbanScandinavia	HD3	-
Construction	Conti CrossTrac	HA3	(HSC, HSR)
	Conti CrossTrac	HD3	HDC, HDR
	Conti CrossTrac	HT3	HTC, HTR
	Conti TerraPlus	HA3	(HSO)
	Conti TerraPlus	HD3	HDO



6FED3.en 2015.10

Continental Reifen Deutschland GmbH
 Büttnerstraße 25
 30165 Hannover
 Germany

www.continental-truck-tires.com
www.continental-corporation.com