



# Consolidated\* Condensed Catalog

## Pressure Relief Solutions

- Safety Relief Valves
- Safety Valves

A extensive range of safety relief valve and safety valve styles, sizes, options and configurations for multiple applications, environments and media.



# Table of Contents

<b>Safety Relief Valves</b> .....	<b>4</b>
Type 1900 .....	5
Type 1900-UM .....	6
Type 19000 .....	7
Type 1982 .....	8
Type 2478 Relief Valve .....	8
Type 2900 Pilot-Operated .....	9
Type 3900 Pilot-Operated .....	9
Type 4900 Pilot-Operated .....	10
Type 13900 Pilot-Operated .....	10
<b>Safety Valves</b> .....	<b>11</b>
Type 1700 Maxiflow* .....	12
Type 2700 .....	12
Type 1811 .....	13
Type 1511 .....	13
Type 1541-3, 1543-3 .....	14
Type 1900/P .....	14
Type 2900-40 Pilot-Operated .....	15
<b>Electromatic Ball Valve System</b> ....	<b>15</b>
Type 3500-5 Electromatic* Ball Valve .....	15

# Consolidated Safety Relief Valves

## In compliance with:

- ASME Section VIII Process Application Standards
- ASME Section I Boiler Application Regulations
- Many other Global and Regional Standards

Safety relief valves often serve as the point-of-protection against potentially dangerous circumstances, so it is important that they be dependable. BHGE's Consolidated safety relief valves have maintained a reputation for excellence and reliability for more than a century.

The Consolidated product line has demonstrated a number innovative solutions, too. Safety relief valve innovations from the product line include the Thermodisc<sup>®</sup> temperature compensating disc and the first modular pilot-operated valve.

## A full range of valves

BHGE provides a full range of Consolidated safety relief valve styles, sizes, options and configurations for multiple industries, applications, environments, and media. From spring-actuated to pilot-operated, each pressure relief valve is configured to offer safer process flow control in harsh environments.

## Meeting evolving needs

BHGE continues to pursue quality and pro-active approach through regular collaboration with our customers and by staying actively involved in the development of regulatory compliance standards. We configure, engineer, and manufacture safety relief valves that adhere to industry regulations and global and regional standards while helping meet our customers' evolving needs.



## Applications:

- Chemical and petrochemical
- Refinery
- Power generation
- Economizer (Water)
- Liquid Phase Thermal Fluid Heaters
- Commercial
- MSR – Moisture Steam Re-heater
- Turbine gland steam seal
- Pegging steam/auxiliary steam
- De-aerators
- Feed-water heaters – tube side and shell side
- Pumps – recirculation line protection
- Fuel oil pumps
- Ammonia systems
- Scrubber systems
- Air compressor
- Miscellaneous pumps
- Trim supplied to match the fluid



## Type 1900 Safety Relief Valve

Inlet Sizes:	1" through 12"
Inlet Ratings:	ASME Class 150 through 2500
Outlet Sizes:	2" through 16"
Outlet Ratings:	ASME Class 150 and 300
Orifice Sizes:	D through W
Set Pressure Range:	4 psig to 6250 psig
Temperature Range:	-450°F to 1500°F
Materials:	Cast carbon steel body with stainless steel trim
Certifications:	ASME B&PVC Section I (Liquid), Section III & VIII PED China Manufacturing License (CML) API 520, 521 and 526 NACE Others available upon request

The highly adaptable type 1900 safety relief valve meets numerous application requirements.

## Options for Type 1900 Safety Relief Valve

### 1900-30

The type 1900-30 valve includes the addition of a balanced bellows that is necessary to compensate for the effects of variable back pressure. By isolating the upper structure and allowing the use of less expensive materials, the bellows is also a cost-effective solution in applications where the valve is exposed to highly viscous or corrosive fluids.

### 1900-DA

The type 1900-DA valve contains an additional O-ring seat seal. This soft seat is the primary seal and it allows the valve to remain leak free at 95 percent of set pressure over 100 psig (6.89 barg). A backup metal seat provides additional safety for fire-relief applications when O-rings can be destroyed by high temperature exposure.

The type 1900-DA O-ring seat is available for set pressures up to 6250 psig (430.92 barg). Some soft seats offered by other manufacturers are limited to 1500 psig.

# Consolidated Safety Relief Valves



## Type 1900-UM Safety Relief Valve

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: D through W

Set Pressure Range: 4 psig to 6250 psig

Temperature Range: -450°F to 1500°F

Materials: Cast carbon steel body with stainless steel trim

Certifications: ASME B&PVC Section III and VIII  
PED  
China Manufacturing License (CML)  
API 520, 521 and 526  
NACE  
Others available upon request

The type 1900-UM valve is capable of flowing liquid, gas or steam with no adjustment required to switch between different media with the same set pressure.

## Options for Type 1900-UM Safety Relief Valve

### 1900-30-UM

The type 1900-30-UM valve includes the addition of a balanced bellows that is necessary to compensate for the effects of variable back pressure. By isolating the upper structure and allowing the use of less expensive materials, the bellows is also a cost-effective solution in applications where the valve is exposed to highly viscous or corrosive fluids.

### 1900-UM-DA Soft Seat

The type 1900-UM-DA soft seat contains an additional soft seal. This soft seat is the primary seal, and it allows the valve to remain leak free at 95 percent of set pressure over 100 psig (6.89 barg). A backup metal seat provides additional safety for fire-relief applications when soft goods can be destroyed by high temperature exposure. The Consolidated type 1900-UM soft seat is available for set pressures up to 6250 psig (430.92 barg). Some soft seats offered by other manufacturers are limited to 1500 psig.



## Type 19000 Safety Relief Valve

Inlet Sizes: 0.5" to 2"

Inlet Ratings: Threaded and ASME Class 150 through 2500"

Outlet Ratings: Threaded and ASME Class 150 to 300

Orifice Sizes: 0.096 sq. in. through 0.567 sq. in.

Set Pressure Range: 5 psig to 8000 psig

Temperature Range: -425°F to 1100°F

Certifications: ASME B&PVC Section III and VIII  
PED  
China Manufacturing License (CML)  
API 520 and 521  
NACE  
Others available upon request

The type 19000 safety relief valve is ASME and PED certified. It meets and exceeds API seat tightness performance. The 19000 offers enhanced capacity and blowdown performance on many media types. In most cases, it does not require parts changes to accommodate different media.

## Options for Type 19000 Safety Relief Valve

### 19000-MS Standard Design

Metal-to-metal seat construction. Seat tightness compliant with API 527.

### 19000-DA O-Ring Seat Option

Soft seat design offers bubble tight seats at up to 97 percent of valve set pressure for valves set at 101 psig (6.96 barg) and above. This option promotes higher, more efficient system operating pressures without significant seat leakage concerns.

# Consolidated Safety Relief Valves



**Type 1982  
Safety Relief Valve**

Inlet Sizes: 0.5" through 2"

Inlet Ratings: Threaded

Outlet Ratings: Threaded

Orifice Sizes: Four sizes - .121 sq. in. through 1.399 sq. in.

Set Pressure Range: 10 psig to 500 psig

Temperature Range: -20°F to 800°F

Materials: Carbon steel bonnet with stainless steel trim

Certifications: ASME B&PVC, Section III  
ASME B&PVC, Section VIII, Division I

The type 1982 safety relief valve is a preferred choice for OEM and skid manufacturers requiring high-relief capacity from a small valve. The 1982 offers superior seat tightness and blowdown performance for most media applications.



**Type 2478  
Relief Valve**

Inlet Sizes: 0.5" through 2.5"

Outlet Sizes: 0.75" through 2.5"

Inlet Rating: Threaded

Outlet Rating: Threaded

Orifice Sizes: D, E, F, G, H and J

Set Pressure Range: 15 to 300 psig

Temperature Range: -325°F to 406°F

Materials: Cast bronze bonnet, brass base and trim and PTFE soft seats

Certifications: Non-Coded

The type 2478 pressure relief valve features an enclosed design for non-corrosive, thermal relief and liquid service applications.



# Consolidated Pilot-Operated Safety Relief Valves



**Type 2900  
Pilot-Operated Safety Relief Valve**

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Seventeen sizes – D through W

Set Pressure Range: 15 to 6250 psig

Temperature Range: -40°F to 505°F  
Above 505°F with heat exchanger

Materials: Stainless steel pilot with carbon steel main valve and stainless steel trim

Certifications: ASME B&PVC Section I (Liquid) & Section VIII PED  
China Manufacturing License (CML)  
API 520, 521 and 526  
(Same centerline-to-face as spring loaded valves)  
NACE  
Others available upon request

The type 2900 pilot-operated safety relief valve combines the advantages of two products into one—the 1900 safety relief valve and the 3900 POSRV. The 2900 POSRV can replace spring-loaded relief valves without requiring modified outlet piping.



**Type 3900  
Pilot-Operated Safety Relief Valve**

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Fourteen sizes – D through (Full bores)

Set Pressure Range: Full Bores 15 to 6250 psig

Temperature Range: -40°F to 505°F  
Above 505°F with heat exchanger

Materials: Stainless steel pilot with carbon steel main valve and stainless steel trim

Certifications: ASME B&PVC Section VIII PED  
China Manufacturing License (CML)  
API 520, 521 and 526  
NACE  
Others available upon request

The type 3900 pilot-operated safety relief valve is a non-flowing design available in a modulating or pop-action pilot. The 3900 POSRV is suitable for the overpressure protection of many pressurized systems and vessels in the chemical, petrochemical, paper mill, oil and gas production and transmission industries.

# Consolidated Pilot-Operated Safety Relief Valves



**Type 4900  
Pilot-Operated Safety Relief Valve**

Inlet Sizes: 1" to 8"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 10"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Fourteen sizes – D through T

Set Pressure Range: 15 psig to 7200 psig

Temperature Range: -40°F to 505°F

Materials: Stainless steel pilot with carbon steel main valve and stainless steel trim

Certifications: ASME B&PVC Section VIII  
PED

China Manufacturing License (CML)  
API 520 and 521  
NACE  
Others available upon request

The type 4900 pilot-operated safety relief valve is a tubeless valve for oil and gas production and the offshore industry.



**Type 13900  
Pilot-Operated Safety Relief Valve**

Inlet Sizes: 16" to 20"

Inlet Ratings: ASME Class 300

Outlet Sizes: 18" through 24"

Outlet Ratings: ASME Class 150

Orifice Sizes: 114, 143.1, 176.7 and 201 sq. in.

Set Pressure Range: 50 psig to 300 psig

Temperature Range: 250°F to 550°F

Materials: Carbon Steel with Stainless Steel trim

Typical Application: Moisture Separator  
Reheater Systems

Certifications: ASME B&PVC Section VIII  
PED

China Manufacturing License (CML)  
API 520 and 521  
Others available upon request

The type 13900 pilot-operated safety relief valve is configured for high-capacity steam overpressure protection for moisture separator reheater systems.

# Consolidated Safety Valves

## In compliance with:

- ASME Section I Code for Boiler Applications

Since 1879, BHGE's Consolidated safety valves have been known for exceptional quality, performance and dependability. Because safety valves play an important role in keeping people and equipment safe, it is important that they be reliable in even the most demanding real-world applications. That's why BHGE works closely with our customers and regulatory organizations to configure, engineer, and manufacture safety valves that can help maintain safer operating conditions in a full range of environments.

## Key valve features

Our comprehensive portfolio of safety valves can help to run operations smoothly and cost effectively, particularly in steam service environments. Consolidated safety valves feature a unique pop-action release that can relieve steam over-pressurization if pressures upstream from the valve reach a set point.

What is more, BHGE's Consolidated safety valves comply with the ASME Section I code for boiler applications. They are built with many features that meet ASME requirements for steam-compressible fluids. For example, all models feature a lifting lever, required by the code for testing, instead of deadweight or weighted levers. Consolidated safety valves can also withstand set pressures up to 103 percent with a blowdown value of 4 percent, or 96 percent of set pressure drop before the valve re-seats.

## A full range of valves

With a range of styles, models, options and configurations, Consolidated safety valves work in many different boiler applications.

## Applications:

- Economizer (steam/water)
- Drum
- Superheater main steam line
- Power actuated relief valve
- Cold re-heater line
- Hot re-heater line
- Soot blowers in forced flow steam generators
- Organic fluid vapor generators
- High temp hot water generators
- Electric boilers
- Waste heat recovery boilers



# Consolidated Safety Valves



**Type 1700  
Maxiflow\* Safety Valve**

Inlet Sizes: 1.5" through 6"

Inlet Ratings: ASME Class 600 through 4500 Flanged and BWE

Outlet Sizes: 3" through 10" flanged

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Eleven sizes – 1 through RR

Set Pressure Range: 100 psig to 5800 psig

Temperature Range: Up to 1200°F

Materials: Alloy and carbon steel cast body with stainless steel trim

Certifications: ASME B&PVC Section I and VIII  
PED  
China Manufacturing License (CML)  
Others available upon request

The 1700 Maxiflow high-pressure safety valve is a premium product that is installed on a majority of power generating stations worldwide to help protect boilers from overpressure conditions.



**Type 2700  
Safety Valve**

Inlet Sizes: 1.5" through 6"

Inlet Ratings: ASME Class 600, 900 and 1500

Outlet Sizes: 3" through 8"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: Seven sizes – 1 through Q

Set Pressure Range: 100 psig to 1600 psig

Temperature Range: Up to 1050°F

Materials: Alloy and carbon steel cast body with stainless steel trim

Certifications: ASME B&PVC Section I and VIII  
PED  
China Manufacturing License (CML)  
Others available upon request

The type 2700 safety valve is configured to meet the specific requirements of the cogeneration and waste-to-energy markets.



**Type 1811  
Safety Valve**

Inlet Sizes: 1.25" through 6"

Inlet Ratings: ASME Class 300 and 600

Outlet Sizes: 1.5" through 8"

Outlet Ratings: ASME Class 150

Orifice Sizes: Ten sizes – F through Q

Set Pressure Range: 15 psig to 725 psig

Temperature Range: Up to 1000°F

Materials: Alloy and carbon steel cast body with stainless steel trim

Certifications: ASME B&PVC Section I and VIII  
PED  
China Manufacturing License (CML)  
Others available upon request

The type 1811 safety valve is a cost-effective, high-capacity, flanged-steel safety valve for steam service.



**Type 1511  
Safety Valve**

Inlet Sizes: 1.5" through 6"

Inlet Ratings: ASME Class 250

Outlet Sizes: 2.5" through 4"

Outlet Ratings: ASME Class 125

Orifice Sizes: Eight sizes – H through Q

Set Pressure Range: 15 psig to 250 psig

Temperature Range: -20°F to 420°F

Materials: Cast iron body with brass trim

Certifications: ASME B&PVC Section I and VIII  
PED  
China Manufacturing License (CML)  
Others available upon request

The type 1511 safety valve is configured for low pressure, steam heating boilers and steam generators as well as air service applications.

# Consolidated Safety Valves



Type 1541-3, 1543-3  
Safety Valve

Inlet Sizes:	0.5" through 2.5"
Outlet Sizes:	0.75" through 2.5"
Inlet Rating:	Threaded
Outlet Rating:	Threaded
Orifice Sizes:	D, E, F, G, H and J
Set Pressure Range:	15 to 350 psig
Temperature Range:	-20°F to 420°F
Materials:	Cast iron bonnet with brass base and trim
Certifications:	ASME B&PVC Section I and VIII

The type 1541 and 1543 safety valves are configured for steam and other compressible fluids. Compression media is limited to non-toxic, non-flammable, non-corrosive service. These valves are most commonly used in pharmaceutical and process plants.



Type 1900/P  
Safety Valve

Inlet Sizes:	1" through 8"
Inlet Ratings:	ASME Class 150 through 2500
Outlet Sizes:	2" through 10"
Outlet Ratings:	ASME Class 150 and 300
Orifice Sizes:	D through T
Set Pressure Range:	5 to 6000 psig
Temperature Range:	-20°F to 850°F
Certifications:	ASME B&PVC, Section I (Steam Service) API 520 and 527 Others available upon request

The type 1900/P safety valve is designed to meet Economizer and Organic fluid applications.

# Consolidated Electromatic\* Ball Valve System



**Type 2900-40  
Pilot-Operated Safety Valve**

Inlet Sizes: 1" through 12"

Inlet Ratings: ASME Class 150 through 2500

Outlet Sizes: 2" through 16"

Outlet Ratings: ASME Class 150 and 300

Orifice Sizes: D through W


Set Pressure Range: 15 to 5800 psig

Temperature Range: -40°F to 505°F  
Above 505°F with heat exchanger

Materials: Carbon steel base and 316 stainless steel  
internal components; pilot valve 316 stainless steel

Certifications: ASME B&PVC Section I  
Certified for steam and water per ASME B&PVC  
Code Case 2446  
China Manufacturing License (CML)  
API 520 and 521  
Others available upon request

The type 2900-40 pilot-operated safety valve offers exceptional performance and meets demanding ASME Section I Economizer and Boiler Applications.

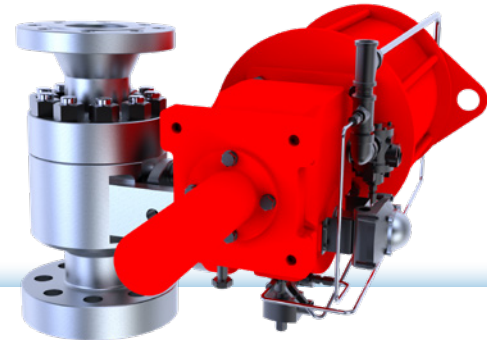

**3500-5 Series EBV  
Electromatic\* Ball Valve System**

Inlet Sizes: 1.5" / 2" / 2.5" / 3" / 4"

Inlet Ratings: ASME Class 1500, 2500, 3100 and 4500

Outlet Sizes: 3" / 4" / 6"

Outlet Ratings: ASME Class 300 and 900

Bore sizes: 0.875" / 1" / 1.75" / 2" / 2.5" / 3"  
(Reduces bore sizes available without ASME V stamp.)

Set Pressure Range: 50 psig to 6000 psig

Temperature Range: up to 1150°F

Materials: Alloy steel body with Colmonoy® coated  
inconel alloy ball and seat assembly

Certifications: ASME B & PVC Section I 'V' code stamp on once  
through boilers (full bore only) and non-code section I

The 3500-5 EBV Series offers automatic or manual overpressure protection for steam boiler systems, and can also be used to assist start-up and shut-down venting. The new enhanced design includes a superior coating and manufacturing process that enhances leak free performance, and improves reliability and increases valve life.

# DIRECT SALES OFFICE LOCATIONS

## AUSTRALIA

Brisbane:

Phone: +61-7-3001-4319

Fax: +61-7-3001-4399

Perth:

Phone: +61-8-6595-7018

Fax: +61-8-6595-7299

Melbourne:

Phone: +61-3-8807-6002

Fax: +61-3-8807-6577

## BRAZIL

Phone: +55-19-2104-6900

## CHINA

Phone: +86-10-5738-8888

Fax: +86-10-5918-9707

## FRANCE

Courbevoie

Phone: +33-1-4904-9000

Fax: +33-1-4904-9010

## INDIA

Mumbai

Phone: +91-22-8354790

Fax: +91-22-8354791

New Delhi

Phone: +91-11-2-6164175

Fax: +91-11-5-1659635

## ITALY

Phone: +39-081-7892-111

Fax: +39-081-7892-208

## JAPAN

Tokyo

Phone: +81-03-6871-9008

Fax: +81-03-6890-4620

## KOREA

Phone: +82-2-2274-0748

Fax: +82-2-2274-0794

## MALAYSIA

Phone: +60-3-2161-0322

Fax: +60-3-2163-6312

## MEXICO

Phone: +52-55-3640-5060

## RUSSIA

Veliky Novgorod

Phone: +7-8162-55-7898

Fax: +7-8162-55-7921

Moscow

Phone: +7 495-585-1276

Fax: +7 495-585-1279

## SAUDI ARABIA

Phone: +966-3-341-0278

Fax: +966-3-341-7624

## SINGAPORE

Phone: +65-6861-6100

Fax: +65-6861-7172

## SOUTH AFRICA

Phone: +27-11-452-1550

Fax: +27-11-452-6542

## SOUTH & CENTRAL

AMERICA AND THE CARIBBEAN

Phone: +55-12-2134-1201

Fax: +55-12-2134-1238

## SPAIN

Phone: +34-935-877-605

## UNITED ARAB EMIRATES

Phone: +971-4-8991-777

Fax: +971-4-8991-778

## UNITED KINGDOM

Bracknell

Phone: +44-1344-460-500

Fax: +44-1344-460-537

## UNITED STATES

Jacksonville, Florida

Phone: +1-904-570-3409

Deer Park, Texas

Phone: +1-281-884-1000

Fax: +1-281-884-1010

Houston, Texas

Phone: +1-281-671-1640

Fax: +1-281-671-1735

[valves.bhge.com](http://valves.bhge.com)

\*Denotes a trademark of Baker Hughes, a GE company LLC.

Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

© 2019 Baker Hughes, a GE company LLC - All rights reserved.

Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your BHGE representative for the most current information. The Baker Hughes logo is a trademark of Baker Hughes, a GE company. The GE Monogram is a trademark of the General Electric Company.

GEA18713F 09/2019

**BAKER  
HUGHES**  
a GE company

