


DELL EMC UNITY ALL FLASH STORAGE

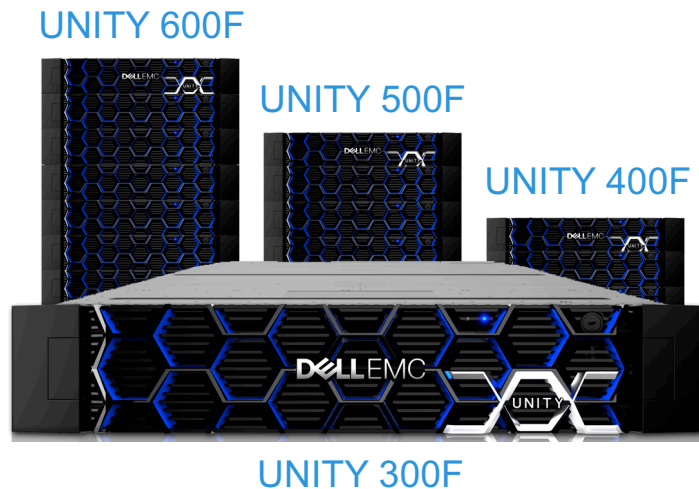

THE ULTIMATE IN STORAGE SIMPLICITY & VALUE

Dell EMC Unity™ is the only storage system that successfully meets all 4 requirements of today's IT professionals.

- **Unity is Simple:** Unity All Flash solutions sets new standards for storage systems with compelling simplicity, modern design, affordable prices, and flexible deployments – to meet the needs of resource-constrained IT professionals in large or small companies.
- **Unity is Modern:** Unity has a modern 2U architecture designed for all flash, designed to support the high density SSD's including 3D NAND TLC (triple level cell) drives. Unity includes automated data lifecycle management to lower costs, inline compression*, built-in encryption, local point-in-time copies and remote replication, data-in-place conversions, and deep ecosystem integration with VMware and Microsoft.
- **Unity is Affordable:** Our dual-active controller system was designed to optimize the performance, density, and cost of your storage to deliver all-flash configurations for much less than you thought possible.
- **Unity is Flexible:** Unity is available as a virtual storage appliance, purpose-built all flash configurations, or as converged systems – with one Unity operating environment that connects them all together.

Specifications

ARCHITECTURE

Based on the powerful new family of Intel E5-2600 processors, EMC's Unity All Flash storage systems implement an integrated architecture for block, file, and VMware VVols with concurrent support for native NAS, iSCSI, and Fibre Channel protocols. Each system leverages dual storage processors, full 12 Gb SAS back end connectivity and EMC's patented multi-core architected operating environment to deliver unparalleled performance & efficiency. Additional storage capacity is added via Disk Array Enclosures (DAEs).

* Block only



UNITY PHYSICAL SPECIFICATIONS

	UNITY 300F	UNITY 400F	UNITY 500F	UNITY 600F
Min/Max Drives	5/150	5/250	5/500	5/1000
Array Enclosure	A 2U Disk Processor Enclosure (DPE) with twenty five 2.5" drives			
Drive Enclosure (DAE - Disk Array Enclosure)	All models support 2U twenty five drive trays for 2.5" drives			
Standby Power System	Unity systems are powered by 2 power supplies (PS) per DPE/DAE. Each power supply can provide power to the entire module if the peer PS has been removed or is faulted. DPE power during a power failure is provided by a Battery Back Up (BBU) module. BBU is located within the SP enclosure and provides power to a single module (power zone)			
RAID Options	1/0, 5, 6			
CPU per Array	2 x Intel 6-core, 1.6GHz	2 x Intel 8-core, 2.4GHz	2 x Intel 10-core, 2.6GHz	2 x Intel 12-core, 2.5GHz
Memory per Array	48 GB	96 GB	128 GB	256 GB
Max IO Modules per Array*	4	4	4	4
Embedded SAS IO Ports per Array	4 x 4 lane 12Gb/s SAS ports for BE (back end) Connection	4 x 4 lane 12Gb/s SAS ports for BE Connection	4 x 4 lane 12Gb/s SAS ports for BE Connection	4 x 4 lane 12Gb/s SAS ports for BE Connection
Base 12 Gb/s SAS BE Buses per Array	2 x 4 Lane	2 x 4 Lane	2 x 4 Lane	2 x 4 Lane
Max FE (front end) Total Ports per Array (all types)	24	24	24	24
Max Initiators per Array	1,024	2,048	2,048	4,096
Max FC Ports per Array	20	20	20	20
Embedded 10GbaseT Ports per Array	4	4	4	4
Embedded CNA ports per Array	4 ports: 8/16 Gb FC**, 10Gb IP/iSCSI, or 1Gb RJ45	4 ports: 8/16 Gb FC**, 10Gb IP/iSCSI, or 1Gb RJ45	4 ports: 8/16 Gb FC**, 10Gb IP/iSCSI, or 1Gb RJ45	4 ports: 8/16 Gb FC**, 10Gb IP/iSCSI, or 1Gb RJ45
1 GbaseT/iSCSI Max Total Ports per Array	20	20	20	20
10 GbE/iSCSI Max Total Ports per Array	24	24	24	24
Max Raw Capacity***	2.34 PBs	3.91 PBs	7.81 PBs	9.77 PBs
Max SAN Hosts	512	1,024	1,024	2,048
Max Number of Pools	20	30	40	100
Max Number of LUNs Per Array	1,000	1,500	2,000	6,000
Max LUN Size	256 TB	256 TB	256 TB	256 TB

Idle Mode

2.0

2.0

2.0

2.0

2.0

2.0

2.0

*GB = Base2 GiB (GB = 1024x1024x1024)

UNITY OE PROTOCOLS AND SOFTWARE FACILITIES

Unity offers support for a wide variety of protocols and advanced features available via various software suites, plug-ins, drivers and packs.

PROTOCOLS AND FACILITIES SUPPORTED		
Access-based Enumeration (ABE) for SMB protocol	Address Resolution Protocol (ARP)	Block Protocols: iSCSI, Fibre Channel (FCP SCSI-3)
Controller based Data at Rest Encryption (D@RE)	DFS Distributed File System (Microsoft) as Leaf node or Standalone Root Server	Direct Host Attach for Fibre Channel and iSCSI
Dynamic Access Control (DAC) with claims support	Internet Control Message Protocol (ICMP)	Kerberos Authentication
LDAP (Lightweight Directory Access Protocol)	LDAP SSL	Link Aggregation for File (IEEE 802.3ad)
Lock Manager (NLM) v1, v2, v3, and v4	Management & Data Ports IPv4 and/or IPv6	NAS Servers Multi-protocol for UNIX and SMB clients (Microsoft, Apple, Samba)
Network Data Management Protocol (NDMP) v1-v4	Network Information Service (NIS) Client	Network Status Monitor (NSM) v1
Network Time Protocol (NTP) client	NFS v3/v4 Secure Support	NT LAN Manager (NTLM)
Portmapper v2	REST API: Open API that uses HTTP requests to provide management	Restriction of Hazardous Substances (RoHS) compliance
RSVD v1 for Microsoft Hyper-V	Simple Home Directory access for SMB protocol	SMI-S v1.6.0 compatible Unity File client
Simple Mail Transfer Protocol (SMTP)	Simple Network Management Protocol v3 (SNMP)	Virtual LAN (IEEE 802.1q)

* Controller based D@RE has been submitted for FIPS 140-2 validation

UNITY 300F, UNITY 400F, UNITY 500F, AND UNITY 600F

All Inclusive Base Software

Management Software:

- Unisphere: Element Manager
- Unisphere Central: Consolidated dashboard and alerting
- CloudIQ: Cloud-based storage analytics
- Thin Provisioning
- Compression (block only)
- Proactive Assist: Configure remote support, online chat, open a service request, etc.
- Quality of Service (for Block)
- EMC Storage Analytics Adapter for VMware® vRealize™
- File Tiering (Cloud Tiering Appliance)

Unified Protocols:

- File
- Block
- VVols

Local Protection:

- Controller Based Encryption (optional)
- Local Point-In-Time Copies
- AppSync Basic
- Anti-virus

Remote Protection:

- Native Asynchronous Block & File Replication
 - Native Synchronous Block Replication
 - EMC RecoverPoint Basic
 - EMC RecoverPoint for VMs
-

Interface Protocols

NFSv3, NFSv4, NFSv4.1; CIFS (SMB 1), SMB 2, SMB 3.0 and SMB 3.02; FTP and SFTP; FC, iSCSI included

Optional Software

- AppSync Advanced
 - Data Protection Suite: Backup, Archive and Collaboration Software
 - EMC RecoverPoint Advanced
 - PowerPath Migration Enabler
 - PowerPath Multipathing
 - VPLEX
-

Note: For more details on software licensing, please contact your sales representative

VIRTUALIZATION SOLUTIONS

Unity offers support for a wide variety of protocol and advanced features available via various software suites and packs including but not limited to:

- EMC Storage Integrator (ESI): For provisioning within the Microsoft management context (Systems Center) for Hyper-V and SharePoint
- OpenStack Cinder Driver: For provisioning and managing block volumes within an OpenStack environment
- OpenStack Manila Driver: For managing shared file systems within an OpenStack environment
- EMC Virtual Storage Integrator (VSI) for VMware vSphere™ : For provisioning, management, and cloning
- VMware Site Recovery Manager (SRM) Integration: Managing failover and failback making disaster recovery rapid and reliable
- Virtualization API Integration: VMWare: VAAI and VASA. Hyper-V: Offloaded Data Transfer (ODX) and Offload Copy for File

UNITY ELECTRICAL SPECIFICATIONS

All power figures shown represent a worst case product configuration with max normal values operating in an ambient temperature environment of 20°C to 25°C.

The chassis power numbers provided may increase when operating in a higher ambient temperature environment.

DISK PROCESSOR ENCLOSURES

	Unity 300F DPE 25 2.5" SFF drives and two IO modules	Unity 400F DPE 25 2.5" SFF drives and two IO modules	Unity 500F DPE 25 2.5" SFF drives and two IO modules	Unity 600F DPE 25 2.5" SFF drives and two IO modules
POWER				
AC Line Voltage	100 to 240 VAC ± 10%, single phase, 47 to 63 Hz			
AC Line Current (operating maximum)	9.04 A max at 100 VAC; 4.48 A max at 200VAC	9.09 A max at 100 VAC; 4.55 A max at 200VAC	9.55 A max at 100 VAC; 4.78 A max at 200VAC	9.89 A max at 100 VAC; 4.89 A max at 200VAC
Power Consumption (operating maximum)	907.5 VA (903.5 W) max at 100 VAC; 907.5 VA (895.5 W) max at 200 VAC	909.0 VA (905.0 W) max at 100 VAC; 909.0 VA (897.0 W) max at 200 VAC	955.0 VA (951.0 W) max at 100 VAC; 955.0 VA (943.0 W) max at 200 VAC	989.0 VA (985.0 W) max at 100 VAC; 989.0 VA (977.0 W) max at 200 VAC
Power Factor	0.95 min at full load 100/ 200 VAC			
Heat Dissipation (operating maximum)	3.25 x 10 ⁶ J/hr, (3,083 Btu/hr) max at 100 VAC; 3.22 x 10 ⁶ J/hr, (3,056 Btu/hr) max (100V*)	3.26 x 10 ⁶ J/hr, (3,088 Btu/hr) max at 100 VAC; 3.23 x 10 ⁶ J/hr, (3,061 Btu/hr) max (100V*)	3.42 x 10 ⁶ J/hr, (3,245 Btu/hr) max at 100 VAC; 3.40 x 10 ⁶ J/hr, (3,218 Btu/hr) max (100V*)	3.55 x 10 ⁶ J/hr, (3,361 Btu/hr) max at 100 VAC; 3.55 x 10 ⁶ J/hr, (3,334 Btu/hr) max (100V*)
In-rush Current	45 Apk "cold" per line cord, at any line voltage	45 Apk "cold" per line cord, at any line voltage	45 Apk "cold" per line cord, at any line voltage	45 Apk "cold" per line cord, at any line voltage
Startup Surge Current	120 Apk "hot" per line cord, at any line voltage			
AC Protection	15 A fuse on each power supply, single line			
AC Inlet Type	IEC320-C14 appliance coupler, per power zone			
Ride-through Time	10 ms min			
Current Sharing	± 5 percent of full load, between power supplies			
DIMENSIONS				
Weight kgs/lbs	empty 24.60/54.11	empty 24.60/54.11	empty 24.60/54.11	empty 24.60/54.11
Vertical size	2 NEMA units	2 NEMA units	2 NEMA units	2 NEMA units
Height cm/inches	8.88/3.5	8.88/3.5	8.88/3.5	8.88/3.5
Width cm/inches	44.76/17.62	44.76/17.62	44.76/17.62	44.76/17.62
Depth cm/inches	60.9/24.0	60.9/24.0	60.9/24.0	60.9/24.0

Note: Power consumption values for DPEs and DAEs are based on fully populated enclosures (power supplies, drives and I/O modules).

DISK ARRAY ENCLOSURE

25x2.5" Disk Array Enclosure

POWER

AC Line Voltage	100 to 240 VAC \pm 10%, single phase, 47 to 63 Hz
AC Line Current (operating maximum)	4.50 A max at 100 VAC, 2.40 A max at 200 VAC
Power Consumption (operating maximum)	453.0 VA/ 432.0 W max at 100 VAC 485.0 VA/ 427.0 W max at 200VAC
Power Factor	0.95 minimum at full load, 100V/200V
Heat Dissipation (operating maximum)	1.56×10^6 J/hr, (1,474 Btu/hr) max at 100 VAC 154.0×10^6 J/hr, (1,457 Btu/hr) max at 200 VAC
In-rush Current	30 A max for $\frac{1}{2}$ line cycle, per line cord at 240 VAC
Startup Surge Current	40 Amps peak max per line cord, at any line voltage
AC Protection	15 A fuse on each power supply, both Line and Neutral
AC Inlet Type	IEC320-C14 appliance coupler, per power zone
Ride-through Time	12 ms minimum
Current Sharing	\pm 5 percent of full load, between power supplies

WEIGHTS AND DIMENSIONS

Weight kg/lbs	Empty: 10.0/22.1 Full: 20.23/44.61
Vertical size	2 NEMA units
Height cm/inches	8.46/3.40
Width cm/inches	44.45/17.5
Depth cm/inches	33.02/13

CABINETS

STANDARD 40U CABINET

AC Line Voltage	200 to 240 VAC \pm 10%, single-phase, 47 to 63 Hz
Power Configuration	One, two, three or four power domains, each redundant
Power Inlet Count	Two, four, six, or eight (two per domain)
Plug Types	NEMA L6-30P or IEC309-332 P6 or IP57 (Australia)
Input Power Capacity	1 Domain: 4,800 VA @ 200 VAC, 5,760 VA @ 240 VAC 2 Domain: 9,600 VA @ 200 VAC, 11,520 VA @ 240 VAC 3 Domain: 14,400 VA @ 200 VAC, 17,280 VA @ 240 VAC 4 Domain: 19,200 VA @ 200 VAC, 20,040 VA @ 240 VAC
AC Protection	30 A site circuit breakers on each power branch
40U Cabinet Dimensions	Height - 75 in (190.8 cm); Width - 24.0 in (61.1 cm); Depth - 39.0 in (99.2 cm); Weight Empty - 380 lb (173 kg)

OPERATING ENVIRONMENT (MEETS ASHRAE EQUIPMENT CLASS A4)

Recommended Range Operation	The limits under which equipment will operate the most reliably while still achieving reasonably energy-efficient data center operation.	18°C to 27°C (64.4°F to 80.6°F) at 5.5°C (41.9°F) dew point to 60% relative humidity and 15°C (59°F) dew point
Continuous Allowable Range Operation	Data center economization techniques (e.g. free cooling) may be employed to improve overall data center efficiency. These techniques may cause equipment inlet conditions to fall outside the recommended range but still within the continuously allowable range. Equipment may be operated without any hourly limitations in this range.	10°C to 35°C (50°F to 95°F) at 20% to 80% relative humidity with 21°C (69.8°F) maximum dew point (maximum wet bulb temperature). De-rate maximum allowable dry bulb temperature at 1°C per 300m above 950m (1°F per 547 ft above 3117 ft).
Expanded Allowable Range Operation	During certain times of the day or year, equipment inlet conditions may fall outside the continuously allowable range but still within the expanded improbable range. Equipment operation is limited to $\leq 10\%$ of annual operating hours in this range.	5°C to 10°C and 35°C to 40°C (with no direct sunlight on the equipment) at -12°C dew point and 8% to 85% relative humidity with 24°C dew point (maximum wet bulb temperature). Outside the continuously allowable range (10°C to 35°C), the system can operate down to 5°C or up to 40°C for a maximum of 10% of its annual operating hours. For temperatures between 35°C and 40°C (95°F to 104°F), de-rate maximum allowable dry bulb temperature by 1°C per 175m above 950m (1°F per 319 ft above 3117 ft).
Exceptions to Expanded Allowable Range Operation	During certain times of the day or year, equipment inlet conditions may fall outside the continuously allowable range but still within the expanded exceptional range. Equipment operation is limited to $\leq 1\%$ of annual operating hours in this range.	5°C to 10°C and 35°C to 40°C (with no direct sunlight on the equipment) at -12°C dew point and 8% to 85% relative humidity with 24°C dew point (maximum wet bulb temperature). Outside the continuously allowable range (10°C to 35°C), the system can operate down to 5°C or up to 45°C for a maximum of 1% of its annual operating hours. For temperatures between 35°C and 45°C (95°F to 104°F), de-rate maximum allowable dry bulb temperature by 1°C per 125m above 950m (1°F per 228 ft above 3117 ft).
Temperature Gradient		20°C / hour (36°F / hour)
Altitude	Max Operating	3050m (10,000ft)

STATEMENT OF COMPLIANCE

This Information Technology Equipment is compliant with the electromagnetic compatibility (EMC) and product safety regulations/standards required by the countries in which the product is sold. EMC compliance is based on FCC part 15, CISPR22/CISPR24 and EN55022/EN55024 standards, including applicable international variations. EMC compliant Class A products are marketed for use in business, industrial, and commercial environments. Product Safety compliance is based on IEC 60950-1 and EN60950-1 standards, including applicable national deviations.

This Information Technology Equipment is in compliance with EU RoHS Directive 2011/65/EU.

The individual devices used in this product are approved under a unique regulatory model identifier that is affixed to each individual device rating label, which may differ from any marketing or product family name in this data sheet.

For additional information see <https://support.emc.com>, under the Safety & EMI Compliance Information tab.

CONFIGURE AND QUOTE EMC UNITY.



Compare features, see options and get pricing: store.emc.com/unity

CONTACT US

To learn more, contact your local representative or authorized reseller.



EMC2, EMC, the EMC logo, Unity, Unisphere, AppSync, Data Protection Suite, EMC RecoverPoint, PowerPath, and VPLEX are registered trademarks or trademarks of EMC Corporation in the United States and other countries. VMware, vCenter, vSphere, and the VMware logo are registered trademarks or trademarks of VMware, Inc., in the United States and other jurisdictions. © Copyright 2016 EMC Corporation. All rights reserved. Published in the USA. 7/16 Specification Sheet H14957.4

EMC believes the information in this document is accurate as of its publication date. The information is subject to change without notice.

EMC is now part of the Dell group of companies.