



MIPI CSI-2 CAMERAS

Direct Register Access Controls Reference

V2.3.1

FW 00.07.00.81db3896

Direct Register Access Controls Reference at a glance

This document describes controls for the **Direct Register Access** of Alvium CSI-2 cameras.



CSI-2 access mode	Description
Direct Register Access 	Controls the camera by reading from and writing to registers, using an embedded board or an FPGA.
Video4Linux Access 	Controls the camera by V4L2 controls, using the Allied Vision MIPI CSI-2 V4L2 and GenICam Hybrid Driver directly. Existing PC-based machine vision applications can be scaled down to V4L2 on lean embedded systems, reducing power consumption and costs.

Table 1: CSI-2 Access modes overview

Parameter	Value
Firmware release version	00.07.00.81db3896
CCI Register Layout Version	1.0

Table 2: Supported firmware version and CCI Register Layout Version

What else do you need?

The following downloads provide additional information.

Document	Link
Alvium CSI-2 Cameras User Guide	www.alliedvision.com/en/support/technical-documentation/
Various other documents and downloads	alvium-csi-2-documentation

Table 3: Additional downloads overview

Contact us

Website, email

General

www.alliedvision.com/en/contact
info@alliedvision.com

Distribution partners

www.alliedvision.com/en/avt-locations/avt-distributors

Support

www.alliedvision.com/en/support
www.alliedvision.com/en/about-us/contact-us/technical-support-repair-/-rma

Offices

Europe, Middle East, and Africa (Headquarters)

Allied Vision Technologies GmbH
Taschenweg 2a
07646 Stadtroda, Germany
T// +49 36428 677-0 (Reception)
T// +49 36428 677-230 (Sales)
F// +49 36428 677-28

Asia-Pacific

China

Allied Vision Technologies
(Shanghai) Co., Ltd.
2-2109 Hongwell Int. Plaza
1602# ZhongShanXi Road
Shanghai 200235, China
T// +86 21 64861133

Singapore

Allied Vision Technologies Asia Pte. Ltd
82 Playfair Rd, #07-02 D'Lithium
Singapore 368001
T// +65 6634 9027

North, Central, and South America

Canada

Allied Vision Technologies Canada Inc.
300 – 4621 Canada Way
Burnaby, BC V5G 4X8, Canada
T// +1 604 875 8855

USA

Allied Vision Technologies, Inc.
102 Pickering Way- Suite 502
Exton, PA 19341, USA
Toll-free// +1-877-USA-1394
T// +1 978 225 2030

Contents

Direct Register Access Controls Reference at a glance	2
What else do you need?	2
Contact us	3
Document history and conventions	8
Document history	9
Conventions used in this document	10
Typographical styles	10
Symbols and notes	10
Controls access	11
Controls order	11
Reading register descriptions	11
0x0000 V4L2 Register Map Version	11
Explanation	11
Copyright and trademarks	12
Controls behavior and registers	13
Registers and address spaces	14
Pixel format naming	14
Improper operation	15
CCI registers	16
0x0000 CCI Register Layout Version	16
0x0008 Device Capabilities	16
0x0014 V4L2 Register Map Address	17
0x0018 Device GUID	17
0x0058 Manufacturer Name	17
0x0098 Model Name	17
0x00D8 Family Name	17
0x0118 Device Version	18
0x0158 Manufacturer Info	18
0x0198 Serial Number	18
0x01D8 User Defined Name	18
0x0218 Checksum	19
0x021E Soft Reset	19
0x0220 Camera I2C Address	19
CSI-2 streaming setup	20
Numeric registers	21
Target values for auto controls	21
Controls processing order	22
Image data flow	22
Control interdependencies	23
V4L2 registers	24

Register offset	25
General controls	26
0x0000 V4L2 Register Map Version	26
0x0008 Register Inquiry	27
0x0010 Device Firmware Version	28
0x0018 Write Done Handshake	29
Streaming Control	30
0x0040 Supported CSI-2 Lane Counts	30
0x0044 CSI-2 Lane Count	30
0x0048 CSI-2 Clock Min Value	31
0x004C CSI-2 Clock Max Value	31
0x0050 CSI-2 Clock	31
0x0054 Buffer Size	32
0x0078 CSI-2 Phy Reset	32
Acquisition Control	33
0x0080 Acquisition Start	33
0x0084 Acquisition Stop	33
0x008C Acquisition Status	34
0x0090 Acquisition Frame Rate	34
0x0098 Acquisition Frame Rate Min Value	34
0x00A0 Acquisition Frame Rate Max Value	35
0x00B0 Acquisition Frame Rate Enable	35
0x00B4 Frame Start Trigger Mode	36
0x00B8 Frame Start Trigger Source	36
0x00BC Frame Start Trigger Activation	37
0x00C0 Frame Start Trigger Software	37
0x00C8 Exposure Active Output Line Mode	38
0x00CC Exposure Active Output Line	38
0x00D0 Line Configuration	39
0x00D4 Line Status	40
Image Format Control	41
0x0100 Width	41
0x0104 Width Min Value	41
0x0108 Width Max Value	41
0x010C Width Increment	42
0x0110 Height	42
0x0114 Height Min Value	42
0x0118 Height Max Value	43
0x011C Height Increment	43
0x0120 Offset X	43
0x0124 Offset X Min Value	44
0x0128 Offset X Max Value	44
0x012C Offset X Increment	44
0x0130 Offset Y	45
0x0134 Offset Y Min Value	45

0x0138 Offset Y Max Value	45
0x013C Offset Y Increment	46
0x0140 MIPI Data Format	46
0x0148 Available MIPI Data Formats	47
0x0150 Bayer Pattern Inquiry	48
0x0154 Bayer Pattern	48
0x0158 Reverse X	49
0x015C Reverse Y	49
0x0160 Sensor Width	50
0x0164 Sensor Height	50
0x0168 Width Max	50
0x016C Height Max	51
Brightness Control	52
0x0180 Exposure Time	52
0x0188 Exposure Time Min Value	52
0x0190 Exposure Time Max Value	52
0x0198 Exposure Time Increment	53
0x01A0 Exposure Auto	53
0x0330 Exposure Auto Min Value	54
0x0338 Exposure Auto Max Value	54
0x01A4 Intensity Auto Precedence	55
0x01A8 Intensity Auto Target Value	55
0x01AC Intensity Auto Target Min Value	56
0x01B0 Intensity Auto Target Max Value	56
0x01B4 Intensity Auto Target Increment	56
0x01B8 Black Level	57
0x01BC Black Level Min Value	57
0x01C0 Black Level Max Value	57
0x01C4 Black Level Increment	57
0x01C8 Gain	58
0x01D0 Gain Min Value	58
0x01D8 Gain Max Value	58
0x01E0 Gain Increment	59
0x01E8 Gain Auto	59
0x0340 Gain Auto Min Value	60
0x0348 Gain Auto Max Value	60
0x01F0 Gamma	61
0x01F8 Gamma Min Value	61
0x0200 Gamma Max Value	61
0x0208 Gamma Increment	62
Color Management	63
0x0240 Saturation	63
0x0244 Saturation Min Value	63
0x0248 Saturation Max Value	63
0x024C Saturation Increment	64
0x0250 Hue	64
0x0254 Hue Min Value	64

0x0258 Hue Max Value	65
0x025C Hue Increment	65
0x0280 Red Balance Ratio	65
0x0288 Red Balance Ratio Min Value	66
0x0290 Red Balance Ratio Max Value	66
0x0298 Red Balance Ratio Increment	66
0x02C0 Blue Balance Ratio	67
0x02C8 Blue Balance Ratio Min Value	67
0x02D0 Blue Balance Ratio Max Value	67
0x02D8 Blue Balance Ratio Increment	68
0x02E0 White Balance Auto	68
Other	69
0x0310 Device Temperature	69
Index	70

Document history and conventions

This chapter includes:

Document history	9
Conventions used in this document	10
Copyright and trademarks	12

Document history

Version	Date	Remarks
V2.3.1	2021-Dec-17	<ul style="list-style-type: none"> Removed information on Digital Binning because it is not supported by the current camera driver. Applied minor editorial changes.
V2.3.0	2021-Dec-07	<p>Firmware version: V00.07.00.81db3896</p> <ul style="list-style-type: none"> Added Controls processing order on page 22. Added register descriptions for Camera I2C Address controls in CCI registers on page 16. Added register descriptions for Digital Binning controls in V4L2 registers on page 24. Applied minor editorial changes.
V2.2.0	2021-Apr-22	<p>Firmware version: V00.04.00.34658</p> <ul style="list-style-type: none"> Added RAW pixel formats for 10-bit and 12-bit Mono in <ul style="list-style-type: none"> - MIPI Data Format - Available MIPI Data Formats. Correct the address for YUV422 8-bit (UYVY) in MIPI Data Format Added register descriptions: <ul style="list-style-type: none"> - Exposure Active Output controls - Line Configuration - Line Status Applied minor editorial changes.
V2.1.0	2020-Dec-08	<p>Firmware version: V00.03.00.31919</p> <ul style="list-style-type: none"> Added register descriptions: <ul style="list-style-type: none"> - Intensity Auto controls - Controls for value ranges of Exposure Auto Gain Auto - Controls for Acquisition Frame Rate Frame Start Trigger Changed pixel format naming to improve clarity. See Pixel format naming on page 14. Applied minor editorial changes.
V2.0.1	2020-Feb-14	<ul style="list-style-type: none"> Added descriptions for target values used with Exposure Auto and Gain Auto. Reworked descriptions for register addresses.

Version	Date	Remarks
V2.0.0	2020-Jan-06	Firmware version: V00.01.02.28100 <ul style="list-style-type: none"> Added register descriptions to control Width, Offset X, Saturation, and Hue. Added notes for Improper operation on page 15. Applied editorial changes.
V1.0.0	2019-Jun-14	Firmware version: V00.01.00.26405 Release version

Conventions used in this document

To give this document an easily understood layout and to emphasize important information, the following typographical styles are used:

Typographical styles

Style	Function
Control	Control names
Emphasis	Programs, or highlighting important things
<i>Value</i>	Control values (modes)
Web links and references	Links to webpages and internal cross references

Table 4: Typographical styles

Symbols and notes



Practical tip

Additional information helps to understand or ease handling the camera.



Avoiding malfunctions

Precautions are described.



Additional information

Web address or reference to an external source with more information is shown.

Controls access

Acronym	Meaning
R/W	Read and write control
R/C	Read-only control that is constant
R	Read-only control that may change
W	Write-only control

Table 5: Controls access

Controls order

The document defines controls listed by register address, grouped in categories.

Reading register descriptions

The following example shows the description for V4L2 Register Map Version. Contents highlighted in **red** are explained below.

0x0000 | V4L2 Register Map Version

Displays the version of the V4L2 register map layout. The first version is **1.0**, where major version = **1**, minor version = **0**.

Offset	0x0000
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	16	Minor version of the V4L2 register map.
16	16	Major version of the V4L2 register map.

Explanation

Offset: For CCI registers, addresses are absolute; for V4L2 registers, addresses are relative. Because of this, **Offset** is used for register addresses. See [Registers and address spaces](#) on page 14.

LSB: The LSB is shifted by the number of bits represented by **x**.

In the example, the LSB is shifted by 16 bit to set the value to **Major Version**.

Copyright and trademarks

All text, pictures, and graphics are protected by copyright and other laws protecting intellectual property. All content is subject to change without notice.

All trademarks, logos, and brands cited in this document are property and/or copyright material of their respective owners. Use of these trademarks, logos, and brands does not imply endorsement.

Copyright © 2021 Allied Vision Technologies GmbH. All rights reserved.

Controls behavior and registers




This chapter informs about writing registers:

Registers and address spaces	14
Pixel format naming	14
Improper operation	15
CCI registers	16
CSI-2 streaming setup	20
Numeric registers.....	21
Target values for auto controls	21
Controls processing order.....	22

Registers and address spaces

Alvium CSI-2 cameras are operated via the Camera Control Interface (CCI) protocol, which requires a 16-bit address space. Within this space, different register maps can be found:

Register map	Function	Reference
CCI register map	Basic information	CCI registers on page 16
V4L2 register map	Video4Linux Access	V4L2 registers on page 24



The CCI address space used to operate Alvium CSI-2 cameras contains the CCI register map and the V4L2 register map. To get the absolute address of V4L2 registers, you must consider the offset of the CCI register map.

For the absolute address of V4L2 registers:

1. Read out [0x0014 | V4L2 Register Map Address](#) on page 17.
2. Add this value to the relative address of V4L2 registers in [V4L2 registers](#) on page 24.

Pixel format naming

In Direct Register Access, Alvium CSI-2 cameras output pixel formats according to the MIPI CSI-2 standard, **in Video4Linux Access**, according to V4L2 definitions. This document states extended MIPI CSI-2 definitions:

Naming pattern	Examples
MIPI CSI-2 (FOURCC)	RAW8 (GREY)
	RGB888 (RGB3)

Table 6: Pixel format naming convention in specifications

Different names for equivalent formats:

MIPI CSI-2	V4L2	V4L2 FOURCC	PFNC ¹
YUV422 8-bit	V4L2_PIX_FMT_UYVY	UYVY	YCbCr422_8_CbYCrY
RGB888	V4L2_PIX_FMT_RGB24	RGB3	RGB8
RAW8	V4L2_PIX_FMT_GREY	GREY	Mono8

¹GenICam Pixel Format Naming Convention

Table 7: Equivalent pixel formats in different standards

Improper operation

If registers are not used properly, the camera may behave unexpectedly, such as changing values or ignoring operations. To avoid malfunctions and camera crashes, we recommend you to:

- Use only documented register addresses
- Keep values in the specified range
- Write only to registers specified for writing access, not to reading registers
- Write to one register at a time
- Ensure that the camera has completed writing to registers.
Use [0x0018](#) | [Write Done Handshake](#) on page 29 to poll the camera.

As best practice, read written values back from the camera. Should errors occur:

- Verify register access options and adjust your script accordingly.
- Check for conflicts between settings.

CCI registers

0x0000 | CCI Register Layout Version

Displays the version of the CCI register layout. This register is used to check for the compatibility of the register layout with the previous version. The first version is **1.0**, where major version = **1**, minor version = **0**.

Offset	0x0000
Type	UInt32
Access	R
Size [Bytes]	4

Bit offset (LSB << x)	Width (bits)	Description
0	16	Minor version of the CCI register layout.
16	16	Major version of the CCI register layout.

0x0008 | Device Capabilities

Displays information about the camera's capabilities, such as access modes or string encoding.

Offset	0x0008
Type	UInt64
Access	R
Size [Bytes]	8

Bit offset (LSB << x)	Width (bits)	Description
0	1	User Defined Name is supported.
1	1	Video4Linux Access is supported.
2	2	Vimba Access is supported (selected models only).
4	4	String encoding of I2C string registers is supported. <ul style="list-style-type: none"> 0x0 -> ASCII
8	1	Family Name is supported.
9	55	Reserved.

0x0014 | V4L2 Register Map Address

Displays the address of V4L2 register map. Use as offset to get absolute addresses of V4L2 registers.

Offset	0x0014
Type	UInt16
Access	R
Size [Bytes]	2

0x0018 | Device GUID

Displays the GUID (Globally Unique Identifier) of the camera.

Offset	0x0018
Type	String
Access	R
Size [Bytes]	64

0x0058 | Manufacturer Name

Displays the camera manufacturer name.

Offset	0x0058
Type	String
Access	R
Size [Bytes]	64

0x0098 | Model Name

Displays the camera model name.

Offset	0x0098
Type	String
Access	R
Size [Bytes]	64

0x00D8 | Family Name

Displays the camera family name.

Offset	0x00D8
Type	String
Access	R
Size [Bytes]	64

0x0118 | Device Version

Displays the camera's device version.

Offset	0x0118
Type	String
Access	R
Size [Bytes]	64

0x0158 | Manufacturer Info

Displays the manufacturer information.

Offset	0x0158
Type	String
Access	R
Size [Bytes]	64

0x0198 | Serial Number

Displays the camera's serial number.

Offset	0x0198
Type	String
Access	R
Size [Bytes]	64

0x01D8 | User Defined Name

Controls the user defined name.

Offset	0x01D8
Type	String
Access	R/W
Size [Bytes]	64

0x0218 | Checksum

Displays the checksum which can be used for the register space 0x0000 to 0x0217.

Offset	0x0218
Type	UInt32
Access	R
Size [Bytes]	4

Use this control to check if data was transferred to the host correctly. Make sure that the host calculates the checksum with the following parameters:

Name	JAMCRC
Width	32 bit
Polynomial	0x4C11DB7
Input reflected	Yes
Output reflected	Yes
Output XOR value	0x00000000
Example output for ASCII input string "123456789" (9 bytes)	0x340BC6D9

0x021E | Soft Reset

Performs a soft reset of the camera (Set to 1 to reset the camera).

Offset	0x021E
Type	UInt8
Access	W
Size [Bytes]	1

0x0220 | Camera I2C Address

Controls the I2C address that becomes valid after the next camera reboot.

Offset	0x0220
Type	UInt8
Access	R/W
Size [Bytes]	1

Value	Description
0x3C	Default value

CSI-2 streaming setup

The following steps must be performed to transfer a lane count and clock frequency for CSI-2 between host and device:

1. The host determines which lane counts are supported by the host (by such as hardware and driver).
2. The host reads the **Supported CSI-2 Lane Count** register from the device. This register contains a bitfield to indicate which lane counts are supported by the device.
3. The host selects a lane count that is compatible to host and device. Potential modes:
 - Automatically select the highest lane count supported by host and device.
 - Manually select one of the lane counts that are supported by host and device.
4. The host determines the CSI clock frequency range supported by host (by hardware, driver etc.) for the selected lane count (from step 3).
5. The host writes the selected lane count (from step 3) into the **CSI-2 Lane Count** register.
6. The host reads **CSI-2 Clock Min Value** and **CSI-2 Clock Max Value** registers to get the range for the clock frequency supported by the device for the selected lane count (from step 3).
7. The host selects a clock frequency that is compatible to host and device. Potential modes:
 - Automatically select the highest clock frequency supported by host and device.
 - Manually select a clock frequency that is supported by host and device.
8. The host writes selected clock frequency (from step 7) to the **CSI-2 Clock** register. The device may not be able to support the exact clock frequency selected. In this case it will use the highest clock frequency that is lower or equal to the clock frequency written to the register.

Example: The transport layer writes 650 MHz to the register of a device that only supports clock frequencies with a multiple of 100 MHz. In this case the device uses a clock frequency of 600 MHz (6×100 MHz).

9. The host reads the actual clock frequency from the **CSI-2 Clock** register.
10. The host checks if the actual clock frequency used in the device (from step 9) lies in the range of clock frequencies supported by the host (from step 4). If not, image acquisition cannot be started, and an error will be issued on the host.

Sometimes, this procedure does not transfer a lane count or it does not select a compatible clock frequency supported by the host. In this case, image acquisition cannot be started and an error is issued on the host.

The host must perform this negotiation during opening the device (for example, so that any frame rate limit calculation in the device can take the result of this negotiation into consideration).

Numeric registers

Most of the numeric controls listed in the next chapter consist of a list of four registers:

1. Value register: Used for reading or writing the current value of the control.
2. Minimum register: The minimal value that can be set to the value register.
3. Maximum register: The maximal value that can be set to the value register.
4. Increment register: The step or increment of values valid for the value register (beginning with minimal value).

For such a control, a valid value must hold the following three conditions true:

1. Value \geq minimum
2. Value \leq maximum
3. $((\text{Value} - \text{minimum}) \% \text{increment}) == 0$

If a value is written to such value register that is not valid, the camera will correct the value to the nearest valid value. The updated or corrected value can be read back by the user.

This control behavior is used for the following controls:

- Acquisition Frame Rate
- Black Level
- Blue Balance Ratio
- Exposure Time
- Gain
- Gamma
- Height
- Hue
- Intensity Auto Target
- Offset X
- Offset Y
- Red Balance Ratio
- Saturation
- Width

Target values for auto controls


Exposure Auto and **Gain Auto** adjust the mean pixel intensity to a target value of 50% between minimum and maximum. Use **Intensity Auto Target** controls to adjust the target value (with a tolerance of 5%). Use **Intensity Auto Precedence** to set the priority between **Exposure Auto** and **Gain Auto**.

Controls processing order

To develop your application effectively, note the order in which the controls are processed in Alviu cameras.

Image data flow

In the Alviu user guides, the image data flow describes the sequence of image processing steps inside the camera. The shown functionalities represent controls or control groups.

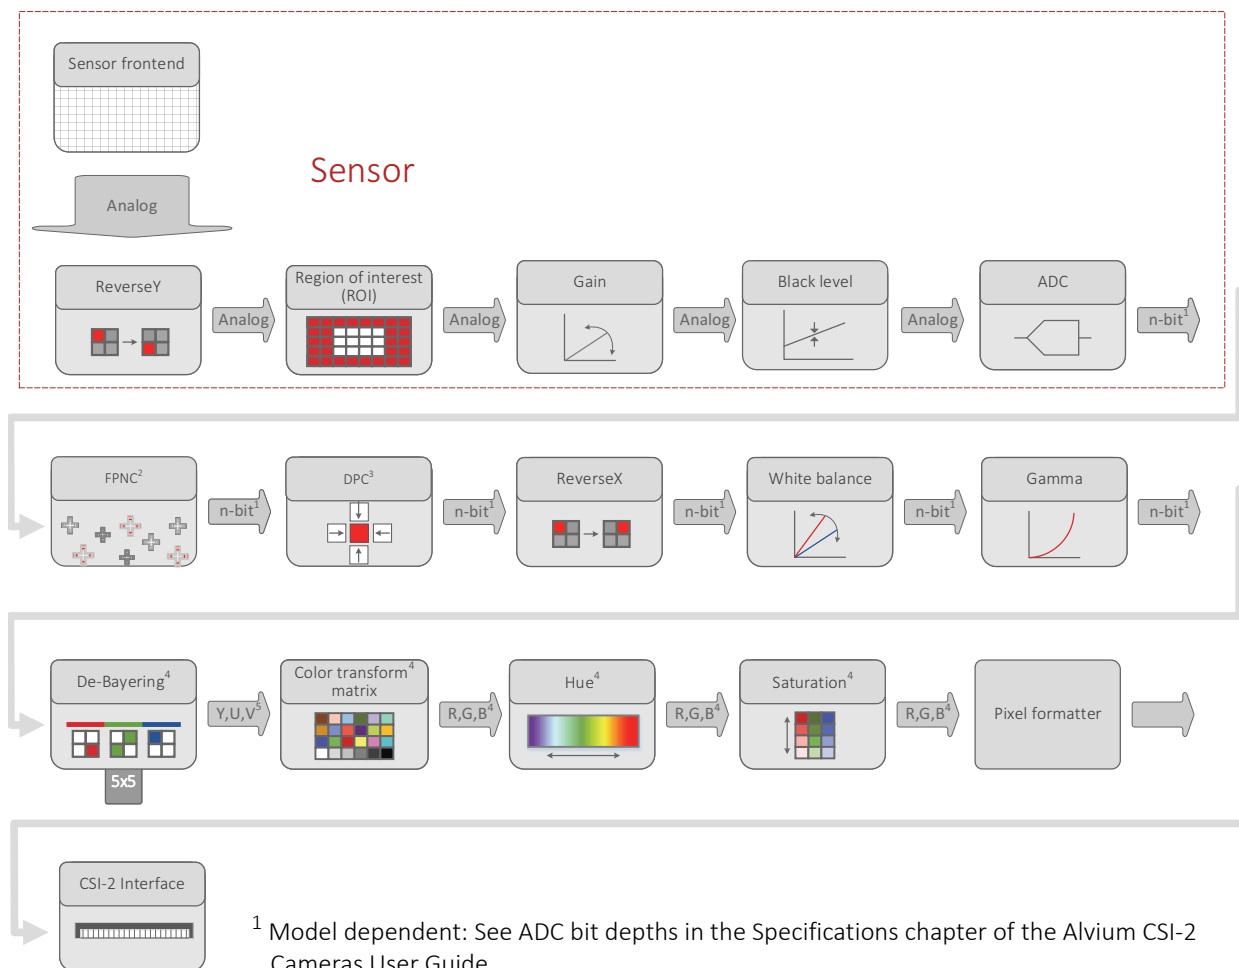

¹ Model dependent: See ADC bit depths in the Specifications chapter of the Alviu CSI-2 Cameras User Guide.

² Factory preset for FPNC = Fixed pattern noise correction
The current firmware version does not support FPNC for Alviu 1800 C-2050.

³ Factory preset for DPC = Defect pixel correction

⁴ Color models only

⁵ For monochrome models: Y only

Figure 1: Image data flow for Alviu CSI-2 cameras

Control interdependencies

The conversion between time and clock cycles affects control values. Features for pixel format, bandwidth, cropping (ROI), exposure time, and triggering are related to each other. Changing values for one control can change values for another control. For example, frame rates can be reduced when **Mipi Data Format** is changed subsequently. *Figure 2* shows the interdependencies.

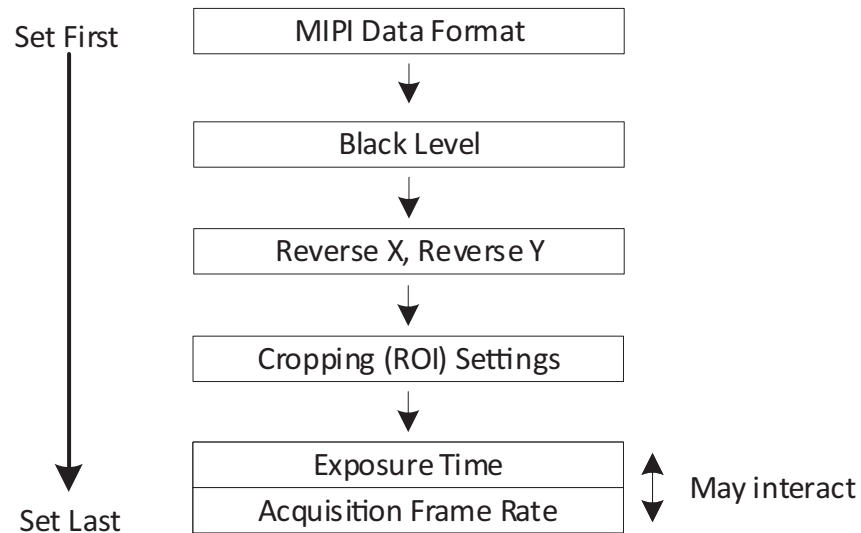


Figure 2: Interdependencies between controls

V4L2 registers



This chapter defines controls listed by register address and grouped in controls categories:

Register offset	25
General controls.....	26
Streaming Control	30
Acquisition Control.....	33
Image Format Control	41
Brightness Control.....	52
Color Management	63
Other	69

Register offset

The CCI address space used to operate Alvium CSI-2 cameras contains the CCI register map and the V4L2 register map. To get the absolute address of V4L2 registers, you must consider the offset of the CCI register map.

For the absolute address of V4L2 registers:

1. Read out [0x0014 | V4L2 Register Map Address](#) on page 17.
2. Add this value to the relative address of V4L2 registers.

General controls

0x0000 | V4L2 Register Map Version

Displays the version of the V4L2 register map layout. The first version is **1.0**, where major version = **1**, minor version = **0**.

Offset	0x0000
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	16	Minor version of the V4L2 register map.
16	16	Major version of the V4L2 register map.

0x0008 | Register Inquiry

Displays if non-mandatory registers are available.

Note: Availability can change during runtime.

Offset	0x0008
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	Reverse X is available.
1	1	Reverse Y is available.
2	1	Intensity Auto controls are available.
3	1	Black Level controls are available.
4	1	Gain controls are available.
5	1	Gamma controls are available.
6	1	Reserved
7	1	Saturation controls are available.
8	1	Hue controls are available.
9	1	White Balance is available.
10	1	Reserved
11	1	Exposure Auto controls are available.
12	1	Gain Auto controls are available.
13	1	White Balance Auto is available.
14	1	Device Temperature is available.
15	1	Reserved
16	1	Acquisition Frame Rate controls are available.
17	1	Frame Start Trigger controls are available.
18	1	Exposure Active Output Line is available.
19 to 63	45	Reserved Set to 0.

0x0010 | Device Firmware Version

Displays the current firmware version installed on the camera.

Offset	0x0010
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	8	Special firmware version.
8	8	Major firmware version.
16	16	Minor firmware version.
32	32	Patch firmware version.

0x0018 | Write Done Handshake

Read access: The camera confirms that the previous write access to registers has been processed.

Write access: Enables the control and resets the success confirmation.

Offset	0x0018
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	1: The camera confirms the previous write access has been processed. 0: Written by the host to reset this flag.
1	6	Reserved, set to 0 .
7	1	1: The camera outputs if it supports Write Done Handshake.

Streaming Control

0x0040 | Supported CSI-2 Lane Counts

Displays the CSI-2 lane counts supported by the camera.

Offset	0x0040
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	1-lane operation is supported.
1	1	2-lane operation is supported.
2	1	3-lane operation is supported.
3	1	4-lane operation is supported.
4	4	Reserved Set to 0.

0x0044 | CSI-2 Lane Count

Controls the current CSI-2 lane count.

Note: This control must be set before [0x0050 | CSI-2 Clock](#). See [CSI-2 streaming setup](#) on page 20 for details.

[0x0048 | CSI-2 Clock Min Value](#) supports a minimum value of 80 MBps per lane. Select suitable settings so that the resulting data rate is supported by the host.

Offset	0x0044
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

0x0048 | CSI-2 Clock Min Value

Displays the minimum CSI-2 clock frequency supported for the current CSI-2 lane count.

Note: The minimum supported value per lane is 80 MBps. Select suitable settings for this control and for [0x0044 | CSI-2 Lane Count](#), so that the resulting data rate is supported by the host.

Offset	0x0048
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Hertz
Availability	All camera models

0x004C | CSI-2 Clock Max Value

Displays the maximum CSI-2 clock frequency supported for the current CSI-2 lane count.

Offset	0x004C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Hertz
Availability	All camera models

0x0050 | CSI-2 Clock

Controls the current CSI-2 clock frequency.

Note: Set [0x0044 | CSI-2 Lane Count](#) before this control. See [CSI-2 streaming setup](#) on page 20 for details.

Offset	0x0050
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Unit	Hertz
Availability	All camera models

0x0054 | Buffer Size

Displays the size of the streaming buffer (payload).

Offset	0x0054
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Bytes
Availability	All camera models

0x0078 | CSI-2 Phy Reset

Controls the Phy (physical layer) reset state.

Offset	0x0078
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	CSI-2 Phy is operated normally.
1	CSI-2 Phy is held in reset state.

Acquisition Control

0x0080 | Acquisition Start

Starts the acquisition. Reading the register returns the command value until the acquisition is stopped or aborted. Otherwise 0 is returned.

Read access: The register returns 1 if acquisition is active and 0 if acquisition has been stopped.

Offset	0x0080
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
1	Starts the acquisition.

0x0084 | Acquisition Stop

Stops the acquisition **after the current frame has been acquired**.

Read access: The register returns 1 if acquisition is active and 0 if acquisition has been stopped.

Offset	0x0084
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
1	Stops the acquisition.

0x008C | Acquisition Status

Displays if the camera is acquiring images.

Offset	0x008C
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Value	Description
0	Acquisition has been stopped.
1	Acquisition has been started or is running.

0x0090 | Acquisition Frame Rate

Controls the frequency at which the frames are captured.

Offset	0x0090
Origin of control	Camera
Type	UInt64
Access	R/W
Size [Bytes]	8
Unit	Micro Hertz [μ Hz]
Availability	All camera models

0x0098 | Acquisition Frame Rate Min Value

Displays the minimum value for Acquisition Frame Rate.

Offset	0x0098
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Micro Hertz [μ Hz]
Availability	All camera models

0x00A0 | Acquisition Frame Rate Max Value

Displays the maximum value for **Acquisition Frame Rate**.

Offset	0x00A0
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Micro Hertz [μ Hz]
Availability	All camera models

0x00B0 | Acquisition Frame Rate Enable

Enables or disables **Acquisition Frame Rate**.

Note: **Acquisition Frame Rate** is used only if **Frame Start Trigger Mode** is set to *Off*.

Offset	0x00B0
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	Acquisition Frame Rate is disabled.
1	Acquisition Frame Rate is enabled.

0x00B4 | Frame Start Trigger Mode

Enables or disables the **Frame Start Trigger**.

Offset	0x00B4
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	The Frame Start Trigger is disabled.
1	The Frame Start Trigger is enabled.

0x00B8 | Frame Start Trigger Source

Selects the internal signal or physical input line to use as trigger source.

Notes:

- To use this control, the **Frame Start Trigger Mode** must be set to *On*.
- Line 2 and line 3 are used for I2C.

Offset	0x00B8
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	Line0 is selected.
1	Line1 is selected.
4	Software is selected.

0x00BC | Frame Start Trigger Activation

Selects how signals activate the **Frame Start Trigger**.

Offset	0x00BC
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	The trigger is enabled on the rising edge of the signal.
1	The trigger is enabled on the falling edge of the signal.
2	The trigger is enabled on the any edge of the signal.
3	The trigger is enabled by a high-level signal.
4	The trigger is enabled by a low-level signal.

0x00C0 | Frame Start Trigger Software

Generates a software trigger.

Note: **Trigger Source** must be set to *Software*.

Offset	0x00C0
Origin of control	Camera
Type	UInt8
Access	W
Size [Bytes]	1
Availability	All camera models

Value	Description
1	A trigger is generated.



Recommended workflow for using the exposure active output controls

1. Disable the signal by **Exposure Active Output Line Mode** for the selected output line.
2. Select the desired line for exposure active output signal by **Exposure Active Output Line**.
3. Set the selected line to output (option: enable *Invert* to invert exposure active output signal) by **Line Configuration**.
3. Enable the exposure active output signal by **Exposure Active Output Line Mode**.
4. Read the signal level from the oscilloscope (option: use **Line Status**).

0x00C8 | Exposure Active Output Line Mode

Enables or disables the exposure active output signal on the line selected by **Exposure Active Output Line**.

Offset	0x00C8
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	Off : The signal is disabled.
1	On : The signal is enabled.

0x00CC | Exposure Active Output Line

Selects the physical output line for the exposure active output signal.

Note: **Exposure Active Output Line Mode** must be set to *Off* before output lines can be changed.

Offset	0x00CC
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
0	Line0 is selected.
1	Line1 is selected.

0x00D0 | Line Configuration

Configures the line as input or output and inverted or not-inverted.

Note: To get **constant low** on a line, please set the line to output mode with invert bit set to 0. For **constant high**, please set the invert bit to 1.

Offset	0x00D0
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Availability	All camera models

Bit offset (lsb << X)	Width (bits)	Description
0	1	Line0 is set to input or output.
1	1	Line0 is set to inverted or not inverted.
2 to 7	6	Reserved
8	1	Line1 is set to input or output.
9	1	Line1 is set to inverted or not inverted.
10 to 31	22	Reserved

To switch between input or output, set bits as follows:

Value	Description
0	False: The selected line is set to input.
1	True: The selected line is set to output.

To switch between inverted and not inverted, set bits as follows:

Value	Description
0	False: The selected line is set to not inverted.
1	True: The selected line is set to inverted.

0x00D4 | Line Status

Returns the logical state (high or low) of the selected line.

Offset	0x00D4
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Bit offset (lsb << X)	Width (bits)	Description
0	1	The logical state (high or low) of Line0 is returned
1	1	The logical state (high or low) of Line1 is returned

The logical state of the selected line is displayed as follows:

Value	Description
0	False: The logical state is low.
1	True: The logical state is high.

Image Format Control

0x0100 | Width

Controls the current image width.

Offset	0x0100
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0104 | Width Min Value

Displays the minimum image width available.

Offset	0x0104
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0108 | Width Max Value

Displays the maximum image width available.

Offset	0x0108
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x010C | Width Increment

Displays the increment value available for **Width**.

Offset	0x010C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0110 | Height

Controls the current image height.

Offset	0x0110
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0114 | Height Min Value

Displays the minimum image height available.

Offset	0x0114
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0118 | Height Max Value

Displays the maximum image height available.

Note: This excludes region of interest, as known from GenICam SFNC features.

Offset	0x0118
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x011C | Height Increment

Displays the increment value available for **Height**.

Offset	0x011C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0120 | Offset X

Controls the horizontal offset from the origin to the region of interest (ROI).

Offset	0x0120
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0124 | Offset X Min Value

Displays the minimum value available for **Offset X**.

Offset	0x0124
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0128 | Offset X Max Value

Displays the maximum value available for **Offset X**.

Offset	0x0128
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x012C | Offset X Increment

Displays the increment value available for **Offset X**.

Offset	0x012C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0130 | Offset Y

Controls the vertical offset from the origin to the region of interest (ROI).

Offset	0x0130
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0134 | Offset Y Min Value

Displays the minimum value available for **Offset Y**.

Offset	0x0134
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0138 | Offset Y Max Value

Displays the maximum value available for **Offset Y**.

Offset	0x0138
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x013C | Offset Y Increment

Displays the increment value available for **Offset Y**.

Offset	0x013C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0140 | MIPI Data Format

Controls the (pixel) data format provided by the camera.

Offset	0x0140
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Availability	Sensor model dependent

Name	Value	Description
<i>YUV422 8-bit (UYVY)</i>	0x1E	Selects YUV422 8-bit (UYVY).
<i>RGB888 (RGB3)</i>	0x24	Selects RGB888 (RGB3).
<i>RAW8 (GREY)</i>	0x2A	Selects RAW8 (GREY) data.
<i>RAW10 (Y10)</i>	0x2B	Selects RAW10 (Y10) data.
<i>RAW12 (Y12)</i>	0x2C	Selects RAW12 (Y12) data.



Pixel format availability and naming

- The **availability** of pixel formats depends on camera models and the abilities of the connected system.
- For the **naming**, see [Pixel format naming](#) on page 14.

0x0148 | Available MIPI Data Formats

Displays a bitmap with the representation of the available MIPI (pixel) data formats.

Offset	0x0148
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	Sensor model dependent

Bit offset (LSB << x)	Width (bits)	Description
1 to 5	5	Reserved
6	1	YUV422 8-bit (UYVY) is available.
7	1	RGB888 (RGB3) is available.
8 to 13	6	Reserved
14	1	RAW8 (GREY) is available.
15	1	RAW10 (Y10) is available.
16	1	RAW12 (Y12) is available.
17 to 63	47	Reserved Set to 0.



Pixel format availability and naming

- The **availability** of pixel formats depends on camera models and the abilities of the connected system.
- For the **naming**, see [Pixel format naming](#) on page 14.

0x0150 | Bayer Pattern Inquiry

Displays the Bayer pattern availability for RAW formats, independent of the currently selected MIPI Data Format.

Offset	0x0150
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	Monochrome format is available.
1	1	Bayer GR is available.
2	1	Bayer RG is available.
3	1	Bayer GB is available.
4	1	Bayer BG is available.
5 to 7	3	Reserved. Set to 0.

0x0154 | Bayer Pattern

Displays the Bayer pattern for RAW formats. If the current MIPI Data Format is not a RAW format, this register value is ignored.

Offset	0x0154
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	Selects monochrome format.
1	1	Selects Bayer GR.
2	1	Selects Bayer RG.
3	1	Selects Bayer GB.
4	1	Selects Bayer BG.

0x0158 | Reverse X

Flips the image horizontally.

Note: Region of interest is applied after this control.

Offset	0x0158
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	Image remains unchanged.
1	1	The image is flipped horizontally.

0x015C | Reverse Y

Flips the image vertically.

Note: Cropping is applied after this control.

Offset	0x015C
Origin of control	Camera
Type	UInt8
Access	R
Size [Bytes]	1
Availability	All camera models

Bit offset (LSB << x)	Width (bits)	Description
0	1	Image remains unchanged.
1	1	The image is flipped vertically.

0x0160 | Sensor Width

Displays the number of horizontal pixels of the image sensor.

Offset	0x0160
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0164 | Sensor Height

Displays the number of vertical pixels of the image sensor.

Offset	0x0164
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x0168 | Width Max

Displays the number of horizontal pixels of the image sensor available before region of interest has been applied.

Offset	0x0168
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

0x016C | Height Max

Displays the number of vertical pixels of the image sensor available before region of interest has been applied.

Offset	0x016C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	Pixel
Availability	All camera models

Brightness Control

0x0180 | Exposure Time

Sets the exposure time when **Exposure Auto** is *Off*. This controls the duration during which the photosensitive cells are exposed to light.

Offset	0x0180
Origin of control	Camera
Type	UInt64
Access	R/W
Size [Bytes]	8
Unit	Nanoseconds [ns]
Availability	All camera models

0x0188 | Exposure Time Min Value

Displays the minimum value available for **Exposure Time**.

Offset	0x0188
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Nanoseconds [ns]
Availability	All camera models

0x0190 | Exposure Time Max Value

Displays the maximum value available for **Exposure Time**.

Offset	0x0190
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Nanoseconds [ns]
Availability	All camera models

0x0198 | Exposure Time Increment

Displays the increment value available for **Exposure Time**.

Offset	0x0198
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Nanoseconds [ns]
Availability	All camera models

0x01A0 | Exposure Auto

Sets the auto exposure mode. The output of the auto exposure function affects the whole image. **Exposure Time** is disabled.

Note: The pixel intensity is set to a target value of 50% of the mean. Use **Intensity Auto Target** controls to adjust the target value or use **Intensity Auto Precedence** to set the priority between **Exposure Auto** and **Gain Auto**.

Offset	0x01A0
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	Camera model dependent

Value	Description
0	<i>Off</i> : Exposure duration is user controlled using Exposure Time .
1	<i>Once</i> : Exposure duration is adapted once by the device. After it has converged, it returns to the <i>Off</i> state.
2	<i>Continuous</i> : Exposure duration is constantly adapted by the device according to scene illumination.

0x0330 | Exposure Auto Min Value

Controls the minimum value for auto exposure time. The range of this register is:

- Exposure Auto Min \geq Exposure Time Min
- Exposure Auto Min \leq Exposure Time Max
- Exposure Auto Min \leq Exposure Auto Max

Notes:

- This control is not supported by CSI-2 driver versions up to V1.0.4.
- This control must be displayed as available in Register Inquiry and Exposure Auto Max value must not be 0.

Offset	0x0330
Origin of control	Camera
Type	Int64
Access	R/W
Size [Bytes]	8
Unit	Nanoseconds [ns]
Availability	Camera model dependent

0x0338 | Exposure Auto Max Value

Controls the maximum value for auto exposure time. The range of this register is:

- Exposure Auto Max \geq Exposure Time Min
- Exposure Auto Max \leq Exposure Time Max
- Exposure Auto Max \geq Exposure Auto Min

Notes:

- This control is not supported by CSI-2 driver versions up to V1.0.4.
- This control must be displayed as available in Register Inquiry and Exposure Auto Max value must not be 0.

Offset	0x0338
Origin of control	Camera
Type	Int64
Access	R/W
Size [Bytes]	8
Unit	Nanoseconds [ns]
Availability	Camera model dependent

0x01A4 | Intensity Auto Precedence

Selects the priority between exposure and gain control loops for auto intensity.

Note: This parameter is used only if both **Exposure Auto** and **Gain Auto** are available and set to *Once* or *Continuous*.

Offset	0x01A4
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All camera models

Value	Description
<i>0</i>	<i>Minimize noise:</i> Loops for Exposure Time are applied before loops for Gain .
<i>1</i>	<i>Minimize blur:</i> Loops for Gain are applied before loops for Exposure Time .

0x01A8 | Intensity Auto Target Value

Controls the target value for pixel intensity with auto controls.

Note: This control has a tolerance of 5%.

Offset	0x01A8
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Unit	0.1%
Availability	All camera models

0x01AC | Intensity Auto Target Min Value

Displays the minimum target value available for pixel intensity with auto controls.

Offset	0x01AC
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	0.1%
Availability	All camera models

0x01B0 | Intensity Auto Target Max Value

Displays the maximum target value available for pixel intensity with auto controls.

Offset	0x01B0
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	0.1%
Availability	All camera models

0x01B4 | Intensity Auto Target Increment

Displays the increment for target values available for pixel intensity with auto controls.

Offset	0x01B4
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Unit	0.1%
Availability	All camera models

0x01B8 | Black Level

Controls the analog black level as DC offset applied to the video signal.

Offset	0x01B8
Origin of control	Camera
Type	Int32
Access	R/W
Size [Bytes]	4
Availability	Camera model dependent

0x01BC | Black Level Min Value

Displays the minimum value available for **Black Level**.

Offset	0x01BC
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Availability	Camera model dependent

0x01C0 | Black Level Max Value

Displays the maximum value available for **Black Level**.

Offset	0x01C0
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Availability	Camera model dependent

0x01C4 | Black Level Increment

Displays the increment value available for **Black Level**.

Offset	0x01C4
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Availability	Camera model dependent

0x01C8 | Gain

Controls the amplification factor applied to the video signal.

Offset	0x01C8
Origin of control	Camera
Type	UInt64
Access	R/W
Size [Bytes]	8
Unit	Millibel (1/100 Decibel)
Availability	Camera model dependent

0x01D0 | Gain Min Value

Displays the minimum value available for **Gain**.

Offset	0x01D0
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Millibel (1/100 Decibel)
Availability	Camera model dependent

0x01D8 | Gain Max Value

Displays the maximum value available for **Gain**.

Offset	0x01D8
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Millibel (1/100 Decibel)
Availability	Camera model dependent

0x01E0 | Gain Increment

Displays the increment value available for **Gain**.

Offset	0x01E0
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Unit	Millibel ($1/_{100}$ Decibel)
Availability	Camera model dependent

0x01E8 | Gain Auto

Controls the automatic gain control (AGC) mode. The output of the auto gain function affects the whole image.

Note: The pixel intensity is set to a target value of 50% of the mean. Use **Intensity Auto Target** controls to adjust the target value or use **Intensity Auto Precedence** to set the priority between **Exposure Auto** and **Gain Auto**.

Offset	0x01E8
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	Camera model dependent

Value	Description
<i>0</i>	<i>Off:</i> Gain is User-controlled using Gain .
<i>1</i>	<i>Continuous:</i> Gain is constantly adjusted by the camera.

0x0340 | Gain Auto Min Value

Controls the minimum value for auto gain. The range of this register is:

- Gain Auto Min \geq Gain Min
- Gain Auto Min \leq Gain Max
- Gain Auto Min \leq Gain Auto Max

Notes:

- This control is not supported by CSI-2 driver versions up to V1.0.4.
- This control must be displayed as available in Register Inquiry and Gain Auto Max value must not be 0.

Offset	0x0340
Origin of control	Camera
Type	Int64
Access	R/W
Size [Bytes]	8
Unit	Millibel (1/100 Decibel)
Availability	All camera models

0x0348 | Gain Auto Max Value

Controls the maximum value for auto gain. The range of this register is:

- Gain Auto Max \geq Gain Min
- Gain Auto Max \leq Gain Max
- Gain Auto Max \geq Gain Auto Min

Notes:

- This control is not supported by CSI-2 driver versions up to V1.0.4.
- This control must be displayed as available in Register Inquiry and Gain Auto Max value must not be 0.

Offset	0x0348
Origin of control	Camera
Type	Int64
Access	R/W
Size [Bytes]	8
Unit	Millibel (1/100 Decibel)
Availability	All camera models

0x01F0 | Gamma

Controls the correction of pixel intensity.

$$Y' = (Y / Y_{\max})^{(\text{Gamma} \times 0.01)} \times Y_{\max}$$

where

Y' is the new pixel intensity

Y is the original pixel intensity

Y_{max} is the maximum pixel value (for example, 255 for RAW8)

Gamma is the hundredfold correction factor.

Offset	0x01F0
Origin of control	Camera
Type	UInt64
Access	R/W
Size [Bytes]	8
Availability	Camera model dependent

0x01F8 | Gamma Min Value

Displays the minimum value available for **Gamma**.

Offset	0x01F8
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	Camera model dependent

0x0200 | Gamma Max Value

Displays the maximum value available for **Gamma**.

Offset	0x0200
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	Camera model dependent

0x0208 | Gamma Increment

Displays the increment value available for **Gamma**.

Offset	0x0208
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	Camera model dependent

Color Management

0x0240 | Saturation

Controls the amplification of the chrominance signal as $100 \times$ factor.

Offset	0x0240
Origin of control	Camera
Type	UInt32
Access	R/W
Size [Bytes]	4
Availability	All color models

0x0244 | Saturation Min Value

Displays the minimum value available for **Saturation**.

Offset	0x0244
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Availability	All color models

0x0248 | Saturation Max Value

Displays the maximum value available for **Saturation**.

Offset	0x0248
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Availability	All color models

0x024C | Saturation Increment

Displays the increment value available for **Saturation**.

Offset	0x024C
Origin of control	Camera
Type	UInt32
Access	R
Size [Bytes]	4
Availability	All color models

0x0250 | Hue

Controls the color tone by rotating the chrominance field clockwise with values > 0 and counter clockwise with values < 0. Values are 100 × factor.

Offset	0x0250
Origin of control	Camera
Type	Int32
Access	R/W
Size [Bytes]	4
Unit	$\frac{1}{100}$ degrees [°]
Availability	All color models

0x0254 | Hue Min Value

Displays the minimum value available for **Hue**.

Offset	0x0254
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Availability	All color models

0x0258 | Hue Max Value

Displays the maximum value available for Hue.

Offset	0x0258
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Availability	All color models

0x025C | Hue Increment

Displays the increment value available for Hue.

Offset	0x025C
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Availability	All color models

0x0280 | Red Balance Ratio

Controls the ratio of the red color component to the green color component (variable C). It is used for white balancing. The color balance is realized by the following formula:

$$C_w = \text{Red Balance Ratio} \times C$$

C_w : Intensity of selected color component after white balancing

Red Balance Ratio: White balance coefficient

C: Intensity of the color component before white balancing.

Offset	0x0280
Origin of control	Camera
Type	UInt64
Access	R/W
Size [Bytes]	8
Availability	All color models

0x0288 | Red Balance Ratio Min Value

Displays the minimum value available for **Red Balance Ratio**.

Offset	0x0288
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All color models

0x0290 | Red Balance Ratio Max Value

Displays the maximum value available for **Red Balance Ratio**.

Offset	0x0290
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All color models

0x0298 | Red Balance Ratio Increment

Displays the increment value available for **Red Balance Ratio**.

Offset	0x0298
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All color models

0x02C0 | Blue Balance Ratio

Controls the ratio of the blue color component to the green color component (variable C). It is used for white balancing. The color balance is realized by the following formula:

$$C_w = \text{Blue Balance Ratio} \times C$$

C_w : Intensity of selected color component after white balancing

Blue Balance Ratio: White balance coefficient

C: Intensity of the color component before white balancing.

Offset	0x02C0
Origin of control	Camera
Type	UInt64
Access	R/W
Size [Bytes]	8
Availability	All color models

0x02C8 | Blue Balance Ratio Min Value

Displays the minimum value available for **Blue Balance Ratio**.

Offset	0x02C8
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All color models

0x02D0 | Blue Balance Ratio Max Value

Displays the maximum value available for **Blue Balance Ratio**.

Offset	0x02D0
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All color models

0x02D8 | Blue Balance Ratio Increment

Displays the increment value available for **Blue Balance Ratio**.

Offset	0x02D8
Origin of control	Camera
Type	UInt64
Access	R
Size [Bytes]	8
Availability	All color models

0x02E0 | White Balance Auto

Controls the mode for automatic white balancing between the color channels. The white balancing ratios are adjusted automatically.

Offset	0x02E0
Origin of control	Camera
Type	UInt8
Access	R/W
Size [Bytes]	1
Availability	All color models

Value	Description
<i>0</i>	<i>Off</i> : The automatic adjustment of white balance is turned off.
<i>1</i>	<i>Once</i> : White balance is adjusted once by the device. Once it has converged, it returns to the <i>Off</i> state.
<i>2</i>	<i>Continuous</i> : White balance is constantly adjusted by the device.

Other

0x0310 | Device Temperature

Displays the temperature of the camera.

Offset	0x0310
Origin of control	Camera
Type	Int32
Access	R
Size [Bytes]	4
Unit	$\frac{1}{10} \text{ } ^\circ\text{C} = \text{d}^\circ\text{C}$
Availability	Camera model dependent

Index

A

Acquisition Control (controls category)	33
Acquisition Frame Rate	34
Acquisition Frame Rate Enable	35
Acquisition Frame Rate Max Value	35
Acquisition Frame Rate Min Value	34
Acquisition Start	33
Acquisition Status	34
Acquisition Stop	33
Allied Vision contact	3
Available MIPI Data Formats	47

B

Bayer Pattern	48
Bayer Pattern Inquiry	48
Black Level	57
Black Level Increment	57
Black Level Max Value	57
Black Level Min Value	57
Blue Balance Ratio	67
Blue Balance Ratio Increment	68
Blue Balance Ratio Max Value	67
Blue Balance Ratio Min Value	67
Brightness Control (controls category)	52
Buffer Size	32

C

Camera I2C Address	19
CCI Register Layout Version	16
Checksum	19
Color Management (controls category)	63
CSI-2 Clock	31
CSI-2 Clock Max Value	31
CSI-2 Clock Min Value	31
CSI-2 Lane Count	30
CSI-2 Phy Reset	32

D

Device Capabilities	16
Device Firmware Version	28
Device GUID	17
Device Temperature	69
Device Version	18

E

Exposure Active Output Line	38
Exposure Active Output Line Mode	38
Exposure Auto	53
Exposure Auto Max Value	54
Exposure Auto Min Value	54
Exposure Time	52
Exposure Time Increment	53
Exposure Time Max Value	52
Exposure Time Min Value	52

F

Family Name	17
Frame Start Trigger Activation	37
Frame Start Trigger Mode	36
Frame Start Trigger Software	37
Frame Start Trigger Source	36

G

Gain	58
Gain Auto	59
Gain Auto Max Value	60
Gain Auto Min Value	60
Gain Increment	59
Gain Max Value	58
Gain Min Value	58
Gamma	61
Gamma Increment	62
Gamma Max Value	61
Gamma Min Value	61
General (controls category)	26

H

Height	42
Height Increment	43
Height Max	51
Height Max Value	43
Height Min Value	42
Hue	64
Hue Increment	65
Hue Max Value	65
Hue Min Value	64

I

Image Format Control (controls category)	41
Intensity Auto Precedence	55
Intensity Auto Target Increment	56
Intensity Auto Target Max Value	56

Intensity Auto Target Min Value	56	Supported CSI-2 Lane Counts	30
Intensity Auto Target Value	55		
L			
Line Configuration	39		
Line Status	40		
M			
Manufacturer Info	18		
Manufacturer Name	17		
MIPI Data Format	46		
Model Name	17		
O			
Offset X	43		
Offset X Increment	44		
Offset X Max Value	44		
Offset X Min Value	44		
Offset Y	45		
Offset Y Increment	46		
Offset Y Max Value	45		
Offset Y Min Value	45		
Other (controls category)	69		
R			
R, access mode	11		
R/C, access mode	11		
R/W, access mode	11		
Red Balance Ratio	65		
Red Balance Ratio Increment	66		
Red Balance Ratio Max Value	66		
Red Balance Ratio Min Value	66		
Register Inquiry	27		
Reverse X	49		
Reverse Y	49		
S			
Saturation	63		
Saturation Increment	64		
Saturation Max Value	63		
Saturation Min Value	63		
Selectors	11		
Sensor Height	50		
Sensor Width	50		
Serial Number	18		
Soft Reset	19		
Streaming Control (controls category)	30		
support	3		
		U	
		User Defined Name	18
		V	
		V4L2 Register Map Address	17
		V4L2 Register Map Version	26
		W	
		W, access mode	11
		White Balance Auto	68
		Width	41
		Width Increment	42
		Width Max	50
		Width Max Value	41
		Width Min Value	41
		Write Done Handshake	29