

DRAWER SLIDES



10032 Precision Slides

Use for box drawer or pedestal file drawers up to 20" wide. Manufactured by an ISO 9001 registered plant of heat hardened steel for rigidity. Hold in feature prevents bounce back. Positive out stop. Positive drawer release clips, with non-handed quick disconnect. 32mm hole patterns – install with Euro screws or #8 truss head screws, 5/8" over travel.

Mounting: Side – suitable for frame and frameless cabinetry construction.
 Space requirements: 1-3/4" height, 1" +1/16 – 0 width
 Load Rating: 100 lbs. at 18"
 Finish: Zinc Plated (ZP)



<u>Stock No.</u>	<u>Inches</u>
10032B6ZP	6
10032B8ZP	8
10032B10ZP	10
10032B12ZP	12
10032B14ZP	14
10032B16ZP	16
10032B16BL	16
10032B18ZP	18
10032B20ZP	20
10032B22ZP	22
10032B24ZP	24
10032B28ZP	28

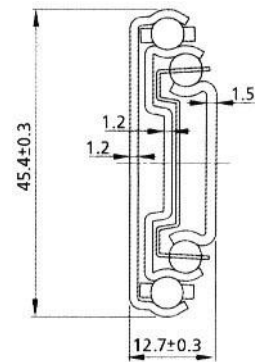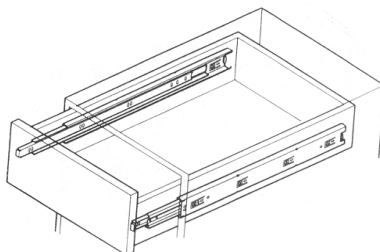

3544- 3/4 extension, 60-Pound Keyboard Slide



Applications: Medium-duty 3/4 extension keyboard slide with adjustable mounting brackets for drop-mounted keyboard applications.

Mounting: Cabinet members mount to underside of desk or table top using adjustable brackets. Drawer members are side mounted.

Height: Overall drop height is adjustable from 3-1/2" to 3-3/4". Cabinet members must be mounted parallel to each other and perpendicular to case front.

Clearance: Width of slide with brackets in outboard position is 1-5/8" per side. Width of side with brackets in inboard position is 5/8" per side.

Features: Mounting brackets can be reversed for inboard or outboard mounting. For ease of installation, track member quickly disconnects using positive lever release. Keyboard is held securely open position by a friction latch that allows easy closure. Anti-rebounding "stay-closed" design holds keyboard in closed position yet allows easy opening.

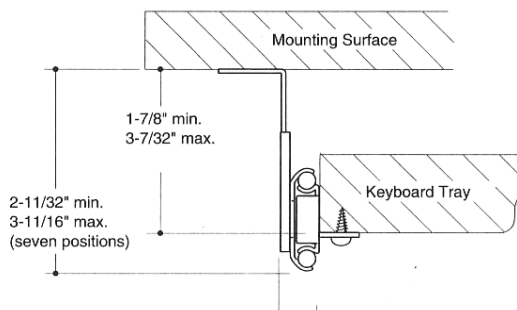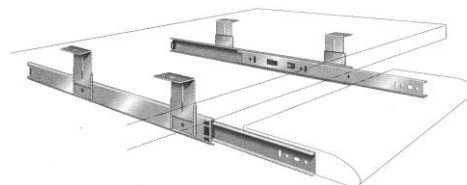

<u>Stock Number</u>	<u>Length in Inches</u>
3544P14	14
3544P16	16
3544P18	18
3544P20(d)	20


3554 - Light Duty Pencil Drawer Slide 3/4 extension, 60 lbs

Applications: Light-duty 3/4 extension pencil slide with adjustable in- or outboard brackets.


Mounting: Cabinet members mount to underside of desk or table top using adjustable brackets. Drawer members are side mounted.

Height: Overall drop height is adjustable from 74.5 to 95.9 mm. Cabinet members must be mounted parallel to each other and perpendicular to case front.

Features: Positive detent-out & detent-in. Comes in lengths of 12"-18", electro-zinc-plated

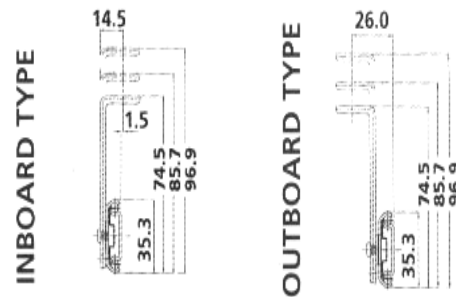

<u>Stock No.</u>	<u>Length in Inches</u>
3554P14	14
3554P16	16
3554P18	18
3554P20	20
3554P22	22

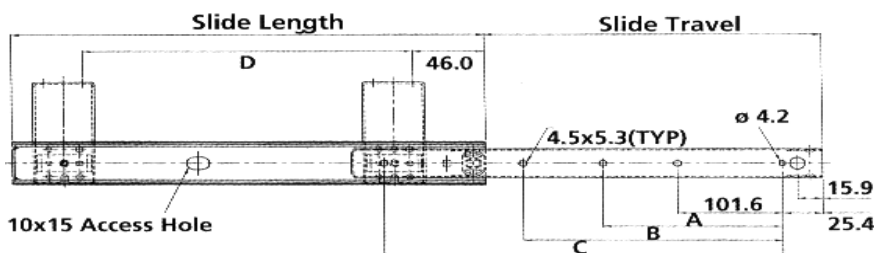

4932 – Full extension, 120 lb. rated with over travel when side mounted, 40 lbs when under mounted



Applications: An exceptional slide – suitable for the finest desk and credenza box and file drawers, lateral files to 30" wide and display fixtures.

Mounting: Case + drawer = side, height = 2", side space = 1/2", + 1/32, -0

Features: In detent, telescoping action, cushioned in & out stops, 32mm Euro screw holes, Steel bearings, drawer member trigger disconnect, non-handed.

10 pairs per box

<u>Bulk Stock No.</u>	<u>Length</u>	<u>Slide Travel</u>
4932B16	16"	17-1/2"
4932B22	22"	23-1/2"
4932P24	24"	25-1/2"

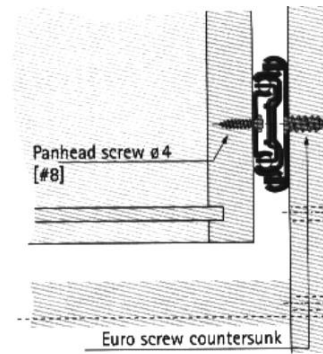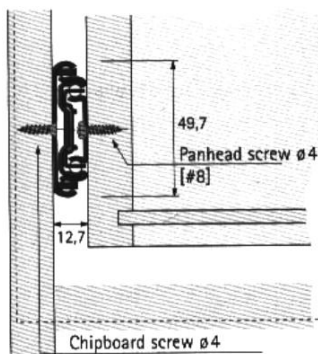

15032 – 1-1/2" Over travel Drawer Slide, 150# progressive action slides for pedestal and lateral file drawers. Suitable for drawers to 36" wide until overtravel engages – at which time width rating drops to 30".




Mounting: Side, for frame and frameless construction.

Height: 3-1/2"

Clearance: 1/2" + 1/32" minus 0" each side

Features: 32mm hole pattern for system mounting. Factory-attached drawer release clips with non-handed quick disconnect drawer members. Hold-in feature to prevent bounce back. Positive in/out stops, metal ball retainer holds 3 bearings per inch of race for smooth and quiet motion.

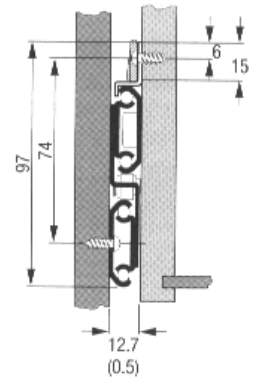

Stock Number	Length in Inches
15032B12	12
15032B14	14
15032B16	16
15032B18	18
15032B20	20
15032B22	22
15032B24	24
15032P28	28


8900 – Extra Heavy Duty Full Extension Precision Ball Bearing Slide with loading capacity up to 400# modest use. Suitable for drawers to 48" wide

Features: Smooth running and lateral stability with a side mount or under mount. 3/4", (19 mm) installation width. It is non-handed and features a clear chromate finish and steel ball bearings.


Members are complete non-detachable unit.

* Load rating based on 18", 457 mm slide length

**Under mount 180 lbs. max per pair, but approx. 45% of rated side mount rating

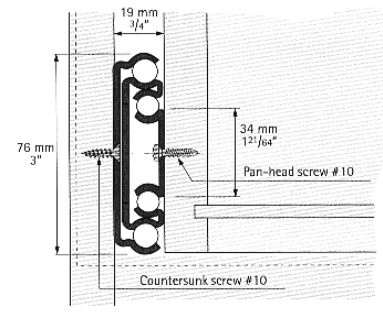

Stock No.	Length in Inches	Slide Travel in Inches
8900P18	18	18
8900P22	22	22
8900P28	28	28
8900P36	36	36
8900P60	60	60

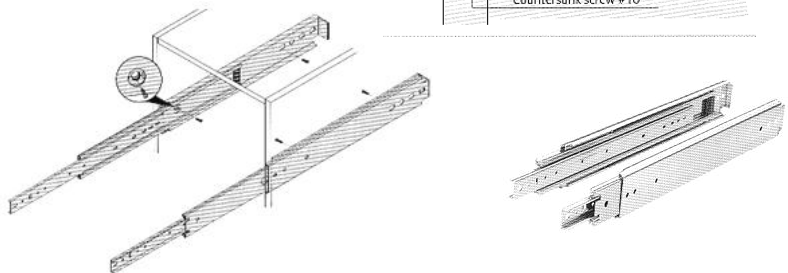

FLIPFRONT16 - Precision Slide with Flip-Front

Color: Black

Size: 16" long

Wt. Capacity: 66 lbs./ 30 kg

Material: steel, epoxy coated

Features: 3/4" extension, self-closing, bottom mounted, easy hook-in key hole attachment, adjustment slots for horizontal/vertical adjustment of front plate




TWOWAY22 - Two-Way Drawer slide System

Weight Capacity: 75 lbs.

Material: Zinc-plated cold rolled steel

Features:

- Bottom tabs for easy installation
- Two-way movement from both directions
- Firm click stop in center position
- Excellent smooth running
- Precision engineered ball bearing slide system

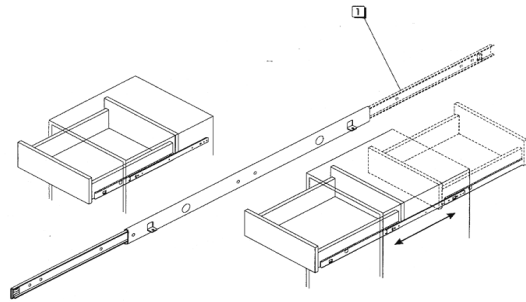


524P18 - 3/4 extension, 50 lb. rated, side mount

Applications: A fine quality slide suitable for computer keyboards or any other application in which an out detent is desired.


Mounting: Case - side, drawer - side or bottom, height - 1-1/2"

Features: Minimum deflection, out detent, cannot disconnect in open position, polymer bearings



European Style Slides 3/4 Extension, 75# rated

- Side mounted drawer member wraps fully under the drawer bottom with screw holes at the bottom and side
- Features 3-3/8" self-closing action
- Drawer member holes line up for 32 mm drilling
- Extension loss 3-1/2" on slide lengths to 14", 4" on slides 16" & over
- Minimum cabinet depth = cabinet member length + 3mm

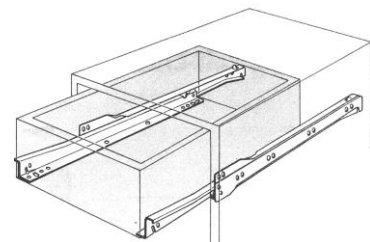

<u>White/3/4 Ext.</u>	<u>Length</u>
EURO14WHB	14"
EURO16WHB	16"
EURO18WHB	18"
EURO20WHB	20"
EURO22WHB	22"
EURO24WHB	24"

European Style Slides, Full Extension, 150# Rated

Features:

- Excellent lateral stability thru a special formed double captive profile
- High running qualities thru precision nylon rollers and smooth epoxy coating
- Backstop on the intermediate profile to prevent running back when drawer is being installed
- Cabinet profile suitable for frame and frameless mounting
- Patented intermediate profile with reinforced front section and holdout catch for ease of drawer insertion
- Patented backstop on the cabinet profile for soft closing
- Patented non-removable overrun clip to prevent drawer from falling out when slammed open
- Side mounting holes on drawer profiles

White/Full Ext. Stock No.	Length
EURO8FXWH	8"
EURO10FXWH	10
EURO12FXWH	12
EURO14FXWH	14
EURO16FXWH	16
EURO18FXWH	18
EURO22FXWH	22
EURO24FXWH	24

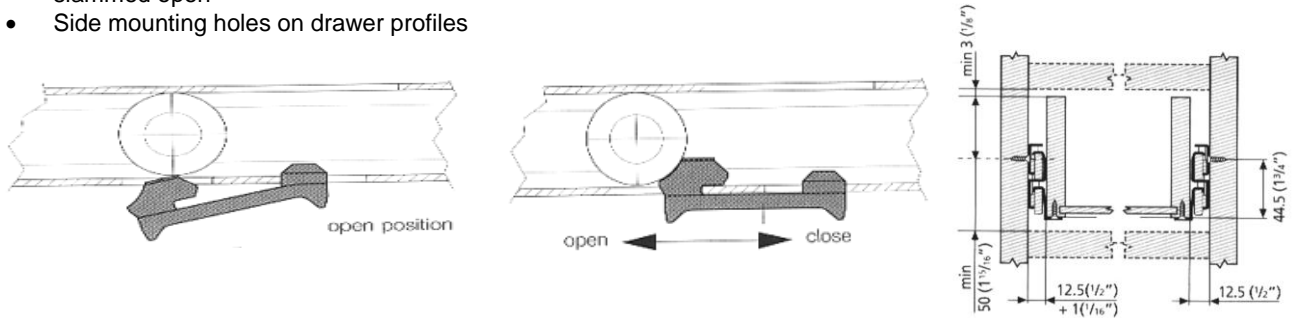


Illustration of function of impact absorbing stops and non-removable overrun safety clip. Moving down one 32mm hole spacing enables instant conversion to a regular-extension.

SELF CLOSING SLIDE WITH "BUTTERFLY" RELEASE

(Stock No: 10032B__SC)



Precision ball bearing slide

Lengths = 14" - 22"

Finish – electro-zinc plated

Packed in pairs


Slide Length	Slide Travel
13-25/32	14
15-3/4	16
17-23/32	18
19-11/16	20
21-21/32	22

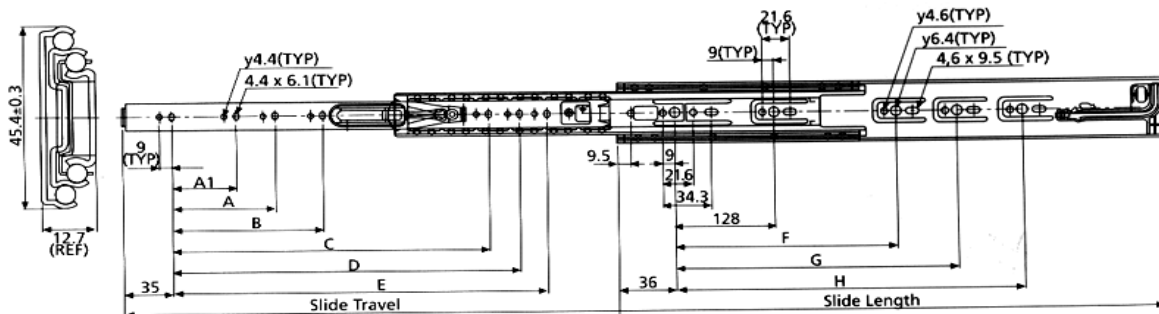

6555 CONCEALED DRAWER SLIDE – Soft Self-close
Full-extension runner fixed to the drawer frontal by clip.
Smove: fully integrated in the runner, decelerates the closing action of the drawer.





Product features

- Dynamic load capacity N 294 (Kg 30 or 66 lbs.)
- With Smove decelerated closing.
- Safety system that prevents the drawers from turning over during transport.
- Drawer height adjustment (+2,5 mm).
- Pull drawer straight out.
- Compatible with ART. 6155.
- Finish: bright zinc-plated.

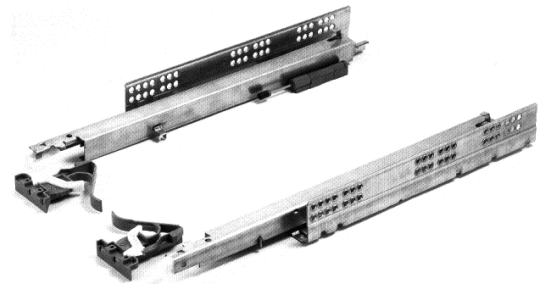

<u>STOCK NUMBER</u>	<u>LENGTH</u>
SS6555B16	16"
SS6555B18	18"
SS6555B20	20"
SS6555B22	22"

Order shown clips separately
SSA710610

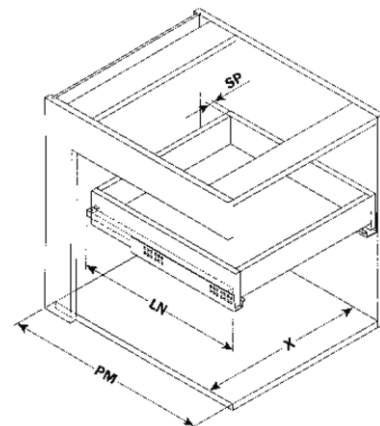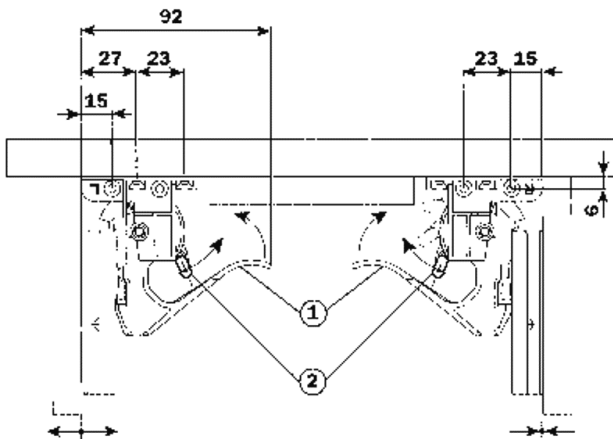
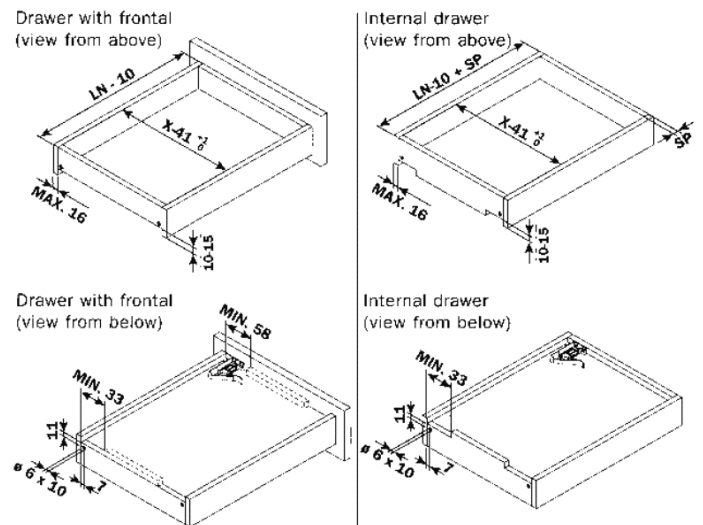
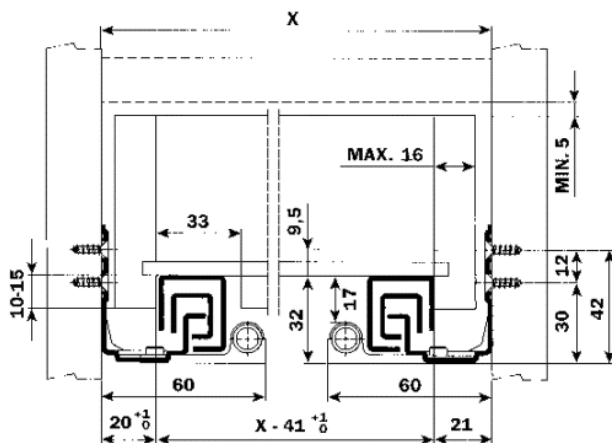


6557 CONCEALED DRAWER SLIDE-Touch Opening

Full-extension runner fixed to the drawer front by clip.
 Push: fully integrated in the runner-touch to open and decelerate the closing action of the drawer.

Product features

- Dynamic load capacity N 294 (Kg 30 or 66 lbs.)
- With Smove decelerated closing.
- Safety system prevents the drawers from turning over
- Drawer height adjustment (+2,5 mm).
- Pull drawer straight out for removal
- Finish: bright zinc-plated.

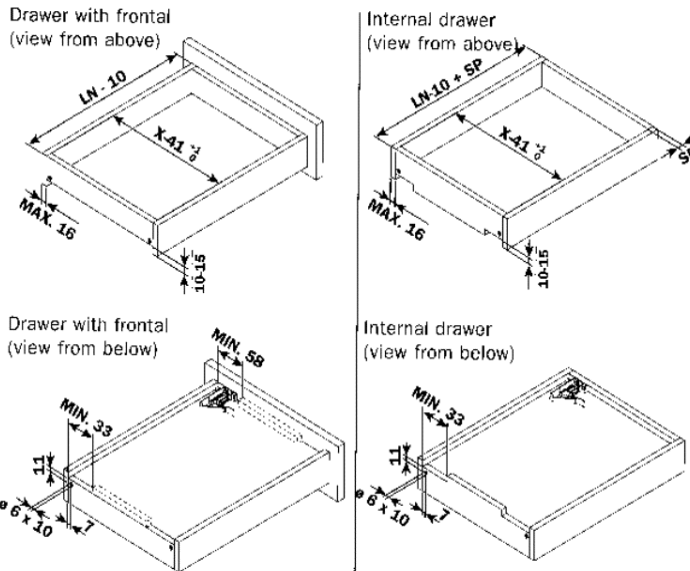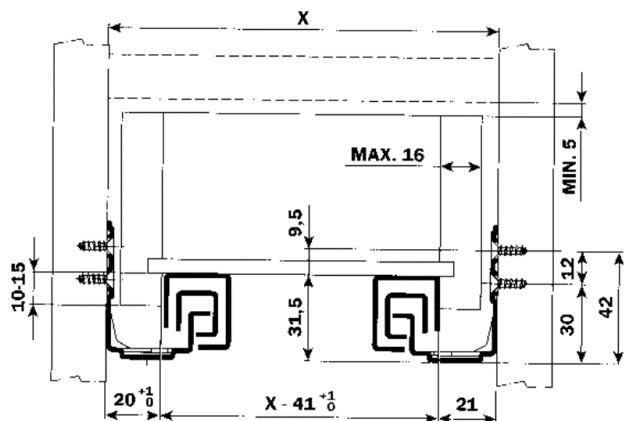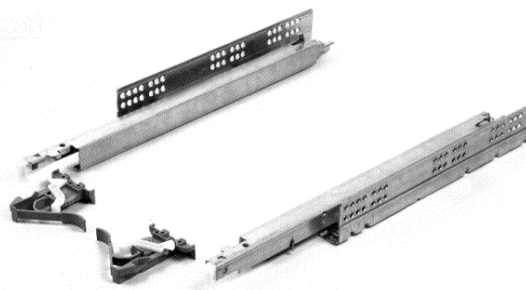

1) Fitting the drawer



Place the drawer, with the clips pre-mounted on the frontal, onto the runners and fully close it.

2) Removal of the drawer

Press the 2 levers "1" and simultaneously withdraw the drawer from the cabinet.

3) Adjustment of the drawer

By using the levers "2" it is possible to adjust the drawer vertically (+ 2,5 mm).

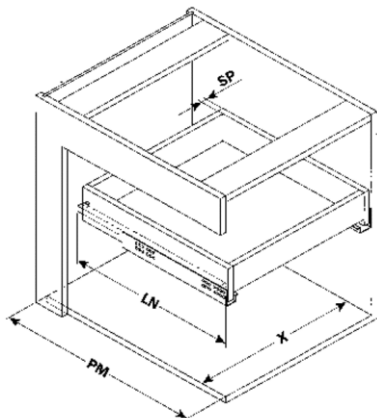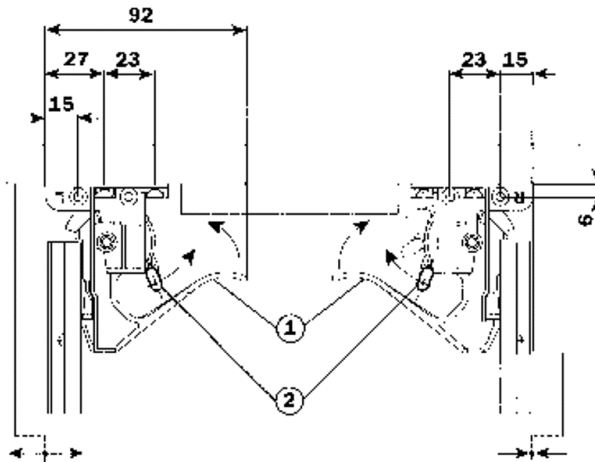

SP = thickness of drawer
 LN = nominal slide length
 PM= depth of cabinet
 X = internal width of cabinet

STOCK NUMBER

- SS6557B16
 - SS6557B18
 - SS6557B20
 - SS6557B22
- Order shown clips separately
 SSA710610

LENGTH

- 16"
- 18"
- 20"
- 22"

QUADRO IW 21 Silent System

Full-extension runner for wooden drawers

Load capacity up to 75 lbs dynamic, 100 lbs static

(Blum and QUADRO IW21 drawer and box construction are identical)



- Load capacity up to 75 lbs dynamic, 100 lbs static
- Perfect vertical and lateral stability. The robust, resilient tracks ensure optimal runner action through precision-guided steel balls.
- Maintenance-free through self-cleaning ball tracks.
- **Soft closure with selfclose** – the spring-operated mechanism acts independently of load and closes the drawer safely and automatically.
- **Slide-on assembly** – simply place the drawer on the runners and push in for connection.
- **Flexibility through interchangeability** – Quadro partial and full extension runners interchange without altering drawer dimensions.
- For 5/8" (16 mm) drawer material thickness and 1/2" (12 mm).
- **Silent System:** the damping device integrated in Quadro IW 21 closes the drawer softly and soundlessly.

Article	Order no.	Cabinet depth inch	Drawer box length inch	Sets per box
Quadro IW 21 Silent System 9"	9 048 982	9 3/16 - 13 1/8	9	10
Quadro IW 21 Silent System 12"	9 048 740	12 3/4 - 15 3/8	12	10
Quadro IW 21 Silent System 15"	9 048 976	15 3/4 - 18 3/8	15	10
Quadro IW 21 Silent System 18"	9 048 793	18 3/4 - 21 3/8	18	10
Quadro IW 21 Silent System 21"	9 048 776	21 3/4 - 24 3/8	21	10

Values are based on using plastic rear attachment set (9026835)
 When using metal rear attachment set (9055093) add 1/8" to max. cabinet depth

Quadro IW 21 accessories

Front fixing clip set


contains:

- 1 front fixing clip left
- 1 front fixing clip right
- 2 spacers for 1/2" (12 mm) box thickness



Article	Order no.	PU
Front fixing clip set	9 026 839	10 sets

Assembly front fixing clip

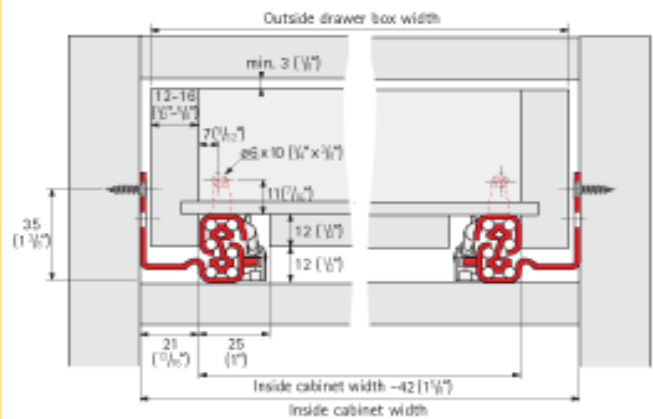


Outside drawer box width

For box thickness	Deduct from inside cabinet width
1/2"	5/8"
5/8"	3/8"

250P18ZP - 250 LBS. Load Capacity Heavy Duty Full Extension Ball Bearing Drawer Slide
5/8" side clearance


- Precision ball bearing runners for heavy duty case
- Extra 1" (25mm) overtravel
- Hole location for 32 system
- Non-handed, zinc plated



KD51- Under Desk Keyboard Drawer

Ergonomic Features:

- Pre-mounted with smooth ball bearing slides with spring locks and nylon mounting brackets
- Accommodates PC/AT (101) keyboards
- Keyboard tray dimensions: 20-1/4" x 9-1/2" x 3-1/2" or 4-1/4" mounting height
- Beige tray / zinc slides

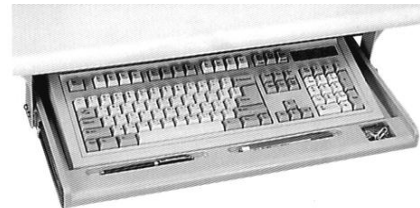



110P18 – EZ-Glide One-Piece Keyboard/Mouse Tray

Ergonomic Features:

- Optimal knob mechanism for height and tilt adjustment
- 9-3/4" of extended height adjustment extending up to 1" above the work surface
- 15 degree +/- tilt with 360 degree swivel
- 18" EZ-Glide track
- Slim-profile keyboard/mouse platform with 25" gel palm rest
- One-piece keyboard platform with dual mousing areas. Allows left or right mousing and can be easily switched at any time.
- Mouse surface ensures smooth mouse operation
- Phenolic construction



KEYBOARDHINGE - Suitable for mounting hinged fascias or for connecting two door sections on folding/sliding door. The integrated spring system keeps the door closed in a 90° position and also keeps the fascia aligned with the door. The flat side arm takes up little space when the door is pushed into position between side panel and auxiliary panel.

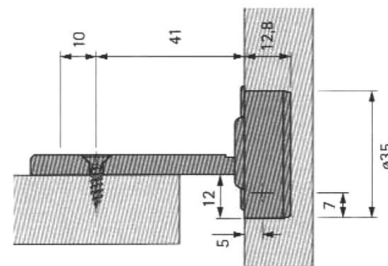

FLIPPER DOOR SLIDES – 30 lb. Class, 3/4 Retraction

Medium-duty, precision slides with a selection of hinges options for pivot door applications.

Maximum horizontal door size: 24" high, 48" wide

Maximum vertical door size: 42" high, 24" wide



Mounting: Channels may be mounted to the side of the case for pocket doors, or to the underside of top for receding doors.

Features: Oversized "L"-shaped follower-strip mounting plate. Attached hinge base and self-closing 3-way adjustable, clip-on type door hinge for ease of assembly. Cushioned stops and door hold-out feature. Adjustable channel slots for installation ease. Corner rollers for door guidance. Metal ball retainer holds 3 bearings per inch of race for smooth and quiet motion.

Application: Suitable for many door thickness & overlays. Check with salesperson for specifics. Order hinges separately.

In all cases, this allows a 1/8" gap between carcass and door. Door travel is 3" less than the length of the slide.

Stock Number	Length in Inches	Stock Number	Length in Inches
KV8081P12	12	KV8081P20	20
KV8081P14	14	KV8081P22	22
KV8081P16	16	KV8081P24	24
KV8081P18	18		

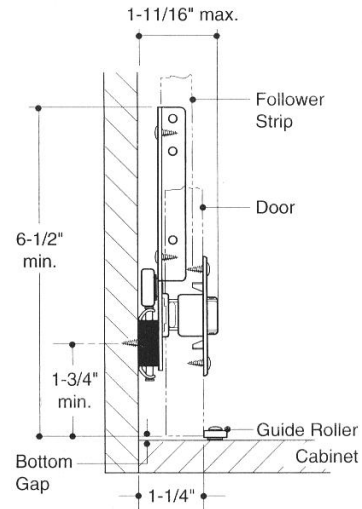

KV8091 - 4X4 Pocket Door Slide


Ideal for use in large entertainment and home theater cabinets. It is specially designed to hold over-size doors up to 75 pounds and 72 inches in height. The 4x4 Pocket Door Slide's dual rack and pinion system virtually eliminates door sag, speeding installation, minimizing adjustment and eliminating callbacks. Meets and exceeds ANSI performance standards as established by BIFMA, BHMA and KCMA.

Features:

- 75-pound class rated for heavy duty applications
- Maximum door dimensions 72"h x 26"w
- Innovative index pin allows door slide to nest within door rack for easy alignment and installation.
- Precision steel ball bearings provide smooth and quiet operation.

Application: Suitable for many door thickness & overlays. Check with salesperson for specifics.

All of the above allow a 1/8" gap between carcass and door.

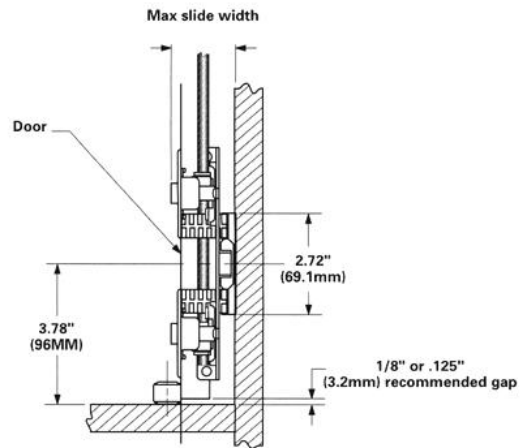


Stock Number	Length in Inches	Stock Number	Length in Inches
KV8091PEB18	18	KV8091PEB26	26
KV8091PEB20	20	KV8091PEB28	28
KV8091PEB22	22	KV8091PEB30	30
KV8091PEB24	24		

All slides require a steel rod following strip, stocked in 72" lengths
KV8090BEB72

DRAWER SLIDE ACCESSORIES

For pendaflex filing systems, **PENDARAIL** is designed to press over the top of 1/2" side rail material, saving finishing time /costs (use instead of edge banding). The top portion is especially sized so pendaflex folders slide along the rail. Aluminum for strength and easy cutting. Especially treated so it won't rub off black on your customer's hand. Shipping tube holds 60 pcs., also sold individually.




FLATBAR1/8X1

Measures 1/8" x 1" x 96" and is designed to fit into a rabbet or kerf, depending on the mounting method. Especially treated so as not to rub off black onto your customers hands with use. Shipping tube holds 50 pcs., also sold individually.




FLATBAR1/8X1/2


Measures 1/8"x1/2"x72" used in conjunction with clips shown below.




Hanging file bracket, screws to:
1/2" side material = **KHFB1/2**
5/8" side material = **KHFB5/8**



Hanging file rail connector – installs between two flat bars **KHFB1/8**




Hanging file top mount bracket - mounts on 1/2", 5/8", 3/4" side material **KHFBTM**



Hanging file rail connector double-sided hook. **KHFB1/8DS**


KV476F Letter sized follower is 10-3/4" wide, and when mounted, has an overall height of 7-5/8". While shown mounted on track, track is not included – order separately. Color is bright anochrome. Follower and track may be surface mounted, or the track may be mortised into a 2-1/4" x 1/4" slot.



KV476T Track used with follower. While shown with follower, it is not included. Order separately.


DRAWERADJ20 is inserted into a pre-drilled 20mm diameter hole in the drawer front. Insert an M4 (usually use 1") truss head screw (see screw section for lengths available) through front of drawer into the connector. Length of screw should be drawer box thickness plus 1/4". Allows 2mm horizontal and 2mm vertical adjustment.

Also available: **DRAWERADJ25** (Uses M4 x 1" machine screws.) . Allows 1/4" vertical and 1/4" horizontal adjustments.




KV704ANO is an anochrome label holder, measures 3-1/2" x 1-3/4" for a card measuring 2-15/16"x 1-1/2".

KV704SB polished solid brass is screw mounted (2-1/2" on center), height is 1-31/32. Uses 2- 5 x 5/8 screws per holder.



LABEL3/4BP - for 3/4" x 2-1/2" label, measures 20mm x 2-7/8. Applied with Brads (not included) or glue, or 2-sided tape.



PENCILTRAY has 11 compartments, and is dark grey in color, measures 277mm (10 7/8" appx.) x 332 (13-1/16" appx.)




HEAVY DUTY TABLE SLIDES

Material: Heavy gauge interlocked rolled steel sections telescope for strength, durability and smooth function with minimized center "sag". Designed and engineered to compensate for table sag. When closed, table slide should extend between 66% & 75% the length of the table. 2-7/16" beam height provides additional strength.

Accurate riveted construction insures precision fit

Finish: Brown acrylic paint; all riveted construction; anti-rust treated & built-in embossed leaf levelers.


<u>Stock Number</u>	<u>Closed Length</u>	<u>Expansion</u>	<u>No. of Leaves</u>
S404342	30"	38"	3 x 12

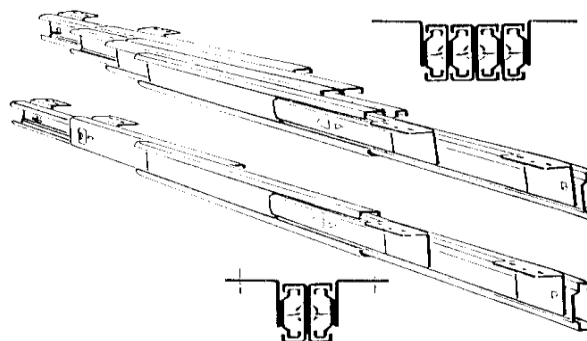

LEAFALIGN

Table pins (male) and sockets (female) ensure positive alignment of table leaves and avoid distortion due to expansion and contraction.

Brass plated, 5/16" diameter



Use the **WINDOWLOCK** to insure tightly joined table leaves. Closing action pulls straight -so leaves do not get misaligned. Picture shows locked position -when unlocked, the handle is at 6:00 (it turns only counter-clockwise from as shown, and turns only 90°