


DuPont™ Tychem® 2000 C , TCCHA5TYL00

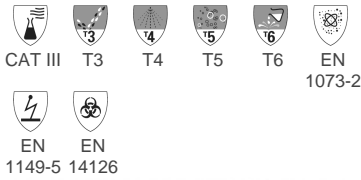

Product Description

DuPont™ Tychem® 2000 C. Hooded coverall. Stitched and over-taped seams. Thumb loops. Elastication at wrists, ankles, face and waist. Self-adhesive double zipper flap and chin flap. Yellow.

Certifications

- Certified according to Regulation (EU) 2016/425
- Chemical protective clothing, Category III, Type 3-B, 4-B, 5-B and 6-B
- EN 14126 (barrier to infective agents), EN 1073-2 (protection against radioactive contamination)
- Antistatic treatment (EN 1149-5) - on inside

Packaging (Quantity/Box)

25 per box, individually packed.

| Size | Article Number | Chest Girth(cm) | Body Height(cm) | Chest Girth(in) | Body Height(ft/in) |
|------|----------------|-----------------|-----------------|-----------------|--------------------|
| SM | D13494990 | 84-92 | 162-170 | 33-36 | 5'4"-5'7" |
| MD | D13494969 | 92-100 | 168-176 | 36-39 | 5'6"-5'9" |
| LG | D13395589 | 100-108 | 174-182 | 39-43 | 5'8"-6'0" |
| XL | D13395699 | 108-116 | 180-188 | 43-46 | 5'11"-5'2" |
| 2X | D13395560 | 116-124 | 186-194 | 46-49 | 6'1"-6'4" |
| 3X | D13494922 | 124-132 | 192-200 | 49-52 | 6'3"-6'7" |

Reference Number: TCCHA5TYL00

Physical Properties

| Property | Test Method | Result | EN Class |
|--|----------------------|---|---------------------|
| Colour | N/A | Yellow | N/A |
| Basis Weight | DIN EN ISO 536 | 83 g/m ² | N/A |
| Thickness | DIN EN ISO 534 | 180 µm | N/A |
| Abrasion Resistance ⁷ | EN 530 Method 2 | >1500 cycles | 5 of 6 ¹ |
| Flex Cracking Resistance ⁷ | EN ISO 7854 Method B | >5000 cycles | 3 of 6 ¹ |
| Flex Cracking Resistance at -30 °C | EN ISO 7854 Method B | >500 cycles | N/A |
| Trapezoidal Tear Resistance (MD) | EN ISO 9073-4 | 35 N | 1 of 6 ¹ |
| Trapezoidal Tear Resistance (XD) | EN ISO 9073-4 | 30 N | 1 of 6 ¹ |
| Tensile Strength (MD) | DIN EN ISO 13934-1 | 160 N | 3 of 6 ¹ |
| Tensile Strength (XD) | DIN EN ISO 13934-1 | 150 N | 3 of 6 ¹ |
| Puncture Resistance | EN 863 | 18 N | 2 of 6 ¹ |
| Resistance to Water Penetration | DIN EN 20811 | >30 kPa | N/A |
| Surface Resistance at RH 25%, inside ⁷ | EN 1149-1 | < 2,5 • 10 ⁹ Ohm | N/A |
| Surface Resistance at RH 25%, outside ⁷ | EN 1149-1 | No antistatic treatment | N/A |
| Exposure to high Temperature | N/A | Garments seams opens at -98 °C | N/A |
| Exposure to low Temperature | N/A | Flexibility retained down to -73 °C | N/A |
| Resistance to Ignition ⁷ | EN 13274-4 Method 3 | No after flame, no drop formation, hole formation | N/A |
| Bursting Strength (Mullenburst) | ISO 2758 | 475 kPa | N/A |

1 According to EN 14325 2 According to EN 14126 3 According to EN 1073-2 4 According to EN 14116 12 According to EN 11612 5 Front Tyvek® / Back 6 Based on test according to ASTM D-572 7 See Instructions for Use for further information, limitations and warnings > Larger than < Smaller than N/A Not Applicable STD DEV Standard Deviation

Garment Performance

| Property | Test Method | Result | EN Class |
|--|--------------------------|-----------------------|---------------------|
| Type 3: Resistance to Penetration by Liquids (Jet Test) | EN 17491-3 | Pass | N/A |
| Type 4: Resistance to Penetration by Liquids (High Level Spray Test) | EN ISO 17491-4, Method B | Pass | N/A |
| Type 5: Inward Leakage of Airborne Solid Particulates | EN ISO 13982-2 | Pass | N/A |
| Type 6: Resistance to Penetration by Liquids (Low Level Spray Test) | EN ISO 17491-4, Method A | Pass | N/A |
| Nominal protection factor ⁷ | EN 1073-2 | >5 | 1 of 3 ³ |
| Seam Strength | EN ISO 13935-2 | >125 N | 4 of 6 ¹ |
| Shelf Life ⁷ | N/A | 10 years ⁶ | N/A |

1 According to EN 14325 3 According to EN 1073-2 12 According to EN 11612 13 According to EN 11611 5 Front Tyvek® / Back 6 Based on test according to ASTM D-572 7 See Instructions for Use for further information, limitations and warnings 11 Based on the average of 10 suits, 3 activities, 3 probes > Larger than < Smaller than N/A Not Applicable * Based on lowest single value

Comfort

| Property | Test Method | Result | EN Class |
|----------------------------------|-------------|--------|----------|
| Air Permeability (Gurley method) | ISO 5636-5 | No | N/A |

2 According to EN 14126 5 Front Tyvek ® / Back > Larger than < Smaller than **N/A** Not Applicable

Penetration and Repellency

| Property | Test Method | Result | EN Class |
|--|-------------|--------|---------------------|
| Resistance to Penetration by Liquids, Sulphuric Acid (30%) | EN ISO 6530 | <1 % | 3 of 3 ¹ |
| Resistance to Penetration by Liquids, Sodium Hydroxide (10%) | EN ISO 6530 | <1 % | 3 of 3 ¹ |
| Resistance to Penetration by Liquids, o-Xylene | EN ISO 6530 | <1 % | 3 of 3 ¹ |
| Resistance to Penetration by Liquids, Butan-1-ol | EN ISO 6530 | <1 % | 3 of 3 ¹ |
| Repellency to Liquids, Sulphuric Acid (30%) | EN ISO 6530 | >95 % | 3 of 3 ¹ |
| Repellency to Liquids, Sodium Hydroxide (10%) | EN ISO 6530 | >95 % | 3 of 3 ¹ |
| Repellency to Liquids, o-Xylene | EN ISO 6530 | >95 % | 3 of 3 ¹ |
| Repellency to Liquids, Butan-1-ol | EN ISO 6530 | >90 % | 2 of 3 ¹ |

1 According to EN 14325 > Larger than < Smaller than

Biological Barrier

| Property | Test Method | Result | EN Class |
|---|-----------------------|--------------|---------------------|
| Resistance to Penetration by Blood-borne Pathogens using Bacteriophage Phi-X174 | ISO 16604 Procedure C | 20 kPa | 6 of 6 ² |
| Resistance to Penetration by Contaminated Liquids | EN ISO 22610 | >75 min | 6 of 6 ² |
| Resistance to Penetration by Biologically Contaminated Aerosols | ISO/DIS 22611 | log ratio >5 | 6 of 6 ² |
| Resistance to Penetration by Contaminated Solid Particles | ISO 22612 | log cfu <1 | 3 of 3 ² |

2 According to EN 14126 > Larger than < Smaller than

Permeation Data for Tychem® 2000 C

| Hazard Name | Physical State | CAS | BT Act | BT 0.1 | BT 1.0 | EN | SSPR | MDPR | Cum 480 Time 150 | ISO | |
|--------------------------------------|----------------|-------------|--------|--------|--------|----|--------|------------|------------------|------|---|
| Acetic acid (10%) | Liquid | 64-19-7 | >480 | >480 | >480 | 6 | <0.04 | 0.04 | <19.2 | >480 | 6 |
| Acetic acid (2%) | Liquid | 64-19-7 | >480 | >480 | >480 | 6 | <0.04 | 0.04 | <19.2 | >480 | 6 |
| Acetic acid (>95%) | Liquid | 64-19-7 | imm | imm | imm | | 3 | 0.05 ppm | | | |
| Acetic acid ethyl ester | Liquid | 141-78-6 | imm | imm | imm | | 12.7 | 0.11 ppm | | | |
| Acetone | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Acetonitrile | Liquid | 75-05-8 | imm | imm | imm | | 16 | 0.23 ppm | | | |
| Acroleic acid | Liquid | 79-10-7 | imm | imm | imm | | 5.4 | 0.2 | | | |
| Acrylic acid | Liquid | 79-10-7 | imm | imm | imm | | 5.4 | 0.2 | | | |
| Acrylonitrile | Liquid | 107-13-1 | imm | imm | imm | | 10.6 | 0.005 | | | |
| Amino benzene | Liquid | 62-53-3 | imm | imm | imm | | 2.1 | 0.14 | | | |
| Ammonia (gaseous) | Vapor | 7664-41-7 | imm | imm | imm | | 3.1 | 0.001 | | | |
| Ammonium aqueous (28%) | Liquid | 1336-21-6 | imm | imm | imm | | 62 | 0.035 | | | |
| Ammonium hydroxide (28%) | Liquid | 1336-21-6 | imm | imm | imm | | 62 | 0.035 | | | |
| Aniline | Liquid | 62-53-3 | imm | imm | imm | | 2.1 | 0.14 | | | |
| Benzenamine | Liquid | 62-53-3 | imm | imm | imm | | 2.1 | 0.14 | | | |
| Bromine (liquid) | Liquid | 7726-95-6 | imm | imm | imm | | >50 | 0.0064 | | | |
| Butadiene, 1,3- (gaseous) | Vapor | 106-99-0 | imm | imm | imm | | >17 | 0.001 | | | |
| Butan-1-ol | Liquid | 71-36-3 | imm | imm | imm | | 1.6 | 0.057 ppm | | | |
| Butanal, n- | Liquid | 123-72-8 | imm | imm | imm | | 22 | 0.0063 | | | |
| Butanol, 1- | Liquid | 71-36-3 | imm | imm | imm | | 1.6 | 0.057 ppm | | | |
| Butanol, n- | Liquid | 71-36-3 | imm | imm | imm | | 1.6 | 0.057 ppm | | | |
| Butyl alcohol, n- | Liquid | 71-36-3 | imm | imm | imm | | 1.6 | 0.057 ppm | | | |
| Butyraldehyde, n- | Liquid | 123-72-8 | imm | imm | imm | | 22 | 0.0063 | | | |
| Carbon disulfide | Liquid | 75-15-0 | imm | imm | imm | | 4367 | 0.0057 ppm | | | |
| Carboplatin (10mg/ml) | Liquid | 441575-94-4 | >240 | >240 | >240 | 5 | <0.001 | 0.001 | | | |
| Carmustine (3.3 mg/ml, 10 % Ethanol) | Liquid | 154-93-8 | 30 | >240 | >240 | 5 | 0.002 | 0.001 | | | |
| Caustic ammonia (28%) | Liquid | 1336-21-6 | imm | imm | imm | | 62 | 0.035 | | | |
| Caustic soda (42%) | Liquid | 1310-73-2 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Caustic soda (50% at 50 °C) | Liquid | 1310-73-2 | >480 | >480 | >480 | 6 | <0.02 | 0.02 | <9.6 | >480 | 6 |
| Caustic soda (50%) | Liquid | 1310-73-2 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Chlorine (gaseous) | Vapor | 7782-50-5 | imm | imm | imm | | >50 | 0.2 | | | |
| Chloro ethanol, 2- | Liquid | 107-07-3 | imm | imm | imm | | 3.1 | 0.06 ppm | | | |
| Chromic acid (CrO3) (44.9%) | Liquid | 1333-82-0 | >480 | >480 | >480 | 6 | <0.07 | 0.07 | <33.6 | >480 | 6 |
| Chromic acid (H2SO4 x CrO3) (80%) | Liquid | 1333-82-0 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Cisplatin (1 mg/ml) | Liquid | 15663-27-1 | >240 | >240 | >240 | 5 | <0.002 | 0.002 | | | |
| Cyanoethylene | Liquid | 107-13-1 | imm | imm | imm | | 10.6 | 0.005 | | | |
| Cyanomethane | Liquid | 75-05-8 | imm | imm | imm | | 16 | 0.23 ppm | | | |
| Cyclophosphamide (20 mg/ml) | Liquid | 50-18-0 | <10* | >240 | >240 | 5 | <0.002 | 0.002 | | | |
| Dichloromethane | Liquid | 75-09-2 | imm | imm | imm | | >50 | 0.001 | | | |

BT Act (Actual) Breakthrough time at MDPR [mins] BT 0.1 Normalized breakthrough time at 0.1 µg/cm²/min [mins] BT 1.0 Normalized breakthrough time at 1.0 µg/cm²/min [mins] EN Classification according to EN 14325
 SSPR Steady state permeation rate [µg/cm²/min] MDPR Minimum detectable permeation rate [µg/cm²/min] CUM 480 Cumulative permeation mass after 480 mins [µg/cm²] Time 150 Time to reach cumulative permeation mass of 150 µg/cm² [mins] ISO Classification according to ISO 16602 CAS Chemical abstracts service registry number mins Minutes > Larger than < Smaller than imm Immediate (< 4 min) nm Not tested
 sat Saturated solution N/A Not Applicable * Based on lowest single value na Not attained 8 Actual breakthrough time; normalized breakthrough time is not available

Permeation Data for Tychem® 2000 C

| Hazard Name | Physical State | CAS | BT Act | BT 0.1 | BT 1.0 | EN | SSPR | MDPR | Cum 480 | Time 150 | ISO |
|---|----------------|------------|--------|--------|--------|----|--------|-----------|---------------------------------|----------|-----|
| Diethyl amine | Liquid | 109-89-7 | imm | imm | imm | | 64.3 | 0.017 ppm | | | |
| Dimethyl fumarate (27 °C) | Solid | 624-49-7 | 177* | nm | 291* | 5 | <0.39 | 0.39 | | | |
| Dimethyl ketal | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Dimethyl ketone | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Doxorubicin HCl (2 mg/ml) | Liquid | 25136-40-9 | >240 | >240 | >240 | 5 | <0.007 | 0.007 | | | |
| Epoxy ethane (gaseous) | Vapor | 75-21-8 | imm | imm | imm | | 170 | 0.02 | | | |
| Ethane 1,2-diol | Liquid | 107-21-1 | >480 | >480 | >480 | 6 | <0.05 | 0.05 | <24 | >480 | 6 |
| Ethane nitrile | Liquid | 75-05-8 | imm | imm | imm | | 16 | 0.23 ppm | | | |
| Ethyl acetate | Liquid | 141-78-6 | imm | imm | imm | | 12.7 | 0.11 ppm | | | |
| Ethyl ethanamine, N- | Liquid | 109-89-7 | imm | imm | imm | | 64.3 | 0.017 ppm | | | |
| Ethyl nitrile | Liquid | 75-05-8 | imm | imm | imm | | 16 | 0.23 ppm | | | |
| Ethylene carboxylic acid | Liquid | 79-10-7 | imm | imm | imm | | 5.4 | 0.2 | | | |
| Ethylene chlorohydrin | Liquid | 107-07-3 | imm | imm | imm | | 3.1 | 0.06 ppm | | | |
| Ethylene glycol | Liquid | 107-21-1 | >480 | >480 | >480 | 6 | <0.05 | 0.05 | <24 | >480 | 6 |
| Ethylene oxide (gaseous) | Vapor | 75-21-8 | imm | imm | imm | | 170 | 0.02 | | | |
| Ethylene tetrachloride | Liquid | 127-18-4 | imm | imm | imm | | >400 | 0.11 ppm | | | |
| Etoposide (Toposar®, Teva) (20 mg/ml, 33.2 % (v/v) Ethanol) | Liquid | 33419-42-0 | >240 | >240 | >240 | 5 | <0.01 | <0.01 | | | |
| Ferric (III) chloride (40%) | Liquid | 7705-08-0 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.5 | >480 | 6 |
| Fluorosilicic acid (33-35%) | Liquid | 16961-83-4 | >480 | >480 | >480 | 6 | <0.04 | 0.04 | <19.2 | >480 | 6 |
| Fluorouracil, 5- (50 mg/ml) | Liquid | 51-21-8 | >240 | >240 | >240 | 5 | <0.002 | 0.002 | | | |
| Formaldehyde (10%) | Liquid | 50-00-0 | >480 | >480 | >480 | 6 | <0.1 | 0.1 | <48 | >480 | 6 |
| Formaldehyde (37%) | Liquid | 50-00-0 | imm | imm | >480 | 6 | 0.31 | 0.1 | | | |
| Formalin (10%) | Liquid | 50-00-0 | >480 | >480 | >480 | 6 | <0.1 | 0.1 | <48 | >480 | 6 |
| Formalin (37%) | Liquid | 50-00-0 | imm | imm | >480 | 6 | 0.31 | 0.1 | | | |
| Fuel oil | Liquid | 68476-30-2 | imm | imm | imm | | 1.776 | 0.01 | | | |
| Fuel-oil no 2 | Liquid | 68476-30-2 | imm | imm | imm | | 1.776 | 0.01 | | | |
| Gemcitabine (38 mg/ml) | Liquid | 95058-81-4 | 15* | >240 | >240 | 5 | <0.01 | 0.003 | | | |
| Glycol alcohol | Liquid | 107-21-1 | >480 | >480 | >480 | 6 | <0.05 | 0.05 | <24 | >480 | 6 |
| Glycol chlorohydrin | Liquid | 107-07-3 | imm | imm | imm | | 3.1 | 0.06 ppm | | | |
| Hydrochloric acid (32%) | Liquid | 7647-01-0 | >480 | >480 | >480 | 6 | <0.001 | 0.001 | | | |
| Hydrochloric acid (37%) | Liquid | 7647-01-0 | 60* | 265* | >480 | 6 | 0.46 | 0.001 | | | |
| Hydrofluoric acid (48%) | Liquid | 7664-39-3 | 7 | 17 | >480 | 6 | N/A | 0.005 | 134 | >480 | 6 |
| Hydrofluoric acid (60%) | Liquid | 7664-39-3 | imm | 6 | 81 | 3 | n/a | 0.005 | | | |
| Hydrofluoric acid (70%) | Liquid | 7664-39-3 | imm | imm | 15* | 1 | 15.3 | 0.1 | | | |
| Hydrogen peroxide (50%) | Liquid | 7722-84-1 | >480 | >480 | >480 | 6 | <0.01 | 0.01 | <4.8 | >480 | 6 |
| Hydrogen peroxide (70%) | Liquid | 7722-84-1 | >480 | >480 | >480 | 6 | <0.02 | 0.02 | <10 | >480 | 6 |
| Ifosfamide (50 mg/ml) | Liquid | 3778-73-2 | >240 | >240 | >240 | 5 | <0.009 | 0.009 | | | |
| Iodomethane | Liquid | 74-88-4 | imm | imm | imm | | nm | 0.07 | 4550 µg/cm ² , 8 min | <1 | |
| Isopropanol | Liquid | 67-63-0 | imm | imm | imm | | 8 | 0.04 | | | |

BT Act (Actual) Breakthrough time at MDPR [mins] BT 0.1 Normalized breakthrough time at 0.1 µg/cm²/min [mins] BT 1.0 Normalized breakthrough time at 1.0 µg/cm²/min [mins] EN Classification according to EN 14325
 SSPR Steady state permeation rate [µg/cm²/min] MDPR Minimum detectable permeation rate [µg/cm²/min] CUM 480 Cumulative permeation mass after 480 mins [µg/cm²] Time 150 Time to reach cumulative permeation mass of 150 µg/cm² [mins] ISO Classification according to ISO 16602 CAS Chemical abstracts service registry number mins Minutes > Larger than < Smaller than imm Immediate (< 4 min) nm Not tested
 sat Saturated solution N/A Not Applicable * Based on lowest single value na Not attained 8 Actual breakthrough time; normalized breakthrough time is not available

Permeation Data for Tychem® 2000 C

| Hazard Name | Physical State | CAS | BT Act | BT 0.1 | BT 1.0 | EN | SSPR | MDPR | Cum 480 | Time 150 | ISO |
|--|----------------|------------|--------|--------|--------|----|--------|-----------|--------------------|----------|-----|
| Ketone propane | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Limonene d- | Liquid | 5989-27-5 | imm | imm | imm | | 29.8 | 0.02 | | | |
| Mercuric II chloride (sat) | Liquid | 7487-94-7 | >480 | >480 | >480 | 6 | <0.01 | 0.01 | <4.8 | >480 | 6 |
| Mercury | Liquid | 7439-97-6 | >480 | >480 | >480 | 6 | <0.09 | 0.09 | <43.2 | >480 | 6 |
| Methanol | Liquid | 67-56-1 | imm | imm | imm | | 2.2 | 0.18 ppm | | | |
| Methotrexate (25 mg/ml, 0.1 N NaOH) | Liquid | 59-05-2 | >240 | >240 | >240 | 5 | <0.001 | 0.001 | | | |
| Methyl 4-isopropenyl-1-cyclohexene, 1- | Liquid | 5989-27-5 | imm | imm | imm | | 29.8 | 0.02 | | | |
| Methyl acetyl | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Methyl benzol | Liquid | 108-88-3 | imm | imm | imm | | 503 | 0.033 ppm | | | |
| Methyl cyanide | Liquid | 75-05-8 | imm | imm | imm | | 16 | 0.23 ppm | | | |
| Methyl iodide | Liquid | 74-88-4 | imm | imm | imm | | nm | 0.07 | 4550 µg/cm², 8 min | <1 | |
| Methyl ketone | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Methylene chloride | Liquid | 75-09-2 | imm | imm | imm | | >50 | 0.001 | | | |
| Mitomycin (0.5 mg/ml) | Liquid | 50-07-7 | >240 | >240 | >240 | 5 | <0.002 | 0.002 | | | |
| Nitric acid (70%) | Liquid | 7697-37-2 | >480 | >480 | >480 | 6 | <0.01 | 0.01 | <4.8 | >480 | 6 |
| Nitro benzene | Liquid | 98-95-3 | imm | imm | imm | | 17.7 | 0.001 | | | |
| Oleum (30%) | Liquid | 8014-95-7 | 18 | 82 | 105 | 3 | nm | 0.005 | | | |
| Oxaliplatin (5 mg/ml) | Liquid | 63121-00-6 | 145 | >240 | >240 | 5 | <0.1 | 0.008 | | | |
| Paclitaxel (Hospira) (6 mg/ml, 49.7 % (v/v) Ethanol) | Liquid | 33069-62-4 | >240 | >240 | >240 | 5 | <0.01 | <0.01 | | | |
| Perchloric acid (70%) | Liquid | 7601-90-3 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Phenyl amine | Liquid | 62-53-3 | imm | imm | imm | | 2.1 | 0.14 | | | |
| Phosphoric acid (85%) | Liquid | 7664-38-2 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Potassium chromate (sat) | Liquid | 7789-00-6 | >480 | >480 | >480 | 6 | <0.01 | 0.01 | <4.8 | >480 | 6 |
| Potassium hydroxide (50%) | Liquid | 1310-58-3 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Propan-2-ol | Liquid | 67-63-0 | imm | imm | imm | | 8 | 0.04 | | | |
| Propan-2-one | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Propene acid | Liquid | 79-10-7 | imm | imm | imm | | 5.4 | 0.2 | | | |
| Propenenitrile, 2- | Liquid | 107-13-1 | imm | imm | imm | | 10.6 | 0.005 | | | |
| Propenoic acid nitrile | Liquid | 107-13-1 | imm | imm | imm | | 10.6 | 0.005 | | | |
| Pyroacetic ether | Liquid | 67-64-1 | imm | imm | nm | | 9.7 | 0.11 ppm | | | |
| Sodium cyanide (sat) | Liquid | 143-33-9 | >480 | >480 | >480 | 6 | <0.07 | 0.07 | <33.6 | >480 | 6 |
| Sodium fluoride (sat) | Liquid | 7681-49-4 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Sodium hydroxide (42%) | Liquid | 1310-73-2 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Sodium hydroxide (50% at 50 °C) | Liquid | 1310-73-2 | >480 | >480 | >480 | 6 | <0.02 | 0.02 | <9.6 | >480 | 6 |
| Sodium hydroxide (50%) | Liquid | 1310-73-2 | >480 | >480 | >480 | 6 | <0.005 | 0.005 | <2.4 | >480 | 6 |
| Sodium hypochlorite (15%) | Liquid | 7681-52-9 | >480 | >480 | >480 | 6 | <0.05 | 0.05 | <24 | >480 | 6 |
| Sulfuric acid (50%) | Liquid | 7664-93-9 | >480 | >480 | >480 | 6 | <0.01 | 0.01 | <4.8 | >480 | 6 |
| Sulfuric acid (>95% at 50 °C) | Liquid | 7664-93-9 | >480 | >480 | >480 | 6 | <0.02 | 0.02 | <9.6 | >480 | 6 |
| Sulfuric acid (>95%) | Liquid | 7664-93-9 | >480 | >480 | >480 | 6 | <0.02 | 0.020 | <9.6 | >480 | 6 |

BT Act (Actual) Breakthrough time at MDPR [mins] BT 0.1 Normalized breakthrough time at 0.1 µg/cm²/min [mins] BT 1.0 Normalized breakthrough time at 1.0 µg/cm²/min [mins] EN Classification according to EN 14325
 SSPR Steady state permeation rate [µg/cm²/min] MDPR Minimum detectable permeation rate [µg/cm²/min] CUM 480 Cumulative permeation mass after 480 mins [µg/cm²] Time 150 Time to reach cumulative permeation mass of 150 µg/cm² [mins] ISO Classification according to ISO 16602 CAS Chemical abstracts service registry number mins Minutes > Larger than < Smaller than imm Immediate (< 4 min) nm Not tested
 sat Saturated solution N/A Not Applicable * Based on lowest single value na Not attained 8 Actual breakthrough time; normalized breakthrough time is not available

Permeation Data for Tychem® 2000 C

| Hazard Name | Physical State | CAS | BT Act | BT 0.1 | BT 1.0 | EN | SSPR | MDPR | Cum 480 | Time 150 | ISO | ISO |
|--------------------------------------|----------------|----------|--------|--------|--------|----|--------|-----------|---------|----------|-----|-----|
| Tetrachloro ethylene, 1,1,2,2- | Liquid | 127-18-4 | imm | imm | imm | | >400 | 0.11 ppm | | | | |
| Tetrahydrofuran | Liquid | 109-99-9 | imm | imm | imm | | 183 | 0.11 ppm | | | | |
| Tetramethyl ammonium hydroxide (25%) | Liquid | 75-59-2 | nm | >480 | >480 | 6 | N/A | 0.037 | | | | |
| Thiotepa (10 mg/ml) | Liquid | 52-24-4 | 10 | >240 | >240 | 5 | <0.005 | 0.001 | | | | |
| Toluene | Liquid | 108-88-3 | imm | imm | imm | | 503 | 0.033 ppm | | | | |
| Toluene diisocyanate, 2,4- | Liquid | 584-84-9 | imm | imm | imm | | 42 | 0.0000208 | | | | |
| Trichloro benzene, 1,2,4- | Liquid | 120-82-1 | imm | imm | imm | | 8.4 | 0.001 | | | | |
| Vinyl cyanide | Liquid | 107-13-1 | imm | imm | imm | | 10.6 | 0.005 | | | | |

BT Act (Actual) Breakthrough time at MDPR [mins] **BT 0.1** Normalized breakthrough time at 0.1 µg/cm²/min [mins] **BT 1.0** Normalized breakthrough time at 1.0 µg/cm²/min [mins] **EN** Classification according to EN 14325
SSPR Steady state permeation rate [µg/cm²/min] **MDPR** Minimum detectable permeation rate [µg/cm²/min] **CUM 480** Cumulative permeation mass after 480 mins [µg/cm²] **Time 150** Time to reach cumulative permeation mass of 150 µg/cm² [mins] **ISO** Classification according to ISO 16602 **CAS** Chemical abstracts service registry number **mins** Minutes > Larger than < Smaller than **imm** Immediate (< 4 min) **nm** Not tested
sat Saturated solution **N/A** Not Applicable * Based on lowest single value **na** Not attained **8** Actual breakthrough time; normalized breakthrough time is not available

Permeation Data for Tychem® 2000 C

| Hazard Name | Physical State | CAS | BT Act | BT 0.1 | BT 1.0 | EN | SSPR | MDPR | Cum 480 | Time 150 | ISO |
|-------------|----------------|-----|--------|--------|--------|----|------|------|---------|----------|-----|
|-------------|----------------|-----|--------|--------|--------|----|------|------|---------|----------|-----|

BT Act (Actual) Breakthrough time at MDPR [mins] **BT 0.1** Normalized breakthrough time at 0.1 µg/cm²/min [mins] **BT 1.0** Normalized breakthrough time at 1.0 µg/cm²/min [mins] **EN** Classification according to EN 14325
SSPR Steady state permeation rate [µg/cm²/min] **MDPR** Minimum detectable permeation rate [µg/cm²/min] **CUM 480** Cumulative permeation mass after 480 mins [µg/cm²] **Time 150** Time to reach cumulative permeation mass of 150 µg/cm² [mins] **ISO** Classification according to ISO 16602 **CAS** Chemical abstracts service registry number **mins** Minutes **>** Larger than **<** Smaller than **imm** Immediate (< 4 min) **nm** Not tested
sat Saturated solution **N/A** Not Applicable ***** Based on lowest single value **na** Not attained **8** Actual breakthrough time; normalized breakthrough time is not available

Technical_Description _ 1200 _ EN .pdf Printed on : July 31, 2018 page 8 of 10
 < test="{productPermData17.size() > 0}" >

Permeation Data for Tychem® 2000 C

| Hazard Name | Physical State | CAS | BT Act | BT 0.1 | BT 1.0 | EN | SSPR | MDPR | Cum 480 | Time 150 | ISO |
|-------------|----------------|-----|--------|--------|--------|----|------|------|---------|----------|-----|
|-------------|----------------|-----|--------|--------|--------|----|------|------|---------|----------|-----|

BT Act (Actual) Breakthrough time at MDPR [mins] **BT 0.1** Normalized breakthrough time at 0.1 µg/cm²/min [mins] **BT 1.0** Normalized breakthrough time at 1.0 µg/cm²/min [mins] **EN** Classification according to EN 14325
SSPR Steady state permeation rate [µg/cm²/min] **MDPR** Minimum detectable permeation rate [µg/cm²/min] **CUM 480** Cumulative permeation mass after 480 mins [µg/cm²] **Time 150** Time to reach cumulative permeation mass of 150 µg/cm² [mins] **ISO** Classification according to ISO 16602 **CAS** Chemical abstracts service registry number **mins** Minutes **>** Larger than **<** Smaller than **imm** Immediate (< 4 min) **nm** Not tested
sat Saturated solution **N/A** Not Applicable ***** Based on lowest single value **na** Not attained **8** Actual breakthrough time; normalized breakthrough time is not available

Technical_Description _ 1200 _ EN .pdf Printed on : July 31, 2018 page 9 of 10
 < test="%{productPermData1.size() > 0}">

Important Note

The permeation data published have been generated for DuPont by independent accredited testing laboratories according to the test method applicable at that time (EN369, ASTM F739, EN 374-3, EN ISO 6529 (method A and B) or ASTM D6978)

The data is typically the average of three fabrics samples tested.

All chemicals have been tested at an assay of greater than 95 (w/w) % unless otherwise stated.

The tests were performed at room temperature and environmental pressure unless otherwise stated.

A different temperature may have significant influence on the breakthrough time.

Permeation typically increases with temperature.

Cumulative permeation data have been measured or have been calculated based on steady state permeation rate.

Cytostatic drugs testing has been performed at a test temperature of 27°C according to ASTM D6978 or ISO 6529 with the additional requirement of reporting a normalized breakthrough time at 0.01 µg/cm²/min.

Chemical warfare agents (Lewisite, Sarin, Soman, Mustard, Tabun and VX Nerve Agent) have been tested according to MIL-STD-282 at 22°C or according to FINABEL 0.7 at 37°C.

Permeation data for Tyvek® is applicable to white Tyvek® 500/ Tyvek® 600 only and is not applicable for other Tyvek® styles or colours.

Permeation data are usually measured for single chemicals. The permeation characteristics of mixtures can often deviate considerably from the behaviour of the individual chemicals.

Please use the permeation data provided as a part of the risk assessment to assist with the selection of a protective fabric, garment or accessory suitable for your application. Breakthrough time is not the same as safe wear time. Breakthrough times are indicative of the barrier performance, but results can vary between the test methods and laboratories. Breakthrough time alone is insufficient to determine how long a garment may be worn once the garment has been contaminated. Safe user wear time may be longer or shorter than the breakthrough time depending on the permeation behaviour of the substance, the toxicity of the substance, working conditions and the exposure conditions (e.g. temperature, pressure, concentration, physical state).

Latest Update Permeation Data: 30/05/2018

- The garment does not protect against ionizing radiation.
- This garment and/or fabric are not flame resistant and should not be used around heat, open flame, sparks or in potentially flammable environments.

The information provided herein corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials or additives or in any process, unless expressly indicated otherwise. The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use conditions DuPont makes no warranties and assumes no liability in connection with any use of this information. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent rights.

Technical_Description _ 1200 _ EN .pdf Printed on : July 31, 2018page 10 of 10

For further product information, literature and as well as assistance in locating a local supplier, please visit:

www.safespec.dupont.co.uk

The footnotes can be found on the SafeSPEC™ website.

Copyright © DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.

Technical_Description_1200_EN.pdf Printed on : July 31, 2018

DuPont Personal Protection

DuPont de Nemours (Luxembourg) S.à.r.l.

L-2984 Luxembourg

Tel.: +800 3666 6666 (international toll-free)

Fax: +352 3666 5071

E-mail: personal.protection@lux.dupont.com



The miracles of science™