


Electrical
Contractors





Labor Units Manual

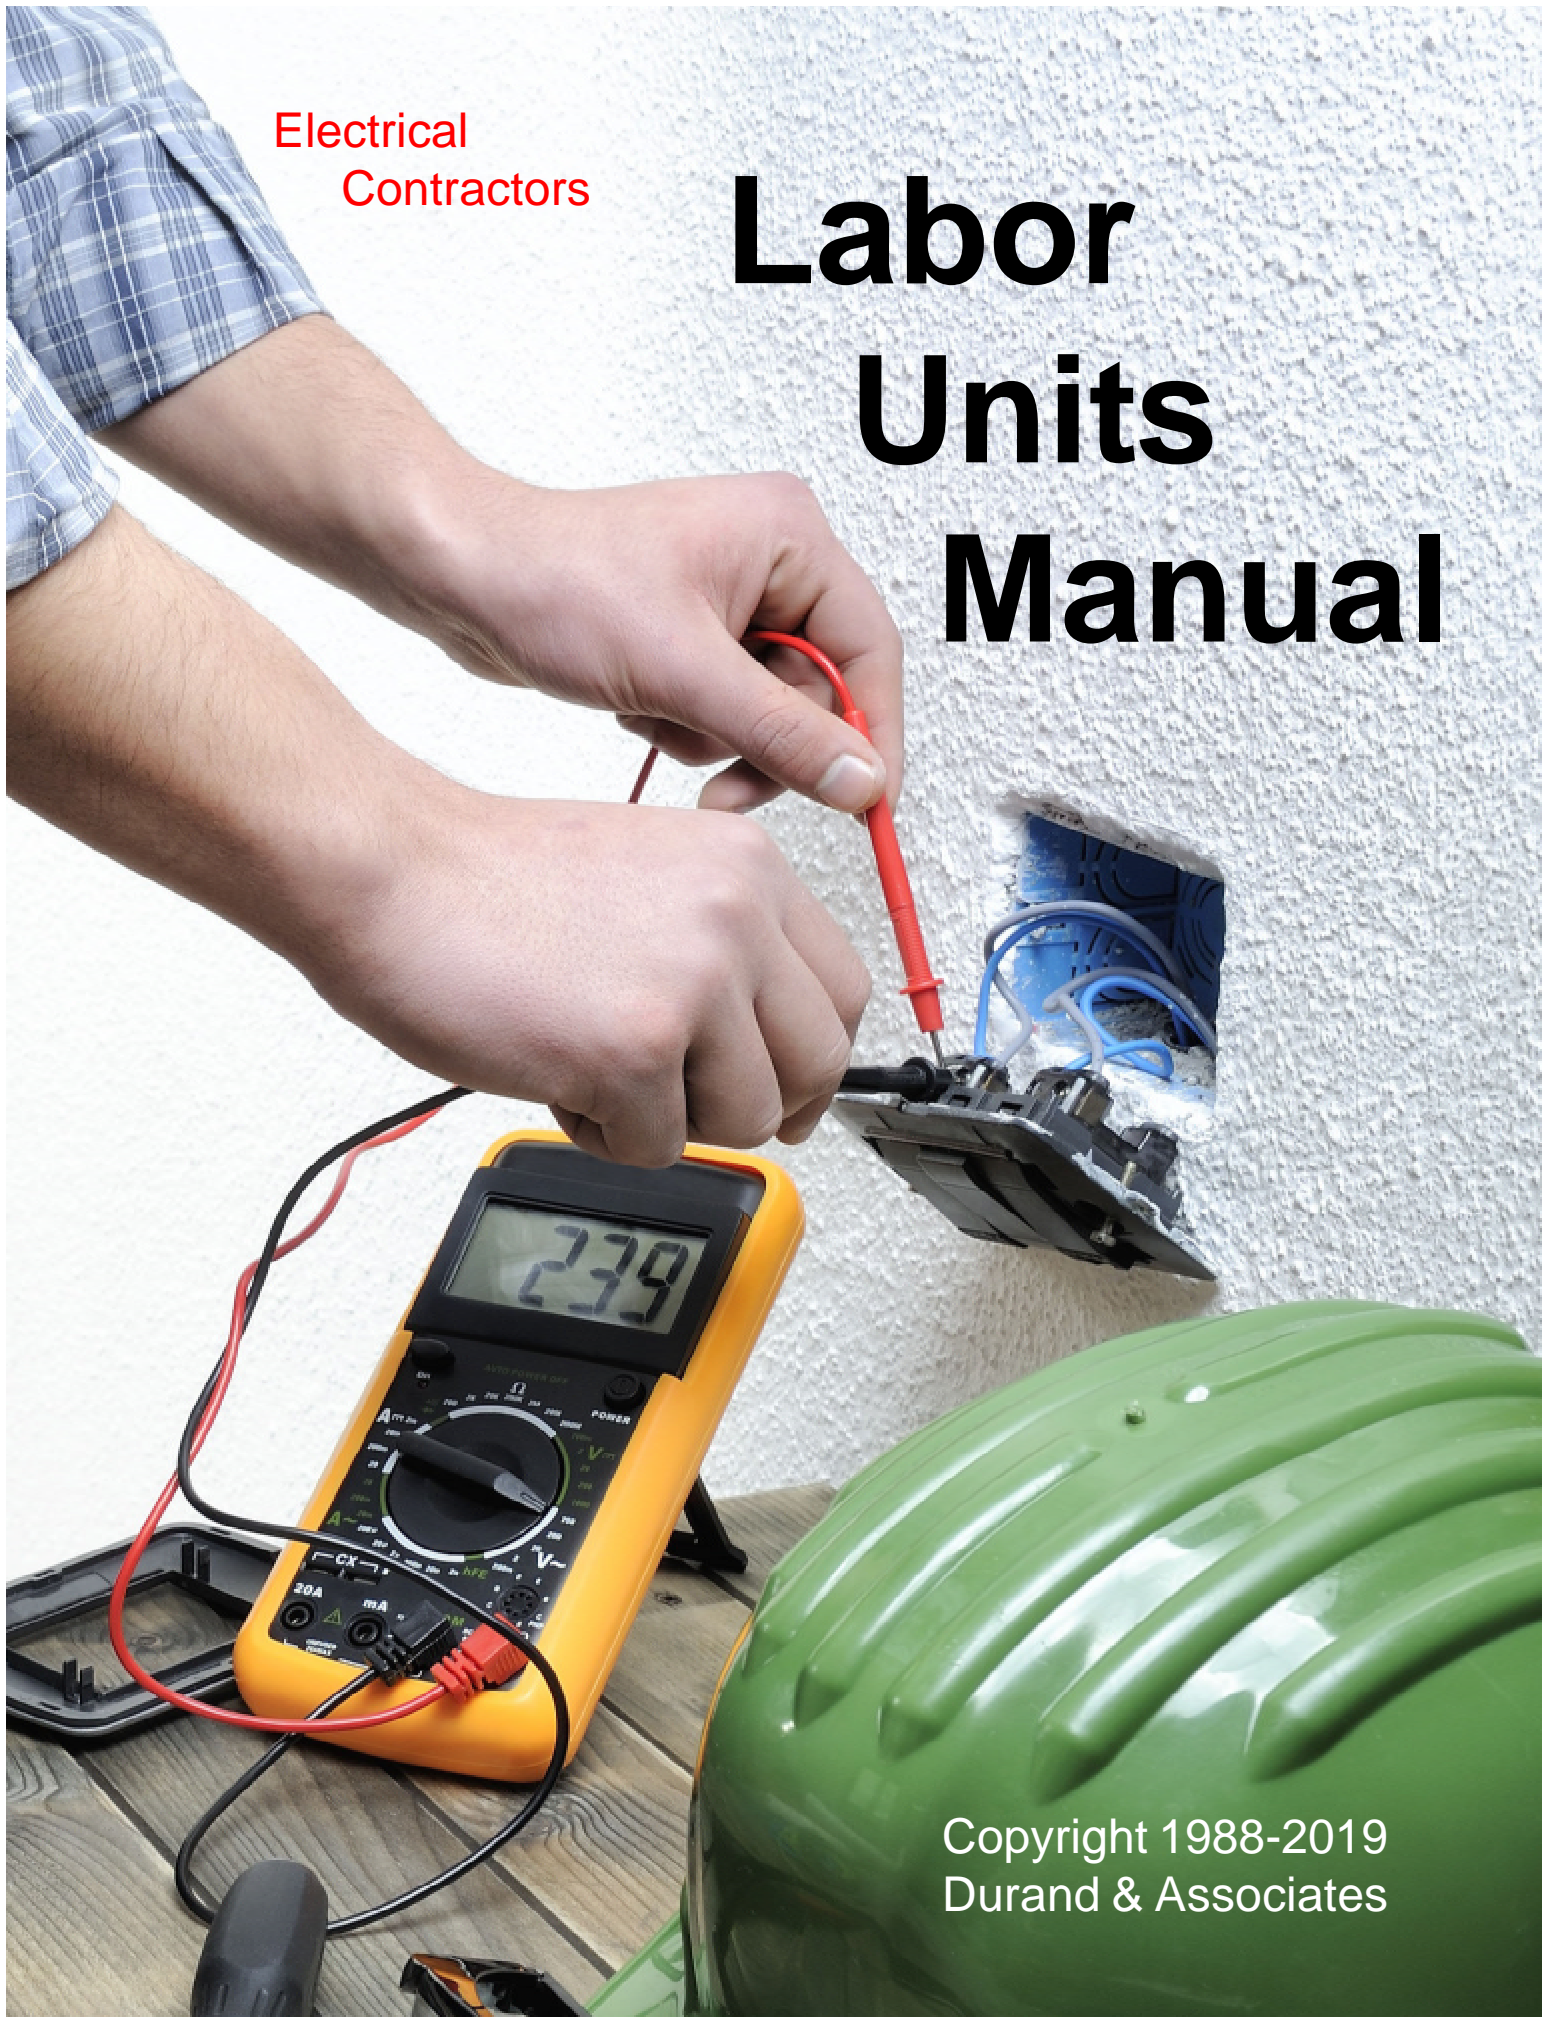

Copyright 1988-2019
Durand & Associates

RIGID CONDUIT & ELBOWS

LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK	PER
RIGID STEEL CONDUIT							
	1/2"	3.50	4.00	4.50	5.00	5.50	C
	3/4"	4.00	4.50	5.00	5.50	6.00	C
	1"	4.50	5.00	5.50	6.00	6.50	C
	1 1/4"	6.25	7.00	7.75	8.50	9.00	C
	1 1/2"	7.00	8.00	9.00	10.00	11.00	C
	2"	9.00	10.00	11.00	12.00	13.00	C
	2 1/2"	10.00	12.00	13.00	14.00	15.40	C
	3"	12.00	14.00	16.00	17.50	19.00	C
	3 1/2"	14.00	16.00	18.00	19.80	22.00	C
	4"	15.00	18.00	21.00	23.00	25.00	C
	5"	23.00	25.00	27.00	30.00	33.00	C
	6"	27.00	30.00	33.00	36.00	39.00	C
RIGID STEEL ELBOWS							
	1/2"	0.15	0.20	0.25	0.28	0.30	E
	3/4"	0.20	0.25	0.30	0.33	0.36	E
	1"	0.25	0.30	0.35	0.39	0.42	E
	1 1/4"	0.30	0.40	0.50	0.55	0.61	E
	1 1/2"	0.40	0.50	0.60	0.66	0.73	E
	2"	0.60	0.70	0.80	0.88	0.97	E
	2 1/2"	0.90	1.00	1.10	1.21	1.33	E
	3"	1.10	1.25	1.40	1.54	1.69	E
	3 1/2"	1.40	1.60	1.80	1.98	2.18	E
	4"	1.70	2.00	2.30	2.53	2.78	E
	5"	2.50	3.00	3.50	3.85	4.24	E
	6"	3.60	4.00	4.40	4.84	5.32	E
RIGID STEEL SWEEP ELBOWS							
	1"	0.30	0.35	0.45	0.50	0.55	E
	1 1/4"	0.40	0.45	0.50	0.60	0.70	E
	1 1/2"	0.50	0.60	0.70	0.80	0.90	E
	2"	0.70	0.85	0.90	1.05	1.20	E
	2 1/2"	1.05	1.30	1.55	1.80	2.00	E
	3"	1.30	1.60	1.90	2.20	2.50	E
SWEEP	3 1/2"	1.60	2.00	2.40	2.80	3.20	E
	4"	1.90	2.50	3.10	3.70	4.30	E
	5"	2.80	3.60	4.40	5.20	6.00	E
	6"	3.90	4.70	5.50	6.30	7.00	E
RIGID STEEL COUPLINGS *							
	1/2"	0.04	0.05	0.06	0.07	0.07	E
	3/4"	0.05	0.06	0.07	0.08	0.08	E
	1"	0.07	0.08	0.09	0.10	0.11	E
	1 1/4"	0.09	0.10	0.11	0.12	0.13	E
	1 1/2"	0.11	0.12	0.13	0.14	0.16	E
	2"	0.13	0.15	0.17	0.19	0.21	E
	2 1/2"	0.18	0.20	0.22	0.24	0.27	E
	3"	0.22	0.25	0.28	0.31	0.34	E
	3 1/2"	0.25	0.30	0.35	0.39	0.42	E
	4"	0.35	0.40	0.45	0.50	0.54	E
	5"	0.40	0.50	0.60	0.66	0.73	E
	6"	0.50	0.60	0.70	0.77	0.85	E

* Labor for couplings not included with conduit.

LOCKNUTS BUSHINGS

LABOR UNITS

SIZE CONDITIONS EASY AVERAGE DIFFICULT REMODEL OLD WORK PER

SEALING LOCKNUTS



1/2"	0.02	0.02	0.03	0.03	0.04	E
3/4"	0.03	0.03	0.04	0.04	0.05	E
1"	0.04	0.05	0.08	0.09	0.10	E
1 1/4"	0.05	0.07	0.09	0.10	0.11	E
1 1/2"	0.05	0.07	0.09	0.10	0.11	E
2"	0.06	0.09	0.12	0.13	0.15	E
2 1/2"	0.09	0.12	0.15	0.17	0.18	E
3"	0.12	0.15	0.18	0.20	0.22	E
3 1/2"	0.14	0.17	0.20	0.22	0.24	E
4"	0.16	0.19	0.22	0.24	0.27	E
5"	0.18	0.21	0.24	0.26	0.29	E
6"	0.20	0.23	0.26	0.29	0.31	E

BUSHINGS



1/2"	0.02	0.03	0.04	0.04	0.05	E
3/4"	0.03	0.04	0.05	0.06	0.06	E
1"	0.04	0.05	0.06	0.07	0.07	E
1 1/4"	0.06	0.08	0.10	0.11	0.12	E
1 1/2"	0.06	0.08	0.10	0.11	0.12	E
2"	0.07	0.10	0.13	0.14	0.16	E
2 1/2"	0.09	0.12	0.15	0.17	0.18	E
3"	0.12	0.15	0.18	0.20	0.22	E
3 1/2"	0.15	0.19	0.23	0.25	0.28	E
4"	0.20	0.25	0.30	0.33	0.36	E
5"	0.25	0.30	0.35	0.39	0.42	E
6"	0.30	0.35	0.40	0.44	0.48	E

BUSHINGS GROUNDING TYPE



1/2"	0.04	0.06	0.08	0.09	0.10	E
3/4"	0.06	0.08	0.10	0.11	0.12	E
1"	0.08	0.10	0.12	0.13	0.15	E
1 1/4"	0.14	0.16	0.18	0.20	0.22	E
1 1/2"	0.14	0.16	0.18	0.20	0.22	E
2"	0.16	0.20	0.24	0.26	0.29	E
2 1/2"	0.20	0.24	0.28	0.31	0.34	E
3"	0.25	0.30	0.35	0.39	0.42	E
3 1/2"	0.35	0.40	0.45	0.50	0.54	E
4"	0.40	0.50	0.60	0.66	0.73	E
5"	0.50	0.60	0.70	0.77	0.85	E
6"	0.60	0.70	0.80	0.88	0.97	E







INSULATING SLEEVES



1/2"	0.04	0.04	0.04	0.05	0.05	E
3/4"	0.05	0.05	0.06	0.06	0.07	E
1"	0.05	0.06	0.07	0.07	0.08	E
1 1/4"	0.06	0.07	0.08	0.08	0.09	E
1 1/2"	0.06	0.07	0.08	0.08	0.09	E
2"	0.07	0.08	0.09	0.10	0.11	E
2 1/2"	0.08	0.09	0.10	0.11	0.12	E
3"	0.09	0.10	0.11	0.12	0.13	E
3 1/2"	0.11	0.12	0.13	0.15	0.16	E
4"	0.11	0.12	0.13	0.15	0.16	E
5"	0.14	0.15	0.17	0.18	0.20	E
6"	0.14	0.15	0.17	0.18	0.20	E

OCTAGON BOXES


LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
	OCTAGON BOX						
	1/2" KO		0.17	0.20	0.23	0.25	0.28 E
	3/4" KO		0.17	0.20	0.23	0.25	0.28 E
	for Romex		0.17	0.20	0.23	0.25	0.28 E
	OCTAGON BOX W/BRACKET						
	1/2" KO		0.15	0.18	0.21	0.23	0.25 E
	3/4" KO		0.15	0.18	0.21	0.23	0.25 E
	for Romex		0.15	0.18	0.21	0.23	0.25 E
	EXTENSION BOX						
	1/2" KO		0.20	0.25	0.30	0.33	0.36 E
	3/4" KO		0.20	0.25	0.30	0.33	0.36 E
	OCTAGON BOX & HANGER						
	1/2" KO		0.25	0.30	0.35	0.39	0.42 E
	3/4" KO		0.25	0.30	0.35	0.39	0.42 E
	for Romex		0.25	0.30	0.35	0.39	0.42 E
	SHALLOW BOX						
	1/2" KO		0.20	0.25	0.30	0.33	0.36 E
	for Romex		0.20	0.25	0.30	0.33	0.36 E
	PLASTER RINGS						
	1/2" Raised		0.03	0.05	0.07	0.08	0.08 E
	5/8" Raised		0.03	0.05	0.07	0.08	0.08 E
	3/4" Raised		0.04	0.06	0.08	0.09	0.10 E
	1" Raised		0.05	0.07	0.09	0.10	0.11 E

WIREWAY - NEMA 1

LABOR UNITS

SIZE CONDITIONS EASY AVERAGE DIFFICULT REMODEL OLD WORK PER



NEMA 1

3" X 3"

12" Long	0.36	0.40	0.44	0.48	0.53	E
24" Long	0.54	0.60	0.66	0.73	0.80	E
36" Long	0.63	0.70	0.77	0.85	0.93	E
48" Long	0.81	0.90	0.99	1.09	1.20	E
60" Long	0.99	1.10	1.21	1.33	1.46	E
120" Long	1.26	1.40	1.54	1.69	1.86	E

4" X 4"


12" Long	0.45	0.50	0.55	0.61	0.67	E
24" Long	0.63	0.70	0.77	0.85	0.93	E
36" Long	0.72	0.80	0.88	0.97	1.06	E
48" Long	0.90	1.00	1.10	1.21	1.33	E
60" Long	1.08	1.20	1.32	1.45	1.60	E
120" Long	1.35	1.50	1.65	1.82	2.00	E

6" X 6"

12" Long	0.54	0.60	0.66	0.73	0.80	E
24" Long	0.72	0.80	0.88	0.97	1.06	E
36" Long	0.81	0.90	0.99	1.09	1.20	E
48" Long	0.99	1.10	1.21	1.33	1.46	E
60" Long	1.17	1.30	1.43	1.57	1.73	E
120" Long	1.44	1.60	1.76	1.94	2.13	E


8" X 8"

12" Long	0.63	0.70	0.77	0.85	0.93	E
24" Long	0.81	0.90	0.99	1.09	1.20	E
36" Long	0.90	1.00	1.10	1.21	1.33	E
48" Long	1.08	1.20	1.32	1.45	1.60	E
60" Long	1.26	1.40	1.54	1.69	1.86	E
120" Long	1.53	1.70	1.87	2.06	2.26	E



COUPLINGS

3" X 3"	0.14	0.15	0.17	0.18	0.20	E
4" X 4"	0.18	0.20	0.22	0.24	0.27	E
6" X 6"	0.23	0.25	0.28	0.30	0.33	E
8" X 8"	0.27	0.30	0.33	0.36	0.40	E



HANGERS

6" Wide	0.14	0.15	0.17	0.18	0.20	E
12" Wide	0.18	0.20	0.22	0.24	0.27	E
18" Wide	0.23	0.25	0.28	0.30	0.33	E
24" Wide	0.27	0.30	0.33	0.36	0.40	E

WIREMOLD AL2000 & AL2400

LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
Wiremold							
	AL2000	5.50	5.75	6.00	6.60	7.26	C
	AL2400	5.75	6.00	6.25	6.88	7.56	C
Mounting Clip							
	AL2003	0.15	0.17	0.19	0.21	0.23	C
Cover Clip							
	AL2006	0.03	0.03	0.03	0.04	0.04	E
	AL2406	0.03	0.03	0.03	0.04	0.04	E
Flat Elbow							
	AL2011	0.14	0.15	0.16	0.18	0.19	E
	AL2411	0.14	0.15	0.16	0.18	0.19	E
Internal Elbow							
	AL2017	0.14	0.15	0.16	0.18	0.19	E
	AL2417	0.14	0.15	0.16	0.18	0.19	E
External Elbow							
	AL2018	0.14	0.15	0.16	0.18	0.19	E
	AL2418	0.14	0.15	0.16	0.18	0.19	E
Tee							
	AL2015	0.16	0.17	0.18	0.20	0.22	E
	AL2415	0.16	0.17	0.18	0.20	0.22	E
Cross							
	AL2016	0.18	0.19	0.20	0.22	0.24	E
	AL2416	0.18	0.19	0.20	0.22	0.24	E
Coupling							
	AL2001	0.06	0.07	0.08	0.09	0.10	E
	AL2401	0.06	0.07	0.08	0.09	0.10	E
Wire Clip							
	AL2000WC	0.04	0.05	0.06	0.07	0.07	E
	AL2400WC	0.04	0.05	0.06	0.07	0.07	E

SERVICE ENTRANCE CABLE

LABOR UNITS

SIZE CONDITIONS EASY AVERAGE DIFFICULT REMODEL OLD WORK PER



COPPER

Copper Service Entrance Cable

12-3		6.30	7.00	7.70	8.47	9.32	M
10-3		8.10	9.00	9.90	10.89	11.98	M
8-3		9.90	11.00	12.10	13.31	14.64	M
6-2 & 8-1		11.25	12.50	13.75	15.13	16.64	M
6-3		11.70	13.00	14.30	15.73	17.30	M
4-2 & 6-1		13.05	14.50	15.95	17.55	19.30	M
4-3		13.50	15.00	16.50	18.15	19.97	M
3-3		14.40	16.00	17.60	19.36	21.30	M
2-3		15.30	17.00	18.70	20.57	22.63	M
1-3		16.20	18.00	19.80	21.78	23.96	M
1/0-3		18.00	20.00	22.00	24.20	26.62	M
2/0-3		19.80	22.00	24.20	26.62	29.28	M
3/0-3		21.60	24.00	26.40	29.04	31.94	M
4/0-3		23.40	26.00	28.60	31.46	34.61	M



ALUMINUM

Aluminum Service Entrance Cable

8-3		9.00	10.00	11.00	12.10	13.31	M
6-3		9.90	11.00	12.10	13.31	14.64	M
4-2 & 6-1		10.35	11.50	12.65	13.92	15.31	M
4-3		10.80	12.00	13.20	14.52	15.97	M
2-2 & 4-1		12.15	13.50	14.85	16.34	17.97	M
2-3		12.60	14.00	15.40	16.94	18.63	M
1-2 & 3-1		13.05	14.50	15.95	17.55	19.30	M
1-3		13.50	15.00	16.50	18.15	19.97	M
1/0-2 & 2-1		14.85	16.50	18.15	19.97	21.96	M
1/0-3		15.30	17.00	18.70	20.57	22.63	M
2/0-2 & 1-1		16.65	18.50	20.35	22.39	24.62	M
2/0-3		17.10	19.00	20.90	22.99	25.29	M
3/0-2 & 1/0-1		18.45	20.50	22.55	24.81	27.29	M
3/0-3		18.90	21.00	23.10	25.41	27.95	M
4/0-2 & 2/0-1		20.25	22.50	24.75	27.23	29.95	M
4/0-3		20.70	23.00	25.30	27.83	30.61	M



Cable Connectors

3/4"		0.04	0.05	0.06	0.06	0.07	E
1"		0.06	0.07	0.08	0.08	0.09	E
1 1/4"		0.09	0.10	0.11	0.12	0.13	E
1 1/2"		0.11	0.12	0.13	0.15	0.16	E
2"		0.14	0.15	0.17	0.18	0.20	E








Straps

3-#8 thru 3-#4		0.05	0.06	0.07	0.08	0.09	E
3-#3 thru 3-#2		0.06	0.07	0.08	0.09	0.10	E
3-#1 thru 3-2/0		0.06	0.08	0.10	0.11	0.12	E
3-3/0 thru 3-4/0		0.07	0.09	0.11	0.12	0.13	E

LUGS

LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
Hi-Press Butt Splice							
	#6	0.32	0.35	0.39	0.42	0.47	E
	#4 - #1	0.36	0.40	0.44	0.48	0.53	E
	1/0 - 4/0	0.45	0.50	0.55	0.61	0.67	E
	250 - 350 MCM	0.59	0.65	0.72	0.79	0.87	E
	400 - 500 MCM	0.63	0.70	0.77	0.85	0.93	E
	600 - 700 MCM	0.77	0.85	0.94	1.03	1.13	E
	750 - 1000 MCM	0.90	1.00	1.10	1.21	1.33	E
Quad Lug							
	#6	0.41	0.45	0.50	0.54	0.60	E
	#4 - #1	0.50	0.55	0.61	0.67	0.73	E
	1/0 - 4/0	0.59	0.65	0.72	0.79	0.87	E
Cable Splicers							
	#2	0.36	0.40	0.44	0.48	0.53	E
	1/0	0.41	0.45	0.50	0.54	0.60	E
	4/0	0.45	0.50	0.55	0.61	0.67	E
	250 MCM	0.54	0.60	0.66	0.73	0.80	E
	350 MCM	0.59	0.65	0.72	0.79	0.87	E
	500 MCM	0.63	0.70	0.77	0.85	0.93	E
Multitap Splicers							
	3/0	0.72	0.80	0.88	0.97	1.06	E
	4/0	0.77	0.85	0.94	1.03	1.13	E
	250 MCM	0.81	0.90	0.99	1.09	1.20	E
	300 MCM	0.86	0.95	1.05	1.15	1.26	E
	350 MCM	0.90	1.00	1.10	1.21	1.33	E
	400 MCM	0.95	1.05	1.16	1.27	1.40	E
	500 MCM	0.99	1.10	1.21	1.33	1.46	E
Ground Clamp							
	#4 - 2/0	0.23	0.25	0.28	0.30	0.33	E
	2/0 - 500 MCM	0.36	0.40	0.44	0.48	0.53	E

NOTE: All lugs include termination labor.

BUS DUCT

LABOR UNITS

SIZE CONDITIONS EASY AVERAGE DIFFICULT REMODEL OLD WORK PER



Bus Duct

100A		12.60	14.00	15.40	16.94	18.63	E
225A		15.30	17.00	18.70	20.57	22.63	E
400A		18.00	20.00	22.00	24.20	26.62	E
600A		27.00	30.00	33.00	36.30	39.93	E
800A		31.50	35.00	38.50	42.35	46.59	E
1000A		36.00	40.00	44.00	48.40	53.24	E
1350A		38.25	42.50	46.75	51.43	56.57	E
1600A		40.50	45.00	49.50	54.45	59.90	E
2000A		45.00	50.00	55.00	60.50	66.55	E
2500A		49.50	55.00	60.50	66.55	73.21	E
3000A		54.00	60.00	66.00	72.60	79.86	E
4000A		58.50	65.00	71.50	78.65	86.52	E



Bus Duct Elbow

100A		1.13	1.25	1.38	1.51	1.66	E
225A		1.35	1.50	1.65	1.82	2.00	E
400A		2.03	2.25	2.48	2.72	2.99	E
600A		2.70	3.00	3.30	3.63	3.99	E
800A		3.15	3.50	3.85	4.24	4.66	E
1000A		3.60	4.00	4.40	4.84	5.32	E
1350A		4.05	4.50	4.95	5.45	5.99	E
1600A		4.50	5.00	5.50	6.05	6.66	E
2000A		4.95	5.50	6.05	6.66	7.32	E
2500A		5.40	6.00	6.60	7.26	7.99	E
3000A		6.30	7.00	7.70	8.47	9.32	E
4000A		7.20	8.00	8.80	9.68	10.65	E









Bus Duct End Cover

100A		0.23	0.25	0.28	0.30	0.33	E
225A		0.32	0.35	0.39	0.42	0.47	E
400A		0.36	0.40	0.44	0.48	0.53	E
600A		0.41	0.45	0.50	0.54	0.60	E
800A		0.45	0.50	0.55	0.61	0.67	E
1000A		0.54	0.60	0.66	0.73	0.80	E
1350A		0.63	0.70	0.77	0.85	0.93	E
1600A		0.72	0.80	0.88	0.97	1.06	E
2000A		0.81	0.90	0.99	1.09	1.20	E
2500A		0.90	1.00	1.10	1.21	1.33	E
3000A		0.99	1.10	1.21	1.33	1.46	E
4000A		1.08	1.20	1.32	1.45	1.60	E






INCANDESCENT FIXTURES

LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
	Flood Light						
1-LAMP		0.51	0.60	0.69	0.76	0.83	E
	Inground Up Light						
1-LAMP		0.85	1.00	1.15	1.27	1.39	E
	Landscape Light						
1-LAMP		0.60	0.70	0.81	0.89	0.97	E
	Lamppost & Fixture						
1-LAMP		1.91	2.25	2.59	2.85	3.13	E
	Exit Fixture						
1-LAMP		0.60	0.70	0.81	0.89	0.97	E
	Emergency Fixture						
1-LAMP		0.60	0.70	0.81	0.89	0.97	E
2-LAMP		0.77	0.90	1.04	1.14	1.25	E






TRAFFIC LIGHTS

LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
	Boom Mounted	4.00	4.50	6.00	6.60	7.26	E
BOOM MOUNT							
	Cable Mounted	5.00	5.50	6.00	6.60	7.26	E
CABLE MOUNT							
	Pole Mounted	3.00	3.25	3.75	4.13	4.54	E
POLE MOUNT							
	Bracket Mounted	3.50	3.75	4.00	4.40	4.84	E
BRACKET MOUNT							
	Lighted Street Sign	1.50	1.75	2.00	2.20	2.42	E

CLOCK SYSTEMS

LABOR UNITS


SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
	Wall Clock	0.45	0.50	0.55	0.61	0.67	E
	Back Box	0.68	0.75	0.83	0.91	1.00	E
	Hall Clock	0.77	0.85	0.94	1.03	1.13	E
	Bell	0.45	0.50	0.55	0.61	0.67	E
	Master Clock	3.60	4.00	4.40	4.84	5.32	E

TRENCHING - HAND EXCAVATED

LABOR UNITS


SIZE EASY AVERAGE DIFFICULT REMODEL OLD WORK PER

Sandy Soil Condition



6" Wide X 6" Deep	1.40	1.75	2.10	2.31	2.54	C
6" Wide X 12" Deep	2.40	3.00	3.60	3.96	4.36	C
6" Wide X 18" Deep	4.00	5.00	6.00	6.60	7.26	C
6" Wide X 24" Deep	5.60	7.00	8.40			
9" Wide X 6" Deep	2.08	2.60	3.12	3.43	3.78	C
9" Wide X 12" Deep	3.60	4.50	5.40	5.94	6.53	C
9" Wide X 18" Deep	6.00	7.50	9.00	9.90	10.89	C
9" Wide X 24" Deep	8.40	10.50	12.60	13.86	15.25	C
12" Wide X 6" Deep	2.80	3.50	4.20	4.62	5.08	C
12" Wide X 12" Deep	4.80	6.00	7.20	7.92	8.71	C
12" Wide X 18" Deep	8.00	10.00	12.00	13.20	14.52	C
12" Wide X 24" Deep	11.20	14.00	16.80	18.48	20.33	C
12" Wide X 30" Deep	14.40	18.00	21.60	23.76	26.14	C








Clay Soil Condition



6" Wide X 6" Deep	2.08	2.60	3.12	3.43	3.78	C
6" Wide X 12" Deep	3.60	4.50	5.40	5.94	6.53	C
6" Wide X 18" Deep	6.00	7.50	9.00	9.90	10.89	C
6" Wide X 24" Deep	8.40	10.50	12.60	13.86	15.25	C
9" Wide X 6" Deep	3.12	3.90	4.68	5.15	5.66	C
9" Wide X 12" Deep	5.40	6.75	8.10	8.91	9.80	C
9" Wide X 18" Deep	9.00	11.25	13.50	14.85	16.34	C
9" Wide X 24" Deep	12.60	15.75	18.90	20.79	22.87	C
12" Wide X 6" Deep	4.16	5.20	6.24	6.86	7.55	C
12" Wide X 12" Deep	7.20	9.00	10.80	11.88	13.07	C
12" Wide X 18" Deep	12.00	15.00	18.00	19.80	21.78	C
12" Wide X 24" Deep	16.80	21.00	25.20	27.72	30.49	C
12" Wide X 30" Deep	21.60	27.00	32.40	35.64	39.20	C

STRUCTURED CABLING

LABOR UNITS

SIZE	CONDITIONS	EASY	AVERAGE	DIFFICULT	REMODEL	OLD WORK PER	
	4-PLACE OUTLET	0.40	0.45	0.54	0.59	0.65	E
	4-PLACE OUTLET	0.50	0.55	0.66	0.73	0.80	E
	12-PLACE OUTLET MODULE	0.75	0.80	0.96	1.06	1.16	E
	1-PLACE OUTLET	0.20	0.25	0.30	0.33	0.36	E
	CABLE CAT 5E OR 6	8.00	10.00	12.00	13.20	14.52	M
	CABLE CAT 5E OR 6 PATCH CABLE	0.06	0.08	0.10	0.11	0.12	M
	COAXIAL CABLE	11.00	12.00	14.40	15.84	17.42	E