



FIVE BOW

FB | SUSPENDED, SURFACE

STANDARD SIZES

1.75" Aperture with Reveal Lens
Configurable in linear shapes and straight run sections

LAMPING

LED - Direct or Indirect - 80/90 CRI - 2700K/3000K/3500K/4000K
Output Options: LOW/MED/HI/DECOR/Tunable White/RGB/RGB+W
Dimming down to 0%

FINISH

18 standard finishes available at no extra charge
RAL classic colors, TCI / Tiger Drylac catalog colors, and custom color
match also available

CONSTRUCTION

Industrial Strength Extruded 6061 Aluminum






PRODUCT SUBMITTAL WORKSHEET

SAMPLE PRODUCT CODE

FB – **S5** – **HI/90/3500** – **0/10V/0%** – **EXT/R** – **AL** – **UNV** – **EMB/1** – **OS/1** – **COMBO** – **SB**
 1 2 3 4 5 6 7 8A 8B 8C

1. BASE MODEL (CHOOSE ONE)


- FBD** 1.75" suspended, direct
- FBI** 1.75" suspended, indirect
- FBSMB** 1.75" surface, back mount

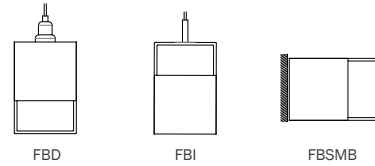

2. SHAPE/LENGTH (CHOOSE ONE & ENTER LENGTH IN FEET – FOR CUSTOM ANGLES, CONTACT ALW)

- S_** Individual/Straight Run Section (enter length, ex. S5)
- SQ_** Square Configuration (enter side length A, ex: SQ5)
- R_** Rectangular Configuration (enter side lengths A and B, ex. R5-7)
- LL_** L-Shaped, Left Configuration (enter side lengths A and B, ex. LL5-7)
- LR_** L-Shaped, Right Configuration (enter side lengths A and B, ex. LR5-7)
- U_** U-Shaped Configuration (enter side lengths A, B, and C, ex. U5-7-4)

*Lengths are nominal and may vary based on lamping and other specification selections. Consult ALW when exact lengths are required.
 *Shape orientation (Looking from the Ceiling down to the floor).

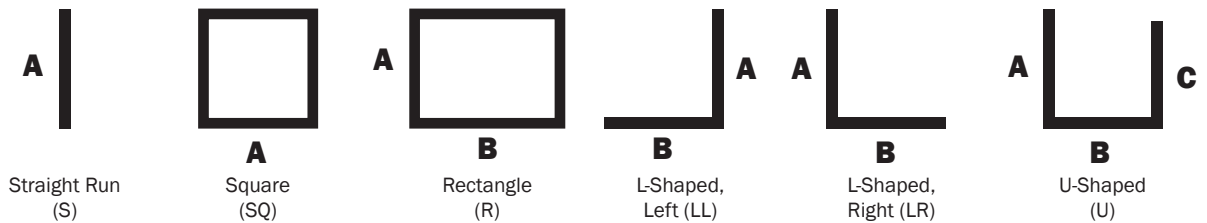

3. LED LAMPING (CHOOSE ONE UNDER A, B, & C, AS NECESSARY)

- | | | |
|--|---|---|
| A. OUTPUT
<input type="checkbox"/> LOW
<input type="checkbox"/> MED
<input type="checkbox"/> HI
<input type="checkbox"/> DECOR
<input type="checkbox"/> TUNE (2700K-6500K, 80CRI)
<input type="checkbox"/> RGB
<input type="checkbox"/> RGBW (White Chip: 3500K, 80CRI) | B. CRI¹
<input type="checkbox"/> 80
<input type="checkbox"/> 90 | C. CCT²
<input type="checkbox"/> 2700K (90 CRI Only)
<input type="checkbox"/> 3000K
<input type="checkbox"/> 3500K
<input type="checkbox"/> 4000K |
|--|---|---|

DELIVERED LUMENS (LM/FT)	WATTS (W/FT)	EFFICACY (LM/W)
See page 6 for complete details.		Up to 120 lm/W

¹CRI not applicable for DECOR, TUNE, RGB, or RGBW lamping
²CCT not applicable for TUNE, RGB, or RGBW lamping



4. DRIVER³ (CHOOSE ONE .STD, DECOR, TUNE & RGB(W) TABLE INDICATES COMPATIBLE LED LAMPING)

	STD ⁴	DECOR	TUNE	RGB(W)	
<input type="checkbox"/> 0/10V/S	●	●	●		0-10V dimming down to 5% (Standard Dimming – Down to 10% for DECOR and TUNE lamping)
<input type="checkbox"/> 0/10V/1%	●	●	●		0-10V dimming down to 1%
<input type="checkbox"/> 0/10V/0%	●	●	●		0-10V premium dimming down to 0%
<input type="checkbox"/> ECOSYS1	●	●			(LDE1) Lutron Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
<input type="checkbox"/> TSERIES⁵			●		Lutron T-Series Tunable White Class 2 LED Driver (For use with Lutron Quantum Control Systems)
<input type="checkbox"/> DALI	●	●	●		DALI flicker-free dimming down to 0%(Down to 1% for Lutron Vive Lighting Control System)
<input type="checkbox"/> DMX	●	●	●	●	DMX flicker-free dimming down to 0%

³Driver specifications provided upon request.

⁴Lutron Vive Control Systems is compatible only with STD lamping. See more information for compatible Driver under 'Sensor Options'.

⁵For use with TUNE Lamping. Lutron T-Series Driver is not compatible with Lutron Vive Lighting Control System.

5. LENS

- EXT/R** Extra diffuse, reveal lens

6. FINISH (CHOOSE ONE. SEE PAGE 7 FOR LARGER SWATCHES AND ADDITIONAL INFORMATION)

STANDARD FINISHES

ALUMINUM

- AL** Anodized Aluminum

BASIC POWDER COAT

- GW** Gloss White
- SW** Satin White
- AW** Antimicrobial Satin White
- TW** Textured Matte White
- TB** Textured Matte Black

METALLIC POWDER COAT

- SG** Silver Gray
- CG** Charcoal Gray
- CU** Copper
- BR** Brass

SATIN ANODIZED EFFECT POWDER COAT

- CS** Clear Silver
- OB** Oil-Rubbed Bronze
- DB** Dark Bronze
- SB** Satin Black

GLOSS POWDER COAT (80-95% GLOSS)

- GO** Orange (RAL 2003)
- GR** Red (RAL 3020)
- GM** Magenta (RAL 4010)
- GB** Blue (RAL 5015)

SPECIAL ORDER FINISHES

- RAL**_____ Specify RAL Classic Color (Ex: RAL 3003) - Most RAL Colors are available for powder coat. See www.alwusa.com/finishes
- CAT**_____ Specify Catalog Colors - Specify colors from the **Tiger Drylac** and **TCI** catalogs
- CCM**_____ Custom Color Match - Specify a custom powder coat color match

7. VOLTAGE (CHOOSE ONE)

- UNV** Universal Voltage (120VAC-277VAC)
- 347** 347 Volt (Driver options may be limited. Not available with EMB)

SS051121-A.0



8. ADDITIONAL OPTIONS (OPTIONAL — CHOOSE ONE UNDER A, B, AND ANY UNDER C, IF DESIRED)

A. EMERGENCY OPTIONS

- EMB/___**⁶ Emergency Battery (*indicate QTY — each battery powers 4ft. section @ 1492lm. Not available in 347V*)
- EMC/___**⁶ Emergency Circuit (*indicate QTY of 4ft sections to be illuminated by emergency circuit*)

⁶For fixtures under 4ft in length, entire fixture will be illuminated with a proportional lumen output. Consult ALW for more details.

B. SENSOR OPTIONS (DEFAULT QUANTITY IS 1 SENSOR PER 8FT, INDICATE ALTERNATE QUANTITY IF DESIRED)

- VRF/___**⁷ Lutron® Vive integral RF wireless fixture control (Lutron Part: DFCSJ-OEM-RF)
- VDO/___**⁷ Lutron® Vive integral RF wireless fixture control + daylight/occ sensor (Lutron Part: DFCSJ-OEM-OCC)
- FCJS/___**⁸ Lutron® Vive remote RF wireless fixture control (Lutron Part: FCJS-ECO or FCJS-010)
- FCJS/S/___**⁸ Lutron® Vive remote RF wireless fixture control + daylight/occ sensor (Lutron Part: FCJS-ECO or FCJS-010, & FC-Sensor)
- ENLGH/___**⁹ Enlighted® remote connected lighting smart sensor (Enlighted Part: SU-5S-H) (*occupancy, daylight, networking, and more*)
- ENLGH/INT/___**⁹ Enlighted® integral connected lighting smart sensor (Enlighted Part: SU-5E) (*occupancy, daylight, networking, and more*)
- OS/___** 0-10V integral occupancy sensor
- PH/___** 0-10V integral photocell/daylight sensor

⁷Lutron® Vive integral sensors are compatible with the following drivers: DALI driver or ECOSYS. Vive Sensors are not compatible with the Lutron T-Series Tunable White Driver. Programming required by Lutron Commissioner.

⁸Lutron® Vive remote sensors are compatible with the following drivers: 0/10V/S, 0/10V/1, 0/10V/0 driver or ECOSYS. Vive Sensors are not compatible with the Lutron T-Series Tunable White Driver. Programming required by Lutron Commissioner.


⁹Enlighted® sensors are compatible with the following drivers: 0/10V/S, 0/10V/1, 0/10V/0. Programming required by Enlighted Commissioner. Additional Enlighted sensor families included IoT Sensors and Enlighted One Sensors are also available as a custom order but not available as a QuickShip option. Contact Customer Support for more information.

C. ADDITIONAL OPTIONS (COMPATIBLE ONLY WITH SUSPENDED MOUNT)


- COMBO** Combination 4.5" canopy at power feed locations to accommodate both power cord & suspension mount hardware.
- SB** Seismic Bracing




MECHANICAL DIAGRAMS – MOUNTING & DIMENSIONS

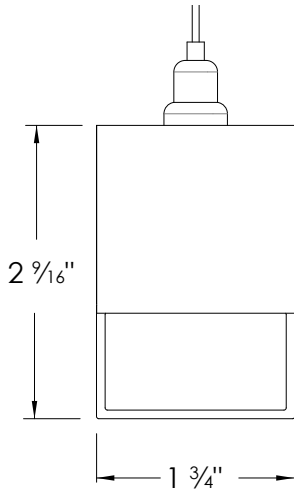

FBD
DIRECT

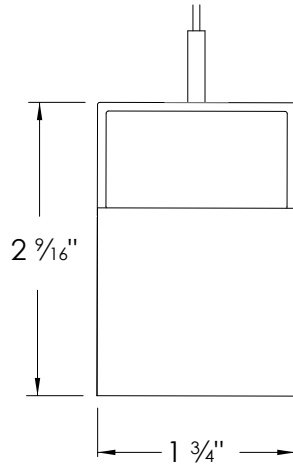

FBI
INDIRECT

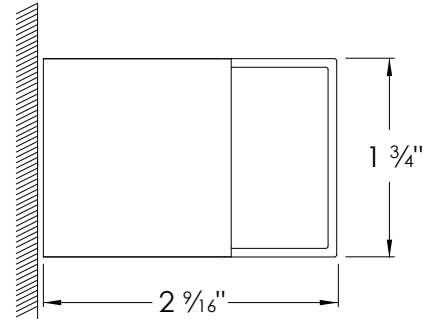

FBSMB
SURFACE/BACK MOUNT

SUSPENSION MOUNTING



CEILING HARDWARE


- (1) 4.5" canopy per power feed location,
- (1) bullet mount,
- (1) 8' aircraft cable
- (1) 2" canopy (for use with T-bar mounting) per suspension point



COMBO CANOPY

Choose option COMBO to specify 4.5" canopies at feed locations with power feed and aircraft cable suspension mounting.

Canopy finish is always white. Contact ALW for alternate colors.



SEISMIC BRACING

Add-on hardware includes cable gripper with hook, 2-cable clamp and specified length of aircraft cable per suspension point.



PERFORMANCE DETAILS – LED LAMPING

OUTPUT	DELIVERED LUMENS (LM/FT)	WATTS (W/FT)	EFFICACY (LM/W)	CRI OPTIONS	CCT OPTIONS
LOW ¹⁰	650	5.3	Up to ~120	80 90	2700K (90CRI Only) 3000K 3500K 4000K
MED ¹⁰	875	7.2			
HI ¹⁰	1100	9.1			
DECOR	294	5.9	49	N/A	3000K 3500K 4000K
TUNE	WW: 439 CW: 484 Total: 923	8.8	Up to ~110		2700K-6500K
RGB ¹¹	RGB: 129	4.4	N/A		N/A
RGBW ¹²	RGB: 129 RGB+W: 237 White Only: 108	4.4		80 (White Chip)	3500K (White Chip)

¹⁰Performance calculations are based on the following LM-79 test: 4000K, 80CRI, HIGH output. MED and LOW values are extrapolated distributions.

¹¹Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue).

¹²Performance calculations are derived from the following LM-79 tests: 1) RGB LEDs illuminated, 2) RGB+W LEDs illuminated, 3) White LED only illuminated.



STANDARD FINISHES

Standard finishes are available at no additional charge.

ALUMINUM



Anodized Aluminum

BASIC POWDER COAT



Gloss White


Satin White

Antimicrobial Satin White

Textured Matte White

Textured Matte Black

METALLIC POWDER COAT

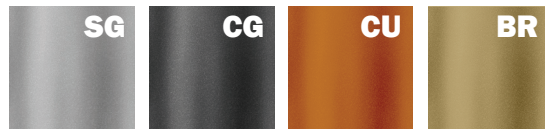

Silver Gray

Charcoal Gray

Copper

Brass

SATIN ANODIZED EFFECT POWDER COAT



Clear Silver

Oil-Rubbed Bronze

Dark Bronze

Satin Black

GLOSS POWDER COAT (80-95% GLOSS)



Orange RAL 2003

Red RAL 3020

Magenta RAL 4010

Blue RAL 5015

SPECIAL ORDER FINISHES*



RAL CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See www.alwusa.com/finishes



CUSTOM COLOR MATCH: CCM_ _ _ _

Custom powder coat color matching is available for a premium setup fee. Consult ALW for additional information.



CATALOG COLORS: CAT_ _ _ _

The complete range of powder coat colors from Tiger Drylac and TCI catalogs are available for a minimum setup fee. Consult ALW for a catalog color you would like to specify.

*An individual setup fee will apply to each unique Special Order Finish per purchase order. (ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)




ADDITIONAL OPTIONS & SPECIFICATIONS

ELECTRICAL PERFORMANCE

Class 2 LED drivers. $L_{70} > 54,000$ hours.
80+ CRI. Luminous flux +/- 5%.

LENS

Extruded, twin-layered, high-impact acrylic. EXT is white and extra diffuse with minimal- to no-source visibility.



EXT/R Lens

HOUSING

100% recyclable, extruded architectural grade 6061 aluminum with a 0.08" minimum wall thickness.

SAFETY & REGULATORY

ETL Listed (U.S. & Canada). Suitable for dry or damp locations.
Conforms to UL std. 1598, Luminaires.
Certified to CSA std. C22.2#250.0:2008 Ed. 3+G1;G2.

OPERATING CONDITIONS

Luminaire should be installed and operated ONLY in dry or damp locations where the ambient temperature ranges from -4 °F to 122 °F (-20 °C to 50 °C). Luminaire operation in environments outside the listed temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and color consistency.

WARRANTY

Limited 5-year warranty. Details: alwusa.com/warranty

POWER CABLES

Power cables come standard in a transparent sheathing to match steel aircraft suspension cables. Please contact customer support if custom cables are required for your application. Power cables cannot be swapped in the field as it will void the ETL Safety Listing and Product Warranty.



CONTROLS, SENSORS, & LED DRIVER

ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs. We currently support integration with Lutron, Enlighted, EldoLED, nLight, Osram, Philips, and more. If there's a component or system needed that you don't see on the spec sheet please contact ALW customer support today so we can review your requirements.