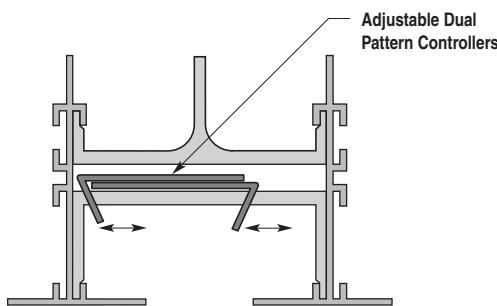


KEY FEATURES:

- High capacity single slot linear diffuser available in five slot widths, offers an attractive alternative to traditional multi-slot designs. Available slot widths are 1" (25), 1 1/2" (38), 2" (51), 2 1/2" (64) and 3" (76). A two slot option is also available.
- Comprehensive selection of frame/border styles and mounting hardware to suit any installation.
- Choice of FLH Series Horizontal or FLV Series Vertical Pattern Controllers. May be combined within a single system.
- Custom curving availability to meet specific design requirements, provides architectural appeal.
- Heavy wall extruded aluminum construction permits support and full integration with ceiling system.
- Mitered end borders are available which maximize aesthetic appeal.
- Available in single sections up to 12 ft. (3658) in length. Longer lengths are supplied in multiple sections with alignment strips for field assembly.
- High performance design is ideally suited to VAV systems, both heating and cooling.
- Custom colors and anodized finishes are available.

FLH SERIES:

Designed primarily for continuous linear slot ceiling applications requiring horizontal air patterns. Tight, high induction air pattern maximizes coanda effect under a wide range of airflow volumes for maximum occupant comfort. Typical applications would include open office perimeter zones, entrance foyers and lobbies, mall and office entrance atriums and conference meeting rooms.

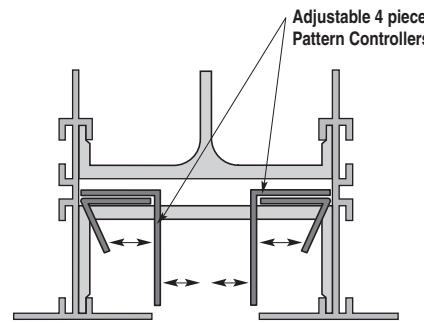
**Horizontal High Throw Series:**

Pattern controllers provide 180° directional control; left or right horizontal throw, angular discharge, volume control and shut-off capability.

FLV SERIES:

Designed primarily for continuous linear slot ceiling applications requiring an adjustable extended throw vertical air pattern. Typical applications would include perimeter glass curtain walls and high bays for heated and/or cooled air, which may be directed downwards, terminating at the floor at a comfortable velocity. Also suitable for interior zones with high ceilings, such as entrance foyers and lobbies, mall and office entrance atriums, convention center and theaters.

This model may also be used in high sidewall applications with long throw requirements.

**Vertical Jet Throw Series:**

Versatile pattern controllers provide for an adjustable perpendicular discharge.

FLP(I) SERIES:

Nailor offers factory built supply air plenum boots in various lengths to suit the application in both uninsulated and insulated versions. Nailor engineered plenums save on costly field labor and ensure a sure-fit trouble free installation.

FT SERIES:

The FlowLine™ Series is available in modular lengths for lay-in T-Bar applications, utilizing either the horizontal high throw or vertical jet throw pattern controllers. Units are supplied with factory installed engineered plenums in uninsulated or insulated versions.

FM SERIES:

The FM Series is an architecturally pleasing modular square ceiling diffuser primarily for lay-in T-Bar applications. Designed to compliment the FlowLine™ Linear Diffuser System, the FM Series features a single slot at the perimeter of a 2 ft. x 2 ft. (600 x 600) ceiling module and accommodates a center acoustic ceiling tile.

FLH SERIES

- HORIZONTAL HIGH THROW PATTERN CONTROLLERS
- CONTINUOUS CUSTOM LINEAR DIFFUSER

Models:

- FLH10 1" (25) Slot
 FLH15 1 1/2" (38) Slot
 FLH20 2" (51) Slot
 FLH25 2 1/2" (64) Slot
 FLH30 3" (76) Slot



The FlowLine™ FLH Series continuous slot diffuser is designed primarily for ceiling applications. The adjustable pattern controllers, which are easily adjusted from the face, allow the discharge air to be directed to the left or right as well as downward. When positioned for horizontal discharge, a tight horizontal air pattern is produced that makes full use of the ceiling (coanda) effect, even at reduced air volumes. High induction characteristics maximize room air movement and mixing, making FlowLine™ FLH Series eminently suitable for variable air volume systems.

STANDARD FEATURES:

- Heavy wall extruded aluminum construction with galvanized steel pattern controllers.
- Sliding pattern controller design provides easy adjustment for horizontal or vertical directional control as well as a volume control or shut-off capability.
- Dual blade pattern controllers are constructed on 24" (610) centers as standard for maximum flexibility.
- Five slot widths in a one or two slot configuration provide a high air volume capability.
- Single section lengths up to 12 ft. (3658) reduce the number of joints in continuous runs.
- Multiple section assemblies are divided into equal length single sections and are provided with alignment strips.
- Mitered end borders on standard

frame Type AA provide a superior architectural finish.

- FlowLine™ can be custom curved in any plane - concave, convex or flat radius.

FRAME/BORDER STYLES:

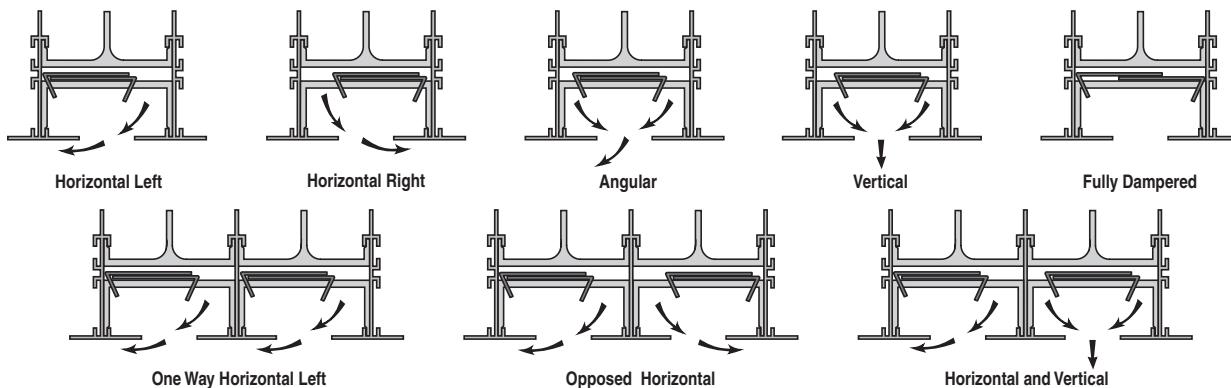
- FlowLine™ FLH Series is designed for continuous length installation in both hard drywall or acoustical suspension (T-Bar) ceiling systems. Optional mounting hardware is available to suit the installation method.
- Available in two standard and various special frame/border designs to suit any installation requirement.
- Various end border options are available to suit installation.
- Mitered corner and transition sections are available.

SUPPLY AIR PLENUMS:

- Model Series FLP(I) factory engineered plenum boots are available, which ensure both a trouble free installation and that catalog performance is met.

FINISH:

- Standard finish is AW Appliance White on exposed frame surfaces. Pattern controllers and interior surfaces are black.
- Custom color and anodized finishes are available to suit architectural requirements.

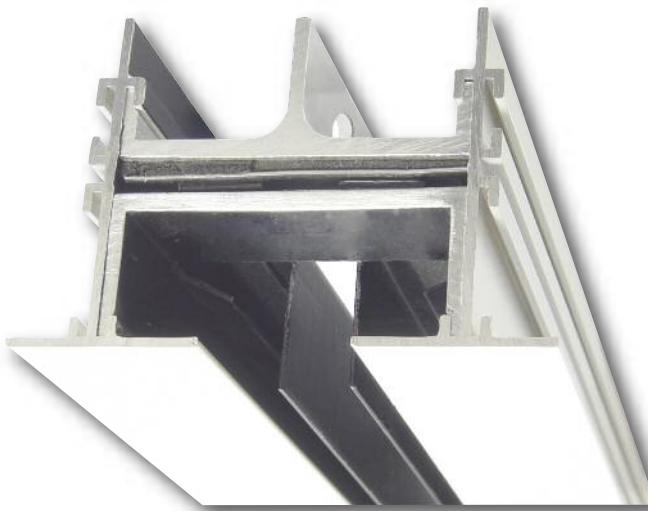
FLH Series Pattern Controller Adjustment

FLV SERIES

- VERTICAL JET THROW PATTERN CONTROLLERS
- CONTINUOUS CUSTOM LINEAR DIFFUSER

Models:

FLV10	1" (25) Slot
FLV15	1 1/2" (38) Slot
FLV20	2" (51) Slot
FLV25	2 1/2" (64) Slot
FLV30	3" (76) Slot



The FlowLine™ FLV Series continuous slot diffuser is designed for both ceiling and high sidewall applications and provides total air pattern control flexibility. Similar in appearance to the FLH Series, the FLV Series features adjustable pattern controllers that direct the airstream perpendicular to the face, providing a strong vertical projection when installed in a ceiling and horizontally when installed in a sidewall application. The pattern controllers permit angular discharge, allowing the airstream to be directed left or right in a ceiling application and up or down in a sidewall application. The pattern controllers also provide a variable aperture capability to adjust performance to specific applications.

STANDARD FEATURES:

- Heavy wall extruded aluminum construction with galvanized steel pattern controllers.
- Sliding pattern controller design provides easy adjustment for vertical directional control as well as a volume control capability.
- Dual blade pattern controllers are constructed on 24" (610) centers as standard for maximum flexibility.
- Five slot widths in a one or two slot configuration provide a high air volume capability.
- Single section lengths up to 12 ft. (3658) reduce the number of joints in continuous runs.
- Multiple section assemblies are divided into equal length single sections and are provided with alignment strips.

- Mitered end borders on standard frame Type AA provide a superior architectural finish.

- FlowLine™ can be custom curved in any plane - concave, convex or flat radius.

FRAME/BORDER STYLES:

- FlowLine™ FLV Series is designed for continuous length installation in both hard drywall or acoustical suspension (T-Bar) ceiling systems. Optional mounting hardware is available to suit the installation method.
- Available in two standard and various special frame/border designs to suit any installation requirement.
- Various end border options are available to suit installation.

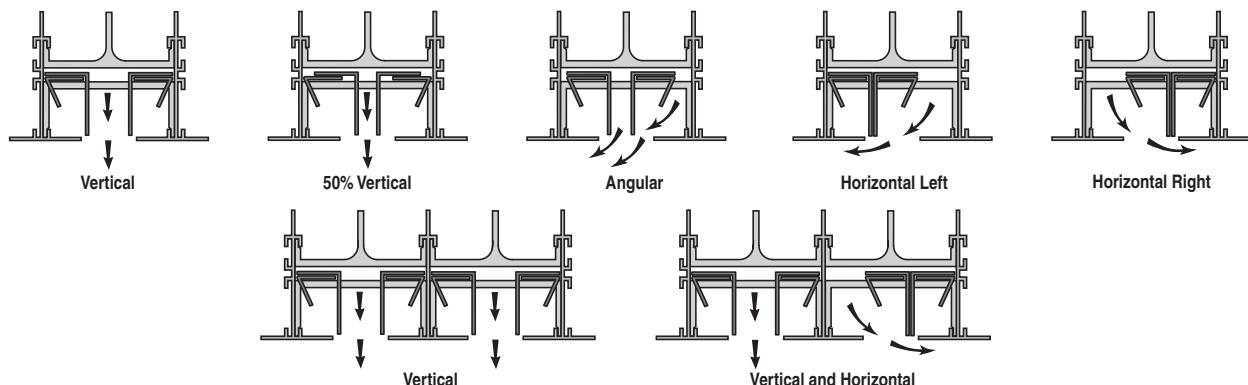
- Mitered corner and transition sections are available.

SUPPLY AIR PLENUMS:

- Model Series FLP(I) factory engineered plenum boots are available, which ensure both a trouble free installation and that catalog performance is met.

FINISH:

- Standard finish is AW Appliance White on exposed frame surfaces. Pattern controllers and interior surfaces are black.
- Custom color and anodized finishes are available to suit architectural requirements.

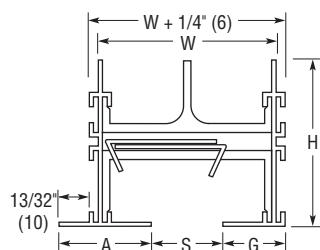
FLV Series Pattern Controller Adjustment

SPECIAL FRAME/BORDER STYLES**(TYPE H HORIZONTAL PATTERN CONTROLLERS ILLUSTRATED. ALSO AVAILABLE WITH TYPE V VERTICAL).**

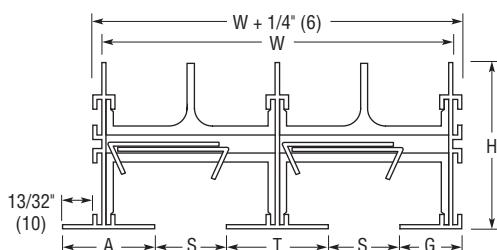
These frame/border styles require installation of the FlowLine™ diffuser prior to installation of the drywall. The ceiling opening should be framed and the diffuser attached with optional mounting clips or suspended from the building structure with hanger wire using the integral hanger brackets supplied with the diffuser.

One Slot**Type AG Flangeless Frame**


- Drywall (ceiling, wall)

**Two Slot****Type AG Flange/Flangeless Frame**

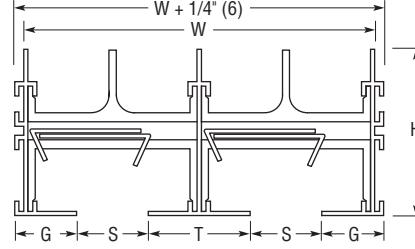
- Drywall (ceiling, wall)

**One Slot****Type GG Flangeless Frame**

- Drywall (ceiling, wall)

**Two Slot****Type GG Flange/Flangeless Frame**

- Drywall (ceiling, wall)

**Dimensional Data - Imperial (Metric) Units**

Model	S Slot Width	1 Slot		2 Slot		A Border Width	G Border Width	H Height	T 2 Slot
		W	W	W	W				
FL(H or V)10	1 (25)	2 1/2 (64)		4 15/16 (125)		1 9/32 (33)	7/8 (22)	2 3/8 (60)	1 7/16 (37)
FL(H or V)15	1 1/2 (38)	3 1/2 (89)		6 15/16 (176)		1 17/32 (39)	1 1/8 (29)	2 5/8 (67)	1 15/16 (49)
FL(H or V)20	2 (51)	4 1/2 (114)		8 15/16 (227)		1 25/32 (45)	1 3/8 (35)	2 7/8 (73)	2 7/16 (62)
FL(H or V)25	2 1/2 (64)	5 1/2 (140)		10 15/16 (278)		2 1/32 (52)	1 5/8 (41)	3 1/8 (79)	2 15/16 (75)
FL(H or V)30	3 (76)	6 1/2 (165)		12 15/16 (329)		2 9/32 (58)	1 7/8 (48)	3 3/8 (86)	3 7/16 (87)

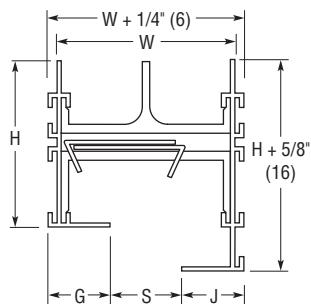
SPECIAL FRAME/BORDER STYLES

These frame/border styles require installation of the FlowLine™ diffuser prior to installation of the drywall. The ceiling opening should be framed and the diffuser attached with optional mounting clips or suspended from the building structure with hanger wire using the integral hanger brackets supplied with the diffuser.

One Slot

Type GJ Concealed Offset Frame

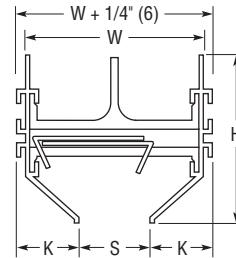
- Drywall (ceiling, wall)



One Slot

Type KK Concealed Angular Frame

- Drywall (ceiling, wall)



Dimensional Data - Imperial (Metric) Units

Model	S Slot Width	1 Slot	G Border Width	J Border Width	H Height
FLH10	1 (25)	2 1/2 (64)	7/8 (22)	7/8 (22)	2 3/8 (60)
FLH15	1 1/2 (38)	3 1/2 (89)	1 1/8 (29)	1 1/8 (29)	2 5/8 (67)
FLH20	2 (51)	4 1/2 (114)	1 3/8 (35)	1 3/8 (35)	2 7/8 (73)
FLH25	2 1/2 (64)	5 1/2 (140)	1 5/8 (41)	1 5/8 (41)	3 1/8 (79)
FLH30	3 (76)	6 1/2 (165)	1 7/8 (48)	1 7/8 (48)	3 3/8 (86)

Dimensional Data - Imperial (Metric) Units

Model	S Slot Width	W	K Border Width	H Height
FLH10	1 (25)	2 1/2 (64)	7/8 (22)	2 3/8 (60)
FLH15	1 1/2 (38)	3 1/2 (89)	1 1/8 (29)	2 5/8 (67)
FLH20	2 (51)	4 1/2 (114)	1 3/8 (35)	2 7/8 (73)

OPTIONS AND ACCESSORIES

Return Hood/Sight Shield

Uninsulated:

FLR10 • 1" (25) Slot

FLR15 • 1 1/2" (38) Slot

FLR20 • 2" (51) Slot

FLR25 • 2 1/2" (64) Slot

FLR30 • 3" (76) Slot

51% free area perforated corrosion resistant steel, painted flat black. Provided in 4 ft. (1219) lengths. Field cut to length.

Insulated:

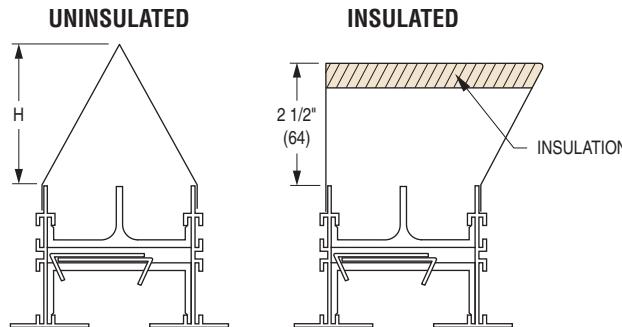
FLRI10 • 1" (25) Slot

FLRI15 • 1 1/2" (38) Slot

FLRI20 • 2" (51) Slot

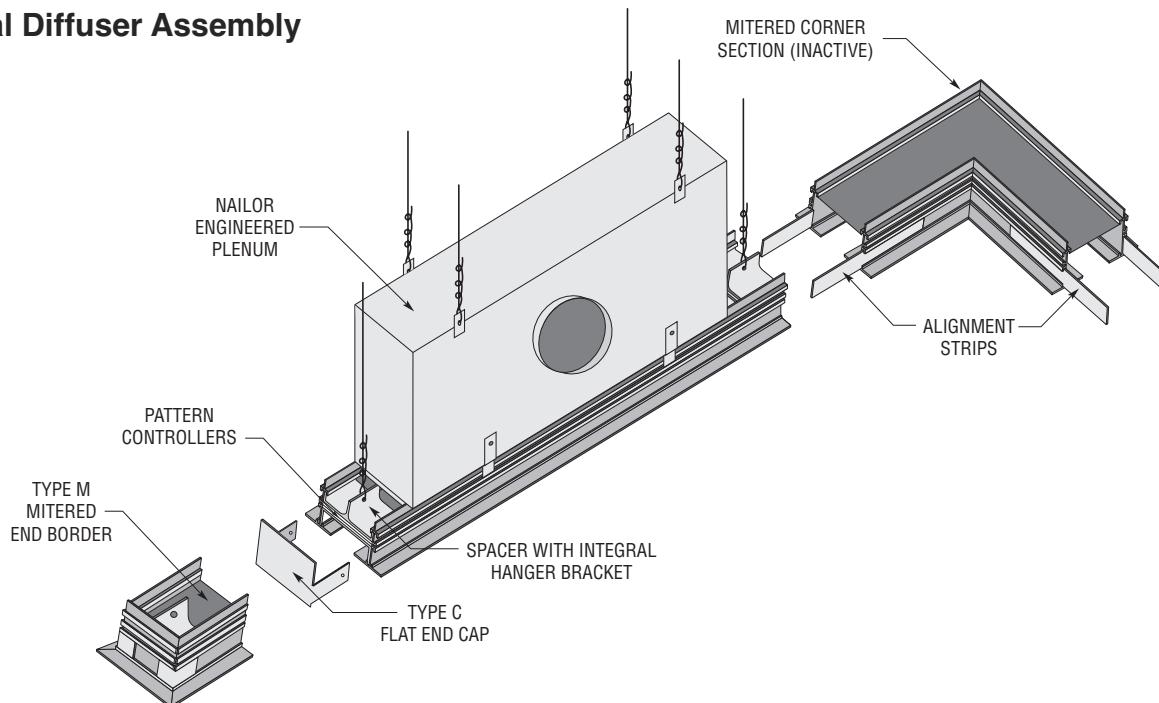
FLRI25 • 2 1/2" (64) Slot

FLRI30 • 3" (76) Slot



No. of Slots	Slot Width	H Height
1	1 (25)	3 3/8 (86)
	1 1/2 (38)	3 3/8 (86)
	2 (51)	3 3/8 (86)
	2 1/2 (64)	3 3/8 (86)
	3 (76)	3 3/8 (86)
2	1 (25)	2 1/8 (54)
	1 1/2 (38)	3 1/8 (79)
	2 (51)	4 1/8 (105)
	2 1/2 (64)	5 1/8 (130)
	3 (76)	6 1/8 (156)

Typical Diffuser Assembly



- Diffuser sections can be joined end to end for long continuous runs.
- Type M Mitered End Borders provide a superior architectural finish. Type C End Caps close off the ends of the diffuser when terminating at a wall or other stop. Type C may be field installed.
- Alignment strips are factory supplied as standard on all

multiple section assemblies to ensure close and positive alignment between sections.

- Nailor's optional engineered plenums ensure catalog performance and a trouble free sure fit installation.
- Unique integral hanger brackets provide independent hanging points and eliminate the need for field add-on hanger clips.

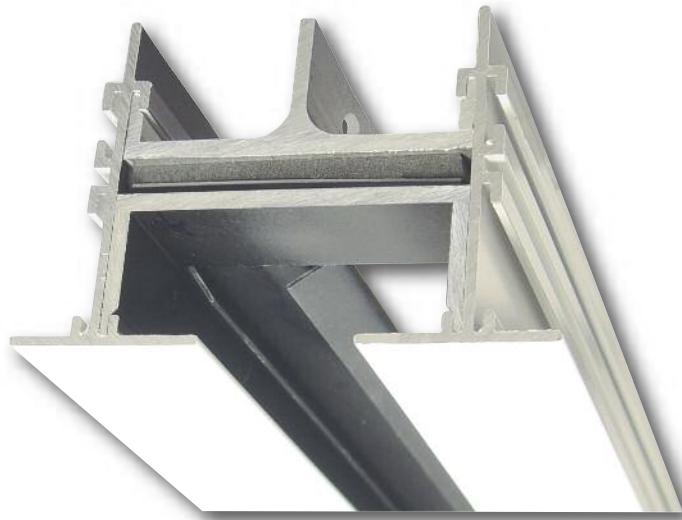
FLH OR FLV SERIES FOR TECHZONE™ TYPE CEILINGS

- HORIZONTAL HIGH THROW AND VERTICAL JET THROW PATTERN CONTROLLERS
- CONTINUOUS CUSTOM LINEAR DIFFUSER
- STANDARD T-BAR & NARROW T-BAR FRAMES
- ALUMINUM

Models:

FLH10TZ 1" (25) Slot

FLV10TZ 1" (25) Slot



The FlowLine™ FL (H or V) 10TZ Series Continuous Slot Diffusers provide outstanding performance flexibility. Compatible with the Armstrong® TechZone™ and USG Logix™ Ceiling Systems, the crisp, clean lines of this linear slot diffuser are not only architecturally appealing but they integrate smoothly into the ceiling system, delivering a high performance VAV solution with 180° air pattern for true design flexibility. The adjustable pattern controllers, which are easily adjusted from the face, allow the discharge air to be directed to the left or right as well as downward. Ideally suited for applications such as open plan offices, computer rooms, corridors (walls-to-desk), auditoriums.

STANDARD FEATURES:

- Heavy duty extruded aluminum frame and spacers.
- Adjustable pattern controllers are corrosion resistant steel, constructed on 24" (610) centers as standard for maximum flexibility.
- Standard module lengths range from 24" (610) to 72" (1829).
- Available in 1" (25) slot width, choice of 1 slot with 4" (102) TechZone™ module or 2 slot with 6" (152) TechZone™ module.
- Single section lengths up to 12 ft. (3658) reduce the number of joints in continuous runs.
- Multiple section assemblies are provided with alignment strips for continuous run applications.
- Linear over 144" (3658) long are supplied in equal section lengths.
- Ends are finished with Type CC Flat End Caps.
- Integral hanger brackets on 24" (610) centers are standard.

FRAME/BORDER STYLES:

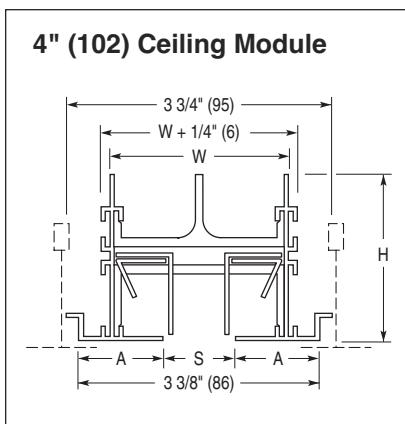
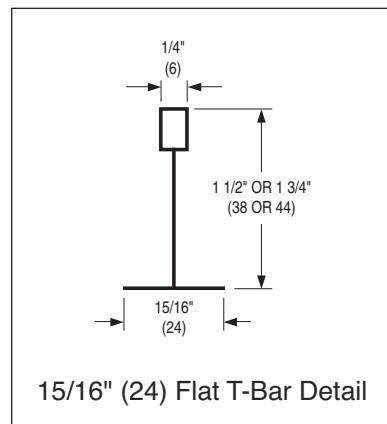
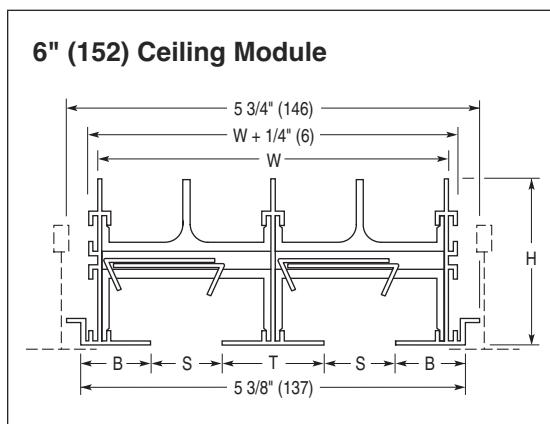
- The FlowLine™ TechZone™ models are compatible with standard 15/16" (24) flat T-Bars (Flowline™ diffuser lays flush on the T-Bars) as well as 9/16" (14) flat tees that provide a regular appearance and 9/16" (14) Bolt-Slot Fineline Type regressed tees for a flush appearance with a regular ceiling tile.

FINISH:

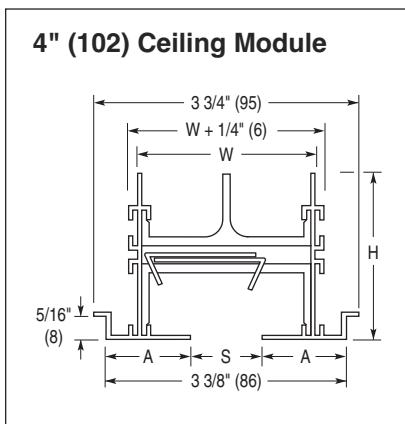
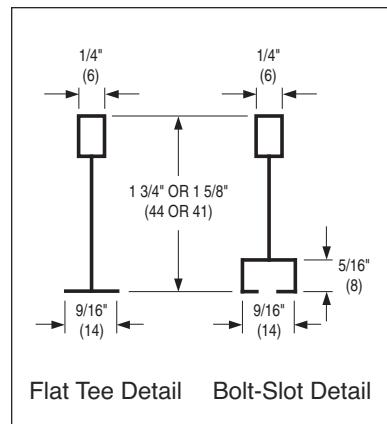
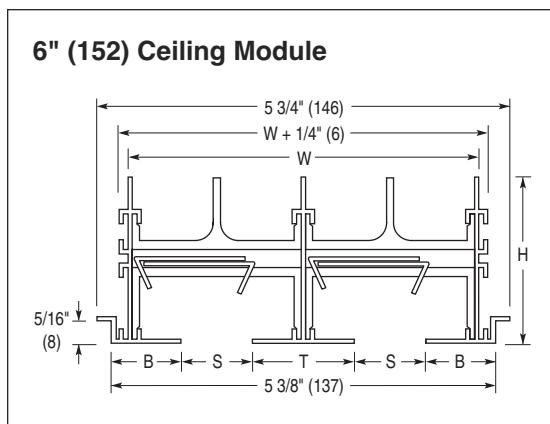
- Standard finish is AW Appliance White on exterior frame surfaces (optional finishes are available). Pattern controllers and interior surfaces are black on all models.
- Custom color and anodized finishes are available to suit architectural requirements.

STANDARD FRAME/BORDER STYLES

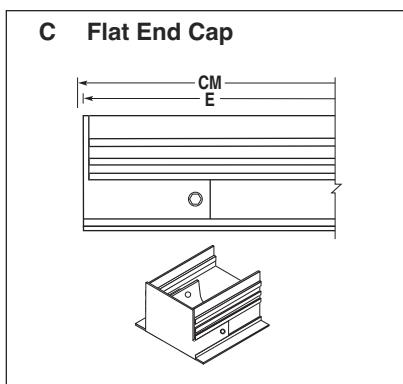
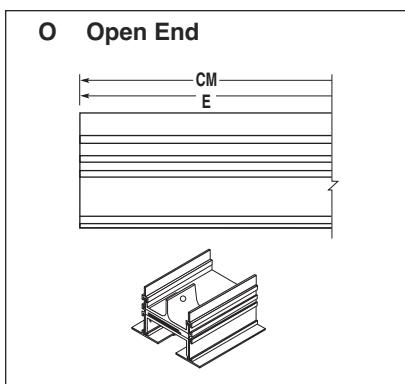
(TYPE H HORIZONTAL PATTERN CONTROLLERS ILLUSTRATED. ALSO AVAILABLE WITH TYPE V VERTICAL).
TYPE LT 15/16" (24) STANDARD T-BAR.

One Slot**Two Slot**

(TYPE H HORIZONTAL PATTERN CONTROLLERS ILLUSTRATED. ALSO AVAILABLE WITH TYPE V VERTICAL).
TYPE NT 9/16 (14) NARROW T-BAR.

One Slot**Two Slot****Dimensional Data - Imperial (Metric) Units**

Model	S Slot Width	1 Slot		2 Slot		Border Width A	B	H Height	T 2 Slot
		W	OW	W	OW				
FL(H or V)10TZ	1 (25)	2 1/2 (64)		4 15/16 (125)		1 3/16 (30)	31/32 (25)	2 3/8 (60)	1 7/16 (37)

End Condition

Type LT End Condition	Face Length E
CC	Ceiling Module – 1/4" (6)
OC	Ceiling Module – 1/8" (3)
OO	Ceiling Module

Type NT End Condition	Face Length E
CC	Ceiling Module – 5/8" (16)
OC	Ceiling Module – 5/16" (8)
OO	Ceiling Module

CM = Ceiling Module

E = Overall Length

FLP SERIES

- SUPPLY AIR ENGINEERED PLENUMS FOR FLOWLINE™ LINEAR DIFFUSERS

Models:

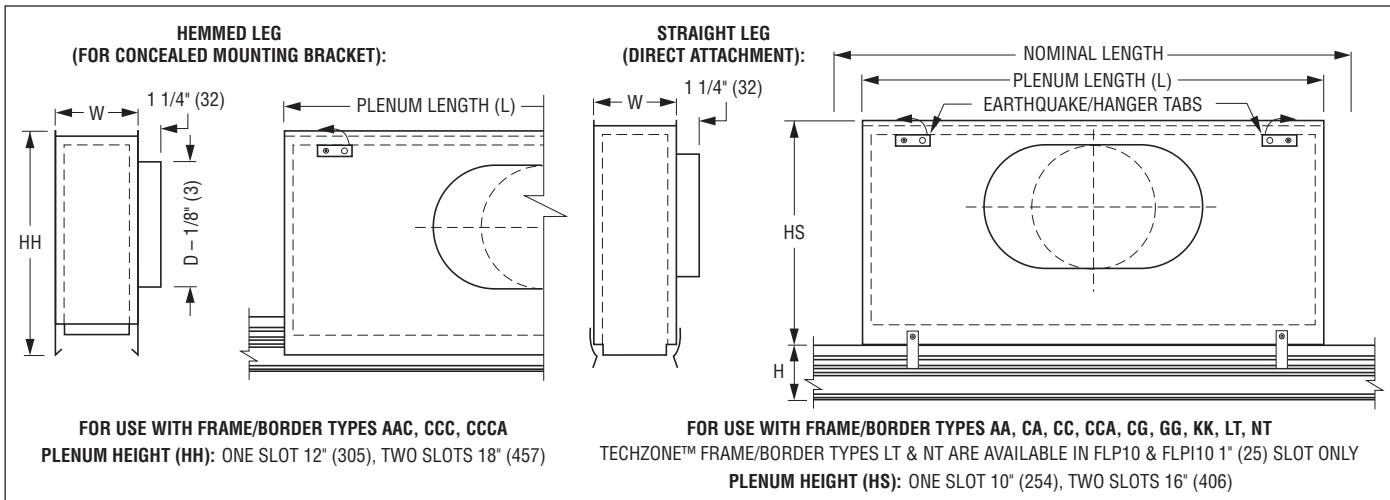
- FLP(I)10** 1" (25) Slot
FLP(I)15 1 1/2" (38) Slot
FLP(I)20 2" (51) Slot
FLP(I)25 2 1/2" (64) Slot
FLP(I)30 3" (76) Slot

(I) Adds internal insulation.



The Nailor FLP Series engineered plenum boots are designed specifically for the FLH and FLV Series FlowLine™ Linear diffuser. These plenums are factory fabricated and tested to provide the engineer with proven catalog performance and the installing contractor with a labor saving, cost effective unit that provides for a fast, correct fit and easy field installation. FLP Series plenums are shipped loose from the factory. Uninsulated and insulated versions are available.

FLP Series plenums are available in two basic styles to suit the installation method. A straight leg version with spring clips is provided for direct attachment to the FlowLine™ diffuser neck. The diffuser and plenum are installed and attached directly to the ceiling structure prior to installation of the drywall or acoustic suspension ceiling and tiles. Plenums are provided as standard with hanger tabs. A hemmed leg version is available when it is desired to install the FlowLine™ diffuser after the hard gypsum board/drywall ceiling. The diffuser requires a frame/border style which includes a factory supplied concealed mounting bracket. The diffuser simply slides up through the ceiling opening until the mounting straps locate in the hem and is then secured through the slot face using the fastening screws provided.

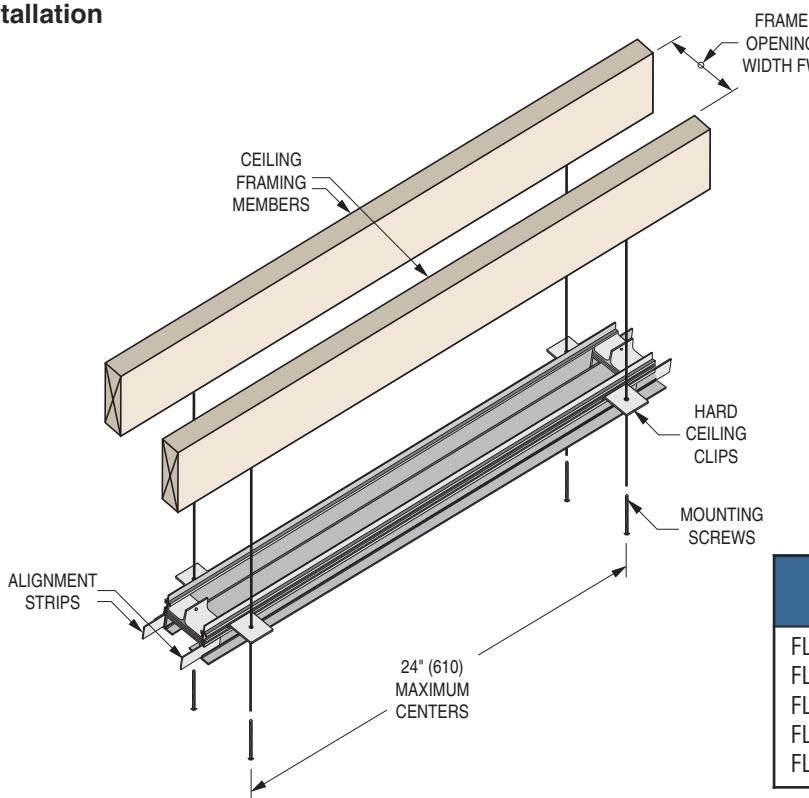
**Dimensional Data**

Nominal Length	Actual Plenum Length (L) for Frame/Border Type		Available Inlet Sizes		Width (W) for Frame/Border Type Noted			
	AA, CA, CC, CCA, CG, GG, KK, LT, NT		AAC, CCC, CCAA		AA, CA, CC, CCA, CG, GG, KK, LT, NT		AAC, CCC, CCAA	
	1 Slot	2 Slot	1 Slot	2 Slot	1 Slot	2 Slot	1 Slot	2 Slot
24 (610)	20 3/4 (527)	24 (610)	6 (152), 8 (203) Round	6 (152), 8 (203), 10 (254), 12 (305), 14 (356) Flat Oval*	2 3/4 (70)	5 3/16 (132)	3 1/2 (89)	5 15/16 (151)
30 (762)	26 3/4 (679)	30 (762)			3 3/4 (95)	7 3/16 (183)	4 1/2 (114)	7 15/16 (202)
36 (914)	32 3/4 (832)	36 (914)			4 3/4 (121)	9 3/16 (233)	5 1/2 (140)	9 15/16 (252)
48 (1219)	44 3/4 (1137)	48 (1219)			5 3/4 (146)	11 3/16 (284)	6 1/2 (165)	11 15/16 (303)
60 (1524)	56 3/4 (1441)	60 (1524)			6 3/4 (171)	13 3/16 (335)	7 1/2 (191)	13 15/16 (354)
72 (1829)	68 3/4 (1746)	72 (1829)						

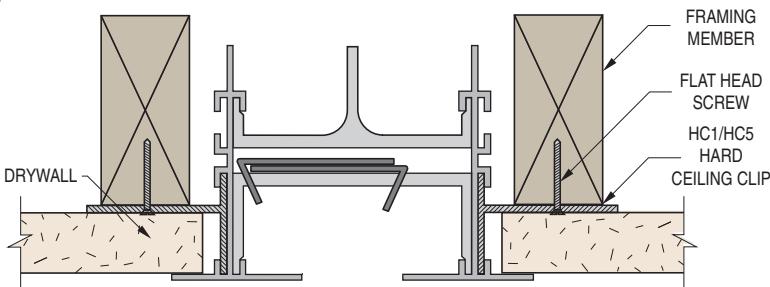
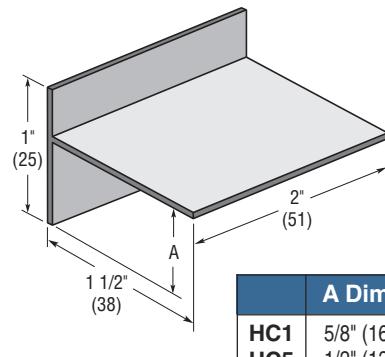
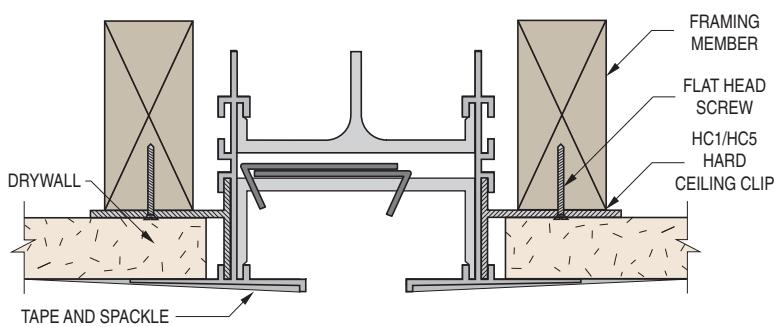
* Equivalent Oval: 10" (254) = 11" x 7 7/8" (279 x 200); 12" (305) = 14 1/8" x 7 7/8" (359 x 200); 14" (356) = 17 5/16" x 7 7/8" (440 x 200).

HARD CEILING APPLICATION AND INSTALLATION METHODS

Typical Installation

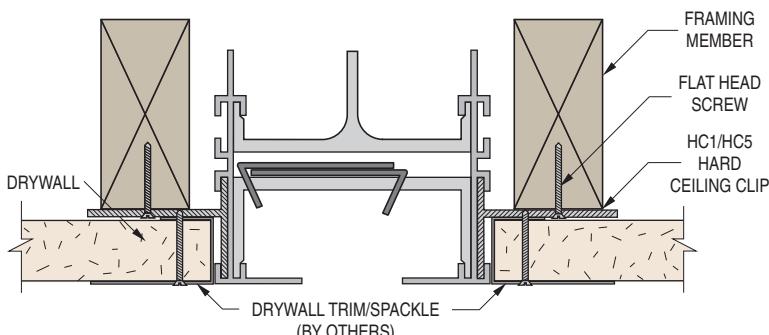
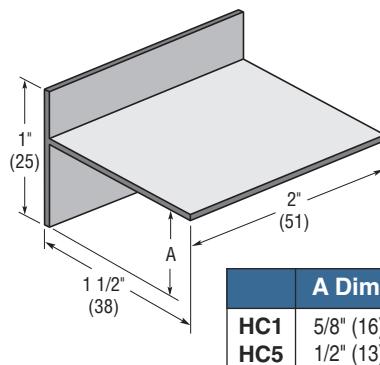
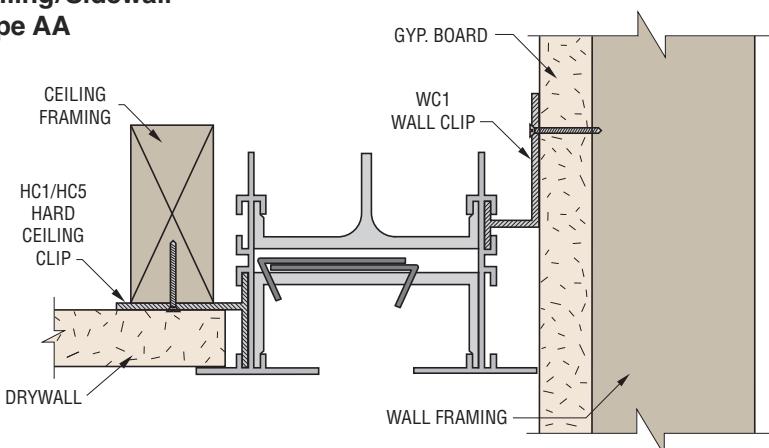
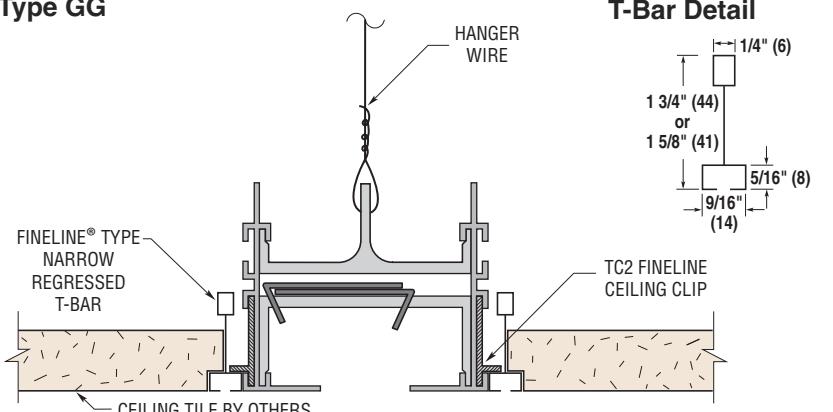


Model	Frame Opening Width FW	
	1 Slot	2 Slot
FL(H or V)10	3 1/4 (83)	5 3/4 (146)
FL(H or V)15	4 1/4 (108)	7 3/4 (197)
FL(H or V)20	5 1/4 (133)	9 3/4 (248)
FL(H or V)25	6 1/4 (159)	11 3/4 (298)
FL(H or V)30	7 1/4 (184)	13 3/4 (349)


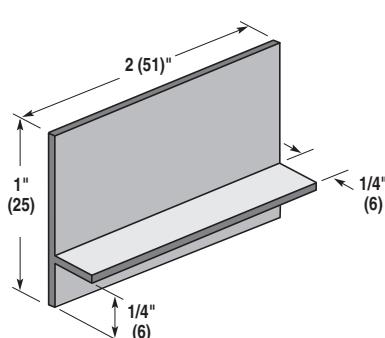
Exposed Flange Frame
Type AAHC1 Hard Ceiling Clip 5/8" (16)
HC5 Hard Ceiling Clip 1/2" (13)Concealed Tapered Frame
Type CC

The HC1 and HC5 Hard Ceiling Clips can be used to mount the FlowLine™ assembly with Frame/Border Types AA, CC or GG, where 5/8" (16) or 1/2" (13) gypsum wallboard (drywall) is used.

HARD CEILING APPLICATION AND INSTALLATION METHODS

**Flangeless Flush Frame
Type GG****HC1 Hard Ceiling Clip 5/8" (16)
HC5 Hard Ceiling Clip 1/2" (13)****Ceiling/Sidewall
Type AA****NARROW REGRESSED T-BAR CEILING SUSPENSION SYSTEM
(COMMONLY REFERRED TO AS BOLT-SLOT OR FINELINE® T-BAR)****Flangeless Frame
Type GG**

USG 'Donn® Fineline®', Rockfon® 'Ultraline™' and Armstrong 'Silhouette' are three common examples of compatibility.

**Typical Regressed
T-Bar Detail****TC2 Fineline® T-Bar Clip**

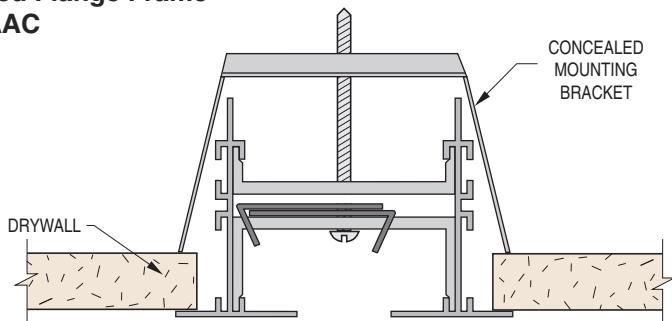
The TC2 Fineline® T-Bar Clips are used to support and level the FlowLine™ assembly in Bolt-Slot (Fineline® Type) suspension systems.

HARD CEILING APPLICATION AND INSTALLATION METHODS

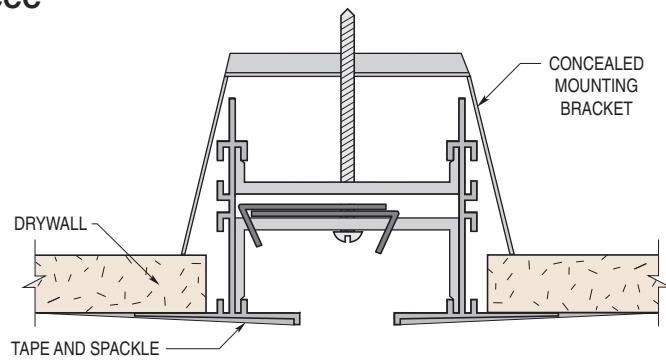
A

FLOWLINE™ LINEAR DIFFUSERS

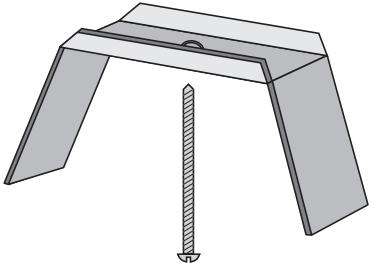
**Exposed Flange Frame
Type AAC**



**Concealed Tapered Frame with Concealed Mounting Brackets
Type CCC**



FLCMB Concealed Mounting Bracket



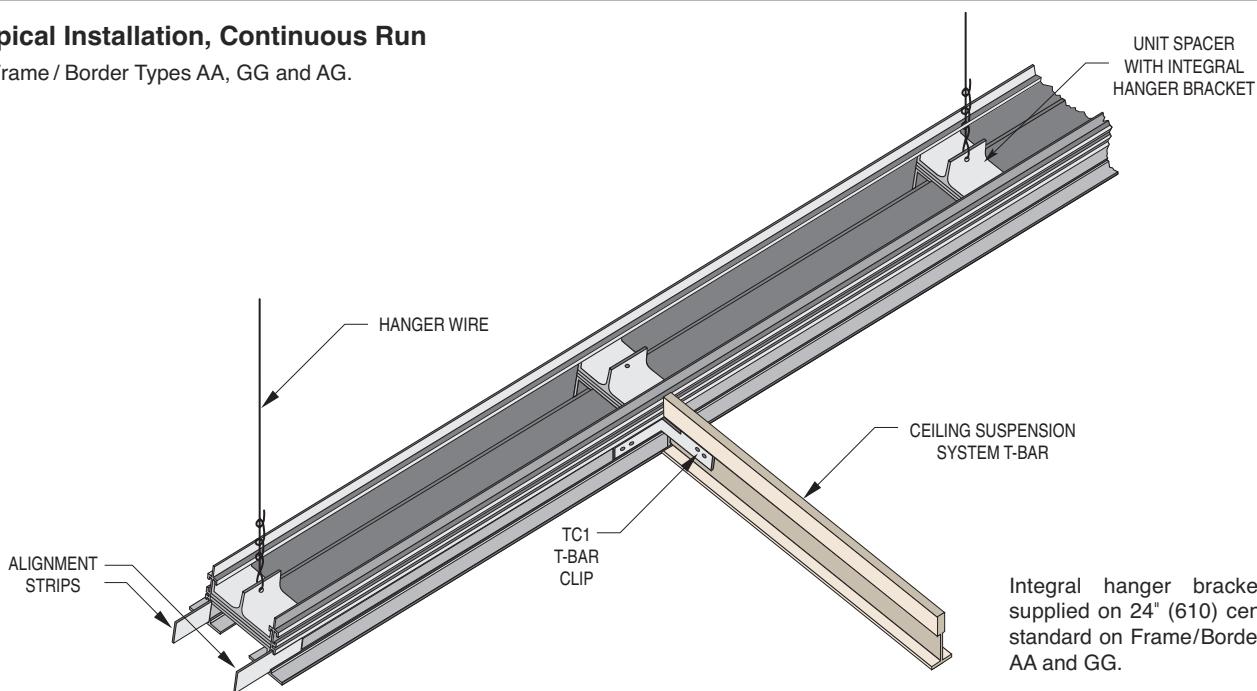
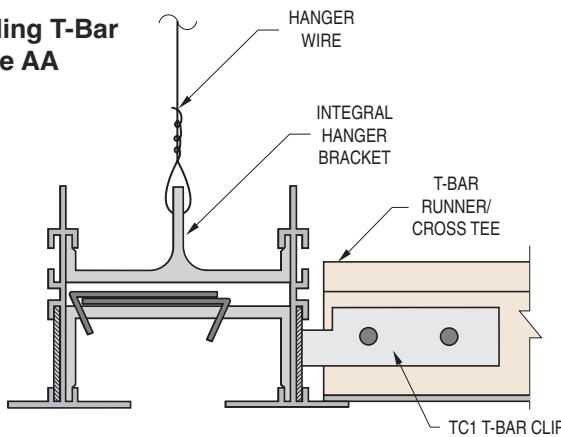
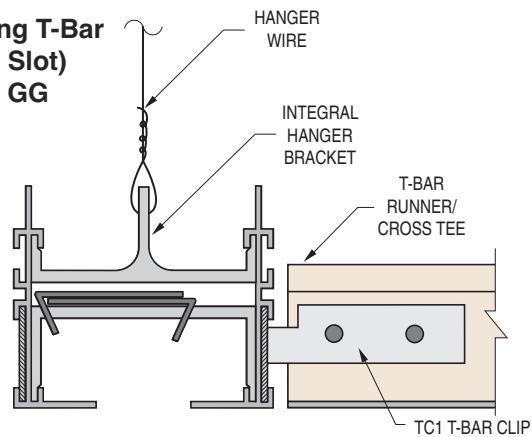
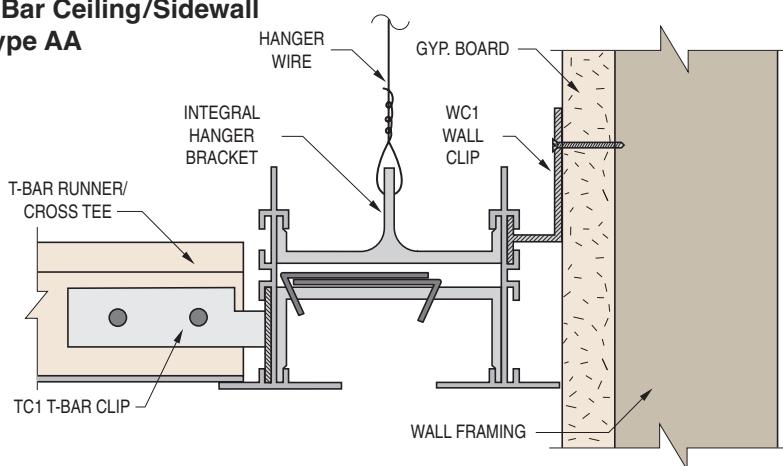
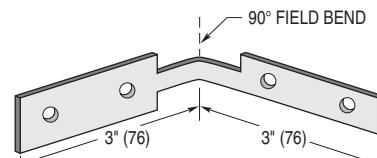
Supplied as standard with Frame/Border Types AAC, CCC and CCCA.



T-BAR CEILING SUSPENSION SYSTEM APPLICATION AND INSTALLATION METHODS

Typical Installation, Continuous Run

- Frame / Border Types AA, GG and AG.

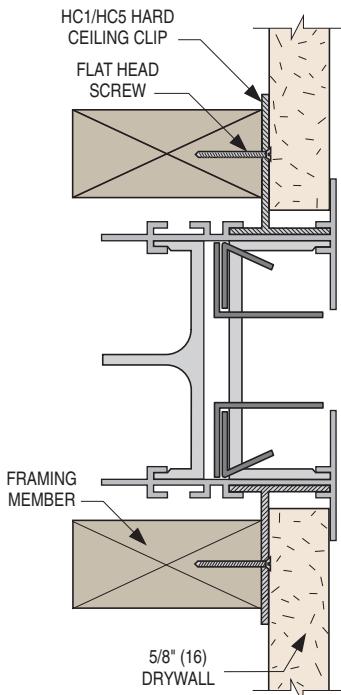
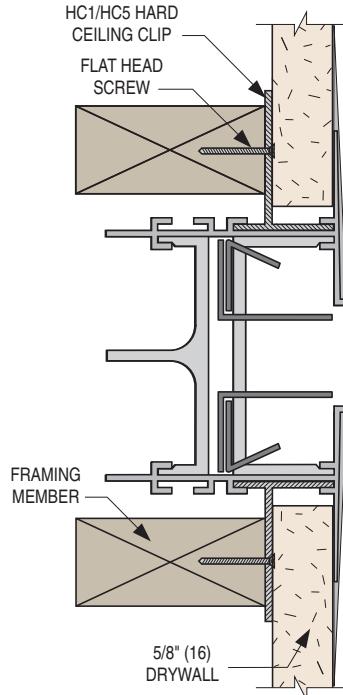
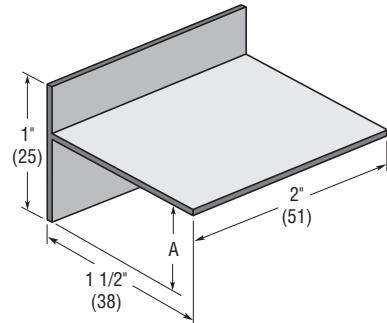
**Ceiling T-Bar Type AA****Ceiling T-Bar (Bolt Slot) Type GG****T-Bar Ceiling/Sidewall Type AA****TC1 T-Bar Clip (field formed)**

The TC1 T-Bar Clip is used to attach drop tees to the FlowLine™ assembly.

SIDEWALL APPLICATION AND INSTALLATION METHODS

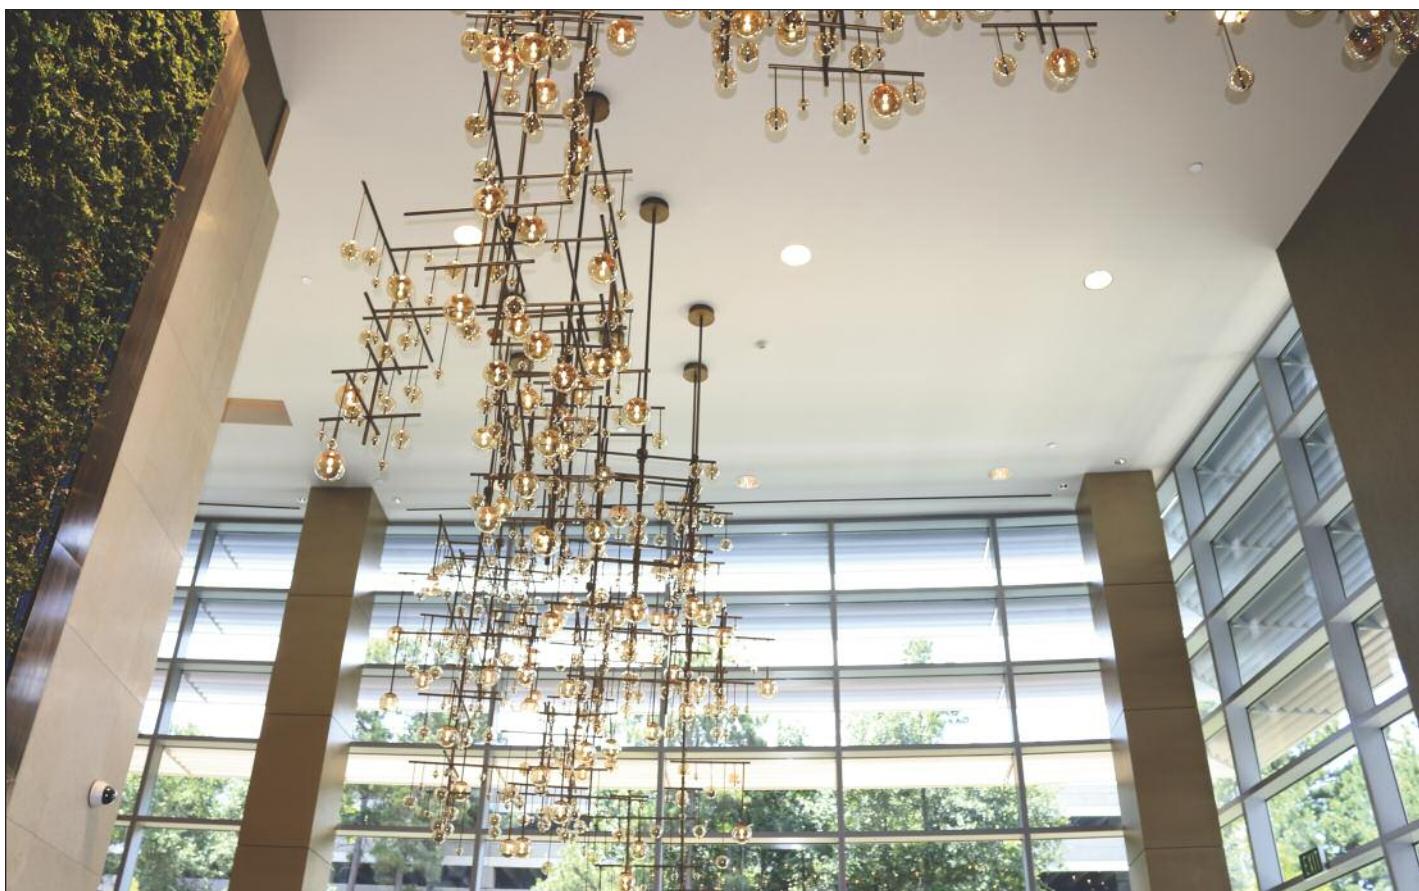
A

FLOWLINE™ LINEAR DIFFUSERS

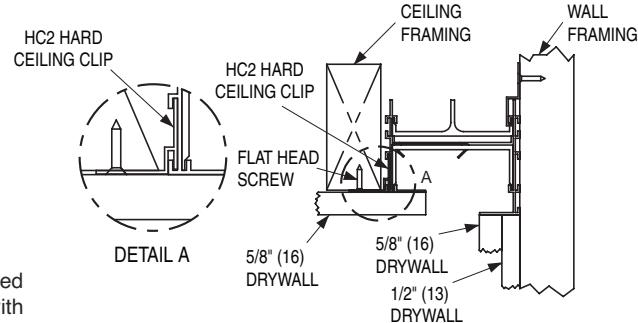
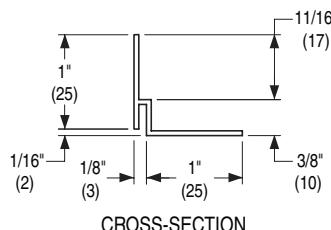
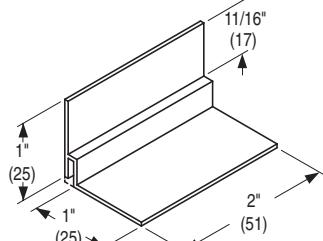
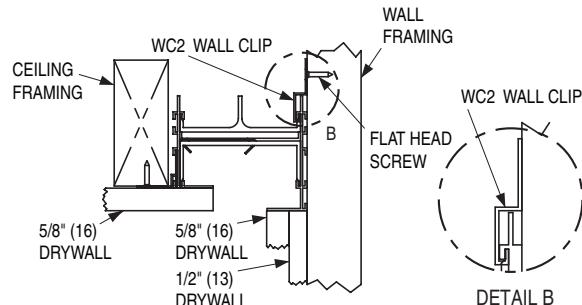
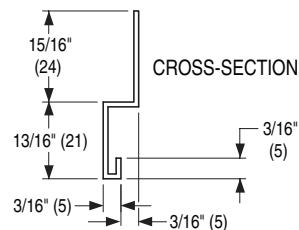
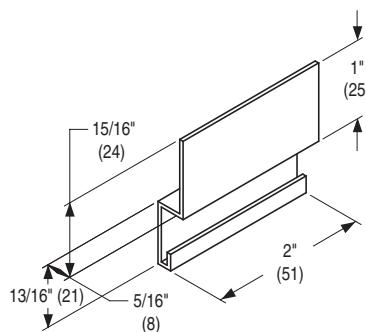
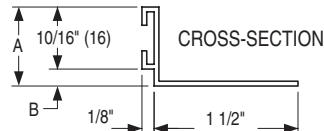
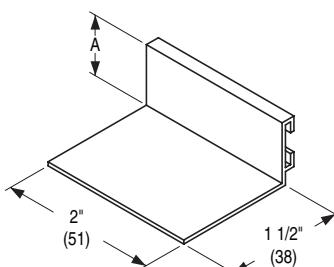
**Exposed Flange Frame
Type AA****Concealed Tapered Frame
Type CC****HC1 Hard Ceiling Clip 5/8" (16)
HC5 Hard Ceiling Clip 1/2" (13)**

A Dim.
HC1 5/8" (16)
HC5 1/2" (13)

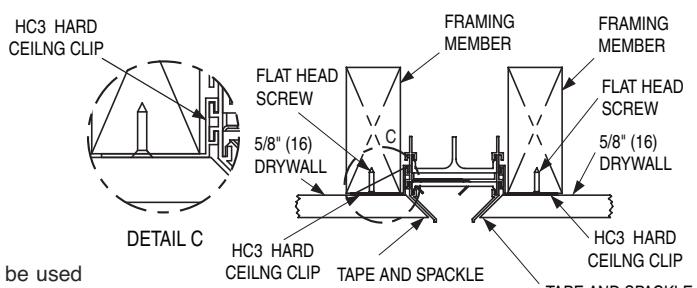
The HC1 and HC5 Hard Ceiling Clips can be used to mount the FlowLine™ assembly with Frame/Border Types AA or CC, where 5/8" (16) or 1/2" (13) gypsum wallboard (drywall) is used.



SIDEWALL APPLICATION AND INSTALLATION METHODS

Mounting Clips
HC2 Hard Ceiling Clip

Flangeless Concealed Frame
Type GJ
Mounting Clips
WC2 Wall Clip

Flangeless Concealed Frame
Type GJ
Mounting Clips
HC3 Hard Ceiling Clip for Type K Border



The HC3 Hard Ceiling Clip can be used to mount the FlowLine™ assembly with frame/border types **G** or **J**, flush to a wall.


Flangeless Concealed Frame
Type KK

Flowline	Part No.	A Dim.	B Dim.
FLH10	HC3-10	13/16 (21)	3/16 (5)
FLH15	HC3-15	1 1/16 (27)	7/16 (11)
FLH20	HC3-20	1 5/16 (33)	11/16 (17)

PERFORMANCE DATA • HORIZONTAL HIGH THROW SERIES

MODELS: FLH30 AND FTH30 • 1 SLOT WITH NAILOR PLENUM



A


FLOWLINE™ LINEAR DIFFUSERS

3" Slot Width	1 Slot 10" Oval Inlet	2 Ft.	Airflow, cfm	125	170	215	260	305	350	395
			Total Pressure	0.030	0.056	0.894	0.131	0.180	0.237	0.302
			Static Pressure	0.027	0.049	0.078	0.115	0.158	0.208	0.265
			NC (Noise Criteria)	<15	<15	<15	24	29	35	40
			Throw	7-11-16	9-13-19	11-15-21	13-17-23	15-18-25	16-19-28	17-20-31
		4 Ft.	Airflow, cfm	200	275	350	425	500	575	650
		4 Ft.	Total Pressure	0.027	0.050	0.081	0.120	0.166	0.220	0.281
		4 Ft.	Static Pressure	0.017	0.032	0.052	0.076	0.106	0.140	0.179
		4 Ft.	NC (Noise Criteria)	<15	<15	18	22	28	34	40
		4 Ft.	Throw	8-13-20	10-15-24	15-19-27	17-21-30	18-23-32	20-24-35	21-26-37
		5 Ft.	Airflow, cfm	220	310	400	490	580	670	760
		5 Ft.	Total Pressure	0.025	0.040	0.082	0.123	0.172	0.230	0.296
		5 Ft.	Static Pressure	0.013	0.026	0.043	0.065	0.091	0.122	0.157
		5 Ft.	NC (Noise Criteria)	<15	<15	16	24	32	39	45
		5 Ft.	Throw	8-12-21	12-17-25	15-20-29	18-23-32	20-24-35	21-26-37	23-28-40
3" Slot Width	1 Slot 12" Oval Inlet	2 Ft.	Airflow, cfm	125	170	215	260	305	350	395
			Total Pressure	0.029	0.053	0.085	0.124	0.170	0.224	0.286
			Static Pressure	0.026	0.049	0.078	0.115	0.158	0.208	0.265
			NC (Noise Criteria)	<15	<15	<15	18	25	31	36
			Throw	7-11-16	9-13-19	11-15-21	13-17-23	15-18-25	16-19-28	17-20-31
		4 Ft.	Airflow, cfm	200	290	380	470	560	650	740
		4 Ft.	Total Pressure	0.022	0.047	0.081	0.123	0.175	0.236	0.306
		4 Ft.	Static Pressure	0.017	0.036	0.061	0.094	0.133	0.179	0.232
		4 Ft.	NC (Noise Criteria)	<15	<15	<15	22	29	36	41
		4 Ft.	Throw	8-13-20	11-16-24	15-20-28	17-22-31	20-24-34	21-26-37	23-28-40
		5 Ft.	Airflow, cfm	220	330	440	550	660	770	880
		5 Ft.	Total Pressure	0.020	0.044	0.079	0.123	0.177	0.241	0.315
		5 Ft.	Static Pressure	0.013	0.030	0.053	0.082	0.118	0.161	0.210
		5 Ft.	NC (Noise Criteria)	<15	<15	19	26	32	39	43
		5 Ft.	Throw	8-12-21	11-14-26	14-16-30	17-20-34	20-25-37	22-27-39	24-29-42

Performance Notes:

1. Data is based upon FlowLine™ with Nailor engineered plenum (uninsulated) as a complete assembly.
2. All pressures are in inches w.g..
3. Throw values are given at 150, 100 and 50 fpm terminal velocities under isothermal conditions.
4. NC (Noise criteria) values are based on 10 dB room absorption, re 10^{-12} watts.
5. Throw values are based on a 1-way air pattern. For 2-way pattern, throw is determined from the 1 slot data at half the specified air volume.
6. Data derived from tests conducted in accordance with ANSI/ASHRAE Standard 70-2006.

**PERFORMANCE DATA • HORIZONTAL HIGH THROW SERIES
MODELS: FLH / FTH (10 & 15) • 2 SLOT WITH NAILOR PLENUM**




1" Slot Width	2 Slot 8" Dia. Inlet	2 Ft.	Airflow, cfm	80	120	160	200	240	280	320
			Total Pressure	0.016	0.036	0.064	0.101	0.145	0.198	0.258
1" Slot Width	2 Slot 10" Dia. Inlet	2 Ft.	Airflow, cfm	160	230	300	370	440	510	580
			Total Pressure	0.025	0.053	0.091	0.138	0.196	0.263	0.340
1" Slot Width	2 Slot 12" Dia. Inlet	2 Ft.	Airflow, cfm	200	280	360	440	520	600	680
			Total Pressure	0.033	0.065	0.108	0.161	0.225	0.300	0.385
1.5" Slot Width	2 Slot 8" Dia. Inlet	2 Ft.	Airflow, cfm	80	130	180	230	280	330	380
			Total Pressure	0.014	0.038	0.073	0.119	0.176	0.244	0.324
1.5" Slot Width	2 Slot 10" Dia. Inlet	2 Ft.	Airflow, cfm	160	240	320	400	480	560	640
			Total Pressure	0.019	0.043	0.076	0.118	0.170	0.232	0.303
1.5" Slot Width	2 Slot 12" Dia. Inlet	2 Ft.	Airflow, cfm	200	295	390	485	580	675	770
			Total Pressure	0.022	0.048	0.085	0.132	0.189	0.256	0.333
1.5" Slot Width	2 Slot 8" Dia. Inlet	4 Ft.	Airflow, cfm	120	160	200	240	280	320	360
			Total Pressure	0.036	0.064	0.101	0.145	0.198	0.258	0.327
1.5" Slot Width	2 Slot 10" Dia. Inlet	4 Ft.	Airflow, cfm	240	310	380	450	520	590	660
			Total Pressure	0.058	0.097	0.146	0.205	0.274	0.352	0.441
1.5" Slot Width	2 Slot 12" Dia. Inlet	4 Ft.	Airflow, cfm	300	370	440	510	580	650	720
			Total Pressure	0.075	0.114	0.161	0.217	0.281	0.352	0.432
1.5" Slot Width	2 Slot 8" Dia. Inlet	5 Ft.	Airflow, cfm	120	170	220	270	320	370	420
			Total Pressure	0.031	0.062	0.103	0.156	0.219	0.293	0.377
1.5" Slot Width	2 Slot 10" Dia. Inlet	5 Ft.	Airflow, cfm	240	320	400	480	560	640	720
			Total Pressure	0.037	0.065	0.102	0.146	0.199	0.260	0.329
1.5" Slot Width	2 Slot 12" Dia. Inlet	5 Ft.	Airflow, cfm	300	400	500	600	700	800	900
			Total Pressure	0.041	0.073	0.114	0.163	0.222	0.291	0.368

For performance table notes, see page A38.

PERFORMANCE DATA • HORIZONTAL HIGH THROW SERIES


MODELS: FLH30 AND FTH30 • 2 SLOT WITH NAILOR PLENUM



3" Slot Width	2 Slot 10" Dia. Inlet	2 Ft.	Airflow, cfm	80	180	280	380	480	580	680
			Total Pressure	0.004	0.022	0.053	0.097	0.155	0.226	0.311
			Static Pressure	0.003	0.015	0.036	0.067	0.106	0.156	0.214
			NC (Noise Criteria)	<15	<15	<15	17	28	36	43
			Throw	1-3-9	6-10-17	11-15-22	14-18-25	16-20-29	18-22-32	20-24-34
		4 Ft.	Airflow, cfm	150	300	450	600	750	900	1050
		4 Ft.	Total Pressure	0.009	0.035	0.080	0.143	0.222	0.321	0.436
		4 Ft.	Static Pressure	0.004	0.016	0.038	0.067	0.104	0.151	0.205
		4 Ft.	NC (Noise Criteria)	<15	<15	<15	19	29	38	45
		4 Ft.	Throw	2-4-12	6-12-23	12-18-28	16-23-32	20-25-35	23-28-39	24-30-42
		5 Ft.	Airflow, cfm	180	350	520	690	860	1030	1200
		5 Ft.	Total Pressure	0.011	0.042	0.092	0.162	0.251	0.360	0.489
		5 Ft.	Static Pressure	0.004	0.016	0.035	0.062	0.096	0.138	0.186
		5 Ft.	NC (Noise Criteria)	<15	<15	<15	19	29	38	45
		5 Ft.	Throw	2-4-13	6-13-24	13-19-30	16-24-34	21-27-38	24-30-41	26-32-45
3" Slot Width	2 Slot 12" Dia. Inlet	2 Ft.	Airflow, cfm	80	180	280	380	480	580	680
			Total Pressure	0.004	0.017	0.042	0.077	0.124	0.180	0.248
			Static Pressure	0.003	0.014	0.034	0.063	0.100	0.146	0.201
			NC (Noise Criteria)	<15	<15	<15	<15	23	32	39
			Throw	1-3-9	6-10-17	11-15-22	14-18-25	16-20-29	18-22-32	20-24-34
		4 Ft.	Airflow, cfm	150	310	470	630	790	950	1110
		4 Ft.	Total Pressure	0.006	0.024	0.056	0.100	0.156	0.226	0.309
		4 Ft.	Static Pressure	0.003	0.014	0.033	0.059	0.093	0.135	0.184
		4 Ft.	NC (Noise Criteria)	<15	<15	<15	23	29	35	42
		4 Ft.	Throw	2-4-12	7-13-23	13-19-28	17-23-32	21-26-36	23-28-40	25-31-43
3" Slot Width	2 Slot 12" Dia. Inlet	5 Ft.	Airflow, cfm	180	360	540	720	900	1080	1260
			Total Pressure	0.007	0.027	0.060	0.108	0.169	0.244	0.331
			Static Pressure	0.003	0.014	0.031	0.056	0.087	0.126	0.170
			NC (Noise Criteria)	<15	<15	16	24	30	35	42
			Throw	2-4-13	6-13-24	13-19-30	17-24-35	22-28-39	24-30-42	26-32-46

Performance Notes:


1. Data is based upon FlowLine™ with Nailor engineered plenum (uninsulated) as a complete assembly.
2. All pressures are in inches w.g..
3. Throw values are given at 150, 100 and 50 fpm terminal velocities under isothermal conditions.
4. NC (Noise criteria) values are based on 10 dB room absorption, re 10^{-12} watts.
5. Throw values are based on a 1-way air pattern. For 2-way pattern, throw is determined from the 1 slot data at half the specified air volume.
6. Data derived from tests conducted in accordance with ANSI/ASHRAE Standard 70-2006.


PERFORMANCE DATA • VERTICAL JET THROW SERIES
MODELS: FLV / FTV (10 & 15) • 2 SLOT WITH NAILOR PLENUM

1" Slot Width	2 Slot 8" Dia. Inlet	2 Ft.	Airflow, cfm	80	155	230	305	380	455	530
			Total Pressure	0.012	0.045	0.098	0.173	0.269	0.385	0.523
			Static Pressure	0.009	0.032	0.070	0.122	0.189	0.272	0.369
			NC (Noise Criteria)	<15	<15	18	27	34	40	45
			Throw	2-4-13	7-12-23	12-19-29	12-23-33	21-26-36	23-29-40	25-31-43
		4 Ft.	Airflow, cfm	160	260	360	460	560	660	760
			Total Pressure	0.031	0.083	0.159	0.261	0.386	0.537	0.712
			Static Pressure	0.017	0.046	0.089	0.144	0.215	0.299	0.396
			NC (Noise Criteria)	<15	<15	24	31	38	43	48
		5 Ft.	Airflow, cfm	200	300	400	500	600	700	800
			Total Pressure	0.045	0.101	0.180	0.280	0.404	0.550	0.718
			Static Pressure	0.022	0.051	0.092	0.143	0.207	0.281	0.368
			NC (Noise Criteria)	<15	<15	25	32	38	43	47
			Throw	2-4-19	4-11-19	9-19-34	13-23-37	19-29-41	22-32-44	25-34-47
1" Slot Width	2 Slot 10" Dia. Inlet	2 Ft.	Airflow, cfm	80	165	250	335	420	505	590
			Total Pressure	0.006	0.029	0.067	0.121	0.190	0.275	0.376
			Static Pressure	0.005	0.024	0.054	0.096	0.151	0.217	0.297
			NC (Noise Criteria)	<15	<15	<15	23	31	37	42
			Throw	2-4-13	8-13-24	13-20-30	18-24-34	22-28-39	24-30-42	26-32-46
		4 Ft.	Airflow, cfm	160	300	440	580	720	860	1000
			Total Pressure	0.016	0.057	0.122	0.212	0.326	0.464	0.628
			Static Pressure	0.011	0.036	0.078	0.136	0.210	0.299	0.404
			NC (Noise Criteria)	<15	<15	20	29	36	42	47
		5 Ft.	Airflow, cfm	200	350	500	650	800	950	1100
			Total Pressure	0.022	0.068	0.140	0.238	0.360	0.506	0.679
			Static Pressure	0.014	0.042	0.085	0.142	0.215	0.304	0.408
			NC (Noise Criteria)	<15	<15	22	31	37	43	47
			Throw	2-4-19	7-14-32	13-23-37	20-31-43	25-43-47	30-36-52	32-40-56
1" Slot Width	2 Slot 12" Dia. Inlet	2 Ft.	Airflow, cfm	80	170	260	350	440	530	620
			Total Pressure	0.004	0.021	0.049	0.090	0.142	0.207	0.282
			Static Pressure	0.004	0.018	0.043	0.077	0.122	0.177	0.242
			NC (Noise Criteria)	<15	<15	<15	21	28	34	39
			Throw	2-4-13	8-13-24	14-21-31	19-25-35	23-28-40	25-31-43	28-33-47
		4 Ft.	Airflow, cfm	160	320	480	640	800	960	1120
			Total Pressure	0.010	0.036	0.082	0.147	0.229	0.330	0.448
			Static Pressure	0.006	0.026	0.058	0.102	0.159	0.229	0.312
			NC (Noise Criteria)	<15	<15	<15	24	32	37	42
		5 Ft.	Airflow, cfm	200	375	550	725	900	1075	1250
			Total Pressure	0.013	0.044	0.095	0.165	0.255	0.363	0.490
			Static Pressure	0.009	0.029	0.062	0.108	0.167	0.238	0.321
			NC (Noise Criteria)	<15	<15	17	26	33	38	43
			Throw	2-4-19	8-17-33	17-25-40	23-32-45	29-35-51	32-39-55	34-42-59
1.5" Slot Width	2 Slot 10" Dia. Inlet	2 Ft.	Airflow, cfm	120	210	300	390	480	570	660
			Total Pressure	0.011	0.033	0.068	0.116	0.175	0.248	0.333
			Static Pressure	0.007	0.024	0.048	0.082	0.124	0.175	0.234
			NC (Noise Criteria)	<15	<15	<15	21	27	33	38
			Throw	2-4-15	6-13-26	12-19-31	17-25-35	21-28-40	24-31-43	26-33-46
		4 Ft.	Airflow, cfm	240	340	440	540	640	740	840
			Total Pressure	0.029	0.059	0.097	0.148	0.207	0.276	0.356
			Static Pressure	0.016	0.032	0.055	0.082	0.114	0.154	0.198
			NC (Noise Criteria)	<15	<15	<15	22	28	32	37
		5 Ft.	Airflow, cfm	260	365	470	575	680	785	890
			Total Pressure	0.031	0.061	0.102	0.152	0.213	0.284	0.365
			Static Pressure	0.016	0.031	0.052	0.078	0.109	0.146	0.187
			NC (Noise Criteria)	<15	<15	<15	22	28	32	36
			Throw	2-4-17	3-8-28	6-13-35	9-20-39	12-25-42	17-30-45	21-33-47

For performance table notes, see page A45.

A



A

PERFORMANCE DATA • VERTICAL JET THROW SERIES
MODELS: FLV / FTV (20, 25 & 30) • 2 SLOT WITH NAILOR PLENUM

2"	2 Slot 14" Dia. Inlet	2 Ft.	Airflow, cfm	140	280	420	560	700	840	980
			Total Pressure	0.004	0.018	0.041	0.073	0.114	0.165	0.225
			Static Pressure	0.003	0.014	0.031	0.055	0.086	0.123	0.168
			NC (Noise Criteria)	<15	<15	<15	<15	21	27	32
			Throw	1-3-11	5-11-22	11-18-27	15-22-31	20-25-36	22-27-39	24-30-42
		4 Ft.	Airflow, cfm	250	450	650	850	1050	1250	1450
			Total Pressure	0.010	0.030	0.062	0.106	0.161	0.228	0.307
			Static Pressure	0.005	0.018	0.037	0.063	0.096	0.137	0.184
			NC (Noise Criteria)	<15	<15	<15	18	24	30	35
		5 Ft.	Airflow, cfm	280	480	680	880	1080	1280	1480
			Total Pressure	0.011	0.030	0.061	0.102	0.153	0.215	0.288
			Static Pressure	0.005	0.017	0.034	0.057	0.086	0.120	0.159
			NC (Noise Criteria)	<15	<15	<15	16	23	28	33
			Throw	1-3-10	3-8-28	7-15-37	11-25-42	17-31-46	24-26-50	28-38-54
2.5"	2 Slot 14" Dia. Inlet	2 Ft.	Airflow, cfm	150	335	520	705	890	1075	1260
			Total Pressure	0.004	0.022	0.054	0.098	0.157	0.229	0.315
			Static Pressure	0.003	0.016	0.037	0.070	0.111	0.162	0.223
			NC (Noise Criteria)	<15	<15	<15	18	26	32	37
			Throw	1-3-9	5-11-24	12-20-30	17-25-35	22-27-39	25-31-43	26-32-46
		4 Ft.	Airflow, cfm	300	540	780	1020	1260	1500	1740
			Total Pressure	0.012	0.039	0.080	0.137	0.209	0.295	0.398
			Static Pressure	0.006	0.021	0.044	0.076	0.116	0.164	0.220
			NC (Noise Criteria)	<15	<15	<15	21	28	33	38
		5 Ft.	Airflow, cfm	350	600	850	1100	1350	1600	1850
			Total Pressure	0.015	0.043	0.087	0.144	0.218	0.306	0.410
			Static Pressure	0.007	0.022	0.044	0.074	0.111	0.157	0.210
			NC (Noise Criteria)	<15	<15	<15	22	28	34	38
			Throw	1-3-9	3-7-26	6-14-34	10-23-38	15-29-43	22-33-47	26-36-50
3"	2 Slot 14" Dia. Inlet	2 Ft.	Airflow, cfm	175	385	595	805	1015	1225	1435
			Total Pressure	0.005	0.026	0.062	0.113	0.181	0.263	0.361
			Static Pressure	0.003	0.017	0.042	0.076	0.120	0.175	0.241
			NC (Noise Criteria)	<15	<15	<15	20	27	33	38
			Throw	1-3-9	5-10-25	11-20-31	18-26-37	22-29-41	26-31-44	28-34-18
		4 Ft.	Airflow, cfm	320	580	840	1100	1360	1620	1880
			Total Pressure	0.013	0.042	0.087	0.149	0.227	0.322	0.433
			Static Pressure	0.006	0.021	0.045	0.078	0.119	0.168	0.227
			NC (Noise Criteria)	<15	<15	<15	22	27	34	39
		5 Ft.	Airflow, cfm	380	645	910	1175	1440	1705	1970
			Total Pressure	0.016	0.045	0.090	0.149	0.224	0.314	0.419
			Static Pressure	0.007	0.020	0.041	0.068	0.103	0.144	0.193
			NC (Noise Criteria)	<15	<15	<15	21	28	33	38
			Throw	1-2-9	3-6-23	5-12-34	9-20-39	13-28-43	18-33-47	24-36-50

Performance Notes:

1. Data is based upon FlowLine™ with Nailor engineered plenum (uninsulated) as a complete assembly.
2. All pressures are in inches w.g..
3. Throw values are given at 150, 100 and 50 fpm terminal velocities under isothermal conditions.
4. NC (Noise criteria) values are based on 10 dB room absorption, re 10⁻¹² watts.
5. Throw values are based on pattern controller set 100% open.
6. Data derived from tests conducted in accordance with ANSI/ASHRAE Standard 70-2006.

HOW TO ORDER

MODEL SERIES: FLH & FLV

CONTINUOUS FLOWLINE™ LINEAR DIFFUSERS

EXAMPLE: FLH20 - 144" x 1 SLOT - AA - AW - MM - HC1 - HC1 - —

1. Models

Horizontal High Throw

FLH10	1" (25) Slot
FLH15	1 1/2" (38) Slot
FLH20	2" (51) Slot
FLH25	2 1/2" (64) Slot
FLH30	3" (76) Slot

Vertical Jet Throw

FLV10	1" (25) Slot
FLV15	1 1/2" (38) Slot
FLV20	2" (51) Slot
FLV25	2 1/2" (64) Slot
FLV30	3" (76) Slot

2. Nominal Length

inches (mm's)

3. Number of Slots

1 One

2 Two

4. Frame/Border Type

AA	Exposed Flange Frame
AAC	Exposed Flange Frame with Concealed Mounting Brackets
AG	Flange / Flangeless Frame
CA	Concealed Tapered/Exposed Flange Frame
CC	Concealed Tapered Frame
CCA	Concealed Tapered Frame with Countersunk Screw Holes
CCC	Concealed Tapered Frame with Concealed Mounting Brackets
CCCA	Concealed Tapered Frame with Concealed Mounting Brackets and Countersunk Screw Holes
CG	Concealed Tapered/Exposed Flangeless Frame
GG	Flangeless Frame

GJ	Exposed/Concealed Offset Frame (one slot FLH only)
KK	Concealed Angular Frame (one slot FLH 10, 15, 20 only)

5. Finish

AW	Appliance White (default) (on Frames AA, AG, GG and GJ)
AL	Aluminum
BK	Black
BW	British White
MI	Mill (default on frames CC and KK)
MIAW	Mill/Appliance White (default on frames CA and CG)
PC	Prime Coat Paint
SA	Satin (clear) anodized (Frame/Border AA and AAC only)
SP	Special custom color
LBP	Light Bronze Paint
MBP	Medium Bronze Paint
DBP	Dark Bronze Paint

6. End Cap Configuration

Frame/Border Types AA, AAC, CC, CCA, CCC and CCCA only

MM	Mitered Mitered (default)
MO	Mitered Open
MC	Mitered Flat Cap

Frame/Border Types AA, AAC, GG and AG only

FF	Flanged Flanged
FO	Flanged Open
FC	Flanged Flat Cap
All Frame/Border Types including CA, CG, GJ and KK	
OO	Open Open
OC	Open Flat Cap
CC	Flat Cap Flat Cap

Mounting Clip Availability

Accessory	Compatibility Frame/Border Type	Accessory	Compatibility Frame/Border Type
HC1	A, C, G	WC1	A
HC2	G	WC2	G, J
HC3-10	K (FLH10)	TC1	A, G
HC3-15	K (FLH15)		
HC3-20	K (FLH20)	TC2	G
HC5	A, C, G		

Options and Accessories

7. Left Hand Mounting Hardware

—	None (default)
HC1	Hard Ceiling Clip – 5/8" (16) drywall
HC2	Hard Ceiling Clip – 5/8" (16) drywall
HC3	Hard Ceiling Clip – 5/8" (16) drywall
HC5	Hard Ceiling Clip – 1/2" (13) drywall
WC1	Wall Clip
WC2	Wall Clip
TC1	T-Bar Mounting Clips
TC2	Fineline® T-Bar Mounting Clips

8. Right Hand Mounting Hardware

—	None (default)
HC1	Hard Ceiling Clip – 5/8" (16) drywall
HC2	Hard Ceiling Clip – 5/8" (16) drywall
HC3	Hard Ceiling Clip – 5/8" (16) drywall
HC5	Hard Ceiling Clip – 1/2" (13) drywall
WC1	Wall Clip
WC2	Wall Clip
TC1	T-Bar Mounting Clips
TC2	Fineline® T-Bar Mounting Clips

8. Angle Cut *

—	None (default)
AC1	One End
AC2	Both Ends

Note:

1. Maximum single section length is 144" (3658).
2. Border Types CC, CCA, CCC, CCCA and KK (concealed frame) are supplied with mill finish (MI) only. Two slot models with Frame/Borders CC (A, C and CA), CA and CG have AW Appliance White center tee.
3. All models except Frame/Border Type AAC, CCC and CCCA (supplied with concealed mounting brackets) include integral hanger brackets on 24" (610) centers as standard.
4. Hard ceiling clips and wall clips are shipped in quantities based on 12" (305) spacing and T-Bar clips on 24" (610) spacing. Left and right hand clips are identical.
5. *Specify AC Angle cut(s) and attach drawing. Angle cuts require an open end border.

HOW TO ORDER

MODEL SERIES: FLH-TZ & FLV-TZ

TECHZONE™ FLOWLINE™ LINEAR DIFFUSERS

EXAMPLE: FLH10TZ - 48" x 2 SLOT - 06 - NT - AW - CC - --

1. Models

Horizontal High Throw

FLH10TZ 1" (25) Slot

Vertical Jet Throw

FLV10TZ 1" (25) Slot

2. Nominal Length

inches (mm's)

3. Number of Slots

1 One

2 Two

4. Ceiling Module Width

04 4" Wide

06 6" Wide

5. Frame/Border Type

LT Lay-in T-Bar

NT Narrow T-Bar

6. Finish

AW Appliance White (default)

AL Aluminum

BK Black

BW British White

MI Mill

PC Prime Coat Paint

SP Special custom color

7. End Cap Configuration

OO Open Open

OC Open Flat Cap

CC Flat Cap Flat Cap

Options and Accessories

8. Angle Cut *

- None (default)

AC1 One End

AC2 Both Ends

Note:

1. Maximum single section length is 144" (3658).

2. All models include integral hanger brackets on 24" (610) centers as standard.

3. *Specify AC Angle cut(s) and attach drawing. Angle cut AC1 is available with OO and OC end cap. Angle cut AC2 is available with OO end cap.

HOW TO ORDER

MODEL SERIES: FLMC

FLOWLINE™ ACCESSORIES – MITERED CORNER SECTIONS

EXAMPLE: FLMC20 - 1 - AA - AW - 90 - HC1 - HC1

1. Models

- FLMC10 1" (25) Slot
- FLMC15 1 1/2" (38) Slot
- FLMC20 2" (51) Slot
- FLMC25 2 1/2" (64) Slot
- FLMC30 3" (76) Slot

2. Number of Slots

- 1 One
- 2 Two

3. Frame/Border Type

- AA Exposed Flange Frame
- AC* Exposed Flange/Concealed Tapered Frame
- AG* Flange/Flangeless Frame
- CA* Concealed Tapered/Exposed Flange Frame
- CC Concealed Tapered Frame
- CG* Concealed Tapered/Exposed Flangeless Frame
- GG Flangeless Frame
- GA* Flangeless/Flange Frame
- GC* Exposed Flangeless/Concealed Tapered Frame
- GJ* Exposed/Concealed Offset Frame (One Slot FLH only)
- KK Concealed Angular Frame (One Slot FLH 10, 15, 20 only)

4. Finish

- AW Appliance White (default)
(on Frames AA, GG, AG, GA & GJ)
- AL Aluminum
- BK Black
- BW British White
- MI Mill (default on frames CC and KK)
- MIAW Mill/Appliance White (default on frames AC, CA, CG and GC)
- PC Prime Coat Paint
- SA Satin (clear) anodized
(Frame/border AA only)
- SP Special custom color
- LBP Light Bronze Paint
- MBP Medium Bronze Paint
- DBP Dark Bronze Paint

5. Mitered Angle

- 90 90 degree (default)
- 135 135 degree
- AN Degree of angle
(Specify angle = _____)

Options and Accessories

6. Inside Mounting Hardware

- None (default)
- HC1 Hard Ceiling Clip – 5/8" (16) drywall
- HC5 Hard Ceiling Clip – 1/2" (13) drywall
- TC2 Fineline® T-Bar Mounting Clip

7. Outside Mounting Hardware

- None (default)
- HC1 Hard Ceiling Clip – 5/8" (16) drywall
- HC5 Hard Ceiling Clip – 1/2" (13) drywall
- TC2 Fineline® T-Bar Mounting Clip

Notes:

1. Border Types CC and KK are supplied with Mill finish (MI). No options (2 slot model CC has AW Appliance White center tee). Border Types AC, CA, CG and GC are supplied with MIAW Mill/Appliance White finish. No options except SP.
2. Mitered corner section is supplied inactive with integral blank-offs. Unit is supported by adjacent Flowline™.
3. *First specified Frame/Border is inside edge of miter, second is outside.

MODEL SERIES: FLEF

FLOWLINE™ ACCESSORIES – FLANGED END CAPS (TYPE F)

EXAMPLE: FLEF20 - 1 - AA - AW

1. Models

- FLEF10 1" (25) Slot
- FLEF15 1 1/2" (38) Slot
- FLEF20 2" (51) Slot
- FLEF25 2 1/2" (64) Slot
- FLEF30 3" (76) Slot

2. Number of Slots

- 1 One
- 2 Two

3. Frame/Border Type

- AA Exposed Flange Frame
- AG Flange / Flangeless Frame
- GG Flangeless Frame

4. Finish

- AW Appliance White (default)
- AL Aluminum
- BK Black
- BW British White
- MI Mill
- PC Prime Coat Paint

HOW TO ORDER

MODEL SERIES: FLP**FLOWLINE™ LINEAR DIFFUSER PLENUMS****EXAMPLE: FLP10 - 48" x 1 SLOT - HSTD - 08 - AA - ID - —****1. Models****Uninsulated Plenum**

FLP10	1" (25) Slot
FLP15	1 1/2" (38) Slot
FLP20	2" (51) Slot
FLP25	2 1/2" (64) Slot
FLP30	3" (76) Slot

Insulated Plenum (internal)

FLPI10	1" (25) Slot
FLPI15	1 1/2" (38) Slot
FLPI20	2" (51) Slot
FLPI25	2 1/2" (64) Slot
FLPI30	3" (76) Slot

2. Nominal Length**Imperial Sizes**

inches (mm's)
24, 30, 36, 48, 60, 72
(610, 762, 914, 1219, 1524, 1829)

Metric Sizes

(mm's)
(600, 750, 900, 1200, 1500, 1800)

3. Number of Slots

- 1 One
2 Two

4. Plenum Height

HSTD Standard (default)

One Slot Option (for round inlets)

H13	13" (330)
H15	15" (381)
H17	17" (432)

5. Inlet Size**One Slot**

06	6" (152)	Round
08	8" (203)	Round
10	10" (254)	Flat Oval
10R	10" (254)	Round
12	12" (305)	Flat Oval
12R	12" (305)	Round
14	14" (356)	Flat Oval
14R	14" (356)	Round

Two Slot

06	6" (152)	Round
08	8" (203)	Round
10R	10" (254)	Round
12R	12" (305)	Round
14R	14" (356)	Round

6. Frame/Border Type**(Diffuser)**

AA	Exposed Flange Frame
AAC	Exposed Flange Frame with Concealed Mounting Brackets
AG	Flange/Flangeless Frame
CA	Concealed Tapered/Exposed Flange Frame
CC	Concealed Tapered Frame
CCA	Concealed Tapered Frame with Countersunk Screw Holes
CCC	Concealed Tapered Frame with Concealed Mounting Brackets
CCCA	Concealed Tapered Frame with Concealed Mounting Brackets and Countersunk Screw Holes
CG	Concealed Tapered/Exposed Flangeless Frame
GG	Flangeless Frame
GJ	Exposed/Concealed Offset Frame (One Slot FLH only)
KK	Concealed Angular Frame
LT	Lay-in T-Bar (TechZone™)
NT	Narrow T-Bar (TechZone™)

Options and Accessories:**7. Inlet Damper**

- None (default)
- ID Inlet Damper with HLQ
- IDCO Cable Operated Damper

8a. External Insulation

- (FLP models only)
- None (default)
- EX External Foil Back (installed)

8b. Internal Insulation

- (FLPI models only)
- FGI 1/4" (6.35) Coated fiberglass (default)
- FFI 3/8" (9.53) Fiber-free foam

Notes:

- Plenums are shipped loose as standard for field installation.
- Plenums for Frame/Border Types AA, AG, CA, CC, CG, CCA, GG, GJ, KK, LT and NT are for different attachment to diffuser neck. TechZone™ Frame Border Type LT and NT are available in FLP10 and FLPI10 1" (25) slot only.
- Plenums for Frame Types AAC, CCC and CCCA are hemmed for field attachment by use of concealed mounting brackets.
- Standard internal insulation ("I" suffix models) is 1/4" (6.35) coated fiberglass.

Available Inlet Sizes – One Slot Plenum

Plenum		Inlet Type/Size	
Code	Height	Round	Oval
HSTD	Standard *	06, 08	10 – 14
H13	13 (330)	06, 08, 10R	12 – 14
H15	15 (381)	06, 08, 10R, 12R	14
H17	17 (432)	06, 08, 10R – 14R	—

* 10" (254) for Type AA, CA, CC, CCA, AG, CG, GG, GJ, KK, LT and NT (straight leg).
12" (305) for Type AAC, CCC and CCCA (hemmed leg).

SUGGESTED SPECIFICATIONS

FLH and FLV Series

Furnish and install Nailor FlowLine™ linear slot diffusers and accessories of the size and type shown on the architectural and mechanical plans and/or air distribution schedules. Mechanical contractor shall coordinate installation with General Contractor and other sub-contractors as required.

The linear slot diffuser shall utilize heavy wall extruded aluminum frames and be capable of supporting the ceiling system. Material shall be minimum wall thickness 0.06" (1.52). Diffuser frames shall be supplied with integral spacer bars and hanger brackets, spaced approximately on 24" (610) centers. The integral hanger brackets shall allow the linear slot diffusers to be supported from the ceiling structure with hanger wire in lay-in suspension ceiling installations. In hard ceiling installations, provide support clips by the manufacturer that allow the diffusers to be secured to the ceiling diffuser opening framing channels.

The linear slot diffuser shall be complete with factory end border configurations as shown or indicated. Where exposed end caps are required, they shall be factory installed architectural mitered picture frame type. Flanges/butt type end caps are not acceptable.

Provide alignment strips and spline clips by the manufacturer to secure joints and ceiling tees to the linear diffuser as required. Mitered corner sections shall be supplied by the manufacturer in one-piece construction.

The air pattern controller shall be dual type on 24" (610) centers and fully adjustable to permit various air pattern configurations, as well as allow throttling, as required for air volume reduction or complete shut-off without adding any blank-off devices. Pattern controllers shall be minimum 20 ga. (1.01) corrosion-resistant steel. One-piece pattern controllers are not acceptable.

Linear slot diffusers shall incorporate either horizontal high throw or vertical jet throw pattern controllers as shown on mechanical plans and drawings.

All diffusers shall have a single slot, unless shown otherwise, and shall be capable of being used for supply, return or exhaust air. Horizontal high throw diffusers shall maintain a tight ceiling pattern from maximum to minimum cataloged airflows and be suitable for VAV systems.

Where curved linear slot diffusers are indicated, they shall be one slot design and stretch formed by the manufacturer to the exact radii required. Segmented linear slot diffusers are not acceptable. Pattern controller shall be factory installed and fixed in the airflow direction specified on the drawings.

Supply air engineered plenum boots shall be minimum 22 ga. (0.85) coated steel and of the same manufacturer as the linear slot diffuser. Lengths and inlet sizes shall be as indicated on the plans and schedules. Where required, plenums shall be insulated with either internal matt faced fiberglass insulation or external foil back insulation, as specified on drawings or schedules. Return hood/sight baffles shall be provided as shown.

Exposed flange/border frames shall be factory painted standard white or custom painted to match specified architectural requirements. Provide paint samples if required. Pattern controllers and integral spacers shall be painted flat black.

Performance of the linear slot diffuser shall be based upon cataloged data obtained from tests conducted in accordance with ASHRAE Standard 70-2006. Pattern controllers shall be field adjusted after diffuser installation and set in their normal operating condition. Air test and balancing of linear slot diffusers shall be in accordance with the testing and balancing portion section of the specifications.

Provide manufacturers submittal drawings and published performance data.

FM Series

Furnish and install Nailor FlowLine™ modular square ceiling diffusers of the size and type shown on the architectural and mechanical plans and/or air distribution schedules. Diffusers shall be designed as a nominal 24" x 24" (600 x 600mm) module size. Mechanical contractor shall coordinate installation with General Contractor and other sub-contractors as required.

These diffusers shall utilize heavy wall extruded aluminum frames with inside and outside mitered corners. The diffusers shall feature a 1" (25) continuous slot around all four sides with dual pattern controllers that are fully adjustable to permit throttling, as required for air volume reduction or complete shut-off without adding any blank-off devices. Diffusers shall be capable of being adjustable for a 4, 3, 2 or 1-way blow pattern as required after installation. Pattern controllers shall be minimum 20 ga. (1.01) corrosion-resistant steel. One-piece pattern controllers are not acceptable. The pattern controllers shall be horizontal high throw type and shall maintain a tight ceiling air pattern from maximum to minimum cataloged airflows and be suitable for VAV systems.

Supply units shall be complete with a compatible steel back pan that is removable and secured by steel 's' clips. The back pan shall incorporate an integral drawn round neck to permit hard or flexible duct connection. Return units shall be similar in appearance but feature a light shield back pan for ductless return installations. The center acoustical ceiling tile shall be supplied, cut and field installed by the acoustical tile sub-contractor.

Exposed flange/border frames shall be factory painted standard white or custom painted to match specified architectural requirements. Provide paint samples if required. Pattern controllers and integral spacers shall be painted flat black.

Performance of the ceiling diffuser shall be based upon cataloged data obtained from tests conducted in accordance with ASHRAE Standard 70-2006. Pattern controllers shall be field adjusted after diffuser installation and set in their normal operating condition. Air test and balancing of ceiling diffusers shall be in accordance with the testing and balancing portion section of the specifications.

Provide manufacturers submittal drawings and published performance data.