











Design Features

- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look No Louvers
- Millivolt / IPI
- Glass Size: 26¼" x 32½", 853¼ in²
- E-Coated Glass (Optional Ceramic Glass)
- Cool Surface System HDK Included
- 130 CFM Room Fan (with variable control)
- Run-Quiet Fan System
- Limited Lifetime Warranty

BUD Learn more at enviro.com/blu enviro.com/bluiq

Available Options

- Burner Options: – Traditional Log Set
- Birch Log Set – Driftwood Log Set
- Glass Burner with Diamond Glass
- Liner Options: – Ceramic Brick Liner (Brown or Black)
- Herringbone Liner – Ledgestone Liner
- Black Enameled Steel Liner - Painted Steel Liner (Included)
- Surround Options:
- Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper – Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	3	0,000 BT	U
BTU Minimum Output*	m Output* 10,000 BTU		
Heating Area	1,600 ft ²		
P4 Efficiency	69.8%		
Viewing Area	34½"h x 39"w		
Glass Size	26½"h x 32½"w		
Fireplace Install Dims.	HEIGHT 42"	width 41½″	DEPTH 18¼″





Traditional Log Set

Birch Log Set

* Turn down = 50% Valve x P4 Efficiency



Driftwood Log Set





Design Features

- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look No Louvers
- Millivolt / IPI
- Glass Size: 29³/₈" x 36¹/₂", 1072 in²
- Ceramic Glass
- Cool Surface System HDK Included
- Run-Quiet Fan System
- Limited Lifetime Warranty
- Billio Learn more at enviro.com/bluig

Available Options

- Burner Options: – Traditional Log Set
- Birch Log Set – Driftwood Log Set
- Glass Burner with Diamond Glass
- Liner Options: – Ceramic Brick Liner (Brown or Black)
- Herringbone Liner – Ledgestone Liner
- Black Enameled Steel Liner
- Painted Steel Liner (Included)
- Surround Options:
- Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	IG 40,000 BTU		
BTU Minimum Output*	7,000 BTU		
Heating Area		2,000 ft ²	
P4 Efficiency	70%		
Viewing Area	37¼"h x 42"w		
Glass Size	29 ³ / ₈ " x 36 ¹ / ₂ "		
Fireplace Install Dims.	HEIGHT 50"	WIDTH 48¾″	DEPTH 23¼″

* Turn down = 50% Valve with Split Flow activated x P4 Efficiency





Top Firebox Lighting

Diamond Glass Burner



Traditional Log Set





Design Features

- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look No Louvers
- Millivolt / IPI
- Glass Size: 30¹/₂" x 43¹/₂", 1326³/₄ in²
- Ceramic Glass
- Cool Surface System HDK Included
- Run-Quiet Fan System
- Limited Lifetime Warranty
- Billio Learn more at enviro.com/bluig

Available Options

- Burner Options:
- Traditional Log Set *Appearance subject to change – Birch Log Set – Driftwood Log Set – Glass Burner with Diamond Glass
- Liner Options:
- Ceramic Brick Liner (Brown or Black)
- Herringbone Liner – Ledgestone Liner
- Black Enameled Steel Liner
- Painted Steel Liner (Included)
- Surround Options:
- Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	4	8,000 BT	U
BTU Minimum Output*	8,700 BTU		
Heating Area		2,200 ft ²	
P4 Efficiency	73.6%		
Viewing Area	39¼"h x 50"w		
Glass Size	30½"h x 43½"w		
Fireplace Install Dims.	height 50″	width 55"	DEPTH 23¼″

* Turn down = 33% Valve with Split Flow activated x P4 Efficiency







Glass Burner with Diamond Glass





Traditional Log Set

G Series Faces



SLIM FACE (G42 pictured with a Painted Black Finish) Available for the G33, G39, G42, and G50






Powder Coated Grey



Powder Coated Silver



Brushed Nickel





Brushed Antique Copper







CERAMIC BRICK LINER (Rustic Brown or Painted Black) Available for the G33, G39, G42, and G50





BLACK ENAMELED STEEL LINER Available for the G33, G39, G42, and G50

PAINTED STEEL LINER Included with the G33, G39, G42, and G50





DRIFTWOOD LOG SET Available for the G33, G39, G42, and G50



14



FORGEWORKS FACE (G42 pictured) Available for the G39, G42, and G50



Midnight Bronze





LEDGESTONE LINER Available for the G33, G39, G42, and G50



GLASS BURNER WITH DIAMOND GLASS Available for the G33, G39, G42, and G50

TRADITIONAL LOG SET Available for the G33, G39, G42, and G50




BIRCH LOG SET Available for the G33, G39, G42, and G50

Unit Specifications

Performance	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
BTU Maximum input - NG / LP	30,000 / 30,000	40,000 / 40,000	48,000 / 48,000
Turn Down* - Valve 820 / Valve 885	50% / 33%	50% / 67.5% w/Split flow	67.5% w/Split flow
Heat Exchanger	v	¥	¥
SIT Valve 820 (Standing Pilot)	Available	Available	N/A
SIT Valve 885 (IPI)	Available	Available	Available
Split Flow Burner	N/A	Included (IPI Only)	Included (IPI Only)
Efficiency - Steady State**	71.37%	72.1%	75.7%
Efficiency - FE rating (P4) [‡]	69.8%	69.6%	73.6%
Glass Size	26¼" x 32½", 853¼ in ²	29 ³ / ₈ " x 36 ¹ / ₂ ", 1072 in ²	301/2" x 431/2", 13263/4 in ²
Run-Quiet Fan System	130 сғм	130 сғм	130 сғм

Installation		G39 Gas fireplace			G42 GAS FIREPLACE			G50 GAS FIREPLACE	
Fireplace Dimensions w/Screen (HWD)	HEIGHT 42"	width 41 ½″	DEPTH 181⁄4″	HEIGHT 50"	WIDTH 48 3⁄4″	DEPTH 23¼″	HEIGHT 50"	width 55″	DEPTH 23¼″
Venting Collar Size	4/7"	=lex x 6 ⁵⁄8″ F	Rigid	5/8	3" Flex & Rig	id	5/8	3″ Flex & Rig	jid
Venting Orientation		Тор			Тор			Тор	
LP Conversion Kit (Standing Pilot)		Included			Included			Included	
Weight (lbs)		192 lbs			250 lbs			280 lbs	

Clearance to Combustibles	G39	G42	G50
A - Side of unit to side wall	7"	7"	7"
B - Minimum clearance to ceiling	72"	78"	78"
C - Minimum clearance to mantle height	45"	451⁄4"	48"
D - Minimum clearance to mantle depth	4"	4"	4"
E - Front of door to edge of floor protection	0"	0"	0"
F - Minimum clearance to alcove width	52"	57"	63½"



Unit Options

Firebox Liners	G39 GAS FIREPLACE
Ceramic Brick Liner	¥
Herringbone Liner	v
Black Enameled Steel Liner	¥
Ledgestone Liner	~
Painted Steel Liner	Included

Fireplace Surrounds	GAS FIR	
Slim Face Surround	HEIGHT 33¾″	width 39"
Forgeworks Surround	33¾″	39″

Burner Variations Gas Firep	
Traditional Log Set	
Birch Log Set 🗸	
Driftwood Log Set	
Glass Burner with Diamond Glass	

Additional Accents	G39 GAS FIREPLACE
Cool Surface System (HDK)	Built-in
Ceramic Glass	Optional
Top Firebox Lighting (Log IPI Only)	~
Adjustable Ember Bed Lighting (Log IPI Only)	\checkmark
Programmable Thermostat	~
Proflame Remote Control	Included with IPI

* Turn down based on AFUE efficiencies on low.

** Steady state rating based on conventional venting configuration.

‡ Efficiency based on the P4 measured efficiency rating of the IPI models

G42 GAS FIREPLACE	G50 GAS FIREPLACE
~	~
~	✓
~	v
v	~
Included	Included

 G42 GAS FIREPLACE
 G50 GAS FIREPLACE

 HEIGHT 37"
 WIDTH 42½"
 HEIGHT 39"
 WIDTH 50½"

 37"
 42½"
 39"
 50½"

G42 GAS FIREPLACE	G50 GAS FIREPLACE
×	~
~	~
~	v
~	\checkmark

G42 GAS FIREPLACE	G50 GAS FIREPLACE
Built-in	Built-in
Standard	Standard
V	✓
\checkmark	✓
V	✓
Included with IPI	Included with IPI


Cool Surface System

INCLUDED WITH THE G SERIES

A Gas Fireplace with Peace of Mind.

We understand that surface temperatures are an important factor when considering how a fireplace will affect HDTVs or any framed decorations that might be mounted above. Heat rises naturally and with that in mind, every Enviro G Series Gas Fireplace comes equipped with our exclusive Cool Surface System.

We designed this system to help channel excess rising heat up behind the wall and safely push it through an included vent bezel bypassing any valuables above your G Series fireplace.

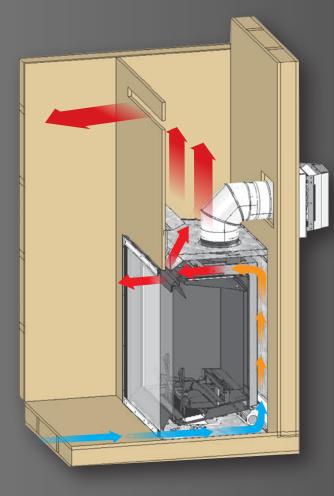

Convective heat that rises from the fireplace is captured in the chase and channeled through the vent using the Cool Surface System.

The Cool Surface System channels rising heat behind the wall.

Allows up to 1" thick combustible material (ie: drywall) to be used.

The Cool Surface System and vent bezel are included with every G Series unit.

Rising heat is evenly vented forward into the living space through the included bezel

Rising heat is channeled safely past valuable wall mounted items such as a TV

Heat radiates forward from the fireplace window



The best way to visualize your dream fireplace at home is with the Enviro App!







Manufactured by Sherwood Industries Ltd • Victoria, BC, Canada enviro.com • info@enviro.com • Printed in Canada, December 2018



