




Gateways

2021 Product Catalog

MONNIT[®]
Remote Monitoring for Business




About Monnit

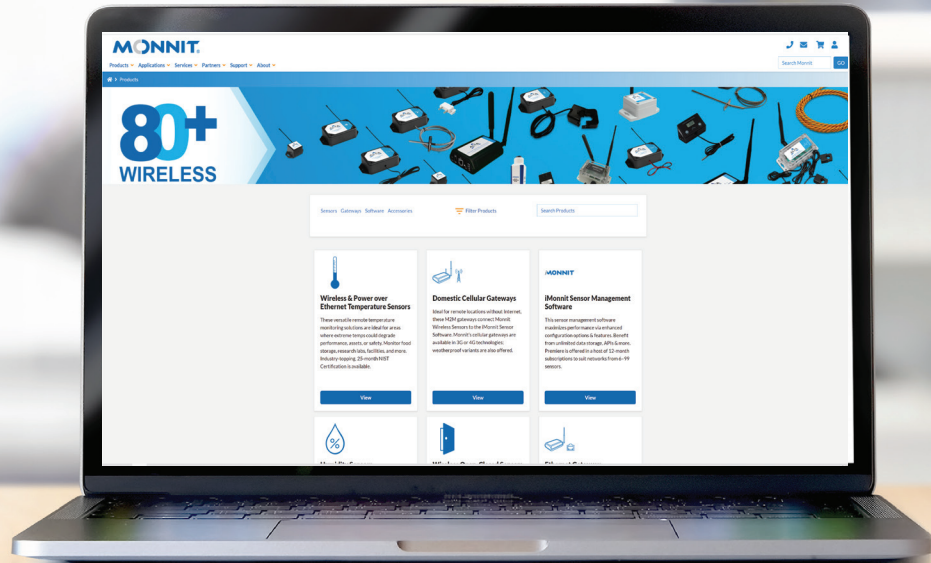

With over 10 years in developing IoT data, Monnit has entrenched its place as a global IoT leader with over 45,000 customers, over 21 billion data readings, and more than 2,000 product SKUs.

Monnit's intention is to be the global leader in touch points to Enterprise. Our team is dedicated to innovation and customer satisfaction.

HOW MONNIT WORKS

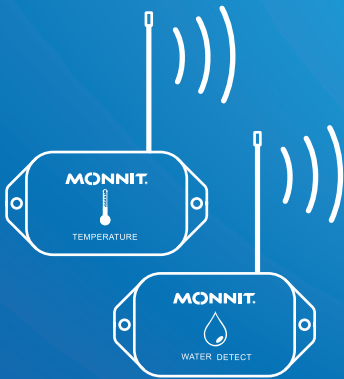

80+ Sensors
Monitor Important
Conditions.



Wireless Gateways
Relay Data to
Software.



Software Choices
Get Remote Access to
Dashboards / Alerts.



ALTA® Gateways

4G LTE Cellular Gateways	1	Modbus Gateway	4
4G LTE Industrial Gateway	1	Serial Modbus Gateway	4
4G LTE Commercial Gateway	1	Sensor Adaptor	4
3G Cellular Gateways	1	Wireless Sensor Adaptor	4
3G Industrial Cellular Gateway	1		
3G Commercial Cellular Gateway	2		
International Gateways	2		
3G Interantional Gateway	2		
2G International Gateway	2		
Ethernet Gateway	3		
ALTA Ethernet Gateway 4	3		
Advanced EDGE Gateway	3		
Advanced EGDE Gateway	3		



For more information about our products or to place an order, please contact our sales department at info@monnit.com or 801-561-5555. Visit us on the web at www.monnit.com.

4G LTE Cellular Gateways

4G LTE Industrial Cellular Gateway

Monnit® 4G LTE Cellular Gateways are based on a 4G LTE CAT-M1/NB1 wireless engine and integrates Monnit's wireless access point network (WAN) for use with Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

To meet the global demand for enterprise IoT deployment. The 4G LTE Gateway offers best-in-class security, connectivity, and reliability. Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-LTE-IN-ND



4G LTE Commercial Cellular Gateway

Monnit® 4G LTE Cellular Gateways are based on a 4G LTE CAT-M1/NB1 wireless engine and integrates Monnit's wireless access point network (WAN) for use with Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

To meet the global demand for enterprise IoT deployment. The 4G LTE Gateway offers best-in-class security, connectivity, and reliability. Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-LTE-CCE-ND



3G Cellular Gateways

3G Industrial Cellular Gateway

Monnit Domestic 3G Cellular Gateways (for use in USA, Canada and Mexico) are based on a 3G (GSM HSPA+) wireless engine and comes integrated with Monnit's wireless access point network (WAN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-3C3N-IN



3G Commercial Cellular Gateway

Monnit Domestic 3G Cellular Gateways (for use in USA, Canada and Mexico) are based on a 3G (GSM HSPA+) wireless engine and comes integrated with Monnit's wireless access point network (WAN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-3C3N-SC



International Gateways

3G International Gateway

The Monnit International 3G Cellular Gateway are based on a 3G (UMTS/GSM) wireless engine and comes integrated with Monnit's wireless access point network (WAN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks.

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG2-9-3C3I-SC



2G International Gateway

The Monnit International 2G Cellular Gateway is based on a 2G (GSM) wireless engine and comes integrated with Monnit's wireless access point network (WAN) for use with all Monnit Wireless Sensors. These gateways allow the sensors to operate on the world's leading cellular networks. (User is responsible for setting up data plan with a compatible wireless carrier.)

Monnit cellular gateways communicate with the iMonnit® (cloud or on-premise) monitoring software via cellular transmission, making them ideal for remote locations or where the internet is not available. The system aggregates sensor information and sends notifications via text, email, or call if user-defined conditions are met or exceeded.

Part Number

MNG-9-3C2I-SC



Ethernet Gateways

ALTA Ethernet Gateway 4

Monnit's Ethernet Gateway allows your Monnit Wireless Sensors to communicate with the iMonnit™ Online Wireless Sensor Monitoring and Notification System without the need for a PC. Simply provide power and plug the gateway into an open Ethernet network port with an internet connection.

It will then automatically connect with our online servers, providing the perfect solution for commercial locations where there is an active internet connection.

The Power-Over-Ethernet option features modified gateway hardware allowing it to be powered through the Ethernet port. Does not include PoE Power Injector.

Part Number

MNG2-9-EGW-CCE



Advanced EDGE Gateway

Advanced EDGE Gateway

The multiple award-winning Advanced EDGE Gateway aggregates data from feature-rich Monnit Wireless Sensors to mainstream cloud providers, such as Amazon AWS, Google Cloud Platform, Microsoft Azure, or IBM Watson. Coupling the prominent MQTTS protocol and the IoT's broadest sensor range, Monnit's Edge Gateway fulfills a key IoT mission of making deployments more agile and productive.

The Edge Gateway features a step-by-step guided, multilingual web interface for configuring and managing Monnit Wireless Sensors, as well as designating MQTT brokers. As the Ethernet-based gateway receives sensor data, the gateway "fingerprints" the data with a cryptographic validation stamp. This authenticated data is then transmitted to a cloud broker (or multiple brokers), where it arrives in a standard format. The Edge Gateway's integrated macros enable data configuration in virtually any format, such as JSON or XML, making it a powerful tool for data analysis and action.

Part Number

MNG2-9-EDG-CCE



Advanced EDGE Gateway - 3 Time Award Winner!



Modbus

Serial Modbus Gateway

The ALTA Serial MODBUS Gateway (SMG) acts as a data concentrator for Monnit's ALTA long range wireless sensor networks. This device allows you to connect up to 50 wireless sensing devices, per gateway, to your existing serial MODBUS RS-232C and RS-485 sensing and control infrastructures.

Monnit has recognized the importance of using open standards like Modbus, allowing ALTA wireless sensors to be used in the majority of industrial applications.

Modbus is often used to connect a supervisory computer with a remote terminal unit (RTU) in supervisory control and data acquisition (SCADA) systems. Modbus allows for communication between many (approximately 247) devices connected to the same wired network. Therefore, ALTA SMG's allows for seemingly unlimited wireless expansion to a traditional wired network.

Part Number
MNG2-9-SG-SMG



Sensor Adaptor

Wireless Sensor Adaptor

The ALTA® Wireless Sensor Adaptor enables Monnit Wireless Sensors to communicate with your local or online wireless sensor monitoring system by connecting to a PC or third-party IoT gateways via USB connection.

Plug into a PC

If an on-site PC has an active Internet connection, it's simple to connect with iMonnit Sensor Configuration and Management Software online and install the free Monnit Gateway application. This combination allows you to pass sensor data to the online system.

With the online iMonnit software, you can easily configure your network, view collected sensor data, and set alarms through SMS or e-mail, all from any web-enabled browser. The system allows for complete configuration and customization at a sensor, local network, or client-wide level.

The ALTA wireless sensor adaptor is specifically designed to respond to the increasing market need for global technology that accommodates several vertical M2M application segments and remote wireless sensor management solutions.

Part Number
MNG2-9-WSA-USB



Monnit Gateway Sizes



- A: 3.8 inches / 96.52 mm
- B: 5.004 inches / 127.10 mm
- C: .151 inches / 38.35 mm



- A: 5.7 inches / 144.78 mm
- B: 3.54 inches / 89.91 mm
- C: 2.14 inches / 54.35 mm

Dimensions for standard housing sizes.
For gateways in non-typical housings, please refer to their data sheets.



Monnit Corporation
3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555
www.monnit.com