

Georg Fischer Type 107 Electrically Actuated Ball Valve

Standard Features

- **Size**
3/8" - 2"
- **Voltage**
24 AC or DC
110-230 AC
- **Emergency Manual Override**
- **Material**
PVC, CPVC
- **Connection Ends**
Socket, Flanged, Threaded NPT
- **Seat**
PTFE
- **Seals**
EPDM or FPM
- **Mounting**
Stainless steel threaded inserts
for easy and secure mounting
- **Duty Cycle**
40%

Optional Features

- **Pneumatic Actuation**
- **Limit Switches**
- **Fail Safe Return**
Back up battery pack
- **Heating Element**



General

Available in PVC and CPVC, the type 107 ball valve is ideal for a variety of applications. The type 107 valve is a perfect fit where simple open/close operation is required. It operates on either AC or DC voltage and has the option for position signalization limit switches. Included with each valve are NPT and Socket end connectors. Manual versions can easily be retrofitted in the field.

Technical specifications Electric actuator 11



CE	✓
SP	✓
UL US	✓

EA 11	
Nominal torque Mdn	10 Nm
Peak torque	20Nm
Control time	5 s/ 90° at Mdn
Actuating angle	max. 180°, set to 90°
L/W/H	129/122/138
Cycles at 70°F and Mdn	150,000
Flanges	F05
Housing materials	PP fiberglass reinforced, flame retardant, external stainless steel screws
Position indicator	optical, integrated
Emergency manual override	integrated
Rated voltage	100- 230V, 50/60 Hz 24V = /24V, 50/60 Hz
Rated voltage tolerance	+/- 10%
Rated output	28 Watts
Direct impedance	230V, 100k 24V, 4k7
Duty cycle ED	40% at 77°F/15 min
Protection class	IP 65 per EN 60529 [3] UL/CSA: for interior use
Overload protection	current / time dependent (resetting) [1]
Overvoltage category [5]	II
Electrical connections	Connector plug 3 P+ E per DIN EN 175301-03 (formerly DIN 43650), additional cable entry point for PG11
Pollution grade [5]	2
Height over NN (UL/CSA)	< 2000m
Ambient temperature	14° to + 110°F [2]
Allowable humidity	max. 80% to 88°F [4]

[1] Overload protection of the motor is dimensioned so that the motor and the power supply board are protected. As soon as the load is in the torque range, the actuator runs again.

[2] At temperatures below 14°F and if there is condensation, the heating element no. 198 190 086 should be built in.

[3] Protection class IP67 for use of cable glands and vertical installation.

[4] Linear decrease up to 50% relative humidity at 104°F.


[5] According to DIN EN 61010-1

Technical Data


Pressure-Temperature Diagrams Technical data for Type 107 Ball Valves 3/8"-2"

The following pressure temperature diagrams are based on a lifetime of 25 years and the medium water or similar media

PVC


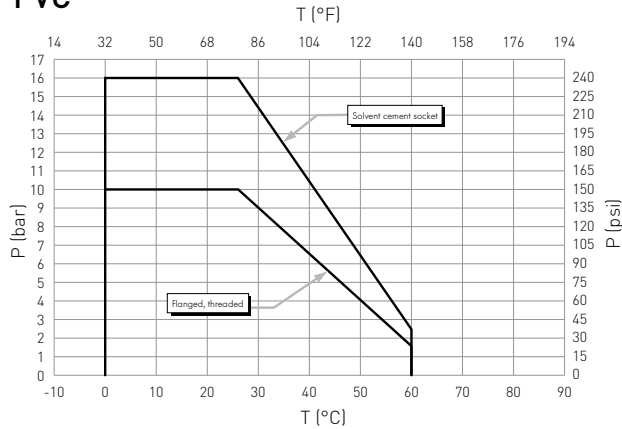


CPVC

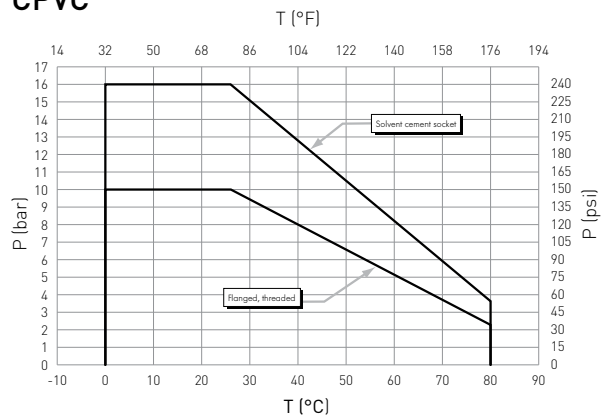



Operating Torque

Average values at nominal pressure

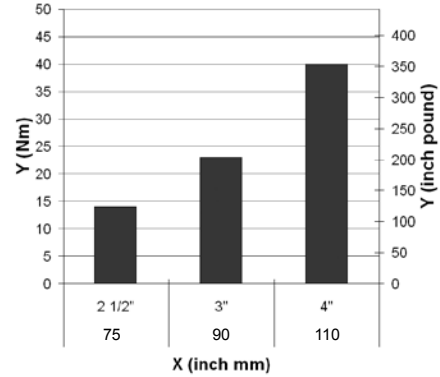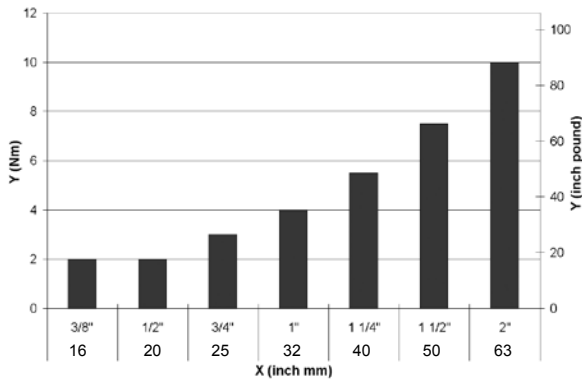

X Size (mm, inch) Y Torque (Nm, inch pound)

Pressure loss

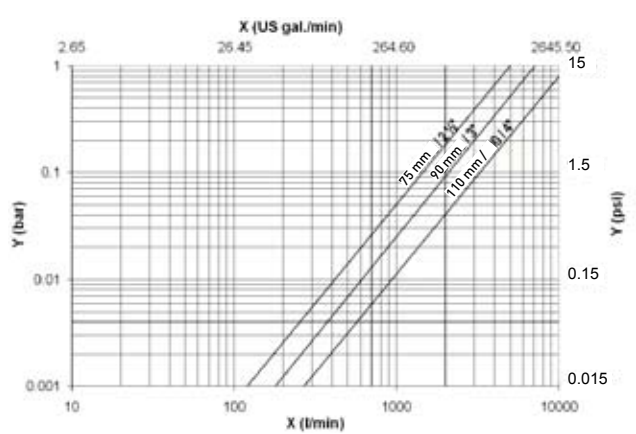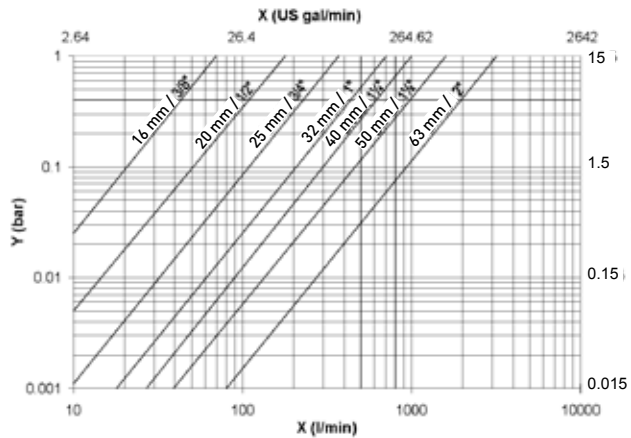

Medium: water, 20°C


X Flow rate (l/min / U.S. gal/min) Y Pressure loss Δp (bar / psi)

PVC

Type 107 Electrically Actuated Ball Valve

With manual emergency override


With solvent cement sockets inch ASTM/threaded NPT

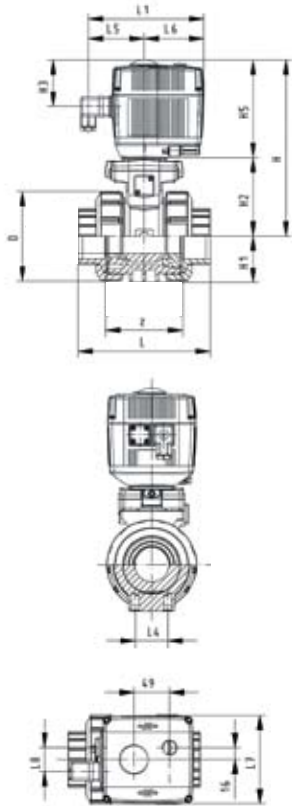

Inch	Cv-value [gal/min]	psi		D [mm]	H [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H5 [mm]
		socket	NPT						
3/8	4.9	232	150	50	200	27	64	64	137
1/2	12.9	232	150	50	200	27	64	64	137
3/4	24.5	232	150	58	209	30	73	64	137
1	49.0	232	150	68	209	36	73	64	137
1 1/4	70.0	232	150	84	220	44	84	64	137
1 1/2	112.0	232	150	97	220	51	84	64	137
2	217.1	232	150	124	243	64	106	64	137

Sockets	L [mm]	L1 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	L8 [mm]	z [mm]
	NPT							
105	98	161	25	79	83	122	67	67
105	98	161	25	79	83	122	67	61
121	111	161	25	79	83	122	67	70
133	127	161	25	79	83	122	67	76
154	147	161	45	79	83	122	67	90
164	157	161	45	79	83	122	67	94
183	183	161	45	79	83	122	67	107

With flanges, ANSI

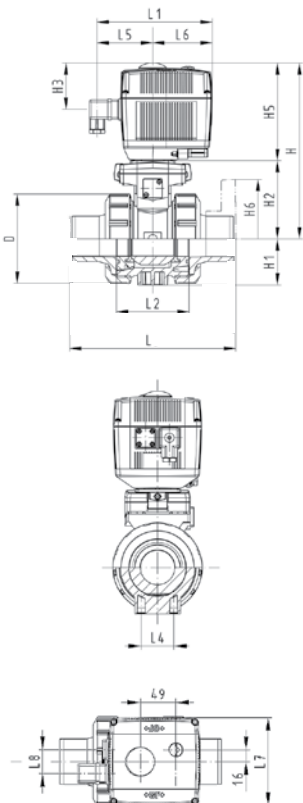


Inch	psi	Cv-value [gal/min]	D [mm]	H [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H5 [mm]	L [mm]
1/2	150	12.9	50	200	27	64	64	137	149
3/4	150	24.5	58	209	30	73	64	137	165
1	150	49.0	68	209	36	73	64	137	184
1 1/4	150	70.0	84	220	44	84	64	137	206
1 1/2	150	112.0	97	220	51	84	64	137	221
2	150	217.0	124	243	64	106	64	137	251

L1 [mm]	L2 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	L8 [mm]
161	56	25	77	83	122	33
161	65	25	77	83	122	33
161	71	25	77	83	122	33
161	85	45	77	83	122	33
161	89	45	77	83	122	33
161	101	45	77	83	122	33

CPVC

Type 107 Electrically Actuated Ball Valve

With solvent cement sockets inch ASTM/threaded NPT

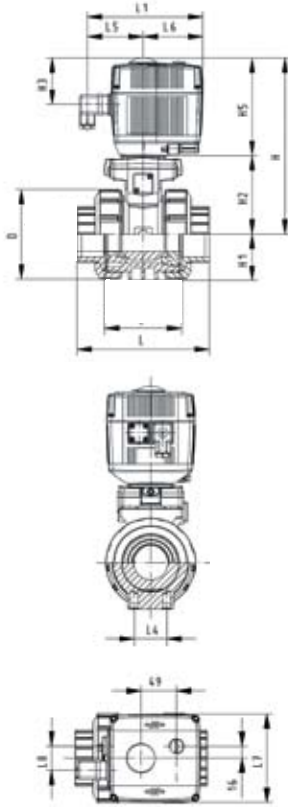

Inch	Cv-value [gal/min]	psi		D [mm]	H [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H5 [mm]
		socket	NPT						
3/8	4.9	232	150	50	200	27	64	64	137
1/2	12.9	232	150	50	200	27	64	64	137
3/4	24.5	232	150	58	209	30	73	64	137
1	49.0	232	150	68	209	36	73	64	137
1 1/4	70.0	232	150	84	220	44	84	64	137
1 1/2	112.0	232	150	97	220	51	84	64	137
2	217.1	232	150	124	243	64	106	64	137

Socket	L [mm]	L1 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	L8 [mm]	z [mm]
	NPT							
105	98	161	25	79	83	122	67	67
105	98	161	25	79	83	122	67	61
121	111	161	25	79	83	122	67	70
133	127	161	25	79	83	122	67	76
154	147	161	45	79	83	122	67	90
164	157	161	45	79	83	122	67	94
183	183	161	45	79	83	122	67	107

GF Piping Systems Product Lines

Piping Systems

Schedule 40 PVC
Hi-Strength Schedule 80 PVC and CPVC
PROGEF® Polypropylene
PPro-Seal™ Natural Polypropylene
PROGEF® Natural PP-n Polypropylene
SYGEF® Plus PVDF
FuseBond™ PFA Schedule 40
Fuseal® Corrosive Waste System
Contain-It™ Secondary Containment
Fusion Technology:

- Electro fusion featuring the MSA 250SE
- Socket fusion featuring the SG 110
- IR Plus®
- BCF Plus®

Automation

Manual and Actuated Valves
Solenoid Valves
Pressure Regulating Valves
Rotameters
Signet Flow, Level and Analytical Instrumentation

Custom Products

Specialty Components
Pre-welded Spools and Assemblies

Semifinished Products

Lining Laminates
Stock Shapes (Sheet, Rod, Block)

CALORPLAST Heat Exchangers

GF Piping Systems, Inc.
2882 Dow Avenue, Tustin, CA 92780
Tel (714) 731-8800 / (800) 854-4090, Fax (714) 731-6201
email: us.ps@georgfischer.com
www.us.piping.georgfischer.com

SYGEF, PROGEF, PPro-Seal, Fuseal, Fuseal Squared, Contain-it, SIGNET, IR Plus, and BCF Plus are registered trademarks.
FuseBond is the trademark of Saint-Gobain Performance Plastics.

Australia

George Fischer Pty Ltd
Kingsgrove NSW 2008
Phone +61(0)2/95 54 39 77
sales@georgfischer.com.au
www.georgfischer.com.au

Austria

Georg Fischer Rohrleitungssysteme GmbH
1070 Herzogenburg
Phone +43(0)2782/856 43-0
office@georgfischer.at
www.georgfischer.at

Belgium/Luxembourg

George Fischer NV/SA
1070 Bruxelles/Brüssel
Phone +32(0)2/556 40 20
info.be@be.piping.georgfischer.com
www.georgfischer.be

Brazil

George Fischer Ltda
04795-100 São Paulo
Phone +55(0)11/5687 1311

China

Georg Fischer Piping Systems Ltd Shanghai
Pudong, Shanghai 201319
Phone +86(0)21/58 13 33 33
info@cn.piping.georgfischer.com
www.cn.piping.georgfischer.com

Denmark/Iceland

Georg Fischer A/S
2630 Taastrup
Phone +45 (0)70 22 19 75
info@dk.piping.georgfischer.com
www.georgfischer.dk

France

Georg Fischer S.A.S.
93208 Saint-Denis Cedex 1
Phone +33(0)1/492 21 34 1
info@georgfischer.fr
www.georgfischer.fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49(0)7161/302-0
info@georgfischer.de
www.rls.georgfischer.de

Georg Fischer DEKA GmbH
35232 Dautphetal-Mornshausen
Phone +49(0)6468/915-0
info@dekapipe.de
www.dekapipe.de

Greece

Georg Fischer S.p.A.
10434 Athens
Phone +30(0)1/882 04 91
office@piping-georgfischer.gr

India

George Fischer Piping Systems Ltd
400 093 Mumbai
Phone +91(0)22/820 2362
branchoffice@georgfischer.net

Italy

Georg Fischer S.p.A.
20063 Cernusco S/N (MI)
Phone +39(0)2/921 861
office@piping.georgfischer.it
www.georgfischer.it

Japan

Georg Fischer Ltd
556-0011 Osaka,
Phone +81(0)6/6635 2691
info@georgfischer.jp
www.georgfischer.jp

Malaysia

Georg Fischer (M) Sdn. Bhd.
47500 Subang Jaya
Phone +60 (0)3-8024 7879
conne.kong@georgfischer.com.my

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31(0)578/678 222
info.vgnl@nl.piping.georgfischer.com
www.georgfischer.nl

Norway

Georg Fischer AS
1351 Rud
Phone +47(0)67 18 29 00
info@no.piping.georgfischer.com
www.georgfischer.no

Poland

Georg Fischer Sp. z o.o.
02-226 Warszawa
Phone +48(0)22/313 10 50
www.georgfischer.pl

Romania

Georg Fischer
Rohrleitungssysteme AG
70000 Bucharest - Sector 1
Phone +40(0)1/222 91 36
office@georgfischer.ro

Singapore

George Fischer Pte Ltd
417 845 Singapore
Phone +65(0)67 47 06 11
info@georgfischer.com.sg
www.georgfischer.com.sg

Spain/Portugal

Georg Fischer S.A.
28009 Madrid
Phone +34(0)91/781 98 90
info@georgfischer.es
www.georgfischer.es

Sweden/Finland

Georg Fischer AB
12523 Älvsjö-Stockholm
Phone +46(0)8/506 77 500
info@georgfischer.se
www.georgfischer.se

Switzerland

Georg Fischer Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41(0)52 631 30 26
info@rohrleitungssysteme.georgfischer.ch
www.piping.georgfischer.ch

United Kingdom/Ireland

George Fischer Sales Limited
Coventry, CV2 2ST
Phone +44(0)2476 535 535
info@georgfischer.co.uk
www.georgfischer.co.uk

USA/Canada/Latin America/Caribbean

George Fischer Inc.
Tustin, CA 92780-7258
Phone (714) 731-8800, Toll Free (800) 854-4090
us.ps@georgfischer.com
www.us.piping.georgfischer.com

Export

Georg Fischer Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41(0)52 631 11 11
export@piping.georgfischer.com
www.piping.georgfischer.com