

# High-Pressure, Pneumatically Actuated Bellows-Sealed Valves



## HB Series

- Packless valves with all-metal seal to atmosphere
- Working pressures up to 3500 psig (241 bar)
- Temperatures up to 400°F (204°C)
- VCR® face seal fitting, Swagelok® tube fitting, and weld end connections

## Features

### Valve

- Flow coefficient ( $C_v$ ) of 0.30
- Full pressure rating in either flow direction for system versatility
- Easily purged to maintain clean operation


### Pneumatic Actuator

- Normally closed and normally open models
- Actuation pressure as low as 30 psig (2.1 bar)

## Technical Data

Flow Coefficient <sup>①</sup> ( $C_v$ )	Orifice in. (mm)	Internal Volume <sup>①</sup> in. <sup>3</sup> (cm <sup>3</sup> )
0.30	0.15 (3.8)	0.27 (4.4)

① Determined using valves with Swagelok tube fitting end connections.

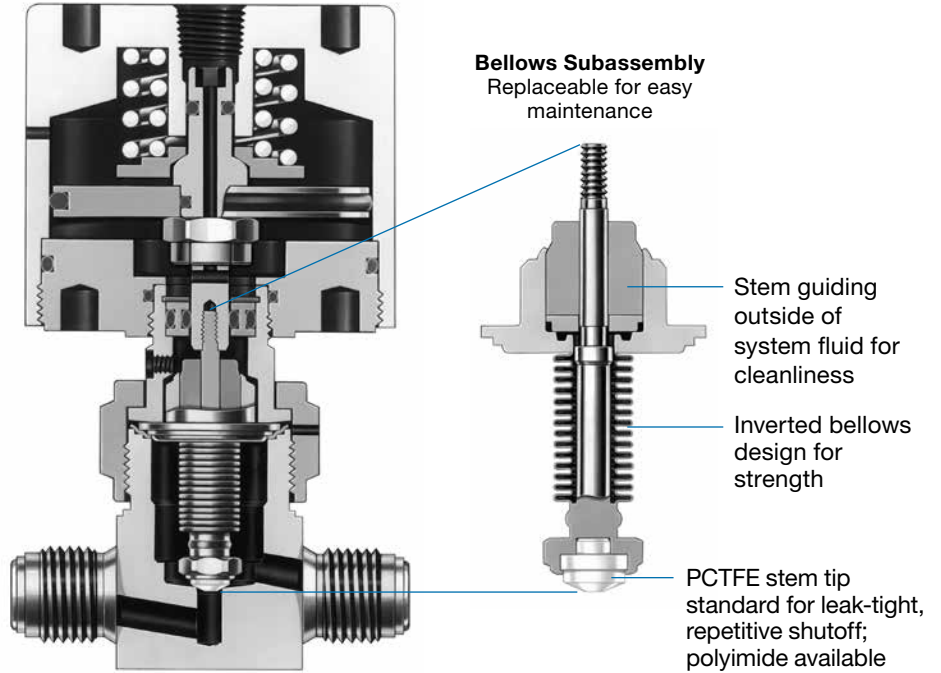

## Materials of Construction

### Valve

Component	Material Grade/ASTM Specification
<i>Body, stem, weld ring, end connections</i>	316L SS/A479
<i>Bellows</i>	316L SS/A269
<i>Gasket</i>	PTFE-coated 316L SS/A240
<i>Stem tip</i>	PCTFE/D1430
Bonnet, bonnet nut	316 SS/A479
Bushing	Bronze/B139
Backstop washer	303 SS/A582
Lubricant	Petroleum-based

Wetted components listed in *italics*.

### Pneumatic Actuator

Component	Material
Cylinder, base	2024-T4 aluminum/B211
O-rings	Fluorocarbon FKM

## Pressure-Temperature Ratings

### Valve

Body Material	316 SS	
Stem Tip Material	PCTFE	Polyimide
Temperature °F (°C)	Working Pressure psig (bar)	
-40 (-40) to 100 (37)	3500 (241)	3500 (241)
150 (65)	3220 (221)	3220 (221)
200 (93)	—	2950 (203)
300 (148)	—	2640 (181)
400 (204)	—	2400 (165)

### Pneumatic Actuator

Pressure Rating at 70°F (20°C)	Temperature Rating °F (°C)
30 to 110 psig (2.1 to 7.5 bar)	-10 to 400 (-20 to 204)


## Flow Data at 70°F (20°C)

0.15 in. (3.8 mm) orifice, 0.30  $C_v$

Pressure Drop to Atmosphere psi (bar)	Water Flow U.S. gal/min (L/min)	Air Flow std ft <sup>3</sup> /min (std L/min)
10 (0.68)	0.95 (3.6)	3.4 (96)
50 (3.4)	2.1 (7.9)	9.0 (250)
100 (6.8)	3.0 (11)	16 (450)

## Pneumatic Actuator Performance

For optimum valve performance, the normally open pneumatic actuator should be limited to 30 psi (2.1 bar) above the pressures shown in the graph.

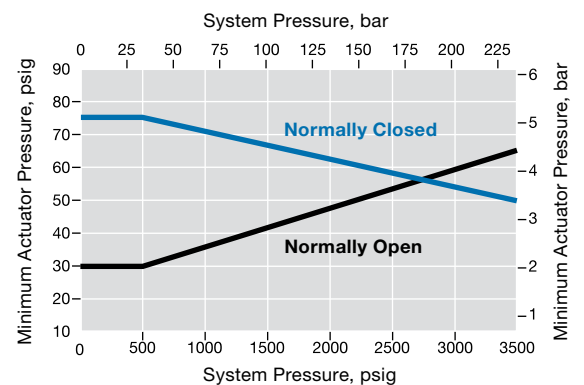

## Process Specifications

See Swagelok *Ultrahigh-Purity Process Specification (SC-01)* catalog, [MS-06-61](#); *Swagelok Photovoltaic Process Specification (SC-06)* catalog, [MS-06-64](#); and *Swagelok Special Cleaning and Packaging (SC-11)* catalog, [MS-06-63](#), for details on processes, process controls, and process verification. See **Cleaning Process Availability**, page 4, for ordering information.

Cleaning	Assembly and Packaging	Process Designator	Process Specification	Wetted Surface Roughness ( $R_a$ )	Testing
Special cleaning with non-ozone-depleting chemicals	Performed in specially cleaned areas; valves are individually bagged.	None	<i>Special Cleaning and Packaging (SC-11)</i>	20 $\mu\text{in.}$ (0.51 $\mu\text{m}$ ) average, machine finished	Inboard helium leak tested to a rate of $4 \times 10^{-9}$ std $\text{cm}^3/\text{s}$ at the seat, envelope, and all seals  Pneumatic actuator leak tested to a maximum leak rate of 1 std $\text{cm}^3/\text{min}$
High-purity cleaning with a continuously monitored, deionized water, ultrasonic cleaning system	Performed in specially cleaned areas; valves are individually bagged.	-SC06	<i>Photovoltaic Process Specification (SC-06)</i>	20 $\mu\text{in.}$ (0.51 $\mu\text{m}$ ) average, machine finished	
High-purity cleaning with a continuously monitored, deionized water, ultrasonic cleaning system	Performed in specially cleaned areas; valves are individually bagged.	-P6	<i>Photovoltaic Process Specification (SC-06)</i>	8 $\mu\text{in.}$ (0.20 $\mu\text{m}$ ) average, machine finished and electropolished	
Ultrahigh-purity cleaning with a continuously monitored, deionized water, ultrasonic cleaning system	Performed in ISO Class 4 work areas; valves are double bagged and vacuum sealed in cleanroom bags.	-P	<i>Ultrahigh-Purity Process Specification (SC-01)</i>	8 $\mu\text{in.}$ (0.20 $\mu\text{m}$ ) average, machine finished and electropolished	

## Performance Specifications

Refer to *HB Series Diaphragm Valve Technical Report*, MS-06-04, for additional information on surface finish specifications, particle counting, moisture analysis, hydrocarbon analysis, ionic cleanliness, and lab cycle testing data.

## Ordering Information and Dimensions

Dimensions, in inches (millimeters), are for reference only and are subject to change.


For a complete ordering number, add **C** for a normally closed pneumatic actuator or **O** for a normally open pneumatic actuator to the basic ordering number.

Example: SS-HBS4-C

### Polyimide Stem Tip

To order a valve with a polyimide stem tip, insert **V** into the valve ordering number.

Example: SS-HBVS4-C

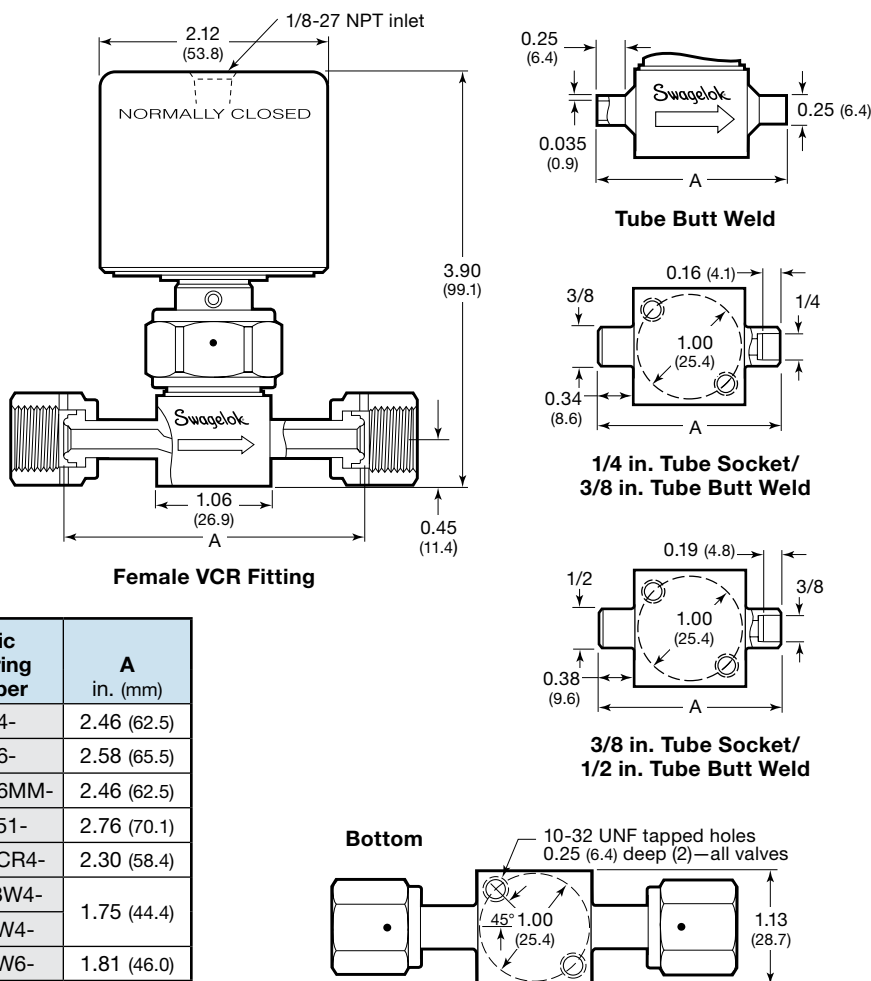

End Connections		Basic Ordering Number	A in. (mm)
Type	Size		
Swagelok tube fitting	1/4 in.	SS-HBS4-	2.46 (62.5)
	3/8 in.	SS-HBS6-	2.58 (65.5)
	6 mm	SS-HBS6MM-	2.46 (62.5)
Female VCR fitting	1/4 in.	SS-HBV51-	2.76 (70.1)
Male VCR fitting	1/4 in.	SS-HBVC4-	2.30 (58.4)
Tube butt weld	1/4 in.	6LV-HBBW4-	1.75 (44.4)
Tube socket and tube butt weld	1/4 and 3/8 in.	SS-HBTW4-	
	3/8 and 1/2 in.	SS-HBTW6-	1.81 (46.0)

Dimensions shown with Swagelok tube fitting nuts finger-tight.

## Cleaning Process Availability

See **Process Specifications**, page 3, for more information about Swagelok cleaning and packaging processes.

### Standard (SC-11)

Swagelok HB series valves are processed in accordance with Swagelok *Special Cleaning and Packaging (SC-11)* catalog, [MS-06-63](#), to ensure compliance with product cleanliness requirements as stated in ASTM G93 Level C.

### Photovoltaic (SC-06)

Swagelok HB series valves with VCR or weld end connections are available cleaned and packaged in accordance with Swagelok *Photovoltaic Process Specification (SC-06)* catalog, [MS-06-64](#), to meet the process requirements of solar cell production. To order, insert **-SC06** into the ordering number.

Example: SS-HBBW4-**SC06**-C

SC-06-cleaned HB series valves with VCR or weld end connections are available with controlled wetted surface finishes and electropolishing. To order, insert **-P6** into the ordering number.

Example: SS-HBVCR4-**P6**-O

### Ultrahigh-Purity (SC-01)

Swagelok HB series valves with VCR or weld end connections are available with wetted surface finishing, cleaning, and packaging in accordance with Swagelok *Ultrahigh-Purity Process Specification (SC-01)* catalog, [MS-06-61](#). To order, insert **-P** into the ordering number.

Example: SS-HBBW4-**P**-C

## Oxygen Service Hazards

For more information about hazards and risks of oxygen-enriched systems, refer to *Oxygen System Safety* technical report, [MS-06-13](#).

## Maintenance Kits

Bellows, stem tip/adaptor, and gasket kits are available. Refer to *Bellows-Sealed Valve Maintenance Kits* catalog, [MS-02-66](#).

## Multiport and Elbow Valves and Monoblock Manifolds

HB series valves are available in multiport and elbow configurations and monoblock manifolds; refer to *Bellows- and Diaphragm-Sealed Multiport and Elbow Valves and Monoblock Manifolds* catalog, [MS-02-442](#).

## Options and Accessories

### Indicator Switch

- Transmits a signal to an electrical device indicating either the open or closed position of a *normally closed* pneumatically actuated valve.
- Features a single-pole, single-throw switch rated at:
  - 1/2 A for 115 V (ac) for normally open switch;
  - 1/4 A for 115 V (ac) for a normally closed switch;
  - -40 to 185°F (-40 to 85°C) temperature.
- Includes a 24 in. (61 cm) wire lead with an inline clip.
- Is available assembled on any normally closed pneumatically actuated HB series valve or for field assembly.



### Factory-Assembled Indicator Switches

To order a valve with an indicator switch, add:

- **M** for a normally open switch
- **M-2** for a normally closed switch or
- **M2** for a switch that indicates open and closed to the valve ordering number.

Examples: SS-HBS4-**CM**  
 SS-HBS4-**CM-2**  
 SS-HBS4-**CM2**

### Actuator with Indicator Switch Kits for Field Assembly

To order a kit for an existing HB series valve, select an ordering number from the table below.

Actuator Position Indicated	Actuator/Switch Retrofit Kit Ordering Number
Open	MS-ISK-HB-CM
Closed	MS-ISK-HB-CM-2
Open and closed	MS-ISK-HB-CM2

## Introduction

Since 1947, Swagelok has designed, developed, and manufactured high-quality, general-purpose and specialty fluid system products to meet the evolving needs of global industries. Our focus is on understanding our customers' needs, finding timely solutions, and adding value with our products and services.

We are pleased to provide this global edition of the book-bound *Swagelok Product Catalog*, which compiles more than 100 separate product catalogs, technical bulletins, and reference documents into one convenient, easy-to-use volume. Each product catalog is up to date at the time of printing, with its revision number shown on the last page of the individual catalog. Subsequent revisions will supersede the printed version and will be posted on the Swagelok website and in the Swagelok electronic Desktop Technical Reference (eDTR) tool.

For more information, visit your Swagelok website or contact your authorized Swagelok sales and service representative.

## Warranty Information

Swagelok products are backed by The Swagelok Limited Lifetime Warranty. For a copy, visit [swagelok.com](http://swagelok.com) or contact your authorized Swagelok representative.

### Safe Product Selection

**When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.**

### WARNING

**Do not mix/interchange Swagelok products or components not governed by industrial design standards, including Swagelok tube fitting end connections, with those of other manufacturers.**

Not all trademarks listed below apply to this catalog.  
Swagelok, Cajon, Ferrule-Pak, Goop, Hinging-Colleting, IGC, Kenmac, Micro-Fit, Nupro, Snoop, Sno-Trik, SWAK, VCO, VCR, Ultra-Torr, Whitey—TM Swagelok Company  
15-7 PH—TM AK Steel Corp.  
AccuTrak, Beacon, Westlock—TM Tyco International Services  
Atlas—TM Asahi Glass Co., Ltd.  
ASCO, El-O-Matic—TM Emerson  
AutoCAD—TM Autodesk, Inc.  
CSA—TM Canadian Standards Association  
Crastin, DuPont, Kalrez, Krytox, Teflon, Viton—TM E.I. duPont Nemours and Company  
DeviceNet—TM ODVA  
Dyneon, Elgiloy, TFM—TM Dyneon  
Elgiloy—TM Elgiloy Specialty Metals  
FM—TM FM Global  
Grafoil—TM GrafTech International Holdings, Inc.  
Honeywell, MICRO SWITCH—TM Honeywell  
MAC—TM MAC Valves  
Microsoft, Windows—TM Microsoft Corp.  
NACE—TM NACE International  
PH 15-7 Mo, 17-7 PH—TM AK Steel Corp  
picofast—Hans Turck KG  
Pillar—TM Nippon Pillar Packing Company, Ltd.  
Raychem—TM Tyco Electronics Corp.  
Sandvik, SAF 2507—TM Sandvik AB  
Simriz—TM Freudenberg-NOK  
SolidWorks—TM SolidWorks Corporation  
UL—Underwriters Laboratories Inc.  
Xylan—TM Whitford Corporation  
© 2021 Swagelok Company