


Overview

The HP NC110T is a cost-effective Gigabit Ethernet server adapter that features single-port, copper, single lane (x1) PCI Express capability, with 48KB onboard memory that provides 10/100/1000T auto-negotiated speed and duplex. Designed with ProLiant server needs in mind, it offers these server features: Cold boot Wake-on-LAN (WOL), PXE, Jumbo Frames (9K), Large Send Offload (LSO), TCP Checksum Offload, and includes brackets for both half (low profile) and full height server slots so that customers have maximum flexibility using this server adapter with their ProLiant server.

The NC110T is based on the Intel 82572GI controller and supports these IEEE standards: 802.3, 802.3u, 802.3ad, and 802.3ab, 802.1x, 802.1Q and 802.1p. Validated by HP so that it meets the highest ProLiant standards and provides a seamless, network solution that is integrated with HP SmartStart, Insight Manager, networking software, firmware, and agents. NIC teaming drivers are available for all major operating systems along with teaming utilities, multiple VLAN tagging, configuration GUI and IPv6 packet transmit and receive support (excluding all offload capabilities).

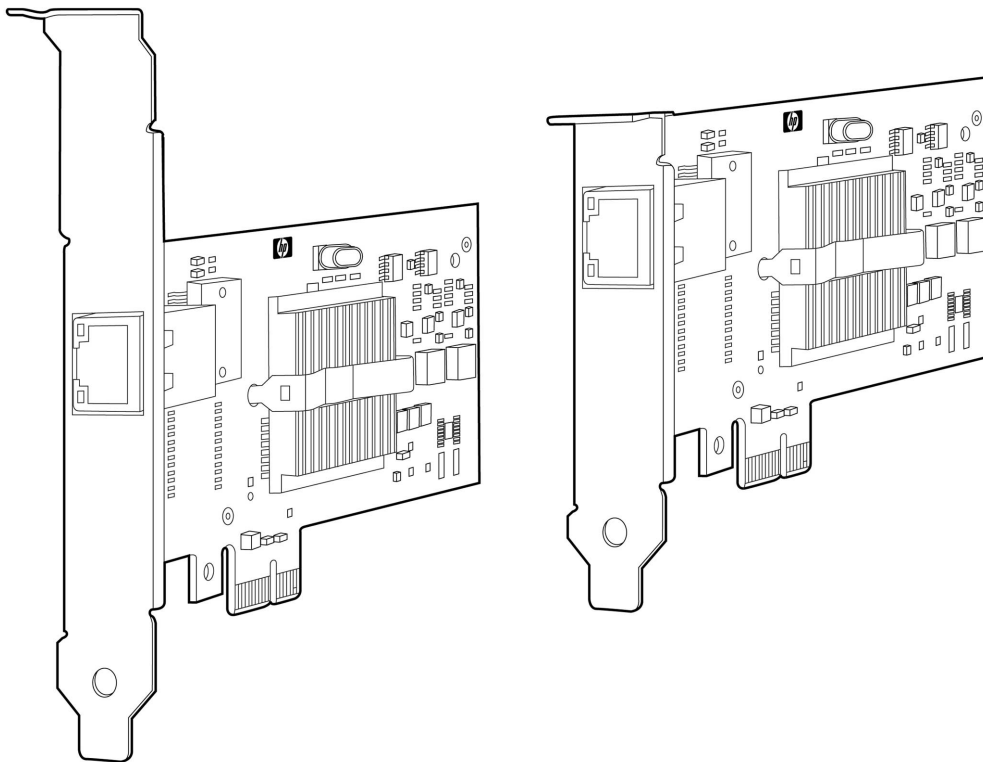

Models

HP NC110T PCI Express Gigabit Server Adapter

434905-B21

NOTE: Does not support Windows 2000.

Kit Contents

1. HP NC110T PCI Express Gigabit Server Adapter PCA ships with a standard height bracket attached to it. (The low profile bracket is included in the clamshell that the PCA ships in.)
2. Product Warranty statement and the Quick Install Card (QIC).



Overview

Standard Features

Server Support

ProLiant DL (expansion-optimized):

- HP ProLiant DL120 G5
- HP ProLiant DL140 G3
- HP ProLiant DL145 G2
- HP ProLiant DL145 G3
- HP ProLiant DL160 G5
- HP ProLiant DL180
- HP ProLiant DL180 G5
- HP ProLiant DL185 G5
- HP ProLiant DL320 G5
- HP ProLiant DL320 G5p
- HP ProLiant DL320s
- HP ProLiant DL360 G5
- HP ProLiant DL365
- HP ProLiant DL365 G5
- HP ProLiant DL380 G5
- HP ProLiant DL385 G2
- HP ProLiant DL385 G5
- HP ProLiant DL385 G5p
- HP ProLiant DL580 G3
- HP ProLiant DL580 G4
- HP ProLiant DL580 G5
- HP ProLiant DL585 G2
- HP ProLiant DL585 G5
- HP ProLiant DL785 G5

ProLiant ML (expansion-optimized):

- HP ProLiant ML110 G4
- HP ProLiant ML110 G5
- HP ProLiant ML110 G6
- HP ProLiant ML115
- HP ProLiant ML115 G5
- HP ProLiant ML115 G6
- HP ProLiant ML150 G3
- HP ProLiant ML150 G5
- HP ProLiant ML310 G4
- HP ProLiant ML310 G5
- HP ProLiant ML310 G5p
- HP ProLiant ML350 G4
- HP ProLiant ML350 G5
- HP ProLiant ML370 G5
- HP ProLiant ML570 G3
- HP ProLiant ML570 G4

NOTE: This is a list of supported servers. Some may be discontinued.



Performance

Performance

Gigabit Throughput Combined with Legacy Ethernet Support 10/100/1000 Mbps Ethernet transfer rate delivers outstanding network performance that improves response time and removes bottlenecks. Because the NC110T supports both 10Mbps Ethernet and 100Mbps Fast Ethernet in addition to Gigabit Ethernet, users are guaranteed end-to-end protocol support across their enterprise.

PCI Express Interface HP was an early champion of PCI Express bus technology and has played a key role in the development and industry adoption of the PCI Express specification. The NC110T features an Intel 82572G1 chipset and offers a single lane (x1) PCI Express bus based on the PCIe v1.0a standard.

Load Balancing Transmit Load Balancing (TLB) and Switch-assisted Load Balancing (SLB) are two advanced features that customers can use to build a bigger pipe for improved networking bandwidth. These port bonding techniques enable users to install up to eight NC110T adapters (or a mix of other HP adapters totaling 8 ports) in a HP ProLiant server and aggregate their throughput up to a theoretical maximum of 16 Gigabits per second full-duplex transmissions.

Jumbo Frames Jumbo Frames (also known as Extended Frames) offer a 9K byte Maximum Transmission Unit (MTU), which is six times the size of traditional Ethernet frames. Like all HP ProLiant server adapters, the NC110T supports jumbo frames as a way to achieve higher throughput and better CPU utilization when deployed in a network infrastructure that supports them.

TCP Checksum Offload and Large Send Offload (LSO) These features reduce the load on the CPU to improve improved overall system response. LSO is based on both IPv4 and IPv6 and TCP Checksum Offload is IPv6 based.

Scalability and Reliability

Network Fault Tolerance (NFT) Network Fault Tolerance, sometimes called "failover" or "NIC Redundancy," allows for the installation of multiple server adapters so that the active device can be backed up by a redundant adapter to improve availability. HP's teaming utility also allows users to specify that when a failed adapter is fixed and replaced, the original adapter resumes its function as the primary network connection.

Distance capabilities The NC110T supports cable runs up to 100 meters (328 feet).

Network Management

Auto-negotiation The NC110T automatically senses and configures itself to the speed of the device to which it is attached. It also automatically configures for half or full duplex, depending on the duplex mode of the switch, hub, or router at the other end of the cable.

Wake-on-LAN The NC110T provides cold boot Wake-on-LAN (WOL) support through the PCI Express bus. A system that supports Wake on LAN can remain available to a systems administrator during its normal downtime. Once the machine is awakened, the systems administrator can remotely control, audit, debug, or manage the machine.



Performance

Management Support Like all HP ProLiant server adapters, the NC110T ships with drivers and agents that can be managed from all versions of Systems Insight Manager. Additionally, it supports any management application that supports SNMP.

Server Integration The SmartStart configuration utility includes setup support for the NC110T so that the adapter can be configured as part of the SmartStart configuration process. Insight Manager can recognize the NC110T individually or in a port-bonded team, and it can collect and report SNMP statistics on the adapter events. Integrated Management Log (IML) support is provided by the NC110T for critical event logging on HP ProLiant servers.

Configuration Utilities Each NC110T ships with a set of utilities that allow the user to:

- Enable initial diagnostics within Windows, Linux, Netware, and DOS operating systems.
- Configure network adapter teaming in a Windows environment. The Windows adapter teaming configuration utility includes a patented teaming GUI for Microsoft Windows 2000 and 2003 operating systems. Support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

LED Indicators Bracket LED indicators show link integrity, network activity, and speed on each port for easy troubleshooting.

Warranty **Maximum:** The remaining warranty of the HP product in which it is installed (to a maximum three-year, limited warranty).
Minimum: One year limited warranty.
See Internet address <http://www.hp.com> for overall information on HP.

Support Services Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical.

A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 ours, 5 day to 24 hours, 7 days call window with options including 4-hour response or 6-hour Call-To-Repair.
- Comprehensive range of software technical support for Microsoft, Linux, ProLiant Essentials, and VMWare-based IT solutions helping to deliver high level of application availability. Response times ranging from 30 minutes for critical problems to 2 hours.
- System Management, Performance Services and Mission Critical Support Solution

NOTE: For more information on HP Care Pack services, contact any of our worldwide sales offices or resellers or visit our worldwide Web site on the internet at: <http://www.hp.com/hps/carepack>

NOTE: For more complete information on HP Services offerings, customers and resellers, please visit us at: <http://www.hp.com/hps>

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>



Related Options

Gigabit Server Adapters	HP NC112T PCIe Gigabit Server Adapter	503746-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
	HP NC365T 4-port Ethernet Server Adapter	593722-B21
	HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
	HP NC375T PCI Express Quad Port Gigabit Server Adapter	538696-B21
	HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21

10 Gigabit Server Adapters

NOTE: No more than two 10GbE I/O devices are supported in a single ProLiant server.

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

HP NC522SFP Dual Port 10GbE Server Adapter 468332-B21

HP NC524SFP Dual Port 10GbE Server Adapter 489892-B21

NOTE: NC524SFP is available only on DL370 G6, ML370 G6, DL580 G7, and DL585 G7.

HP NC550SFP Dual Port 10GbE Server Adapter 581201-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs



Technical Specifications

Compliance	<ul style="list-style-type: none">● 802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q● PCIe v1.0a standard● FCC (U.S. only) Class B● DOC (Canada) Class B● CE EN 55024, EN55022 Class B● VCCI Class II● UL 1950● CSA 950● EN 60950● CE● ACPI 1.1a● MicroSoft WHQL (Windows Hardware Quality Labs)																								
General Specifications	<table><tr><td>Communications Processor</td><td>Intel 82572GI</td></tr><tr><td>On-board memory</td><td>48 KB</td></tr><tr><td>Data rate</td><td>10/100/1000 Mbps, Half- and full-duplex</td></tr><tr><td>Data path</td><td>Single lane (x1) PCI Express compatible with x1, x4, x8, and x16 PCI Express slots</td></tr><tr><td>Interrupt levels</td><td>Automatically configured</td></tr><tr><td>Cable Connector</td><td>One RJ-45</td></tr><tr><td>Bus Connector</td><td>PCI Express</td></tr><tr><td>Distance and Wiring</td><td>Up to 328 feet/100 m with Category 5 (or better) twisted-pair cabling</td></tr><tr><td>Card Dimensions (without brackets) (L x W)</td><td>5.1 x 2.7 in (12.95 x 6.8 cm)</td></tr></table>	Communications Processor	Intel 82572GI	On-board memory	48 KB	Data rate	10/100/1000 Mbps, Half- and full-duplex	Data path	Single lane (x1) PCI Express compatible with x1, x4, x8, and x16 PCI Express slots	Interrupt levels	Automatically configured	Cable Connector	One RJ-45	Bus Connector	PCI Express	Distance and Wiring	Up to 328 feet/100 m with Category 5 (or better) twisted-pair cabling	Card Dimensions (without brackets) (L x W)	5.1 x 2.7 in (12.95 x 6.8 cm)						
Communications Processor	Intel 82572GI																								
On-board memory	48 KB																								
Data rate	10/100/1000 Mbps, Half- and full-duplex																								
Data path	Single lane (x1) PCI Express compatible with x1, x4, x8, and x16 PCI Express slots																								
Interrupt levels	Automatically configured																								
Cable Connector	One RJ-45																								
Bus Connector	PCI Express																								
Distance and Wiring	Up to 328 feet/100 m with Category 5 (or better) twisted-pair cabling																								
Card Dimensions (without brackets) (L x W)	5.1 x 2.7 in (12.95 x 6.8 cm)																								
Power and Environmental Specifications	<table><tr><td>Operating</td><td>Temperature</td><td>32° to 131° F (0° to 55° C)</td></tr><tr><td></td><td>Humidity</td><td>10% to 95% non-condensing</td></tr><tr><td>Non-operating</td><td>Temperature</td><td>-40° to 85° F (-40° to 185° C)</td></tr><tr><td></td><td>Humidity</td><td>-5% to 95%</td></tr><tr><td>Power requirement</td><td colspan="2">760mA @ 3.3V typical</td></tr><tr><td>Emissions Standards</td><td colspan="2">FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B</td></tr><tr><td>Safety Compliant</td><td colspan="2">UL, Canada UL, EN60950</td></tr><tr><td>Operating System Support</td><td>Microsoft:</td><td><ul style="list-style-type: none">● Microsoft Windows Server 2003● Microsoft Windows Server 2003 Web Edition● Microsoft Windows Server 2003 Small Business Server● Microsoft certified miniport and teaming drivers● Microsoft Windows 2003 Standard (32 and x64)● Microsoft Windows 2003 Enterprise (32 and x64)● Microsoft Windows Server 2008● Microsoft Windows HPC Server 2008</td></tr></table>	Operating	Temperature	32° to 131° F (0° to 55° C)		Humidity	10% to 95% non-condensing	Non-operating	Temperature	-40° to 85° F (-40° to 185° C)		Humidity	-5% to 95%	Power requirement	760mA @ 3.3V typical		Emissions Standards	FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B		Safety Compliant	UL, Canada UL, EN60950		Operating System Support	Microsoft:	<ul style="list-style-type: none">● Microsoft Windows Server 2003● Microsoft Windows Server 2003 Web Edition● Microsoft Windows Server 2003 Small Business Server● Microsoft certified miniport and teaming drivers● Microsoft Windows 2003 Standard (32 and x64)● Microsoft Windows 2003 Enterprise (32 and x64)● Microsoft Windows Server 2008● Microsoft Windows HPC Server 2008
Operating	Temperature	32° to 131° F (0° to 55° C)																							
	Humidity	10% to 95% non-condensing																							
Non-operating	Temperature	-40° to 85° F (-40° to 185° C)																							
	Humidity	-5% to 95%																							
Power requirement	760mA @ 3.3V typical																								
Emissions Standards	FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B																								
Safety Compliant	UL, Canada UL, EN60950																								
Operating System Support	Microsoft:	<ul style="list-style-type: none">● Microsoft Windows Server 2003● Microsoft Windows Server 2003 Web Edition● Microsoft Windows Server 2003 Small Business Server● Microsoft certified miniport and teaming drivers● Microsoft Windows 2003 Standard (32 and x64)● Microsoft Windows 2003 Enterprise (32 and x64)● Microsoft Windows Server 2008● Microsoft Windows HPC Server 2008																							

Linux:



Technical Specifications

- Red Hat Enterprise Linux
 - SUSE Linux Enterprise Server
- NOTE:** For more information on Linux, please visit our Linux Certified and Supported matrix:
<http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html>.

Novell Netware

- NetWare 6.5 and Netware OES (6.5)

Solaris

- Solaris 10 8/07

SCO

- UnixWare 7.1.3. and 7.1.4
- Open Server 5.0.7 and 6.0
- NDIS 2 for DOS unattended install (40K or less in size) Microsoft® Windows Server 2003, x64 Edition, and Windows 2000

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2010 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Windows is a US registered trademark of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

