



SILVER SPORT

Transmissions



HYDRAULIC UNDERDASH KIT INSTRUCTIONS FOR GM TKO, T56, AND MAGNUM

BEFORE INSTALLING TRANSMISSION IN CAR, YOU MUST CHECK
THE HYDRAULIC BEARING CUSHION MEASUREMENT!!!

SEE PAGE 6 OF INSTALLATION MANUAL FOR INSTRUCTIONS ON
MEASURING HYDRAULIC BEARING CUSHION. RECORD THIS
MEASUREMENT FOR FUTURE REFERENCE.

DAMAGE WILL OCCUR IF THIS
MEASUREMENT IS INCORRECT!!!

The material herein is the intellectual property of Silver Sport Transmissions (“SST”) and is to be used by SST customers or their authorized installers for the sole purpose of installing SST-supplied transmissions and related parts. Under no circumstances shall the manual or any portion thereof be copied, duplicated, distributed or incorporated in any written or printed document without the express written approval of Silver Sport Transmissions.

SYSTEM DESCRIPTION:

This system uses a steering column mounted hydraulic master cylinder with remote reservoir and a combination slave cylinder/release bearing assembly. This combination bearing is called a concentric slave cylinder (CSC) and **it is designed to be in constant contact with the pressure plate fingers**. The CSC is compressed by the pressure plate fingers when at rest. When the clutch pedal is depressed, the master cylinder forces fluid into the CSC, causing it to expand and depress the pressure plate fingers, thereby releasing the clutch.

This system works best with **DOT 4** brake fluid, **even though the reservoir lid says DOT 3. DO NOT use DOT 5 brake fluid!** The seals in the CSC are not compatible with DOT 5 fluid, and will be ruined on contact with it. We recommend using a high-performance, extra-high-temp name brand **DOT 4** brake fluid from ATE, Wilwood, or others.

This system is engineered for use with a diaphragm-style pressure plate and is not compatible with some three-finger style pressure plates. It is recommended that you remove the over-center spring (if equipped) from the clutch pedal when using a diaphragm-style pressure plate.

KIT CONTENTS

Please confirm that all parts have been received. The parts contained in your Master Cylinder kit will include:

- hydraulic mount assembly and hardware
- fluid reservoir, hose, and fittings
- rod end, pedal bracket, and attachment hardware
- master cylinder
- braided steel hose with bleeder
- T- bolt clamps (2) and bellhousing boot

The parts contained in your Slave Cylinder kit:

- transmission front bearing retainer
- combination slave cylinder/release bearing (CSC)
- 5/16”-18 flat head socket cap screws (4)
- 1/4”-20 hex head bolts (2)
- 1/4” lock washers (2)
- spacer plates (if required for application)

If the hydraulic kit was ordered at the same time as the transmission, then your CSC will already be mounted on the front of the transmission.



As Shipped with Master Cylinder and Pedal Bracket attached to the Hydraulic Mount. Remaining Kit Contents shown below.



DISASSEMBLY

Remove original clutch linkages, transmission and bellhousing components:

- Fork push rod, clutch pedal push rod assembly
- Z-bar retaining clip, Z-bar, ball stud and bracket assembly
- Fork boot
- Drive shaft
- Shifter Handle and Shift Mechanism (if 3 or 4 speed equipped)
- Transmission and bellhousing
- Throw-out bearing, clutch fork and fork pivot

INSTALLATION OPTIONS


The SST hydraulic system may be installed and then bled on the vehicle in the conventional manner, or it may be assembled off the car for bench bleeding, and then installed on the vehicle as a complete unit. If you choose to bench bleed the system and install as a complete unit, **please go through the complete installation procedure as described below to ensure proper fitment of all parts BEFORE bench bleeding.** Once you are satisfied that all the parts are installed correctly, you may remove the master cylinder and reservoir from the firewall and the CSC from the transmission, and then begin the bench bleed procedure.

PEDAL ATTACHMENT

NOTE: If you are changing from a three (3) finger style pressure plate to a diaphragm style pressure plate you should also remove the clutch pedal over center spring, if equipped with one. Failure to remove the over center spring could result in the spring holding the clutch pedal down during normal operation. The over center spring will also tend to hold the pedal down while performing the bleeding operation, until the system is bled enough to return the pedal. An over center spring is not recommended for use with a diaphragm-style pressure plate, and the hydraulic system is not compatible with some three-finger style clutches. We strongly recommend a diaphragm-style pressure plate.

HYDRAULIC MOUNT ASSEMBLY UNDERDASH MOUNTING

1. Remove nut from the two T-Bolt Clamps. Insert first clamp bolt through the Hydraulic Mount opening from the passenger's side. Place the second clamp around the Hydraulic Mount base on the opposite side from the first clamp (see photo on next page).
2. Place the Hydraulic Mount Assembly onto the Steering Column. Attach the pedal mount bracket to the clutch pedal arm using the provided bolts, nuts, and washers (see photo on next page). Select best pedal mounting hole to position heim joint perpendicular to steering column.
3. Using the heim joint and 2 hex jam nuts that are attached to the pedal bracket through the top tab, adjust the pedal bracket so that the push rod is straight in line with the Master Cylinder.
4. Adjust rod end position to achieve proper pedal height with master cylinder pushrod **EXTENDED ALL THE WAY OUT.** If the master cylinder is not fully extended when the pedal is at rest, the master cylinder can be difficult to bleed **and can overextend the CSC and cause it to fail.** When desired pedal height is achieved, tighten locknuts on pushrod and rod end and tighten the T-Bolt Clamps.
5. **DO NOT** depress the pedal any more than necessary before fluid is added to the system. **DOT 4 BRAKE FLUID STRONGLY RECOMMENDED.**

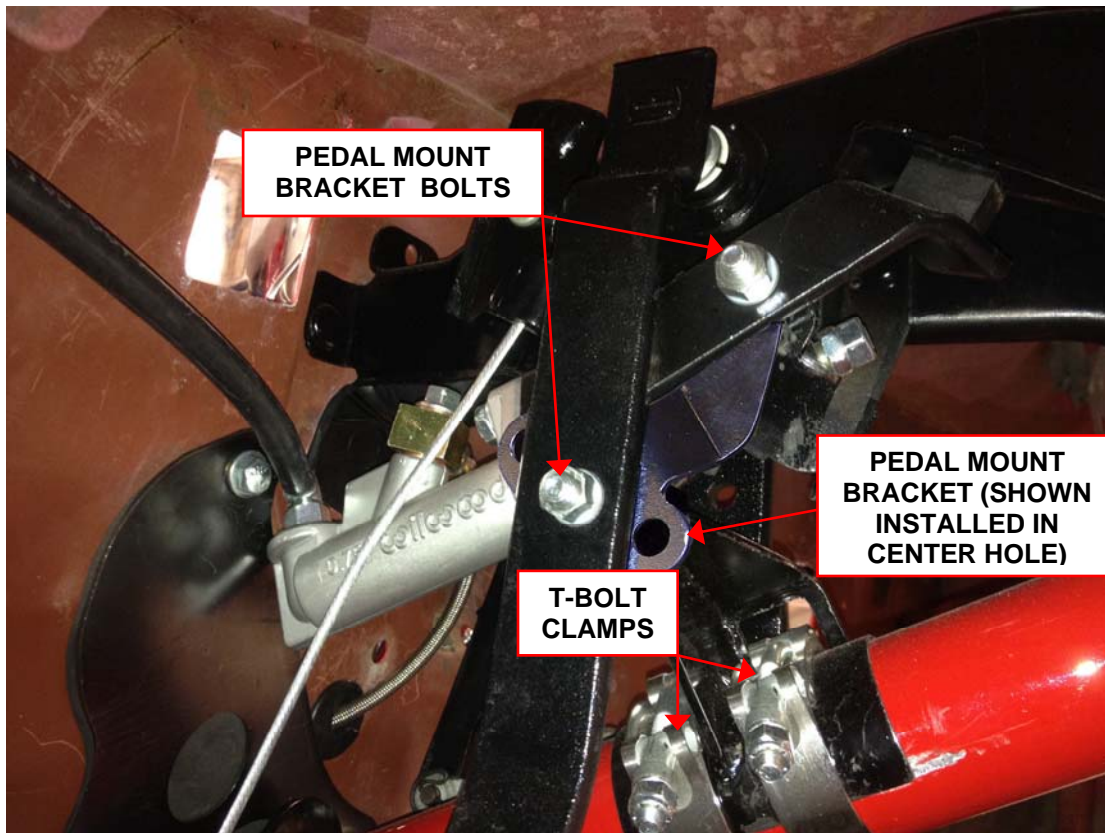

NOTE: If you are also installing a SST transmission that requires a new speedometer cable,

***** NOW IS A REALLY GOOD TIME TO INSTALL THE NEW SPEEDOMETER CABLE! *****

If you already have the dash apart for the master cylinder or clutch pedal installation, go ahead and install the speedometer cable now.

FLUID RESERVOIR MOUNTING

1. Remove the studs or nuts on the left hand (driver) side of the brake master cylinder.
2. Place reservoir bracket over the two holes or studs in the brake master cylinder, replace the original studs or nuts and tighten completely. Alternatively, the reservoir may be attached directly to firewall or cabin sidewall.
3. Assemble reservoir to the bracket using hardware supplied (part # CAA-PACK A).



HYDRAULIC RESERVIOR



HYDRAULIC RESERVIOR INSTALLED

4. The Hydraulic Reservoir Hose can be routed thru the firewall and attached to the brake master cylinder. If there is a cover over an existing hole, remove the cover. Some vehicles may not have a factory hole in the firewall, but there should be a spot that is contoured for a hole. That spot is usually located below and slightly to the left (driver's side) of the brake master cylinder or brake booster mount, near the steering column.

SLAVE CYLINDER MOUNTING

If your hydraulic clutch system was ordered at the same time as your transmission, the CSC will be mounted on the front of your transmission and you can proceed to the next section "HYDRAULIC BEARING CUSHION MEASUREMENT". If it was ordered separately, you will need to mount the CSC onto the transmission following the procedure outlined here.

NOTE – TKO: This procedure involves removal of the transmission's front bearing retainer and replacement with SST's custom bearing retainer. **DO NOT** allow the input shaft to fall out! Roller bearings may then fall into the transmission case, requiring transmission disassembly for removal!


NOTE – T56 & Magnum: On these transmissions, the "bearing retainer" is solely used as a mount for the CSC. It is completely external to the transmission and does not contain the input shaft bearing.

1. **ALL:** Remove four (4) bolts holding the front bearing retainer to the transmission (FIG. A).
2. **ALL:** Remove the front bearing retainer by tapping lightly with a mallet to break it free.
TKO: Be sure to keep pressure on the input shaft or it may fall out (FIG. B).
3. **TKO:** If the bearing race came out with the bearing retainer, remove it from the old bearing retainer and insert it into the transmission, taking care not to lose or damage the input shaft shims that are between the bearing retainer and the bearing race (FIG. C). If the race stayed in the transmission, be sure to remove the shims from inside the old bearing retainer. Clean old sealant from the front of the transmission case using a razor blade scraper.
4. **TKO:** Place shims into new bearing retainer, using petroleum jelly to hold them in place (FIG. E).
5. **TKO:** Following manufacturer directions, spread a THIN coat of Permatex® Ultra Grey RTV Silicone Gasket Maker #82194 or equivalent on the mounting face of the new bearing retainer.
6. **ALL:** Position the new bearing retainer so that the two CSC bolt holes in the retainer are at the top and the lower passenger side of the transmission, and attach to the transmission using four socket head cap screws (FIG. G). **TKO:** Ensure that the oil galley hole located at 12 o'clock lines up with the cutout in the bearing retainer (FIG. F & FIG. G).
7. **ALL:** Torque the fasteners to 12-16 lb.-ft. in an "X" pattern.
8. **TKO:** Make sure that the input shaft still turns and does not have any perceptible fore-and-aft movement. If it does not rotate or has excessive end play, shim per Tremec instructions. The service manual is a free download from Tremec's website at:
<http://www.ttcautomotive.com/English/onlineorder/product.asp#Service%20Manuals> (manual # LD35-0510-0199, TR-3350 & TKO) or the manuals are available for purchase through Silver Sport Transmissions or Tremec. Silver Sport Transmissions has shims available if needed.
9. **ALL:** Slide Concentric Slave Cylinder (CSC) over input shaft (FIG. H).
10. **ALL:** Position CSC so that the hydraulic inlet points towards the fork opening in your bellhousing. Attach CSC using (2) supplied ¼"-20 x ¾" hex bolts and lock washers (torque to 5 ft/lbs). You will only use the 2 ears located at the top and on the lower passenger side, the third one is not used.
11. **ALL:** Continue with the remainder of your hydraulic clutch kit installation.

**FIG. A
REMOVE BOLTS**



**FIG. B
REMOVE OLD RETAINER**

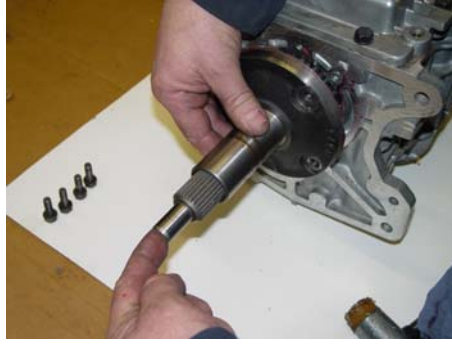

**FIG. C (TKO ONLY)
REMOVE BRG. RACE AND SHIMS**



**FIG. D (TKO ONLY)
INSTALL BEARING RACE IN TRANS**




**FIG. E (TKO ONLY)
INSTALL SHIMS IN RETAINER**



**FIG. F
INSTALL NEW RETAINER**



**FIG. G
RETAINER PROPERLY INSTALLED**

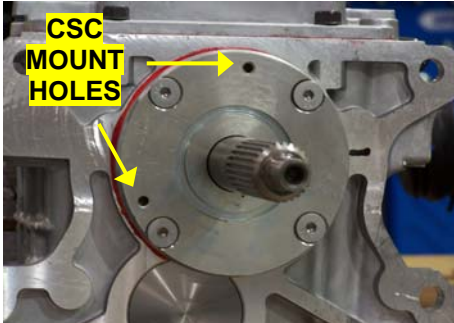

**FIG. H
INSTALL CSC**



**FIG. J
CSC PROPERLY INSTALLED**




HYDRAULIC BEARING CUSHION MEASUREMENT


The CSC is designed to be compressed by more than 1/2" by the pressure plate fingers when at rest. The CSC needs a minimum of 1/8" cushion beyond that to allow for clutch disc wear and expansion from heat. Clutch slippage will result if the CSC bottoms out and is partially depressing the pressure plate fingers at rest. The cushion measurement procedure below tells you how far the CSC is away from being completely bottomed out. The acceptable range for the CSC cushion is **between 1/8" (0.125") and 3/8" (0.375")**.

2. With the correct clutch pressure plate and clutch disc mounted and torqued to the flywheel, install the bellhousing to the engine.
3. Use a straight edge and a steel rule to measure from the transmission mounting face of the bellhousing to the surface of the clutch fingers that contacts the release bearing. Record this depth measurement (X).

FIG. K

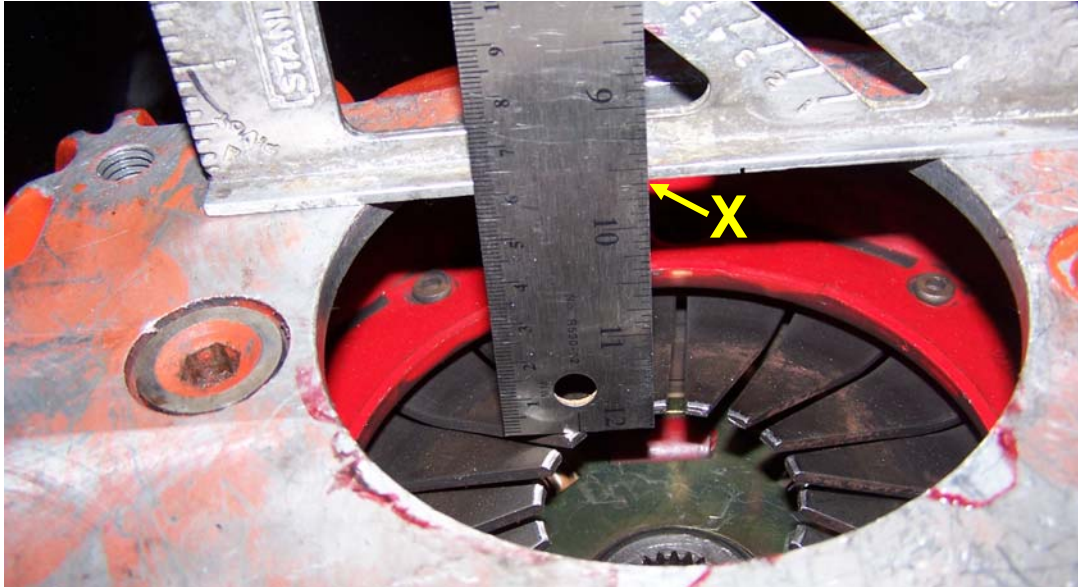

- Next, with the slave cylinder mounted on the transmission, compress the CSC against its internal spring pressure back towards the transmission. With the CSC compressed to its internal stop (completely bottomed out), hold a straight edge across the face of the throw-out bearing and measure the distance from the face of the bearing to the bellhousing mounting face of the transmission. Record this dimension (Y).

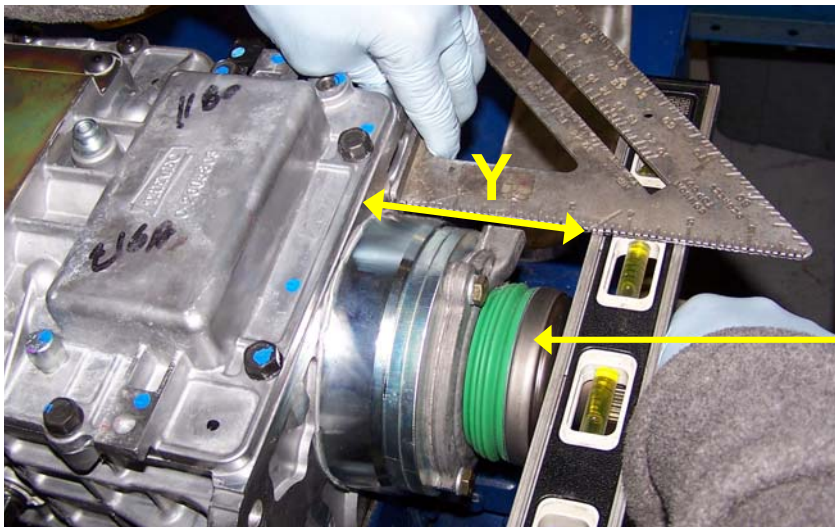

MEASURE FROM THE FRONT OF THE TRANSMISSION CASE TO THE SURFACE OF THE FULLY COLLAPSED BEARING FOR YOUR "Y" DIMENSION.

BEARING FULLY COLLAPSED

- Your depth measurement (X) minus the compressed bearing height (Y) is your bearing cushion:

$$(X) - (Y) = \text{CUSHION}$$


- The resulting cushion dimension should be **at least 1/8" (0.125")**, but **no more than 3/8" (0.375")**. Anywhere within this range is acceptable. There is no advantage or disadvantage to being at the upper or lower end of the range, or even in the middle. The CSC will function exactly the same way, no matter where it lies within this range.

If your cushion measurement is outside of this range, you will need one or more spacers to adjust the position of the CSC.

Call Silver Sport Transmissions to obtain spacers if needed. **Damage WILL result from an incorrect cushion dimension.**

If your cushion measurement is **MORE** than 3/8", you will need one or more CSC spacers to move the CSC closer to the engine block. The spacers are 1/4" thick, and are mounted between the CSC and the input shaft bearing retainer. This is somewhat common with LS series engines.

CSC SPACER

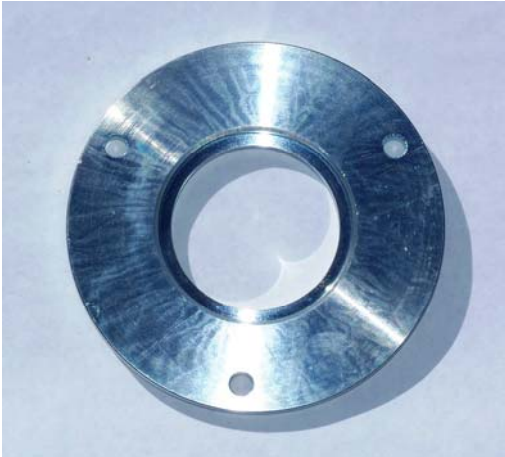

INSTALL SPACERS IF NEEDED



If your cushion measurement is **LESS** than 1/8", you will need a bellhousing spacer to move the transmission and CSC further away from the engine block. The spacer is 1/4" thick, and gets sandwiched in between the bellhousing and the transmission. You can only use one bellhousing spacer. If you need more than 1/4" to get your cushion within specs, you may have to resurface the flywheel, change to a thinner flywheel, or change to a different clutch.



BELLHOUSING SPACER

******* NOTE:** The bearing cushion will also need to be re-measured and recalculated after resurfacing or replacing the flywheel, or changing the bellhousing, engine, or clutch. Different clutches have different stack-up heights, and a scattershield is often deeper than a factory GM bellhousing.

TRANSMISSION MOUNTING

1. Remove bellhousing from engine and install bellhousing to transmission. Tighten bolts only lightly at this time.
2. Install black rubber fork hole boot onto the end of the braided steel line that has the bleeder screw on it. Insert that end of the line through the bellhousing fork hole and attach braided steel line to CSC, being very careful not to cross-thread the fitting. **The line is designed for the bleeder screw to point downwards** in order to reduce the chance of brake fluid getting on painted surfaces on your car during the bleeding process.
3. Verify the braided steel line is towards the back of the bellhousing and away from rotating components.

4. The transmission, bellhousing and hydraulic throw-out bearing are installed as a unit to the engine.

HYDRAULIC LOW PRESSURE HOSE MOUNTING

1. Run the rubber supply hose from the bottom of the reservoir nipple to the barb fitting in the clutch master cylinder, and determine the exact length for the supply hose. The hose should be neither tight nor excessively loose, and should clear all moving steering gear and exhaust components. Take care to prevent foreign debris from entering hose.
2. Cut the line to desired length, ensure that no foreign matter is in the hose. Then, loosely assemble hose clamps.
3. Install hose to the master cylinder, then to the reservoir. When installing hose to the reservoir, hold the top of the reservoir to prevent overloading and damaging the mounting ears.

HYDRAULIC HIGH PRESSURE HOSE MOUNTING

1. After bolting the transmission/bellhousing unit to the engine, attach the remaining end of the braided steel line to the clutch master cylinder and tighten. Use caution not to over tighten and break the fitting.
2. Final tighten all transmission mounting bolts (4 pcs).
3. Inspect the supply line inside bellhousing and confirm the hoses have ample clearance to the rotating clutch plate. It is extremely important that the hydraulic clutch hose **DOES NOT** come into contact with the clutch plate, as serious damage could result.

**NOTE: DOT 4 BRAKE FLUID STRONGLY RECOMMENDED, (even though the lid says DOT 3).
SHIELD HYDRAULIC LINES FROM HEAT, ESPECIALLY NEAR EXHAUST.**

HYDRAULIC FLUID FILL & BLEED – ON CAR

If you have chosen to bench bleed the system and install as a unit, please skip to the next section.

You will need two people to bleed this clutch system when installed on the vehicle. Use caution to prevent brake fluid from contacting paint, as damage will likely occur. If your vehicle has an over-center spring installed, it will tend to hold the clutch pedal to the floor until the system is bled enough to return the pedal itself. Remove reservoir cap from the reservoir.

1. Fill the reservoir full with **DOT 4 brake fluid**. During the next steps check regularly to **make sure that the reservoir does not run out of fluid**. If this happens you will have to start the process over.
2. Open the bleeder screw to allow air to escape from the system. Give the fluid a few minutes to make its way down to the bleeder screw, while watching the fluid level in the reservoir and refilling as necessary. Allow fluid to drip from the bleeder screw into a suitable container.
3. It may be necessary to prime the master cylinder by removing the high pressure hose at the master cylinder and block the fitting outlet to draw fluid into the cylinder when stroking the pedal. When the cylinder is primed, reattach the pressure line and continue the bleeding procedure. Take care not to spill brake fluid on any painted surfaces.
4. When the drip becomes a steady stream, close the bleeder screw. Refill the fluid reservoir. Open the bleeder screw slightly and have your helper depress the pedal **slowly**. Close the bleeder as soon as the pedal reaches the floor. Then have your helper **slowly** release the pedal. **Pressing or releasing the pedal too quickly will cause brake fluid to squirt from**

- the top of the reservoir.** The pedal may need to be manually pulled up from the floor during these steps. Repeat this process several times, refilling the reservoir every 3 strokes or so.
5. When the bleeder stops spitting air, close and tighten the bleeder screw. Pump the pedal several times to check for proper feel. Repeat the process if the pedal is not firm throughout its travel, or if it seems that the clutch is not releasing fully. Make sure that the master cylinder pushrod is traveling its full stroke of 1.4" (1-3/8") and that **the master cylinder is fully extended when the clutch pedal returns to its home position (no tension on the pushrod with the clutch pedal all the way up).**
 6. **VACUUM BLEEDING PROCEDURE:** If bleeding proves difficult for one reason or another, a manual vacuum bleeder can be used to draw a vacuum on the reservoir and thereby the entire system and pull trapped air into the reservoir. With the rubber baffle removed from the reservoir and the cap installed, apply vacuum to the vent hole in the center of the cap. You may try stroking the pedal while vacuum is being applied. Repeat until the system is bled. It may take 20-30 minutes or even more in order for the vacuum method to get all the air out of the system.
 7. Upon successful bleeding, fluid level will need to be lowered to approximately 1/3 full. Excess fluid may be removed from the reservoir by siphoning with a hand-held vacuum pump or with a spoon or medicine cup. Reinstall rubber baffle and cap.
 8. Inspect for leaks, and replace the bellhousing inspection cover.
 9. Check fluid level and add if necessary after the first test drive or after vehicle sits overnight.

NOTE: It may be necessary to bleed the clutch again after minimal use, as operation may dislodge some trapped air.

OPTION: BENCH BLEED PROCEDURE (FTE ONLY)

Do not begin bench bleed procedure unless you have already temporarily installed ALL of the hydraulic kit parts onto the vehicle for test fitment.

Video instruction for this procedure is now available online. The video comes in three parts. Type the web address for Part 1 below into your browser address bar and hit "Enter". After viewing the first one, do the same thing for Part 2 and Part 3.

Part 1: <http://keislertv.com/video/10364>

Part 2: <http://keislertv.com/video/10362>

Part 3: <http://keislertv.com/video/10391>

1. Leaving both hoses attached to the master cylinder and reservoir, and the mount block attached to the firewall, remove master cylinder from mount block and reservoir from firewall.
2. In order to be able to install the system as a unit, the master cylinder and hose assembly must be able to pass through the fork hole opening in the bellhousing. Test this to make sure it will work on your bellhousing. It may be necessary to loosen the braided steel line slightly, just enough that the line itself can be rotated at the master cylinder to allow the assembly to fit through the fork hole. If you must rotate the line slightly, make sure you tighten it in this position before starting the bleeding procedure.
3. Remove CSC from transmission.
4. Secure lower ear of master cylinder in a vise. Position master cylinder so that you will be able to push on the pushrod.
5. Temporarily attach the reservoir to anything you have available that will support the reservoir and keep it upright. You may use a C-clamp to attach it to an open cardboard box or a trash can, for instance. Make sure the reservoir is higher than the master cylinder.
6. The CSC **must** be prevented from over-extending while you are bleeding the system. You may use a C-clamp, bar clamp, handscrew clamp, etc. to restrict the CSC from extending too far. Place the bearing right side up between two wooden blocks and clamp them in place (see photo below). During this step, compress the CSC by hand once until it bottoms out. When you let go of the CSC, the bearing portion (the outer part that you can see) will return to the fully extended

state due to internal spring pressure, but the hydraulic piston will remain fully compressed inside the CSC.

7. Attach the braided steel line to the CSC in the correct orientation, with the bleeder pointed downwards. Loosen the bleeder screw.
8. Make sure that the reservoir is higher than the master cylinder, and that the master cylinder is higher than the CSC.



MASTER CYLINDER AND RESERVOIR MOUNTED FOR BENCH BLEEDING



CSC WITH CLAMP

9. Fill the reservoir with clean, new **DOT4 brake fluid** from a sealed container. With the bleeder screw loosened, fluid will make its way down through the system and start to run out of the bleeder screw. Be sure to keep fluid in the reservoir. When you start to get a steady stream of fluid from the bleeder screw, close the bleeder.
10. Refill the reservoir with **DOT4 brake fluid**. Connect a clear 1/4" I.D. fluid line (such as from a vacuum bleeder kit) to the bleeder screw. Place the other end in the reservoir and secure the hose with a wire to make sure it doesn't come out of the reservoir.
11. Locate a shifter ball, block of wood, or other suitable item to use as a handle to depress the pushrod. Make sure you are pushing it straight in. Crack open the bleeder screw, and **slowly** depress the master cylinder pushrod until it bottoms out. Close the bleeder, and then **slowly** let the pushrod return to the fully extended state. Moving the pushrod too quickly will cause brake fluid to squirt from the top of the reservoir. Do this 3 - 4 times, making sure that the reservoir does not run out of fluid.
12. Repeat until you stop getting air out of the bleeder.
13. Once you stop seeing air bubbles come from the bleeder, crack the bleeder open and then compress the CSC again until it bottoms out. Close the bleeder. Verify that the CSC is securely clamped, and then stroke the master cylinder several times until you feel resistance. Resistance means that the hydraulic piston in the CSC is at the end of its travel, and cannot move any further due to the clamp.
14. If the system is fully bled at this point, you will not be able to depress the master cylinder pushrod more than 1/8" or so with the bleeder closed and the CSC clamped. If the master cylinder pushrod feels spongy or you can move the pushrod in by more than about 1/8", then repeat steps 11 through 13 until you are satisfied that all air has been removed from the system.
15. Remove most of the fluid from the reservoir. With the bleeder closed, **slowly compress the CSC one more time until it bottoms out. The CSC internal hydraulic piston needs to be completely bottomed out in order to install the transmission.** This will displace fluid back up through the system and into the reservoir. Remove the clear fluid line from the reservoir and disconnect from the bleeder. Remove fluid again so that the reservoir is about 1/3 full.
16. Install the reservoir baffle and cap.

17. Remove the clamp from the CSC.
18. Disconnect the reservoir from the master cylinder, and remove the master cylinder from the vise.
19. From inside the bellhousing, thread the reservoir, the master cylinder, the braided steel fluid line and the fork hole cover (if used) through the clutch fork opening in the bellhousing.
20. Install the CSC onto the front of the transmission. See "SLAVE CYLINDER MOUNTING" section above. Torque CSC retaining bolts to 5 lb.-ft.
21. Continue transmission installation. Re-install master cylinder and reservoir onto firewall, and connect pushrod to pedal as described in "PEDAL ATTACHMENT" section above. Re-position and retighten master cylinder pressure line if it was rotated in order to fit through bellhousing fork hole.

INSPECTION AND TESTING

**USE EXREME CAUTION WHEN TESTING CLUTCH RELEASE SYSTEM.
DO NOT TEST IN HIGH TRAFFIC OR PUBLIC AREAS.**

ENGINE-OFF TEST

With the parking brake set, test the release and engagement of the clutch mechanism. Check for the following:

1. Clutch pedal completely up at its home position when released, and that the **master cylinder pushrod is fully extended** when the pedal is all the way up.
2. Clutch pedal does not hit brake lamp bracket or other bracket.
3. Low resistance for initial travel when depressing clutch pedal. Clutch resistance increasing at 1/3 of full stroke and remaining approximately constant through full travel to the floor.
4. Clutch pedal travel to floor without over-travel of clutch plate. Over-travel is characterized by a sudden hard pedal. This should not be a problem if the "Hydraulic Bearing Cushion Measurement" was accurately made.
5. Clutch pedal travel to floor without bottoming out hydraulic bearing. Bottoming out is characterized by a sudden high pressure required to exert further pedal stroke. If this condition occurs, damage to the master cylinder seals or slave cylinder may result from continued operation. **NOTE: The hydraulic slave cylinder has approximately 7/8 inch total stroke, minus the cushion that was measured earlier. Most clutches release within 1/2 inch travel.**
6. Smooth system operation with no abnormal noises.

ENGINE-ON TEST:

Hold brake, place transmission in neutral, start engine. Achieve idle of 1000 rpm or less.

1. Depress clutch pedal.
2. Ease shifter into first gear. **CAUTION:** If grinding occurs, pull back to neutral and stop engine. Repeat bleeding process and verify that the master cylinder pushrod is moving a full 1.4" (1-3/8").
3. Slowly release clutch pedal while maintaining brake pedal pressure. Confirm engine is being loaded as clutch pedal is released.
4. Repeat test step 1-3 through all gears, including reverse. **NOTE for TKO ONLY: Reverse is not synchronized in the TKO 5 speed, and grinding may occur. This can be eliminated through placing shifter in a forward gear immediately before proceeding to reverse.**

CARE AND MAINTENANCE

Your SST hydraulic clutch actuator system is designed to give you years of trouble-free service. In order to maximize the life of the system:

- Periodically check fluid level, hose clamps and hoses for damage.
- Flush the hydraulic fluid every 2 years with new, clean **DOT 4** brake fluid.

SYSTEM SPECIFICATIONS

Master cylinder: Bore = 0.750"
Stroke = 1.400"

CSC: Stroke = .910" total available travel

Fluid: DOT 3 brake fluid is acceptable, **DOT 4** is strongly recommended. **DO NOT USE DOT 5 FLUID.**

ACCESSORY ITEMS

The following accessory items will enhance your installation:

- SST Cast Titanium-Aluminum Chevrolet Bellhousing. New casting features super high strength aircraft alloy, lightweight 15lbs, precision CNC machining for accurate alignment of transmission to crank bore, 168 tooth flywheel mounting. For both 4 & 5 speeds.
- Clutches/Flywheels – We carry a full range of clutches, and both billet steel and aluminum flywheels.
- SST Reproduction Pedal Assemblies – New precision made pedal conversion allow easy conversion from automatic, or quality replacement parts for restoration.
- SHIFTER HANDLES – Full line of 4, 5 & 6 speed shifter handles and shift balls.

CONTACT INFORMATION

SILVER SPORT TRANSMISSIONS
2250 STOCK CREEK BOULEVARD
ROCKFORD, TENNESSEE 37853-3043

Phone: (865) 609-8187
Toll Free: (888) 609-0094
Fax: (865) 609-8287

WWW.SHIFTSST.COM

SILVER SPORT TRANSMISSIONS IS DEDICATED TO YOUR SATISFACTION AND ENJOYMENT OF THIS PRODUCT. PLEASE SEND US PICTURES OF YOUR CAR ALONG WITH A TESTIMONIAL OF HOW YOU RATE THIS PRODUCT. WE WILL BE POSTING MANY CUSTOMER FEEDBACK LETTERS AND PICTURES ON OUR WEBSITE AND BROCHURES.

**ENJOY YOUR SILVER SPORT
TRANSMISSION SYSTEM!**

TROUBLESHOOTING GUIDE

If you are having any sort of problem with the hydraulic system, the first step is to **review the “Hydraulic Bearing Cushion Measurement”** procedure starting on page 7, and verify that you have the correct amount of cushion (1/8” – 3/8”). Do this before going ANY further into the installation.

DIFFICULTY BLEEDING, FLUID WILL NOT FLOW, CAN'T GET ALL THE AIR OUT, CLUTCH WON'T FULLY RELEASE:

Review the bleeding procedure. Verify:

- That the master cylinder pushrod is **fully extended** when the clutch pedal is all the way up. If there is any tension on the pushrod and the pushrod does not come all the way out, it can close off the fill port in the master cylinder, and fluid will not be able to flow from the reservoir to the master cylinder. **This condition can also cause the CSC to overextend and fail.**
- That you are getting a full 1.4” (1-3/8”) of stroke out of the pushrod itself. If not, then the pushrod extension may need to be adjusted, the master cylinder may need to be repositioned on the firewall, or it may be that the pushrod needs to be connected to a different spot on the pedal. If you change the mount position or connection point, make sure that the pushrod still ends up traveling in a straight line into the master cylinder.
- Make sure the firewall is not flexing. If you measure at the pedal arm and the pushrod is moving 1-3/8”, but the firewall is flexing 1/4”, then you are actually only getting 1-1/8” of stroke.
- If you are using a reservoir that did not come from us, make sure the lid is vented. Some aftermarket reservoirs do not have a vented lid, and this will prevent the system from self-adjusting or bleeding properly.
- If you are using a master cylinder that didn't come from SST, it may be too small. Any master cylinder you use must displace nearly the same amount of fluid as ours in order for it to work properly. Our master cylinder has a 0.750” bore and a 1.4” stroke. If you go with a larger diameter bore, it will INCREASE the amount of pedal effort required and require a shorter stroke; a smaller bore will DECREASE the pedal effort, but require a longer stroke.
 - A master cylinder with a 5/8 (0.675)” bore needs a 2.1” stroke to be compatible with our CSC
 - A master cylinder with a 7/8 (0.875)” bore needs a 1.1” stroke to be compatible with our CSC
- Other, non-hydraulic problems can prevent the clutch from releasing. If the clutch disc is too large in diameter for the pressure plate, it could be pinched. The tip of the input shaft could be bottomed out in the crankshaft. The clutch disc could have gotten contaminated and could be stuck to the pressure plate or flywheel. The pilot bearing could be frozen.

HIGH PEDAL EFFORT

- The most common cause for a high pedal effort is having the pushrod connected too low on the pedal. Moving the pushrod connection point up closer to the pedal pivot point will reduce the pedal effort. Doing this may also require that the master cylinder be repositioned.
- If the pushrod is not straight in line with the master cylinder, that will also cause increased pedal effort and will wear the master cylinder prematurely.
- Make sure there are no kinks in the braided steel line.

BLACK FLUID

- If the fluid in the system turns black or has debris in it, that typically means that the pushrod is not straight with the master cylinder. If the pushrod is at an angle to the master cylinder, this will cause the master cylinder to wear prematurely. The black specks are actually oxidized aluminum particles.

CLUTCH WON'T DISENGAGE WHEN HOT, PEDAL GETS SPONGY

- If the fluid gets too hot, it can boil and create bubbles in the system. Route hydraulic lines as far away from the exhaust as possible, and shield them if needed. Make sure you are using **fresh hi-temp DOT4 brake fluid** in the system. Brake fluid that has been sitting on the shelf for a long period of time will absorb moisture from the atmosphere, even if the container is closed. Moisture in the fluid can lower the boiling point significantly.

CLUTCH SLIPS OR DISENGAGES PREMATURELY

- You may be “upside down” on the hydraulic bearing cushion measurement. If your “X” measurement is smaller than your “Y” measurement, this will give you a negative cushion, and the pressure plate fingers are actually being depressed all the time. Double check your hydraulic bearing cushion measurements and your math.

CSC FAILURE, CSC LEAKING FLUID, CSC HAS COME APART

- Your hydraulic bearing cushion measurement is likely too big (greater than 3/8”) OR the master cylinder pushrod is adjusted too tight and is not allowing the master cylinder to return to the fully extended position. Recheck your cushion measurements and your math, as well as the pushrod adjustment. The CSC is not rebuildable. It is an OE part that we modify so that it will work with our transmissions.

If you are still having issues, call Silver Sport Transmissions' Customer Service at (888) 609-0094.