



INDUSTRIAL & COMMERCIAL

2022

PRODUCT CATALOG



airkinglimited.com

TABLE OF CONTENTS

<i>Introduction</i>	<i>2</i>	<i>Commercial Pedestal Fans</i>	<i>11</i>
<i>Industrial Grade Drum Fans</i>	<i>3</i>	<i>Commercial Wall Mount Fans</i>	<i>11</i>
<i>1/3 HP Industrial Grade Air Circulators</i>	<i>4</i>	<i>Commercial Table Fans</i>	<i>12</i>
<i>1/4 HP Industrial Grade Air Circulators</i>	<i>5</i>	<i>Commercial Pivot Fans</i>	<i>12</i>
<i>Industrial Grade Quiet Fans</i>	<i>6</i>	<i>Commercial Box Fan</i>	<i>13</i>
<i>Industrial Grade Floor Fans</i>	<i>7</i>	<i>Commercial Office Fans</i>	<i>13</i>
<i>20" and 18" Industrial Grade Fans</i>	<i>8</i>	<i>Commercial Pivoting Blowers</i>	<i>14</i>
<i>Industrial Grade Multi Mount Fans</i>	<i>9</i>	<i>Window Fans</i>	<i>14</i>
<i>Government Fans</i>	<i>10</i>	<i>Index</i>	<i>15</i>



What is the Best Fan for What I Need?

Drum Fans: Portable, large air volume movers, perfect for large spaces or drying wet surfaces

Pedestal Fans: Portable air circulation perfect for larger areas

Wall Mount Fans: Mounted fan perfect for areas where floor space is limited, able to mount closer to people/work stations

Ceiling Mount Fans: Mounted fan, perfect for areas where floor space is limited, generally mounted higher than wall mount fans and provide larger areas of air circulation

I-Beam Mount Fans: Mounted fan, perfect for areas where floor space is limited, generally mounted higher than wall mount fans and provide larger areas of air circulation

Floor Fans: Quick and easy portable air circulation solution, great for areas that need temporary cooling

Multi Mount Fans: Mounted fan perfect for smaller spaces such as loading docks or smaller production lines

Utility Blowers: Ultra portable fans perfect for job sites

Window Fans: Seasonal fans great for home or small business usage

VALUE, QUALITY, AND SERVICE

As a leading supplier of Industrial and Commercial Grade Air Circulators, Air King is recognized throughout the industry for the superior quality and performance of its products. Our four North American manufacturing facilities ensure every Air King fan is precision-designed, engineered, and tested to meet the high standards our customers have come to expect. We strive every day to exceed our customers' expectations for Value, Service and Quality. Our product design team is constantly working to develop new products to meet the changing needs of today's market place while also keeping our existing products the leader's in the industry. In this way Air King ensures that our customers are always offered the right product at the right price.

PRODUCTS THAT EXCEED YOUR EXPECTATIONS

From Industrial to Commercial Grade fans, Wall Mounts to Pivoting Air Circulators, Air King offers a full line of fans to meet your needs for the workplace. Every Air King fan features a permanently lubricated motor to provide maintenance-free operation and are rigorously tested prior to shipping to provide high volume air movement with years of trouble-free operation. Every fan features a three-wire grounded plug and cord, and fan guards that meet with OSHA requirements. Air King warrants motors for three years, all other fan parts have a one year warranty.

THE AIR KING DIFFERENCE

Customer service is a title that everyone in our company shares. From our corporate staff to our nationwide network of manufacturer's representatives, we are dedicated to making sure your questions are addressed and answered quickly and accurately.



INDUSTRIAL-GRADE DRUM FANS

Common Usages

- Move a high volume of air in large areas economically
- Move air over wet surfaces including poured concrete to facilitate drying
- Move air in warehouse, gyms, and more



FEATURES

- 1/3 HP designed to run cooler than less powerful fans, extends motor life
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel

Belt Drive vs Direct Drive

- Belt drive fans provide high air volume at lower sound levels and lower operational cost
- Direct drive fans provide higher air volume at a lower initial cost

Belt Drive
9942D, 9936D



Direct Drive
9236D



SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9942D	42" Belt Driven Drum Fan	1/3	42"	Side Switch	Black, 10' SJT	ETL, OSHA	47"L x 19"W x 45"H	93.0	23.90	\$1096.00
9936D	36" Belt Driven Drum Fan	1/3	36"	Side Switch	Black, 10' SJT	ETL, OSHA	40"L x 20"W x 40.5"H	75.0	18.75	\$988.00
9236D	36" Direct Drive Drum Fan	1/2	36"	Side Switch	Black, 10' SJT	ETL, OSHA	38"L x 16"W x 40.5"H	61.0	14.25	\$840.00

PERFORMANCE

MODEL	TYPE	SPEEDS	VOLTS	PHASES	BEARINGS	CFM		RPM		AMPS		WATTS		DB A	
						HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW
9942D	42" 1/3 HP	2	120	Single	Enclosed, Ball	13000	8600	490	320	6.50	3.80	460	235	68	58
9936D	36" 1/3 HP	2	120	Single	Enclosed, Ball	9200	6000	575	380	6.50	3.70	440	230	62	55
9236D	36" 1/2 HP	2	120	Single	Enclosed, Ball	10900	7850	1120	805	6.60	5.70	725	565	78	66

Specifications are subject to change.



1/3 HP INDUSTRIAL GRADE AIR CIRCULATORS

Common Usages

- Cool employees on lines or in clustered workstations
- Cool machinery in production facilities
- Direct heat and fumes away from employees
- General air circulation of larger areas



FEATURES

- 1/3 HP designed to run cooler than less powerful fans, extends motor life
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Multiple mounting options available

Oscillation vs Non-Oscillation

- Oscillating fans distribute air over a larger area
- Non-Oscillating fans will be more effective cooling specific areas/people



Wall Mount
9070, 9075, 9071, 9074



Ceiling Mount
9370, 9375, 9371, 9374



I-Beam Mount
9670, 9675, 9671, 9674




Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.

Fans are shipped unassembled in one UPS shippable carton



24" models utilize our traditional rectangular designed fan blade

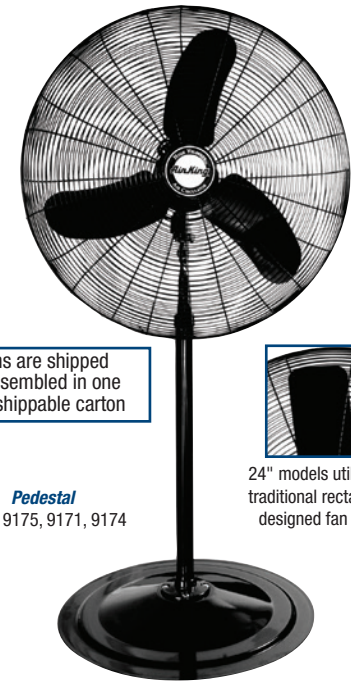

Pedestal
9170, 9175, 9171, 9174

SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	HEIGHT ADJUSTMENT	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9170	30" Pedestal Fan	1/3	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	54.75" - 79"	33.5"L x 29"W x 79"H	80.0	6.03	\$762.00
9175	30" Oscillating Pedestal Fan						56" - 81"	33.5"L x 29"W x 81"H	82.6	6.03	\$802.00
9171	24" Pedestal Fan	1/3	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	53" - 76.5"	27"L x 29"W x 76.5"H	73.5	8.26	\$730.00
9174	24" Oscillating Pedestal Fan						55" - 78.5"	27"L x 29"W x 78.5"H	76.1	8.26	\$764.00
9070	30" Wall Mounted Fan	1/3	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	33.75"L x 25.75"W x 38.75"H	44.9	6.03	\$654.00
9075	30" Oscillating Wall Mount Fan						-	33.75"L x 25.75"W x 38.75"H	46.6	6.03	\$688.00
9071	24" Wall Mounted Fan	1/3	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	26.75"L x 25"W x 34.5"H	38.4	8.26	\$654.00
9074	24" Oscillating Wall Mount Fan						-	26.75"L x 25"W x 34.5"H	40.1	8.26	\$656.00
9370	30" Ceiling Mounted Fan	1/3	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	33.5"L x 29"W x 36.75"H	42.9	6.03	\$722.00
9375	30" Oscillating Ceiling Mount Fan						-	33.5"L x 29"W x 36.75"H	44.9	6.03	\$764.00
9371	24" Ceiling Mounted Fan	1/3	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	27"L x 29"W x 33.63"H	36.7	8.26	\$688.00
9374	24" Oscillating Ceiling Mount Fan						-	27"L x 29"W x 33.63"H	38.4	8.26	\$762.00
9670	30" I-Beam Mounted Fan	1/3	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	42"L x 33"W x 44"H	77.3	6.03	\$894.00
9675	30" Oscillating I-Beam Mount Fan						-	42"L x 33"W x 44"H	81.7	6.03	\$920.00
9671	24" I-Beam Mounted Fan	1/3	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	41"L x 27"W x 41"H	70.8	8.26	\$848.00
9674	24" Oscillating I-Beam Mount Fan						-	41"L x 27"W x 41"H	75.2	8.26	\$896.00

PERFORMANCE

TYPE	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/3 HP ¹	3	120	Single	Enclosed, Ball	8780	7480	5570	1075	925	800	2.80	2.00	1.65	308	205	170	72	70	64
24" 1/3 HP ²	3	120	Single	Enclosed, Ball	5770	5250	4270	1054	869	673	2.50	1.96	1.40	332	226	152	69	67	59


¹ Includes models 9170, 9175, 9070, 9075, 9370, 9375, 9670, 9675 • ² Includes models 9171, 9174, 9071, 9074, 9371, 9374, 9671, 9674
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



1/4 HP INDUSTRIAL GRADE AIR CIRCULATORS

Common Usages

- Cool employees on lines or in clustered workstation
- Cool machinery in production facilities and direct heat and fumes away from employees
- General air circulation of larger areas

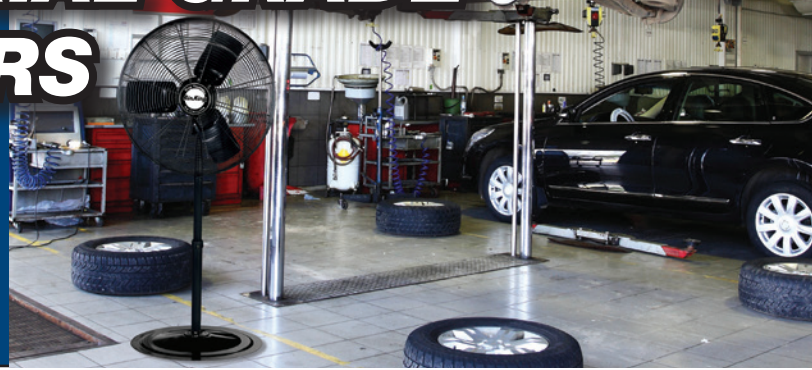


FEATURES

- 1/4 HP motor has lower operational cost than higher HP motors
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Multiple mounting options available

Oscillation vs Non-Oscillation

- Oscillating fans broadcast air over a larger area
- Non-Oscillating fans will be more effective cooling specific areas/people

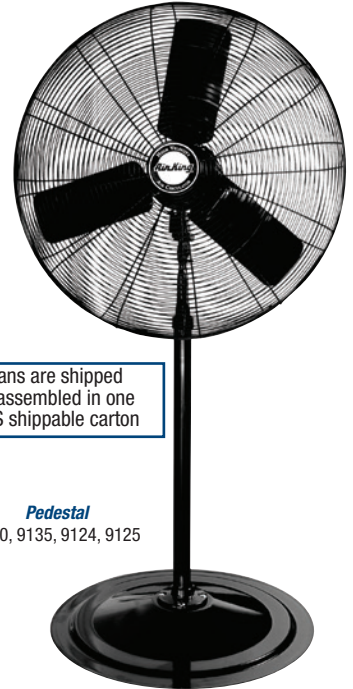

Fans are shipped unassembled in one UPS shippable carton

Pedestal
9130, 9135, 9124, 9125



Wall Mount
9030, 9035, 9024, 9025



Ceiling Mount
9330, 9335, 9724, 9325



I-Beam Mount
9430, 9635, 9424, 9625



Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.

SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	HEIGHT ADJUSTMENT	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9130	30" Pedestal Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	54.75" - 79"	33.5"L x 29"W x 79"H	80.0	6.03	\$720.00
9135	30" Oscillating Pedestal Fan						56" - 81"	33.5"L x 29"W x 81"H	82.6	6.03	\$758.00
9124	24" Pedestal Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	53" - 76.5"	27"L x 29"W x 76.5"H	73.5	8.26	\$684.00
9125	24" Oscillating Pedestal Fan						55" - 78.5"	27"L x 29"W x 78.5"H	76.1	8.26	\$730.00
9030	30" Wall Mounted Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	33.75"L x 25.75"W x 38.75"H	44.9	6.03	\$612.00
9035	30" Oscillating Wall Mount Fan						-	33.75"L x 25.75"W x 38.75"H	46.6	6.03	\$654.00
9024	24" Wall Mounted Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	26.75"L x 25"W x 34.5"H	38.4	8.26	\$574.00
9025	24" Oscillating Wall Mount Fan						-	26.75"L x 25"W x 34.5"H	40.1	8.26	\$618.00
9330	30" Ceiling Mounted Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	33.5"L x 29"W x 36.75"H	42.9	6.03	\$688.00
9335	30" Oscillating Ceiling Mount Fan						-	33.5"L x 29"W x 36.75"H	44.9	6.03	\$722.00
9724	24" Ceiling Mounted Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	27"L x 29"W x 33.63"H	36.7	8.26	\$654.00
9325	24" Oscillating Ceiling Mount Fan						-	27"L x 29"W x 33.63"H	38.4	8.26	\$698.00
9430	30" I-Beam Mounted Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	42"L x 33"W x 44"H	77.3	6.03	\$852.00
9635	30" Oscillating I-Beam Mount Fan						-	42"L x 33"W x 44"H	81.7	6.03	\$896.00
9424	24" I-Beam Mounted Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	-	41"L x 27"W x 41"H	70.8	8.26	\$816.00
9625	24" Oscillating I-Beam Mount Fan						-	41"L x 27"W x 41"H	75.2	8.26	\$852.00

PERFORMANCE

TYPE	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/4 HP ¹	3	120	Single	Enclosed, Ball	7400	6360	4980	1040	902	860	2.40	1.86	1.46	255	200	154	75	71	67
24" 1/4 HP ²	3	120	Single	Enclosed, Ball	5130	4490	3670	1060	925	745	2.39	1.86	1.52	252	199	157	72	69	64

¹ Includes models 9130, 9135, 9030, 9035, 9330, 9335, 9430, 9635 • ² Includes models 9124, 9125, 9024, 9025, 9724, 9325, 9424, 9625
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL-GRADE QUIET FANS

Common Usages

Areas in need of quiet air circulation
Churches, banquet halls, locker rooms,
music venues, schools, auditoriums and more



FEATURES

- Quiet speed allows the fan to operate at a reduced sound level, while still delivering powerful air circulation
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel

PEDESTALS


- Specially designed base reduces noise transfer
- 90° oscillation broadcasts air over a larger area
- Adjustable height: 55" - 80.75" (99532)
52" - 77.75" (99533)

WALL MOUNTED

- Specially designed wall mount reduces noise transfer
- 90° oscillation broadcasts air over a larger area


FLOOR

- Pivoting action allows fan to be easily directed to needed area

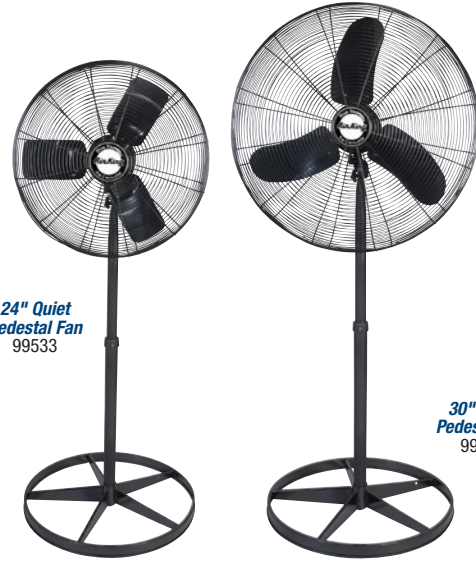


24" Quiet
Pedestal Fan
99533

30" Quiet
Pedestal Fan
99532

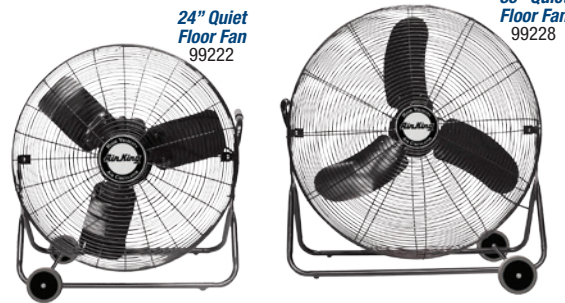


24" Quiet
Floor Fan
99222

30" Quiet
Floor Fan
99228



24" Quiet
Wall Mount
Fan
99539



30" Quiet
Wall Mount
Fan
99538

SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
99532	30" Quiet, Oscillating Pedestal Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	33.5"L x 33.5"W x 80.75"H	70.0	6.03	\$884.00
99533	24" Quiet, Oscillating Pedestal Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	29.5"L x 29.5"W x 77.75"H	66.4	8.26	\$864.00
99538	30" Quiet, Oscillating Wall Mount Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA	33.5"L x 24"W x 33.5"H	53.5	6.03	\$708.00
99539	24" Quiet, Oscillating Wall Mount Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA	27"L x 24"W x 27"H	49.5	8.26	\$690.00
99228	30" Quiet, Floor Fan	1/4	30"	Rotary	Black, 8' SO	ETL, OSHA	33.75"L x 12.25"W x 35.5"H	48.3	8.63	\$676.00
99222	24" Quiet, Floor Fan	1/4	24"	Rotary	Black, 8' SO	ETL, OSHA	27"L x 12"W x 28.75"H	39.9	5.69	\$644.00

PERFORMANCE

TYPE	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET
99532, 99538	3	120	Single	Enclosed, Ball	7450	6090	3450	1010	860	530	2.20	1.60	0.60	245	185	70	68	64	50
99533, 99539	3	120	Single	Enclosed, Ball	5030	4320	2280	1025	880	480	2.00	1.60	0.60	250	190	70	69	65	48
99228	3	120	Single	Enclosed, Ball	7450	6090	3450	1010	860	530	1.80	1.40	1.00	200	165	100	68	64	50
99222	3	120	Single	Enclosed, Ball	5030	4320	2280	1025	880	480	1.80	1.50	1.00	210	175	105	69	65	48

* Decibels (DBA) on quiet speed is at least 10 decibels less than traditional fans. An increase of 10 decibels is perceived to be approximately twice as loud. Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL GRADE FLOOR FANS

Common Usages

Areas in need of portable air circulation such as restaurants, workstations, music venues, garages and more

12" - 14" for individual workstation

18" and above for multiple workstations




FEATURES


- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Pivoting action allows fan to be easily directed to needed area
- Roll-About stand elevates fan to desired height (26" and 28" heights)
- Multiple sizes available




Pivoting Floor Fan
9214, 9212



Pivoting Floor Fan
9220, 9218



Pivoting Floor Fan
9230, 9224

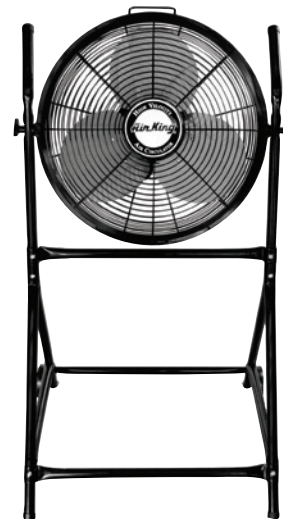

Roll-About Stand w/Fan
9219

SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9230	30" Pivoting Floor Fan	1/4	30"	Rotary	Black, 10' SO	ETL, OSHA	33.75"L x 12.25"W x 35.5"H	48.3	8.63	\$562.00
9224	24" Pivoting Floor Fan	1/4	24"	Rotary	Black, 10' SO	ETL, OSHA	27"L x 12"W x 28.75"H	41.8	5.69	\$532.00
9220	20" Pivoting Floor Fan	1/6	20"	Rotary	Black, 8' S	ETL, OSHA	25.75"L x 12.5"W x 25"H	24.0	4.46	\$282.00
9219	18" Roll-About Stand w/Fan	1/6	18"	Rotary	Black, 8' S	ETL, OSHA	24"L x 25"W x 48"H	27.9	4.44	\$350.00
9218	18" Pivoting Floor Fan	1/6	18"	Rotary	Black, 8' S	ETL, OSHA	22"L x 9.69"W x 22"H	21.4	3.17	\$268.00
9214	14" Pivoting Floor Fan	1/20	14"	Rotary	Black, 8' S	ETL, OSHA	18.69"L x 9"W x 18"H	13.6	1.98	\$224.00
9212	12" Pivoting Floor Fan	1/25	12"	Rotary	Black, 8' S	ETL, OSHA	15.5"L x 8.5"W x 16.5"H	12.1	1.43	\$192.00

PERFORMANCE

MODEL	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9230	3	120	Single	Enclosed, Ball	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9224	3	120	Single	Enclosed, Ball	5130	4490	3670	1500	1250	1000	2.03	1.81	1.63	229	200	176	72	69	64
9220	3	120	Single	Enclosed, Ball	3670	3330	2940	1500	1310	1050	1.60	1.30	1.10	184	155	130	62	55	48
9219	3	120	Single	Enclosed, Ball	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9218	3	120	Single	Enclosed, Ball	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9214	3	120	Single	Enclosed, Ball	1650	1470	1180	1498	1296	934	0.58	0.50	0.44	63	56	48	58	55	48
9212	3	120	Single	Open, Sleeve	1360	1170	1010	1545	1205	900	0.77	0.63	0.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



20" and 18" INDUSTRIAL GRADE FANS

Common Usages

Smaller industrial or commercial areas such as garages, fitness centers, offices, schools or Industrial settings to cool multiple workstations



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Multiple mounting options available
- Pivoting action allows fan to be easily directed to needed area



Pedestal
9420




Pedestal
9418



Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.



Wall Mount
9020




Wall Mount
9518



Ceiling Mount
9320



Ceiling Mount
9718



I-Beam Mount
9520



I-Beam Mount
9618



SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	HEIGHT ADJUSTMENT	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9420	20" Pedestal Fan	1/6	20"	Rotary	Black, 9' S	ETL, OSHA	54" - 64"	26.5"L x 23.25"W x 64"H	34.3	3.76	\$412.00
9020	20" Wall Mount Fan	1/6	20"	Pull Cord	Black, 9' S	ETL, OSHA	-	26.5"L x 16.5"W x 29.5"H	26.0	3.47	\$342.00
9320	20" Ceiling Mount Fan	1/6	20"	Pull Cord	Black, 9' S	ETL, OSHA	-	26.5"L x 10.5"W x 29.5"H	23.7	3.47	\$418.00
9520	20" I-Beam Mount Fan	1/6	20"	Pull Cord	Black, 9' S	ETL, OSHA	-	36"L x 22"W x 42"H	47.6	3.47	\$560.00
9418	18" Pedestal Fan	1/6	18"	Rotary	Black, 9' S	ETL, OSHA	52" - 62"	24"L x 24"W x 62"H	31.4	3.25	\$392.00
9518	18" Wall Mount Fan	1/6	18"	Pull Cord	Black, 9' S	ETL, OSHA	-	24"L x 16.5"W x 28"H	24.8	2.80	\$316.00
9718	18" Ceiling Mount Fan	1/6	18"	Pull Cord	Black, 9' S	ETL, OSHA	-	24"L x 10.5"W x 28"H	23.1	2.80	\$396.00
9618	18" I-Beam Mount Fan	1/6	18"	Pull Cord	Black, 9' S	ETL, OSHA	-	24"L x 37.5"W x 38.5"H	36.9	4.90	\$544.00

PERFORMANCE

TYPE	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
20" 1/6 HP ¹	3	120	Single	Enclosed, Ball	3670	3330	2940	1500	1310	1050	1.60	1.30	1.10	184	155	130	62	55	48
18" 1/6 HP ²	3	120	Single	Enclosed, Ball	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49

¹ Includes models 9420, 9020, 9320, 9520 • ² Includes models 9418, 9518, 9718, 9618
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.




INDUSTRIAL-GRADE MULTI MOUNT FANS

Common Usages

Smaller industrial or commercial areas such as loading docks, fitness centers, restaurants and more


Cool employees at workstation(s)

12" - 14" for individual, 18" for multiple workstations

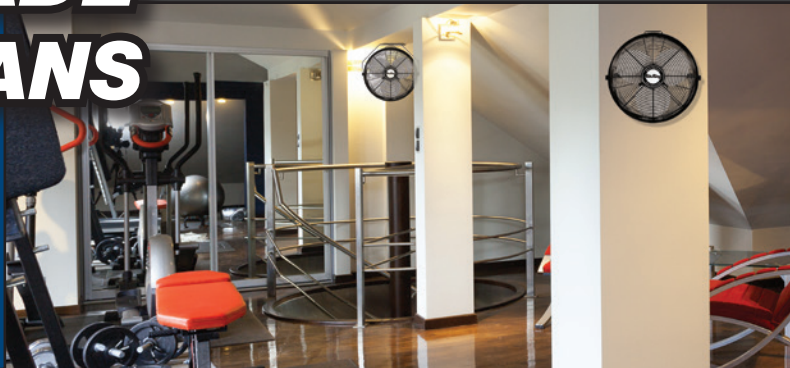


FEATURES


- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Pivoting action allows fan to be easily directed to needed area
- Can be mounted to walls, ceilings, I-beams and more
- Multiple sizes available

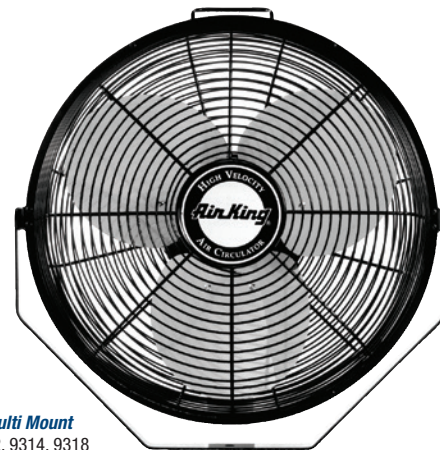

Multi Mount
9312, 9314, 9318



Secondary support
cable included

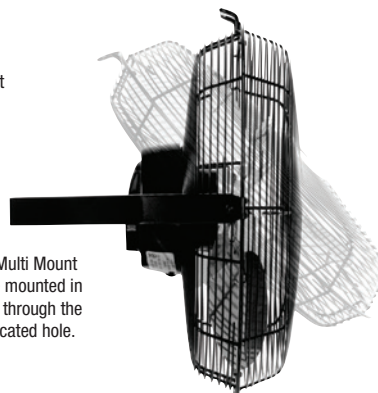

Fan head pivots within Multi Mount Bracket. Bracket can be mounted in virtually any application through the predrilled 3/4" center located hole.



SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9318	18" Multi Mount Fan	1/6	18"	Pull Cord	Black, 9' S	ETL, OSHA	21.5"L x 16"W x 21"H	21.4	2.85	\$272.00
9314	14" Multi Mount Fan	1/20	14"	Pull Cord	Black, 9' S	ETL, OSHA	18"L x 8.88"W x 18.25"H	14.3	1.85	\$230.00
9312	12" Multi Mount Fan	1/25	12"	Pull Cord	Black, 9' S	ETL, OSHA	15"L x 12"W x 15"H	11.5	1.39	\$210.00

PERFORMANCE

MODEL	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9318	3	120	Single	Enclosed, Ball	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9314	3	120	Single	Enclosed, Ball	1650	1470	1180	1498	1296	934	0.58	0.50	0.44	63	56	48	58	55	48
9312	3	120	Single	Open, Sleeve	1360	1170	1010	1545	1205	900	0.77	0.63	0.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



GOVERNMENT FANS

Common Usages

- Government buildings
- Military bases
- When GSA equipment is required



FEATURES


- Split capacitor motor is permanently lubricated for little to no maintenance
- Guards completely enclose the face, perimeter, and reverse side and permit access to blade assembly without special tools.
- Class A or B installation, NEMA Standard number MG-1
- Conforms to the requirements of Underwriters Laboratories Inc. (UL) Standard No. UL 507
- Grounded, 3 wire North American S or SJT type cordsets
- Multiple fan styles available

Table Fan
3151G



Table Fan
3150G

Floor Fan
9214GT

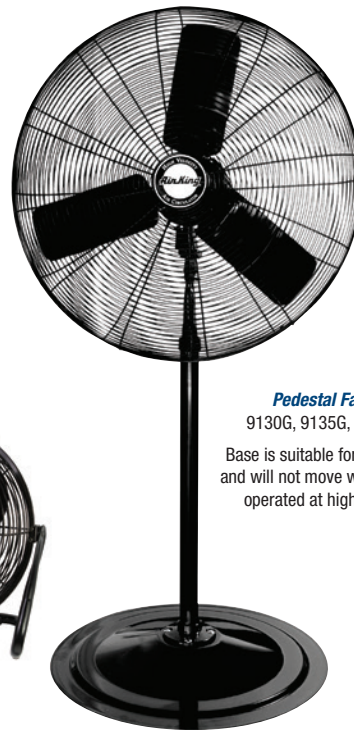

Pedestal Fans
9130G, 9135G, 9125G

Base is suitable for floor use and will not move when fan is operated at high speed



SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	HEIGHT ADJUSTMENT	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9130G	30" Pedestal Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA, UL507	54.75" - 79"	33.5"L x 29"W x 79"H	80.00	6.03	\$680.00
9135G	30" Oscillating Pedestal Fan	1/4	30"	Pull Cord	Black, 10' SJT	ETL, OSHA, UL507	56" - 81"	33.5"L x 29"W x 81"H	82.6	6.03	\$738.00
9125G	24" Oscillating Pedestal Fan	1/4	24"	Pull Cord	Black, 10' SJT	ETL, OSHA, UL507	53" - 76.5"	27"L x 78.5"W x "H	76.1	8.26	\$710.00
9214GT	14" Floor Fan	1/20	14"	Rotary	Black, 9' S	ETL, OSHA, UL507	-	18.7"L x 9"W x 18"H	13.6	1.98	\$224.00
3151G	16" Oscillating Table/Wall Mount Fan	1/20	16"	Rotary	White, 7' SPT	ETL, OSHA, UL507	-	10.8"L x 18"W x 24.4"H	11.0	2.37	\$138.00
3150G	12" Oscillating Table/Wall Mount Fan	1/50	12"	Rotary	White, 7' SPT	ETL, OSHA, UL507	-	11.6"L x 14.3"W x 20.3"H	8.0	1.46	\$136.00

PERFORMANCE

MODEL	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9130G	3	120	Single	Enclosed, Ball	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9135G	3	120	Single	Enclosed, Ball	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9125G	3	120	Single	Enclosed, Ball	5130	4490	3670	1500	1250	1000	2.03	1.81	1.63	229	200	176	72	69	64
9214GT	3	120	Single	Enclosed, Ball	1650	1470	1180	1498	1296	934	0.58	0.50	0.44	63	56	48	58	55	48
3151G	3	120	Single	Sleeve	1392	1302	1142	1493	1360	1190	0.81	0.56	0.48	85	67	57	57	49	44
3150G	3	120	Single	Sleeve	930	780	620	1450	1300	1090	0.40	0.30	0.27	39	35	32	45	41	36

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL PEDESTAL FANS

Common Usages

Commercial settings such as retail stores, gyms, offices, meeting rooms, schools restaurants and more



Oscillating Pedestal
9119



Oscillating Pedestal
9126

FEATURES

- 1/20 HP Split capacitor motor is permanently lubricated for little to no maintenance
- Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- 90° oscillation broadcasts air over a larger area
- Adjustable height: 37" - 53.75" (9119)
36" - 52" (9126)



PERFORMANCE


MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9119	Oscillating Pedestal Fan	1/20	18"	Rotary	White, 7' SPT-2-R	ETL, OSHA	1970	1520	1170	1.10	0.73	0.54	13.8	\$116.00
9126	Oscillating Pedestal Fan	1/20	16"	Rotary	White, 7' SPT-2-R	ETL, OSHA	1710	1500	1330	0.71	0.54	0.48	11.3	\$112.00

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL WALL MOUNT FANS

Common Usages

Commercial settings such as retail stores, fitness centers, salons, offices, meeting rooms, restaurants, schools and more



Oscillating Wall Mount
9018



Oscillating Wall Mount
3016C



Oscillating Wall Mount
9012

FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- 90° oscillation broadcasts air over a larger area
- Wall mount bracket included with the unit



PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9018	Oscillating Wall Mount Fan	1/20	18"	Rotary	White, 7' SPT-2-R	ETL, OSHA	1970	1520	1170	1.10	0.73	0.54	10.9	\$128.00
3016C	Oscillating Wall Mount Fan	1/20	16"	Rotary	White, 7' SPT-2-R	ETL, OSHA	1710	1500	1330	0.71	0.54	0.48	11.3	\$116.00
9012	Oscillating Wall Mount Fan	1/50	12"	Rotary	White, 7' SPT-2-R	ETL, OSHA	930	780	620	0.40	0.30	0.27	8.3	\$104.00

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL-TABLE FANS

Common Usages

Commercial settings such as reception desks, offices, retail stores, restaurants



Oscillating Table Fan
3016C



Oscillating Table Fan
9102

FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- 90° oscillation broadcasts air over a larger area



PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9106	Oscillating Table Fan	1/20	16"	Rotary	White, 7' SPT-2-R	ETL, OSHA	1710	1500	1330	0.71	0.54	0.48	9.8	\$116.00
9102	Oscillating Table Fan	1/50	12"	Rotary	White, 7' SPT-2-R	ETL, OSHA	930	780	620	0.40	0.30	0.27	7.0	\$92.00

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL PIVOTING FANS

Common Usages

Commercial settings such as retail stores, fitness centers, salons, offices, restaurants, music studios and more



Pivot Fan
9500



Pivot Fan
9530



Pivot Fan
9525

FEATURES

- Permanently lubricated for little to no maintenance
- Impact resistant plastic with chemical resistant polypropylene blade
- 120 degree pivoting fan head directs air to where it is needed most
- Wall mount option built into the base (models 9500 and 9530 only)



PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9500	20" Deluxe Pivot Fan	1/22	20"	Rotary	Black, 6' SPT-2-R	ETL, OSHA	2390	1975	1490	1.00	0.73	0.54	12.4	\$104.00
9530	9" High Performance Pivot Fan	1/50	9"	Rotary	Black, 6' SPT-2-R	ETL, OSHA	700	610	520	0.50	0.43	0.37	4.4	\$80.00
9525	9" Pivot Fan	1/100	9"	Rotary	White, 7' SPT-2-R	ETL, OSHA	430	-	340	0.57	-	0.39	4.5	\$66.00



Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL BOX FAN

Common Usages

Commercial settings such as retail stores, gyms, restaurants, schools as well as dorm rooms

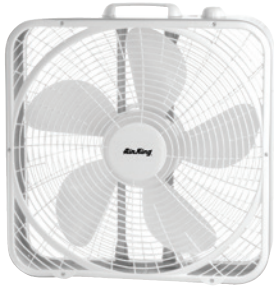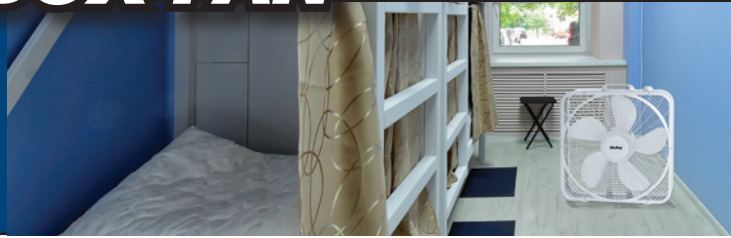

Box Fan
9723



Roll-About Stand
9701

FEATURES

- 1/25 HP Split capacitor motor is permanently lubricated for little to no maintenance
- Steel body with impact resistant plastic grills and chemical resistant polypropylene blade

ROLL-ABOUT STAND

- Gray powder coated steel with 4" diameter wheels for mobility
- Fan can be mounted at either 26" or 28" off the floor (fan sold separately)

Model 9701 Roll-About fits model 9723 Box Fan. Fan is NOT INCLUDED with stand.



PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9723	Box Fan	1/25	20"	Rotary	White, 8' SPT-2-R	ETL, OSHA	2220	1920	1530	1.82	1.30	1.00	12.8	\$90.00
9701	Roll-About Stand (Fan NOT included)	-	-	-	-	-	-	-	-	-	-	-	6.2	\$72.00

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL OFFICE FANS

Common Usages

Commercial settings such as desks, work stations and other tight spaces that need personal cooling



Personal Fan
9146



Clip-On Fan
9145

FEATURES

- 1 phase motor is permanently lubricated for little to no maintenance
- Zinc plated steel front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- Tilting fan head
- Durable, spring-loaded clip holds tightly without marking surfaces (9145)
- Convenient storage compartment (9146)



PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9145	Clip-On Fan	1/300	6"	Rotary	White, 7' SPT-2-R	ETL, OSHA	190	-	90	0.19	-	0.15	2.1	\$54.00
9146	Personal Fan	1/300	6"	Rotary	White, 7' SPT-2-R	ETL, OSHA	190	-	90	0.19	-	0.15	2.1	\$40.00

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL PIVOTING BLOWERS

Common Usages

Areas needing ultra portable air circulation such as:
Construction sites, restaurants, workshops and more
Great for helping to quickly dry floors in basements,
businesses or public areas



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Molded ABS plastic won't rust
- Pivoting action allows fan to be easily directed to needed area
- Ultra portable
- Includes two 120V outlets with circuit breaker and reset button



Pivoting Utility
Blower
9550



Pivoting High
Velocity Blower
9555

PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9555	Pivoting High Velocity Blower	1/13	7" x 7"	Rotary	Black, 7' SO	ETL, OSHA	350	300	250	0.94	0.78	0.70	12.8	\$330.00
9550	Pivoting Utility Blower	1/16	6" x 6"	Rotary	Black, 7' SO	ETL, OSHA	310	269	190	0.80	0.62	0.50	10.1	\$216.00

Specifications are subject to change.

WINDOW FANS

Common Usages


Exhaust hot air out of office areas or
bring cooler air in.

Use in residential settings, small businesses or
businesses set up in residential buildings



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Reversible motor allows fan to exhaust air out or bring air in
- Can be mounted in front of window, allowing window to close behind the fan during inclement weather
- Impact resistant plastic housing, metal front grill and blade (model 9166)
High impact styrene housing, ABS plastic blade, and metal front grill (model 9155)
- Window Size Requirements:
9166: 27" - 38" x 26.25"H
9155: 26.5" - 34.5" x 22"H



Whole House
Window Fan
9166



Window Fan
9155

PERFORMANCE

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	CFM			AMPS			WEIGHT (LBS.)	LIST PRICE
							HIGH	MED	LOW	HIGH	MED	LOW		
9166	20" Whole House Window Fan	1/6	20"	Rotary	Black, 7' SPT-2R	ETL, OSHA	3560	3120	2510	1.40	1.30	1.00	36.0	\$482.00
9155	16" Window Fan	1/6	16"	Rotary	White, 7' SPT	ETL, OSHA	2470	1700	1360	0.83	0.55	0.45	15.0	\$306.00

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.





Model	Description	UPC	Page
Industrial Grade Drum Fans			
9942D	1/2 HP 42" Belt Drive Drum Fan	0-46013-30310-3	3
9936D	1/3 HP 36" Belt Drive Drum Fan	0-46013-30309-7	3
9236D	1/3 HP 36" Direct Drive Drum Fan	0-46013-30301-1	3
1/3 HP Industrial Grade Fans			
9170	30" Pedestal Fan	0-46013-38990-9	4
9175	30" Oscillating Pedestal Fan	0-46013-38960-2	4
9171	24" Pedestal Fan	0-46013-38980-0	4
9174	24" Oscillating Pedestal Fan	0-46013-38970-1	4
9070	30" Wall Mount Fan	0-46013-38940-4	4
9075	30" Oscillating Wall Mount Fan	0-46013-38920-6	4
9071	24" Wall Mount Fan	0-46013-38950-3	4
9074	24" Oscillating Wall Mount Fan	0-46013-38930-5	4
9370	30" Ceiling Mount Fan	0-46013-38900-8	4
9375	30" Oscillating Ceiling Mount Fan	0-46013-38880-3	4
9371	24" Ceiling Mount Fan	0-46013-38910-7	4
9374	24" Oscillating Ceiling Mount Fan	0-46013-38890-2	4
9670	30" I-Beam Mount Fan	0-46013-38860-5	4
9675	30" Oscillating I-Beam Mount Fan	0-46013-38840-7	4
9671	24" I-Beam Mount Fan	0-46013-38870-4	4
9674	24" Oscillating I-Beam Mount Fan	0-46013-38850-6	4
1/4 HP Industrial Grade Fans			
9130	30" Pedestal Fan	0-46013-11780-9	5
9135	30" Oscillating Pedestal Fan	0-46013-39560-3	5
9124	24" Pedestal Fan	0-46013-39500-9	5
9125	24" Oscillating Pedestal Fan	0-46013-39510-8	5
9030	30" Wall Mount Fan	0-46013-39350-0	5
9035	30" Oscillating Wall Mount Fan	0-46013-39550-4	5
9024	24" Wall Mount Fan	0-46013-39480-4	5
9025	24" Oscillating Wall Mount Fan	0-46013-39490-3	5
9330	30" Ceiling Mount Fan	0-46013-38800-1	5
9335	30" Oscillating Ceiling Mount Fan	0-46013-38780-6	5
9724	24" Ceiling Mount Fan	0-46013-38810-0	5
9325	24" Oscillating Ceiling Mount Fan	0-46013-38790-5	5
9430	30" I-Beam Mount Fan	0-46013-39670-9	5
9635	30" Oscillating I-Beam Mount Fan	0-46013-38760-8	5
9424	24" I-Beam Mount Fan	0-46013-39690-7	5
9625	24" Oscillating I-Beam Mount Fan	0-46013-38770-7	5
Industrial Grade Quiet Fans			
99228	30" Quiet, Floor Fan	0-46013-39575-7	6
99222	24" Quiet, Floor Fan	0-46013-30525-2	6
99532	30" Quiet, Oscillating Pedestal Fan	0-46013-39565-8	6
99533	24" Quiet, Oscillating Pedestal Fan	0-46013-39515-3	6
99538	30" Quiet, Oscillating Wall Mount Fan	0-46013-39555-9	6
99539	24" Quiet, Oscillating Wall Mount Fan	0-46013-39495-8	6
Industrial Grade Floor Fans			
9230	1/4 HP 30" Floor Fan	0-46013-39570-2	7
9224	1/4 HP 24" Floor Fan	0-46013-39520-7	7
9220	1/6 HP 20" Floor Fan	0-46013-39300-5	7
9219	1/6 HP 18" Roll-About Stand Fan	0-46013-39190-2	7
9218	1/6 HP 18" Floor Fan	0-46013-39170-4	7

Specifications are subject to change.

Model	Description	UPC	Page
Industrial Grade Floor Fans			
9214	1/20 HP 14" Floor Fan	0-46013-39710-2	7
9212	1/25 HP 12" Floor Fan	0-46013-39160-5	7
20" and 18" Industrial Grade Fans			
9420	1/6 HP 20" Pedestal Fan	0-46013-39290-9	8
9020	1/6 HP 20" Wall Mount Fan	0-46013-39340-1	8
9320	1/6 HP 20" Ceiling Mount Fan	0-46013-38820-9	8
9520	1/6 HP 20" I-Beam Mount Fan	0-46013-39650-1	8
9418	1/6 HP 18" Pedestal Fan	0-46013-39680-8	8
9518	1/6 HP 18" Wall Mount Fan	0-46013-39660-0	8
9718	1/6 HP 18" Ceiling Mount Fan	0-46013-38830-8	8
9618	1/6 HP 18" I-Beam Mount Fan	0-46013-39700-3	8
Industrial Grade Multi Mount Fans			
9318	1/6 HP 18" Multi Mount Fan	0-46013-39470-5	9
9314	1/20 HP 14" Multi Mount Fan	0-46013-39720-1	9
9312	1/25 HP 12" Multi Mount Fan	0-46013-39460-6	9
Government Fans			
9130G	30" Pedestal Fan	0-46013-11750-2	10
9135G	30" Oscillating Pedestal Fan	0-46013-38200-9	10
9125G	24" Oscillating Pedestal Fan	0-46013-38190-3	10
9214GT	14" Floor Fan	0-46013-39710-2	10
3151G	16" Oscillating Table/Wall Mount Fan	0-46013-32210-4	10
3150G	12" Oscillating Table/Wall Mount Fan	0-46013-32200-5	10
Commercial Pedestal Fans			
9119	18" Oscillating Pedestal Fan	0-46013-39080-6	11
9126	16" Oscillating Pedestal Fan	0-46013-39070-7	11
Commercial Wall Mount Fans			
9018	18" Oscillating Wall Mount Fan	0-46013-39090-5	11
3016C	16" Oscillating Wall Mount Fan	0-46013-19790-0	11
9012	12" Oscillating Wall Mount Fan	0-46013-33260-8	11
Commercial Table Fans			
9106	16" Oscillating Table Fan	0-46013-38120-0	12
9102	12" Oscillating Table Fan	0-46013-38110-1	12
Commercial Pivot Fans			
9500	20" Deluxe Pivot Fan	0-46013-39120-9	12
9530	9" High Performance Pivot Fan	0-46013-39320-3	12
9525	9" Pivot Fan	0-46013-39140-7	12
Commercial Box Fan			
9723	20" Box Fan	0-46013-39110-0	13
9701	Roll-About Stand	0-46013-39100-1	13
Commercial Office Fans			
9145	6" Clip-On Fan	0-46013-38030-2	13
9146	6" Personal Fan	0-46013-38040-1	13
Commercial Pivoting Blowers			
9555	Pivoting High Velocity Blower	0-46013-43620-7	14
9550	Pivoting Utility Blower	0-46013-39840-6	14
Window Fans			
9166	20" Whole House Window Fan	0-46013-38020-3	14
9155	16" Window Fan	0-46013-38010-4	14





For additional information regarding our industrial air circulators or any of our other full lines of exhaust fans and range hoods, please contact the dealer nearest you or:

United States:

West Chester, PA

Phone: 877-304-3785

Fax: 610-696-8048

E-mail: sales@airkinglimited.com



www.airkinglimited.com