



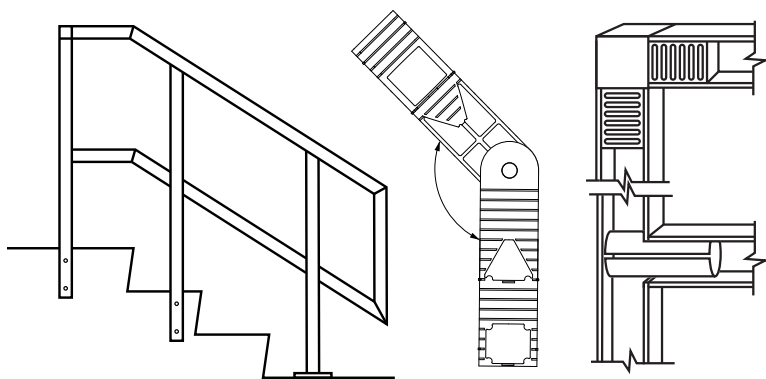

SAF RAIL™

INDUSTRIAL FIBERGLASS RAILING SYSTEM

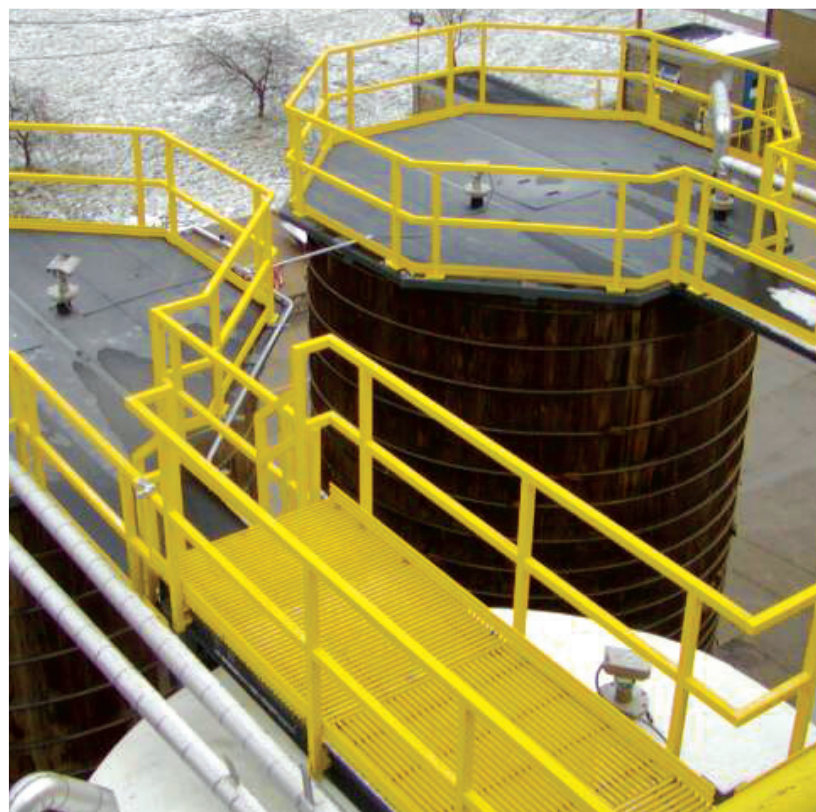

SAFRAIL™ Industrial Fiberglass Railing Systems



SAFRAIL™ system in a chemical plant.



NSF International


Strongwell railing systems can be manufactured using NSF-61 certified materials. See Custom Railing Systems (pg. 3) for details.

American Bureau of Shipping

Approved for use on a variety of ABS Class ships.



SAFRAIL™ and DURAGRID® pultruded grating were fabricated to make access platforms over wastewater recycling tanks. The previous steel structure corroded, and was unsafe.

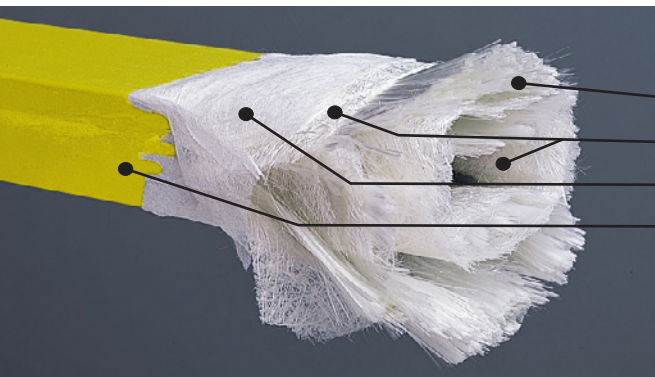

What is SAFRAIL™?

SAFRAIL™ industrial fiberglass railing systems are made exclusively in the U.S.A. for use as stair rails, platform/walkway handrails and guardrails. SAFRAIL™ systems are fabricated from pultruded fiberglass components produced by Strongwell and compression molded FRP connectors. The railing systems are particularly well-suited to corrosive environments like those found in industrial, chemical and wastewater treatment plants, as well as commercial structures with urban and salt air corrosion.

Why Use SAFRAIL™?

SAFRAIL™ systems can be used like traditional metal railing systems but offer the inherent benefits of pultruded fiberglass. In addition, SAFRAIL™ systems have been optimized to offer the following advantages:

- **Ease of Assembly** — lightweight standard sections can be prefabricated in large sections and shipped to the jobsite or fabricated and installed on site with simple carpenter tools.
- **Internal Connection System** — construction of continuous handrail systems is simplified, even around circular tanks, without special fittings.
- **Safety Features** — SAFRAIL™ systems come standard in a “safety yellow color”, feature low electrical conductivity and exhibit high strength. Systems meet federal OSHA standards with a 2:1 factor of safety with a 6-foot (1830mm) maximum post spacing. SAFRAIL™ systems also comply with international standard AFNOR NF E 85-101. In addition, the long-term durability of SAFRAIL™ components virtually eliminates maintenance requirements.*
- **Cost Effective** — Corrosion resistant, pigmented fiberglass will outlast aluminum or steel systems with virtually no maintenance. The systems’ easy-to-assemble designs provide savings on installation time and labor. The light weight of the systems saves on freight costs and minimizes the need for special installation equipment.

SAFRAIL™ can be used in guardrail applications where railing is needed to protect the open side of an elevated walkway. SAFRAIL™ systems meet OSHA 1910.29 standards for a height of 42" (1067mm) from the top of walkway to the top of the guardrail with a 2:1 factor of safety.

Features

SAFRAIL™ fiberglass handrail systems are:

- Corrosion Resistant
- Structurally Strong
- Impact Resistant
- Lightweight
- Easy to Field Fabricate
- Low Thermal and Electrical Conductivity

Materials of Construction

SAFRAIL™ is an engineered composite consisting of:


- Continuous glass fibers
- Two continuous strand glass mats
- A synthetic surfacing veil
- Fire-retardant polyester resin (other resin systems are available upon request)

This unique combination provides the ultimate in strength, stiffness and long-term corrosion and UV protection.*


****Strongwell recommends a coating to reduce color fade for outdoor applications. If a coating is not applied, components may fade rapidly.***

SAFRAIL™ Mechanical Properties


Square Post or Rail

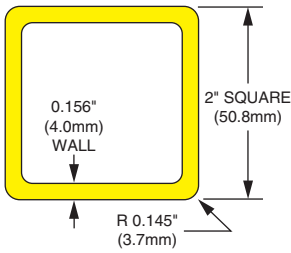

Round Post or Rail

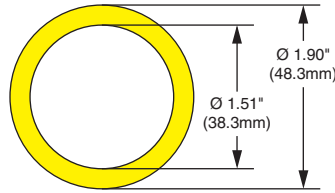

Channel Top Rail

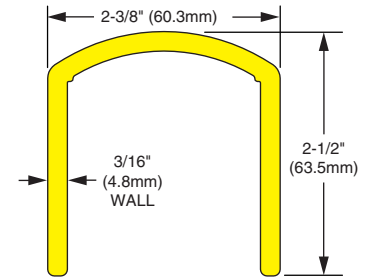

Section Properties

SHAPE	WEIGHT LB/LIN. FT (KG/M)	A IN ² (MM ²)	S IN ³ (MM ³)	I IN ⁴ (MM ⁴)	E* PSI (N/MM ²)
Square	0.95 (1.41)	1.15 (742.5)	0.657 (1.077 x 10 ⁴)	0.657 (2.735 x 10 ⁵)	3.7 x 10 ⁶ (25,500)
Round	0.86 (1.28)	1.05 (677.4)	0.405 (6.637 x 10 ³)	0.385 (1.602 x 10 ⁵)	4.5 x 10 ⁶ (31,000)
Channel Top	0.99 (1.47)	1.21 (780.6)	S _x = 0.962 (1.576 x 10 ⁴) S _y = 0.935 (1.532 x 10 ⁴)	I _x = 0.717 (2.984 x 10 ⁵) I _y = 1.110 (4.620 x 10 ⁵)	3.0 x 10 ⁶ (20,700)

* Where E = Full Section Modulus

Material Properties (Typical)

PROPERTY	TEST METHOD	UNITS	SQUARE RAIL	ROUND RAIL	CHANNEL TOP RAIL
Ultimate Flexural Stress (Full Section)	N/A	psi N/mm ²	36,000 248	60,000 414	30,000 207
Full Section Modulus (non-phenolic)	N/A	psi N/mm ²	3.7 x 10 ⁶ 25,500	4.5 x 10 ⁶ 31,000	3.0 x 10 ⁶ 20,700
Full Section Modulus (phenolic)	N/A	psi N/mm ²	6.0 x 10 ⁶ 41,400	6.0 x 10 ⁶ 41,400	N/A
Density	ASTM D792	lbs/in ³ g/cc	0.065 - 0.075 1.80 - 2.08	0.065 - 0.075 1.80 - 2.08	0.065 - 0.075 1.80 - 2.08
24 hr. Water Absorption (non-phenolic)	ASTM D570	% max by wt.	0.6	0.6	0.6
24 hr. Water Absorption (phenolic)	ASTM D570	% max by wt.	2.0	2.0	N/A
Coefficient of Thermal Expansion, lengthwise	ASTM D696	in/in/°F mm/mm/°C	7 x 10 ⁻⁶ 1.2 x 10 ⁻⁵	7 x 10 ⁻⁶ 1.2 x 10 ⁻⁵	7 x 10 ⁻⁶ 1.2 x 10 ⁻⁵

HOW TO SPECIFY SAFRAIL™

Fiberglass railing shall be SAFRAIL™ as manufactured by Strongwell. Railing shall be pultruded and assembled in the U.S.A. Resin shall be fire retardant (polyester) (vinyl ester) (phenolic) meeting the requirements of a Class 1 rating of 25 or less per ASTM E-84 and the self-extinguishing requirements of ASTM D-635. Color shall be (gray) (yellow). Resin shall be UV inhibited and the composite shall include a veil on all exposed surfaces (unless phenolic). The visual quality of the pultruded shapes shall conform to ASTM D-4385.


Note: If special options are required that are not stated in the above specification, fill in your special requirement in the appropriate section.

CUSTOM RAILING SYSTEMS

SAFRAIL™ systems are cost effective standard systems designed to fit a wide variety of applications. Custom guard and fence systems are also available from Strongwell to suit specific needs. Examples include vertical pickets, multi-color, architectural features, heavy duty systems as well as NSF-61 certified materials.

For more custom handrail options, see Strongwell's STRONGRAIL® Architectural Handrail and Fencing Systems.

STANDARD SQUARE HANDRAIL CONSTRUCTION

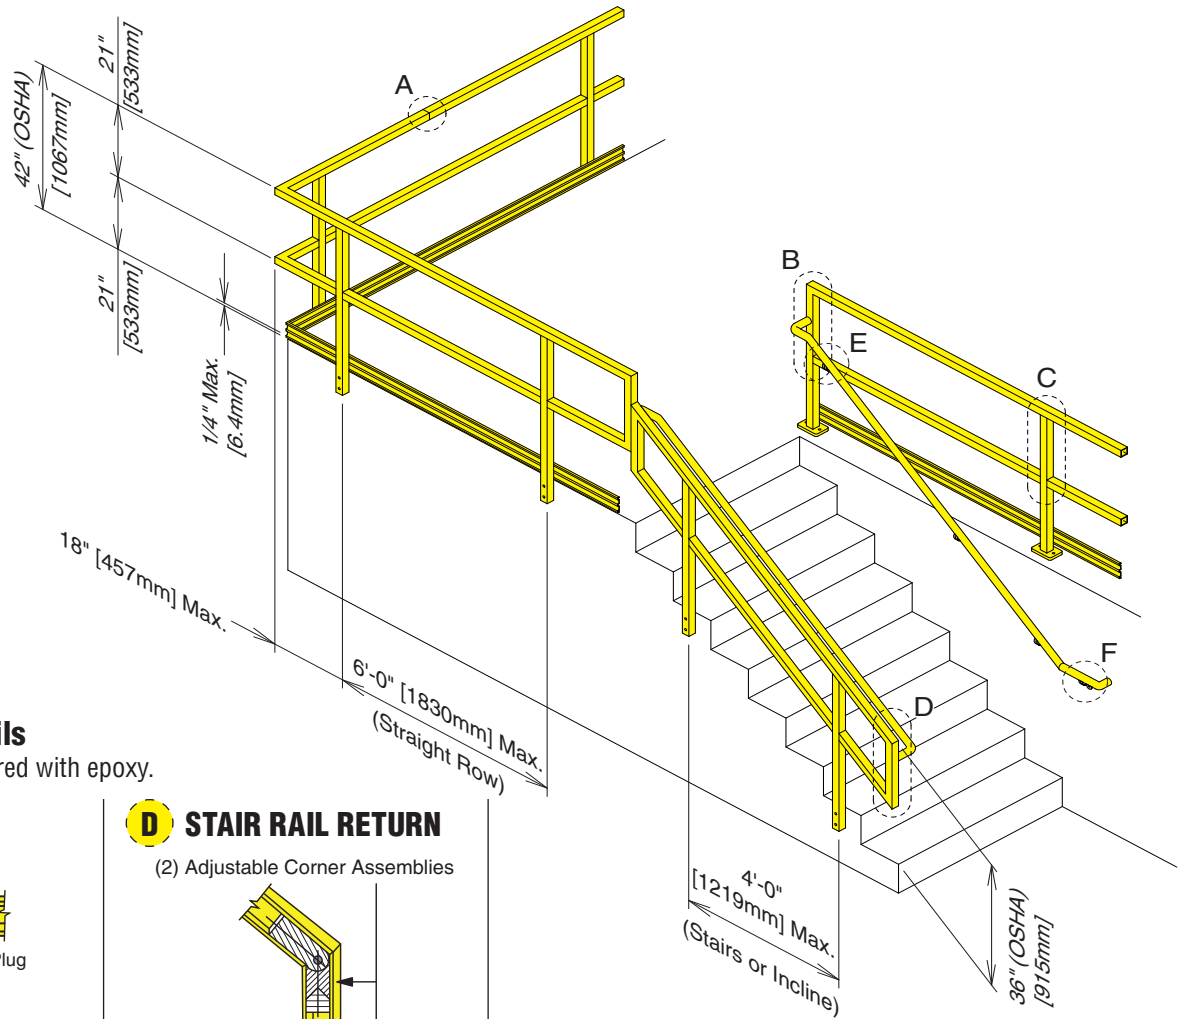


Connection Details


All components secured with epoxy.

A RAIL SPLICE

STRAIGHT




ANGLE



Adjustable Corner Assembly


D STAIR RAIL RETURN

(2) Adjustable Corner Assemblies

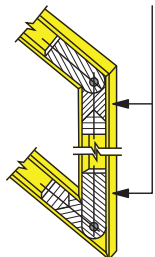


B END POST TO RAIL

90° Corner

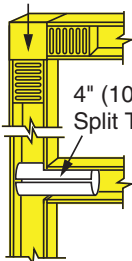


4" (102mm) Split Tube Connector

E POST MOUNTED RAIL

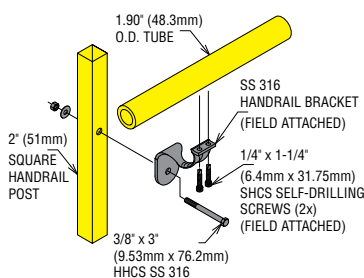


C LINE POST TO RAIL

4" (102mm) Split Tube Connector




8" (203mm) Split Tube Connector

F WALL MOUNTED RAIL

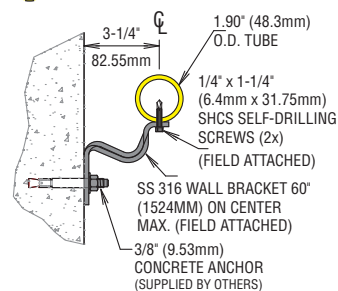


ALTERNATIVE POST DESIGN

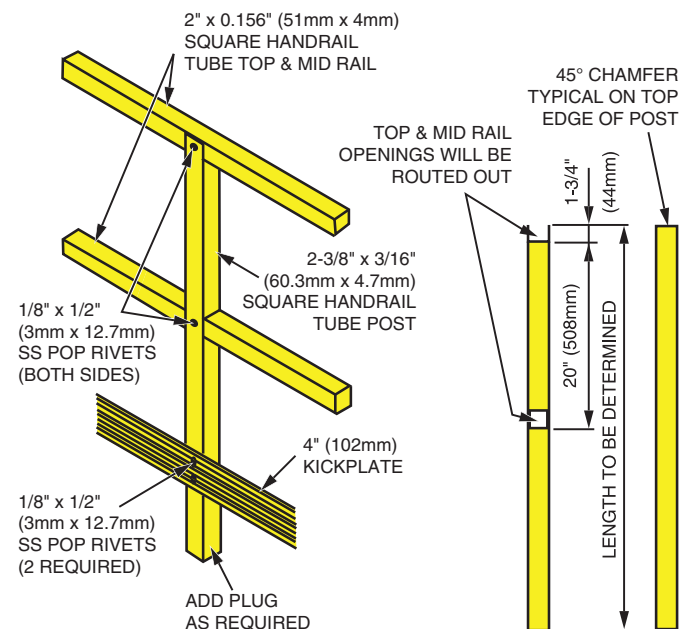


Refer to OSHA 1910.25, Table D-2 for stairway handrail requirements.

RECOMMENDED SQUARE POST AND KICK PLATE INSTALLATION


Posts with FRP Base Plate

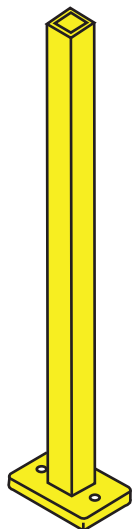


Fastening to Structural Steel or Fiberglass

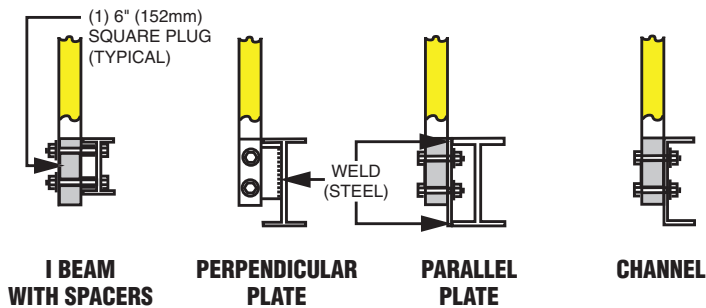


Fastening to Concrete

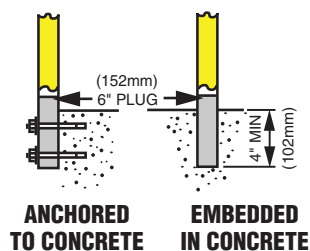

Removable Posts

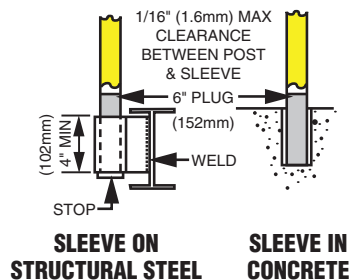


Kickplate to Post

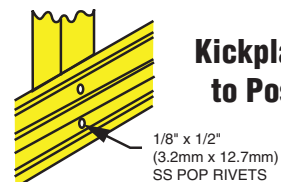


CUT 1-1/2" x 1-1/2" x 4" (38mm x 38mm x 102mm) ANGLE FROM 2" x 2" (51mm x 51mm) TUBE

Kickplate Corner





Kickplate Splice


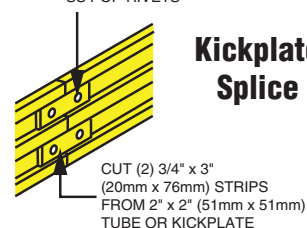


SQUARE HANDRAIL COMPONENTS


POST OR RAIL

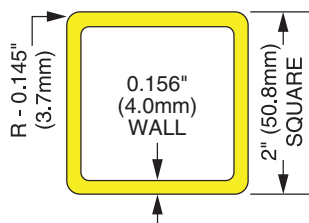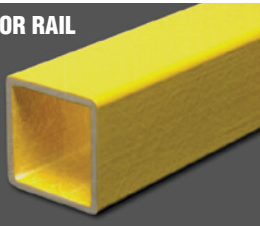



SQUARE PLUG

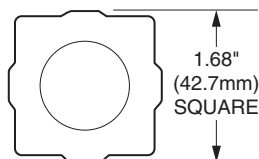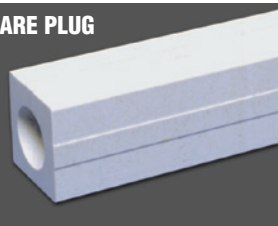



SPLIT TUBE CONNECTOR




KICKPLATE





90° CORNER

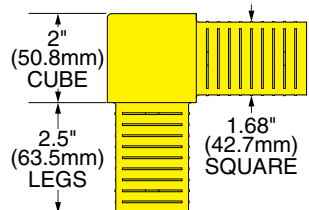

ADJUSTABLE CORNER ASSEMBLY

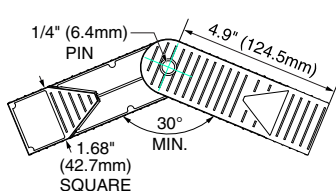


POST BASE (Mounted To Post)

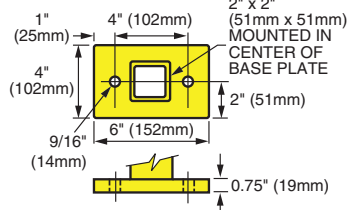


END CAP



Note: For Capping Tubes (Special Construction)

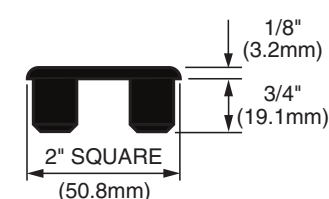

STANDARD ROUND HANDRAIL CONSTRUCTION

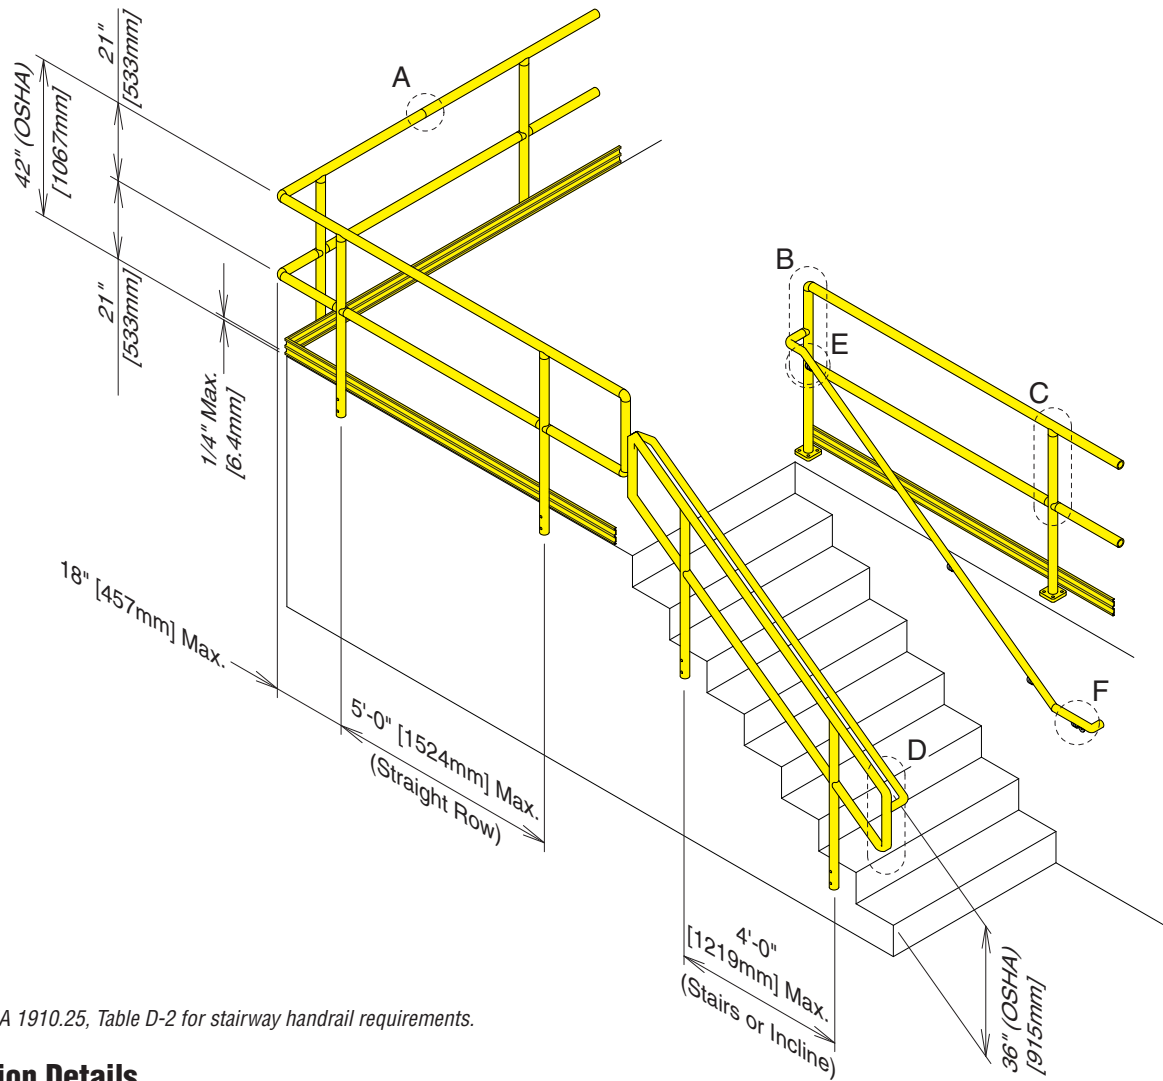


Refer to OSHA 1910.25, Table D-2 for stairway handrail requirements.


Connection Details

All components secured with epoxy.


A RAIL SPLICES

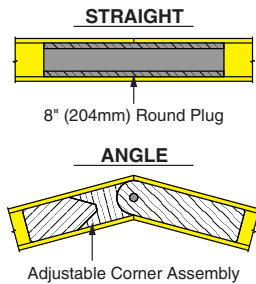


B END POST TO RAIL

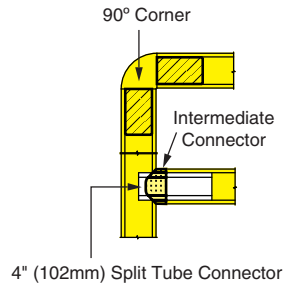


E POST MOUNTED RAIL

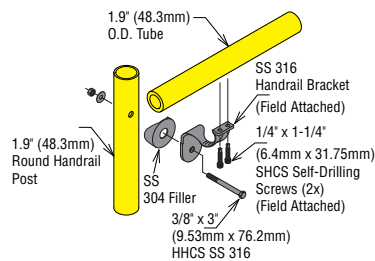


C LINE POST TO RAIL

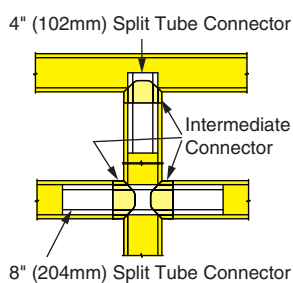


D STAIR RAIL RETURN

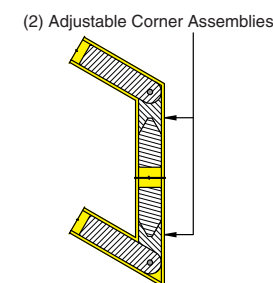


F WALL MOUNTED RAIL

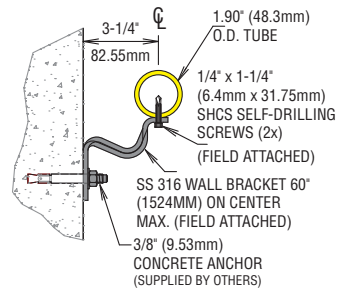

RECOMMENDED ROUND POST AND KICK PLATE INSTALLATION

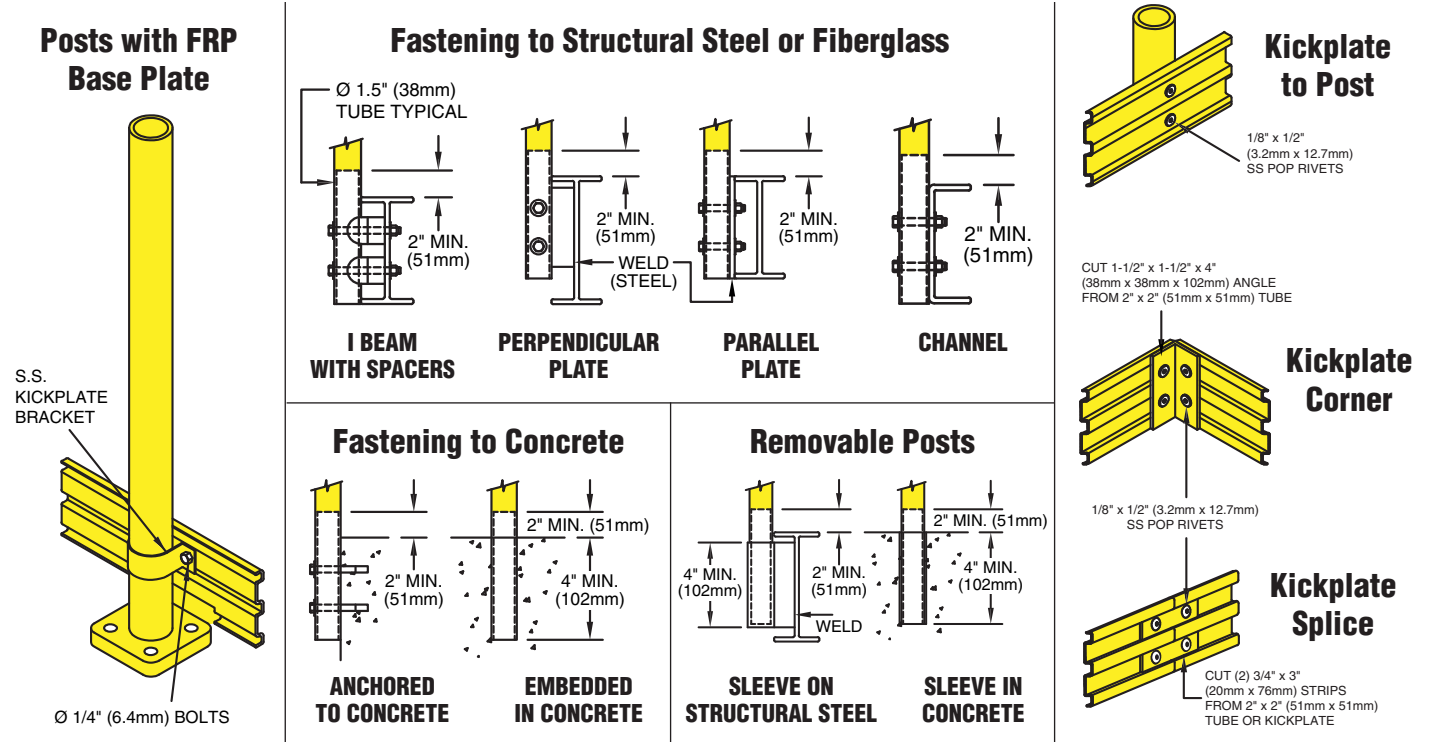

ROUND HANDRAIL COMPONENTS

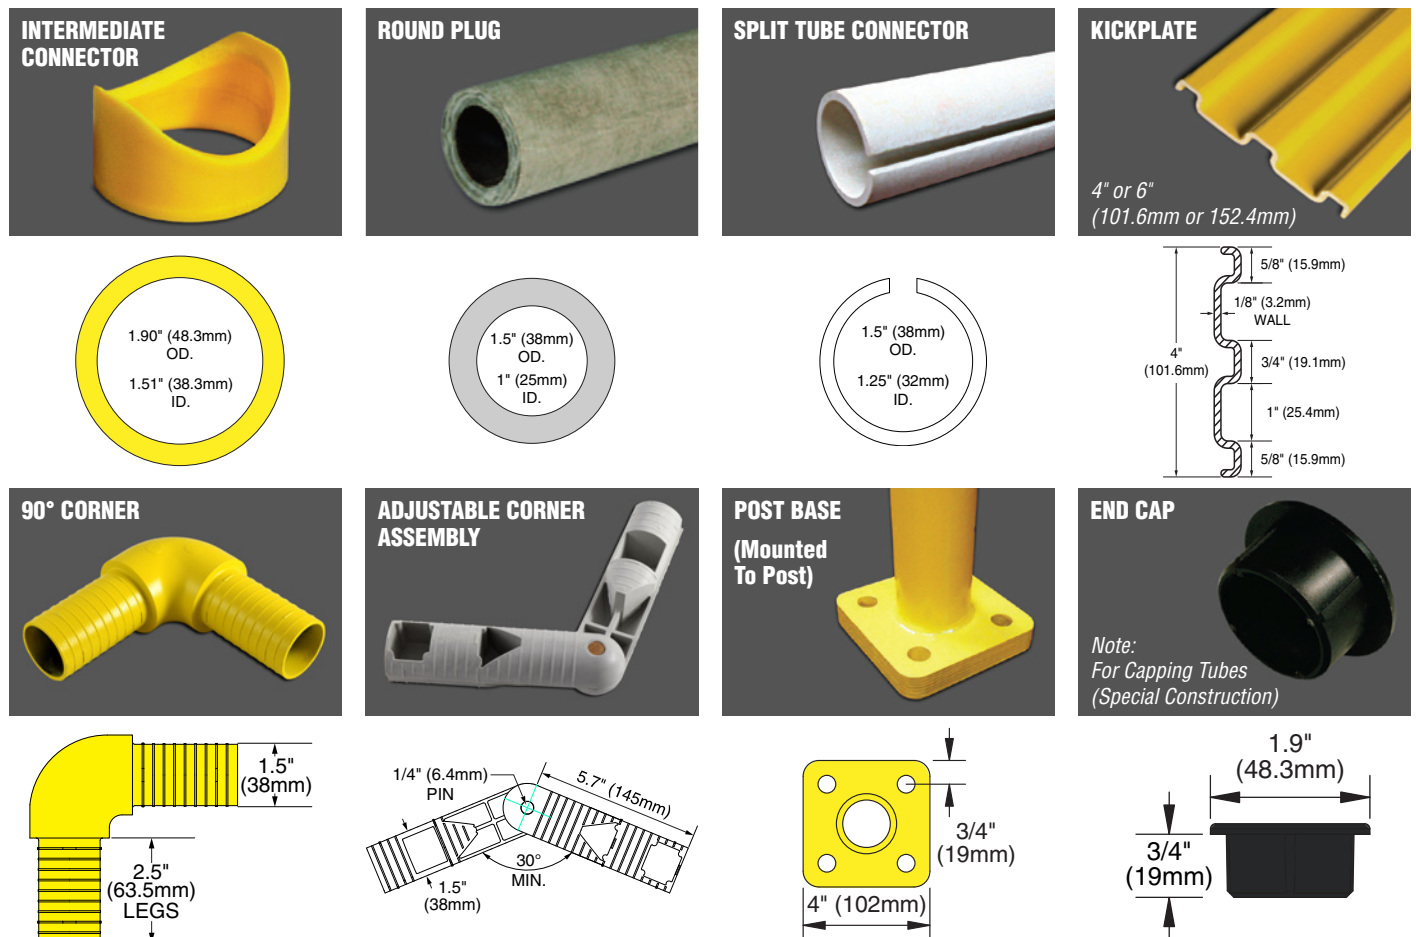

ECONOMY CHANNEL TOP HANDRAIL CONSTRUCTION

SAFRAIL™ channel top industrial fiberglass handrail is an economical commercial railing system designed for long runs on platforms and walkways. The railing system is designed for fabrication efficiency and is not particularly well-suited for stair rails with twists and turns. SAFRAIL™ channel top can be used in combination with round and square SAFRAIL™.

Advantages


The benefits of designing a SAFRAIL™ channel top fiberglass handrail system are:

- Economical installation of long, straight runs
- Fewer components, reduced freight cost
- No epoxy required
- All riveted connections


Safety

The channel top handrail system meets OSHA strength requirements. It has been independently tested and meets British Standard EN ISO 14122-3:2001 requirements. The handrail system sustained a falling weighted bag impact force of 216.5 ft-lb (293.6 N-m).


A RAIL SPLICE

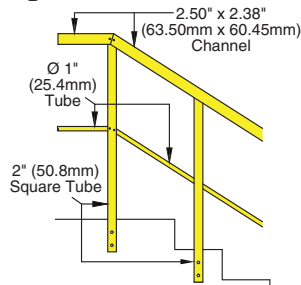


B END RETURN

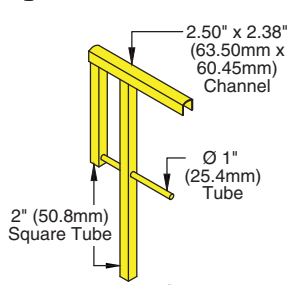

C CORNER POST

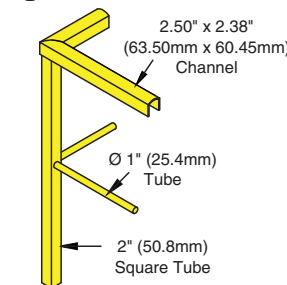


G ALTERNATIVE RAIL SPLICES

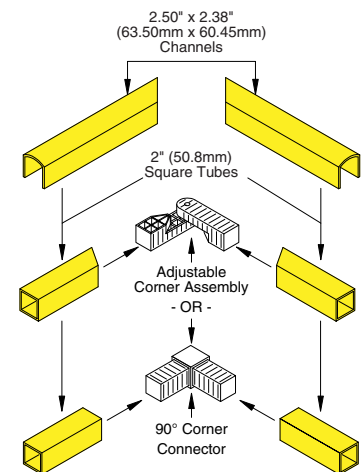


Note: Field epoxy adjustable corner inside 2" (50.8mm) tubes at angled intersections. Slip inside 2.5" (63.5mm) channels.


H POST MOUNTED RAIL

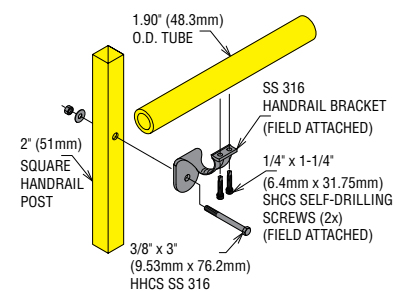


D END POST TO RAIL

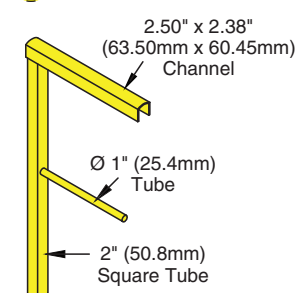


E CORNER END RETURN

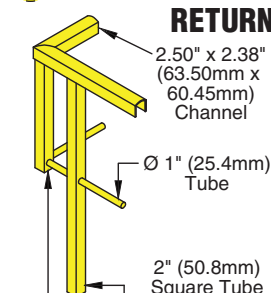

F TOP & MID RAIL SPLICE

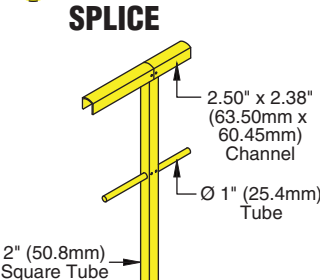


J WALL MOUNTED RAIL

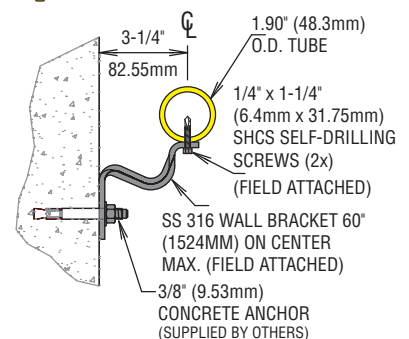


Refer to OSHA 1910.25, Table D-2 for stairway handrail requirements.

RECOMMENDED CHANNEL TOP POST AND KICK PLATE INSTALLATION


Handrail Post, Top Rail & Mid Rail

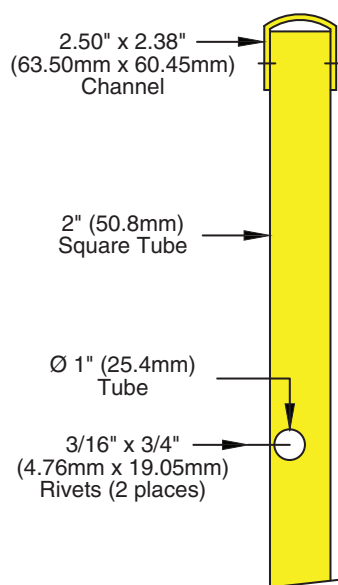


Handrail Post Plug Detail

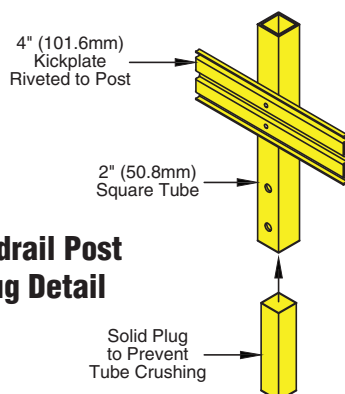


Kickplate Corner at Post

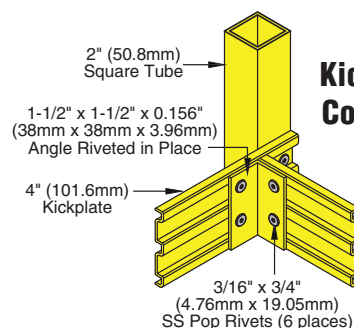

Kickplate Corner Splice

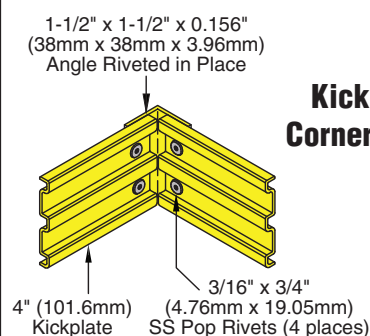


Kickplate Straight Splice

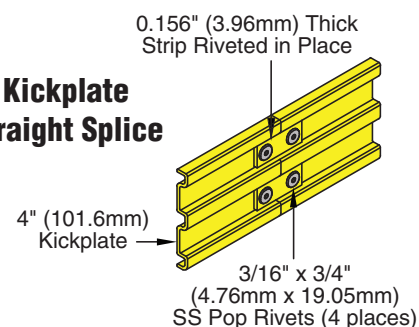


CHANNEL TOP HANDRAIL COMPONENTS



TOP RAIL

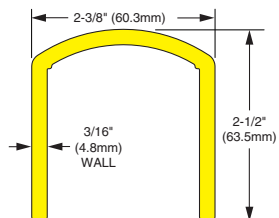


MID RAIL

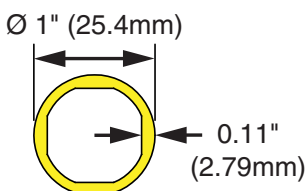


SQUARE PLUG

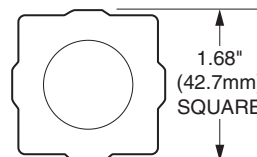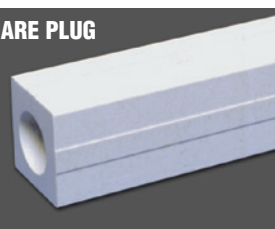



KICKPLATE




4" or 6"
(101.6mm or 152.4mm)





90° CORNER

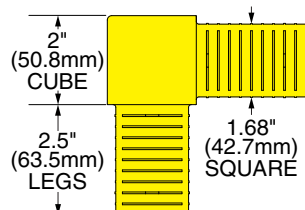


ADJUSTABLE CORNER ASSEMBLY

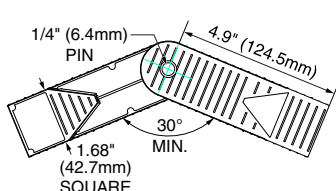


POST BASE (Mounted To Post)

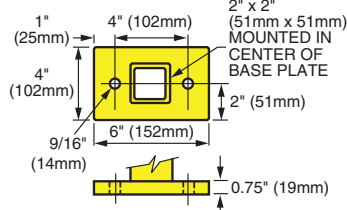

END CAP



Note:
For Capping Tubes
(Special Construction)

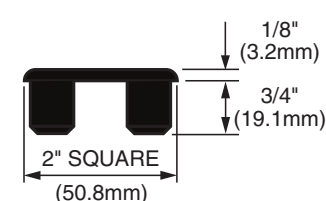

APPLICATIONS

Metal: 12 Years Exposure



Fiberglass: 16+ Years Exposure



In 1994, an industrial equipment supplier teamed with a coal company's engineering group to address corrosion problems at the Galatia, Illinois coal preparation plant. The coal preparation environment results in significant deterioration of carbon steel within two years and stainless steel in less than six. The coal company's goal was to use non-metallic structural products in the design of a new section of the plant.

Strongwell's SAFRAIL™ FRP square tube industrial handrail combined with DURAGRID® I-6000 FRP grating and stair treads were specified in all areas of the new section.

After sixteen years of service, Strongwell revisited the plant in 2012. The results were a testament to the superior performance of the pultruded FRP solution. There had not been a single corrosion related problem, while the metal structures and components around the fiberglass railing and platforms were failing.

BEFORE



AFTER



(Also featured on Cover) A chemical processing plant in Charleston, West Virginia was outfitted with square SAFRAIL™ FRP handrail along with DURAGRID® I-6000 FRP grating, EXTREN® FRP channels and angles and COMPOSOLITE® fiberglass building panels by a Strongwell fabricator. The fabricator designed, built, and installed the two new process vessels to replace old deteriorating wooden tanks, and provided new access walkways, railings, and covers for the two existing vessels.

BEFORE



AFTER




Primary Clarifiers at Albert Lea Wastewater Treatment Plant. One of the most corrosive areas in the water treatment process due to Hydrogen Sulfide and/or Sulfuric Acid. Aluminum clarifier covers trap the corrosive gases, which severely corroded the original steel handrail and grating.

FABRICATION METHODS

1. Cut components to length and miter where necessary.



2. Locate and drill holes for split tube connector. Must use 1.68" dia. core drill (available from Strongwell).

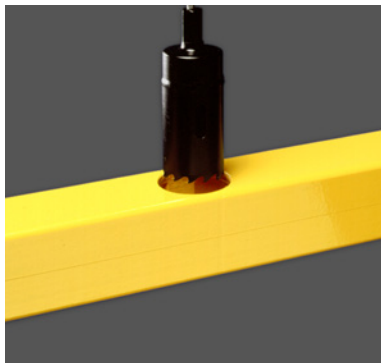

3. Apply recommended epoxy adhesive to connectors and inside tube (available from Strongwell).



4. Press together. Wipe off excess adhesive. 1/8" tension pins may be used at connections for field fabrication.



NOTE: Joints must be immobilized until cured. The recommended temperature for epoxy cure is 60°F (15°C) or above. Failure to use these installation and fabrication methods, including recommended epoxy adhesive and 1.68" dia. core drill, may cause failure.

List of Components & Accessory Items

- 2" x 2" x .156" (51 x 51 x 4mm) Square Tube, Yellow, Polyester Fire Retardant, UV Inhibited @ 240" (6100mm)
- 2-3/8" x 2-3/8" x 3/16" (60 x 60 x 5mm) Square Tube, Yellow, Polyester Fire Retardant, UV Inhibited @ 240" (6100mm)
- 4" Kickplate, Yellow, Polyester Fire Retardant, UV Inhibited @ 240" (6100mm)
- 6" Kickplate, Yellow, Polyester Fire Retardant, UV Inhibited @ 240" (6100mm)
- FRP Base Plate with Post — Total Height 40" (1016mm) (Polyester)
- 2-3/8" x 2-3/8" x 3/16" (60 x 60 x 5mm) Alternate Handrail Post, Routed Out, No Bottom Plugs
- Black End Caps
- Adjustable Corner Assembly (Total Assembly)
- 90° Corner Plug
- Kickplate Splice
- Kickplate 90° Splice
- Split Round Tube 8" (200mm) Length
- Split Round Tube 4" (100mm) Length
- Split Round Tube 144" (3660mm) Length
- 6" (150mm) Square Plug
- 144" (3660mm) Square Plug
- 1/8" x 1-1/2" Tension Pins
- Epoxy Kits — 1 Pint Yellow
- Core Drill (1.68" Dia.)
- 1/8" x 1/2" SS Pop Rivets
- 90° Corner Sample
- Tee Sample
- Mounting Bolts

Tools

- Electric Drill
- Core Drill
- Circular Saw
- 1/8" Drill Bits
- Hammer
- Circular Saw Blades
- Sandpaper

NOTE: Tungsten carbide-tipped core drill bit and 7" grit-edged tungsten carbide circular saw blades are recommended (available from Strongwell).

SAFRAIL™ LADDER AND CAGE SYSTEMS

SAFRAIL™ fiberglass ladders and ladder cages mounted on the sides of tanks and buildings are a common application in a wide range of industries. Fiberglass ladder and ladder cage systems have been in use since the 1950's in chemical plants and other corrosive environments. Even in complete immersion applications, fiberglass has outlasted and outperformed aluminum and steel and required little or no maintenance.

Sizes & Availability


SAFRAIL™ ladders are fabricated in a standard 18" (457mm) rung width configuration with 12" (305mm) rung spacings. Various ladder lengths can be produced as practical. Standard SAFRAIL™ ladder and ladder cage systems are designed and fabricated to meet the requirements of OSHA 1910.23 and 1926.1053. Custom colors and custom designed ladders and access cages can be fabricated upon request. Ladders can be shipped pre-assembled for installation in the field.

Materials of Construction

SAFRAIL™ ladders and ladder cage systems are produced using a premium grade polyester resin system with flame retardant and ultraviolet (UV) inhibitor additives. A vinyl ester resin system is available upon request for additional corrosion resistance. Standard side rails and cages are pigmented OSHA safety yellow. The rungs are a pultruded fiberglass polyester tube with a fluted, non-skid surface.

See the SAFRAIL™ Ladder and Cage Systems brochure for more information.

Standard Cage Walk Through Ladder with Base Mount

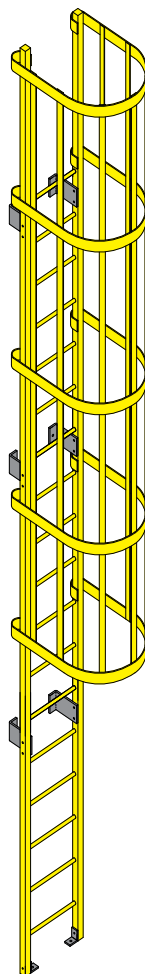

ISO 9001 Quality Certified Manufacturing Plants



BRISTOL LOCATION

400 Commonwealth Ave., Bristol, VA 24201 USA
(276) 645-8000

CHATFIELD LOCATION

1610 Highway 52 South, Chatfield, MN 55923-9799 USA
(507) 867-3479

www.strongwell.com

ST0418
© 2018 Strongwell