



## January 2021 Price List

**AIS**

## PRODUCT INFORMATION

Terms and Conditions . . . . .	3
Finishes and Lead-Times . . . . .	5

## PANELS

Divi Fast Track Permanent Monolithic Panel Availability Details . . . . .	6
Divi Linear Hard Surface Permanent Monolithic Panels . . . . .	7
Divi Linear Tackable Surface Permanent Monolithic Panels . . . . .	8
Divi Linear Quarter Glass Permanent Monolithic Panels . . . . .	9

## CONNECTORS

Divi Linear Base Raceway Shrouds, Wall Tracks and Wall Mounts . . . . .	10
Divi Linear Post Filler Kits . . . . .	11

## ELECTRICAL

Lateral Pass Through Jumpers and Panel-to-Panel Jumpers . . . . .	12
Duplex Outlets . . . . .	13
Base In-Feeds and Ceiling In-Feeds . . . . .	14
Data Plate Kits, Power/Data Pole Kits and Hardwire Junction Boxes . . . . .	15
In-Line Power/Data Pole Combination Kits . . . . .	16
In-Line Power/Data Pole Retrofit Kits and Pole Dividers . . . . .	17

## TABLES

Height Adjustable Tables and Round Tables . . . . .	18
---	----

## WORKSURFACES

Grommet Specifications . . . . .	19
Rectangular and Curvilinear Corner Worksurfaces . . . . .	20
Divi Bullpen Surfaces . . . . .	21
Rectangular Worksurfaces for Height Adjustable Tables . . . . .	22

## SUPPORT

Height Adjustable Table Bases . . . . .	23
A-Legs . . . . .	24
N-Legs and Pedestal-to-Panel Attachment Brackets . . . . .	25
Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels . . . . .	26

## SCREENS

Frameless Up-Mount Glass Screens and Pre-Drilled Topcaps . . . . .	27
--	----

## STORAGE

Mid-Height Shelf and Flipper Doors Units . . . . .	28
L Series Pedestals . . . . .	29
L Series Laterals and Replacement Pulls . . . . .	30

## ACCESSORIES

Task Lights and Task Light Cord Managers . . . . .	31
Monitor Arms . . . . .	32
Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats . . . . .	33
Tackboards, Lock Cores and Keys . . . . .	34

## SEATING

Task and Side Chairs . . . . .	35
Volker Cubes . . . . .	36

## Terms and Conditions

**Pricing & Discounts**

Pricing is determined by size of order and other criteria. Refer to your Divi Fast Track Pricing Program for complete guidelines.

- Note discount being used.
- The list and net amount of order must be clearly indicated on all purchase orders.
- Account must be in good standing and have no past due balance for purchase order to be accepted.
- If there are any discrepancies on a purchase order, dealer will be required to sign off on final order detail. Signature by dealer constitutes acceptance of new purchase order amount and item details contained therein.

**Order Changes & Cancellations**

Order changes and cancellations are not allowed with the Fast Track program due to the enhanced lead times.

**Order Submission**

Orders should be placed electronically through the AIS website using Order Request in DealerNet – <https://dealernet2.ais-inc.com/Orders/Submit>. Any questions on how to submit and track orders should be directed to your Customer Service Representative.

For questions about Divi Fast Track please contact your CSR or email: [divifasttrack@ais-inc.com](mailto:divifasttrack@ais-inc.com)

P.O.'s should clearly state "Divi Fast Track" in subject line and have the electronic file.

Purchase orders must be received by 12:00 PM EST in order for the following day to be considered start of ship date lead-time.

All orders must be submitted with a consolidated SP4 or Sif.

Dealer must specify which discount structure they are using- SPIF or no SPIF.

Orders can be tracked online at  
<https://dealernet2.ais-inc.com/Requests/>

**Payment Terms**

A signed purchase order is required for all orders, unless waived by an officer of Affordable Interior Systems, Inc. (AIS). First time orders require a 50% deposit, unless waived by an officer of Affordable Interior Systems, Inc. (AIS). With approved credit, all balances are due within 30 days of invoice date.

**Credit**

Three trade references (including bank and account number) are required. All accounts with balances beyond 30 days of invoice date will be put on credit hold until the balance is paid in full.

**Acknowledgments**

Every order is acknowledged via e-mail. Dealer must sign the acknowledgment and return to Customer Service within 24 hours. Orders will be manufactured and invoiced based upon the information on the acknowledgment. If there is any discrepancy, please notify AIS immediately. Orders are accepted by AIS per terms on the acknowledgment. Note order is in production when acknowledgment sent.

If you do not want the merchandise earlier than the specified date, please write "Do not ship for arrival before \_\_\_\_\_" on your purchase order.

**Add On Orders**

Add on orders are allowed within 30 days to receive the same discount. Actual freight applies. Please contact Customer Service for a freight code. Must be Divi Fast Track product to receive add-on discount.

**Sales Tax**

Affordable Interior Systems, Inc. is registered with multiple states. In this case, we are required by law to collect and remit sales tax to the states in which we are registered. Please download and complete the Multi-Jurisdictional Sales Tax Exemption Form from our website for all states which your company has a valid resale tax exemption certificate. Fax a completed form to our Accounting Department at (978) 562-0811. Multi-Jurisdictional Sales Tax Exemption Forms are available on DealerNet.

**Freight Policy**

FOB origin, freight pre-paid. Delivery includes standard Monday through Friday 7am to 5pm deliveries.

**Tracking Shipments**

You will receive an email confirmation once your order has shipped that includes the following information: carrier, contact information and shipping reference number. AIS strongly encourages you to contact the carrier in order to track your shipments closely for an estimated delivery date.

**Guaranteed Deliveries**

AIS will gladly accept requests for delivery times and for drop shipments to job sites on full truckload shipments. AIS is not able to guarantee specific delivery times for any less than truckload (LTL) shipments. Please contact AIS Customer Service if you require delivery on a specific day during standard business hours and for a non-rushed shipment. We offer a guaranteed two hour window receipt on full truckload shipments for \$250 for one truckload, or two or more truckloads for \$500 during standard business hours. Your CSR must be notified a week prior to your ship date otherwise additional fees may apply. After-hours, holiday and weekend shipments may be arranged for an additional charge on full truckload shipments. Please contact AIS Customer Service for those rates. Please note that in the case of a missed guaranteed shipment the carrier is only liable for that additional charge, not for labor or other damages.

**Call Before Deliveries**

You may arrange a delivery with the carrier by noting "Call Before Delivery" on your order, which will typically delay receipt of the product to you by about one day. You cannot add a call before delivery on a truckload shipment if you also have a guaranteed delivery arranged. Please note that call before deliveries are estimates only and should not be used when shipping direct to a job site. AIS is not responsible for any damages incurred for any late deliveries, including labor or any other charges resulting from unforeseen delays by any AIS or dealer chosen carrier. AIS strongly urges dealers to take into consideration the risk that carriers typically allow for a 2 day delivery range.

**Consolidating Orders**

AIS acknowledges orders with a two day ship date range. We are committed to shipping your products within that acknowledged range. Shipments may be combined and consolidated in order to create a full truckload shipment. Shipments may also be hand loaded in order to avoid LTL spillover. Full truckload shipments have less variable transit times as well as significantly less freight damage. Our goal is always to provide you with the best possible delivery service. Transportation efforts are managed as part of an ongoing effort to improve AIS's transportation efficiency thereby saving fuel, reducing emissions, and reducing air pollution associated with AIS's transportation activities.

**Please note:**

Dealer may incur additional carrier Accessorial Fees if not specified and quoted at the time of order for the following, which may include but are not limited to:

- No loading dock
- Redirect of product
- Refusal of product
- Storage
- Special truck size (standard is 53" trailer)
- Street unloads
- Lift gate requirement
- Detention charges after 2 hours of unload time for TL and 30 minutes for LTL

## Terms and Conditions

### Deductions

Deductions from invoices are not allowed, for any reason, without authorization from AIS.

### Delay of Shipment

Acceptance of AIS acknowledgment confirms order ship date. If dealer requests delay of shipment for any period greater than one day from scheduled ship date, storage fees will be assessed. Dealer must submit purchase order for estimated storage costs.

### Freight Claims

AIS will file freight claims for loss or damage if policy is followed. In order to make this policy maintainable, certain requirements must be met by the consignee in accordance with freight laws and carrier policies. These requirements are as follows:

All damage or lost freight should be reported to AIS within 72 hours of receipt. In the case of obvious damage, it must be noted in short detail on delivery receipt (i.e. scratched surfaces, dented cartons, missing pieces).

If missing or damaged freight is discovered after receipt is completed, consignee must notify Carrier or AIS within 72 hours and request a corrected delivery receipt acknowledging loss or damage.

A detailed list of missing or damaged pieces is required in order to assess the value of the claim. Upon receipt of this information, AIS will contact the carrier and request an inspection or waiver thereof.

In the case of concealed damage, AIS must be informed within 10 days of receipt of product. All damaged product and packaging must be preserved as received pending an inspection or waiver of inspection by the carrier. All product that has a claim pending against it must be available for carriers to salvage once the claim is paid.

It is highly encouraged that digital photos are taken of any suspected freight damage. Photographic evidence substantiating claims should be provided electronically to AIS.

Any failure to adhere to these policies and procedures will result in claim responsibility shifting from AIS to the consignee.

### Force Majeure

Seller shall not be liable for failure to perform or for delay in performance due to fire, flood, strike, or any other labor difficulty, act of God, act of any governmental authority or of the Purchaser, riot, embargo, fuel or energy shortage, wrecks or delay in transportation, inability to obtain necessary labor, materials, or manufacturing facilities from usual sources or failure of suppliers to meet their contractual obligations or due to any cause beyond its reasonable control. In the event of delay in performance due to any such cause, Seller reserves the right to extend the date of delivery or time for completion by a period of time reasonably necessary to overcome the effect of such delay, to allocate any available supply of goods in a manner it deems reasonable, or to cancel any purchase order.

### Liability

Seller, its contractors, authorized dealers and subcontractors or suppliers of any tier shall not be liable in contract, in tort (including negligence and/or strict liability) or otherwise for any special, indirect, incidental or consequential damages whatsoever, including, without limitations, damages or loss of other property or equipment, loss of profits or revenue or loss of use of equipment (including additional expenses incurred in using existing facilities). The remedies set forth herein are exclusive, and the liability of Seller with respect to any contract or anything done in connection therewith, such as the performance or breach thereof, or from the manufacture, sale, delivery, resale or use of any Product covered by or furnished under the order, whether in contract, in tort (including negligence and/or strict liability) or otherwise shall not exceed the price of the Product or part on which such liability is based.

### Local Codes

Seller considers its product to be office furniture and subject to all applicable local fire, electrical and building codes. Since local codes may vary, the purchaser is responsible for the proper application and installation of AIS product in accordance

with the requirements of these local codes. Engineering, research and testing have been conducted to have electrical components of AIS products conform to national electrical codes. Only Underwriters Laboratories (UL) tested and approved electrical components are used in electrical devices. See [www.UL.com](http://www.UL.com) for complete UL listing information. In addition, all panels and components used by AIS have been UL approved. Seller shall not be responsible for any damages or expenses resulting from Purchaser's specifications not conforming to the requirements of the law or local building codes, unless it specifically agrees in writing to do so. Since Seller has no control over the use to which others may put its Products, each user or specifier should determine the Products' suitability for the particular application.

### Limited Lifetime Warranty

This warranty is given to the initial purchaser and is valid for as long as the product is owned by the original Buyer. The warranty, which runs from the date of manufacture, covers defects in materials and craftsmanship found during normal usage of the products during the warranty period. If a product is defective, and if written notice of the defect is given to AIS within the applicable warranty period, AIS (at its option) will either repair or replace the defective product with a comparable component or product. The limited lifetime warranty applies to all products regardless of the numbers of shifts the product is used each day except as noted below.

Applicable Warranty Period	Products / Restrictions
Lifetime (as defined below)	All AIS branded products (except as noted below)
Ten (10) Years	Electrical products (including Height Adjustable Tables)
Five (5) Years	Moving parts, which include keyboard mechanisms, locks, suspensions, height adjustable table mechanisms, casters as well as all AIS fabrics / upholstery.
Five (5) Years	Calibrate Laminate Storage / Casegoods, Casegood cushions (with upholstery fabric)

This warranty does not apply to "normal wear and tear", damage caused by carrier, damage caused by transport of product from one site or location to another, alterations to the product not expressly authorized by Seller, and products considered to be of a consumable nature such as bulbs and light ballast. It also does not apply to "customer's own material" (i.e. material specified by Buyer that is not a standard AIS product offering) used in the manufacture of AIS products. A product will not be considered defective, and Seller will not be obligated to replace it, if the product is not installed properly or is used in a "non-standard" fashion as prescribed by AIS. It is at the sole discretion of AIS to make a determination if a defect is due to improper product installation.

This warranty is presented in lieu of all other warranties, express or implied, including, but not limited to, any implied warranties of merchantability of fitness for a particular purpose. The customers exclusive remedy with respect to any and all losses or damages resulting from any cause whatsoever shall be repair or replacement as specified above.

Seller (AIS) shall not be liable under any circumstances for consequential, economic, or incidental damages of any nature, including without limitation, damages for personal injury or damages to property, and however occasioned, whether alleged as resulting from breach of warranty or contract by AIS or negligence of AIS or otherwise.

International warranties may differ.

### AIS Supported Specification Software

AIS provides (at no cost) symbols and data libraries for the following applications. Only Authorized AIS Dealers may purchase AIS products. AIS supported software libraries are:

20-20 GIZA  
20-20 CAP  
Project Matrix

## Finishes and Lead-Times

## DIVI FAST TRACK FINISH OPTIONS

Panel Fabric Options		Upholstery Fabric Options*		Laminate Options	
Name	Grade	Name	Grade	Name	Grade
Avenue Dusk	A	Mirador Bahamas	A	Absolute Acajou†	A
Avenue Park Place	A	Mirador Lake Blue	A	Aimtoo Savatre	A
Cape Cod Chatham	A	Mirador Light Green	A	Looks Likatre†	A
Cape Cod Falmouth	A	Mirador Midnight Black	A	Maritime Dune†	A
Cape Cod Harwich	A	Mirador Navy Blue	A	Midwest Maple	A
Cape Cod Hyannis	A	Mirador Neutral	A	Summer Drops	A
Cape Cod Martha's Vineyard	A	Mirador Pacific	A	True White	A
Cape Cod Nantucket	A	Mirador Red	A	Trytoo Savatre†	A
Cape Cod Provincetown	A	Mirador Rusty	A	White Chocolate†	A
Engage Denim	A	Mirador Stone	A	†Indicates a textured laminate.	
Engage Neutral	A	Mirador Storm	A		
Engage Rain Cloud	A	Mirador comes standard as an antimicrobial upholstery. *Available on ped cushions and Volker Cubes only.		2MM Edgeband Options	
Engage Toffee	A			Name	Grade
New England Boston	A	Divi Trim, Base, Storage and X-Base Paint Finish Options		Absolute Acajou	A
New England Cambridge	A	Name	Grade	Aimtoo Savatre	A
New England Concord	A	Black	A	Black	A
New England Dixville Notch	A	Grey Value 1	A	Grey Value 1	A
New England Hartford	A	Medium Tone	A	Looks Likatre	A
New England Lexington	A	Satin White	A	Maritime Dune	A
New England Newton	A	Height Adjustable Table Paint Finish Options		Medium Tone	A
New England Providence	A	Day-to-Day Base Options		Midwest Maple	A
New England Rockport	A	Name	Grade	Satin White	A
New England Salem	A	Black	A	Summer Drops	A
New England York	A	Metallic Silver	A	True White	A
Rainfall Bliss	A	Satin White	A	Trytoo Savatre	A
Rainfall Shore	A	E Series Base Options		White Chocolate	A
Rainfall Sundown	A	Name	Grade	Glass Finish Options	
Rainfall Twilight	A	Metallic Silver	A	Name	Grade
Simplicity Blue Smooth	A			Clear	A
Simplicity Chamoise	A				
Simplicity Grey Blue	A				
Simplicity Sandy Pebble	A				
Simplicity Stone	A				
Stream Light Sand	A				
Twizzle Tan	A				

## 10-Day Lead Time

The ten day lead-time does not include 24-hour order processing period.

Orders missing part numbers and corresponding required finish information are considered incomplete. These orders will not be processed until correct information is received.

Lead-time begins 24 hours after receipt of complete and processable order as defined in the purchase order requirement section of this program.


Lead-time for orders containing non-program items may vary. AIS Customer Service can assist in clarifying mixed order lead-time.

True Divi Fast Track orders receive 10-day leadtime, blended orders will have leadtimes assigned per items on actual order.

## Divi Fast Track Permanent Monolithic Panel Availability Details

### Permanent Monolithic Panel Availability

Fabric Covered - Hard Surface - Powered/Non-Powered:

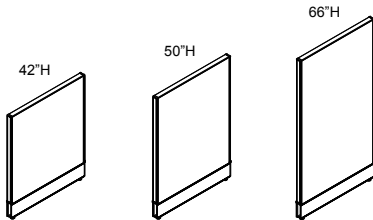


**Nominal Heights:**

42", 50", 66" (Actual Min. Height = Nominal -  $\frac{1}{16}$ ") - 1  $\frac{1}{2}$ " Leveling Glide Range

**Widths:**

24", 30", 36", 42", 48", 60" (Actual Width = Nominal +  $\frac{1}{8}$ ")

Fabric Covered - Tackable Surface - Powered/Non-Powered:




**Nominal Heights:**

50", 66" (Actual Min. Height = Nominal -  $\frac{1}{16}$ ") - 1  $\frac{1}{2}$ " Leveling Glide Range

**Widths:**

24", 30", 36", 42", 48", 60" (Actual Width = Nominal +  $\frac{1}{8}$ ")

Quarter Glass - Fabric Covered Hard Surface - Powered/Non-Powered:




**Nominal Heights:**

50", 66" (Actual Min. Height = Nominal -  $\frac{1}{16}$ ") - 1  $\frac{1}{2}$ " Leveling Glide Range

**Widths:**

24", 30", 36", 42", 48" (Actual Width = Nominal +  $\frac{1}{8}$ ")


### Permanent Monolithic Panel Profile



Duplex outlets are ordered separately. Two outlets can be used per side, four total per panel. Outlets utilize top base cover holes.

Duplex outlet covers hide unused duplex outlet or data locations. Six are shipped with every panel. A 24"W gets three duplex outlet covers. Order extra as needed.

Snap-in data jack housing (order separately) accommodates six Hubbell or compatible data/voice jacks. Snap-in housings may not be used back to back on a spine wall.





Data cable raceway cavity is approximately 2" wide by 3" tall and can accommodate between 32 and 40 Cat 6 data cables, depending on how tightly they are packed.

Cat 5 and 6 data jacks extend beyond center line of raceway, preventing jack housings to be used back to back on a spine. Plan on using "cross corners" on panel to eliminate this issue.

## Divi Linear Hard Surface Permanent Monolithic Panels

DIVI LINEAR HARD SURFACE PERMANENT MONOLITHIC  
NON-POWERED PANELS

H	W	Model Number	List
42	24	P-DLFRPM4224	498
42	30	P-DLFRPM4230	539
42	36	P-DLFRPM4236	575
42	42	P-DLFRPM4242	610
42	48	P-DLFRPM4248	646
42	60	P-DLFRPM4260	773
50	24	P-DLFRPM5024	534
50	30	P-DLFRPM5030	593
50	36	P-DLFRPM5036	650
50	42	P-DLFRPM5042	709
50	48	P-DLFRPM5048	772
50	60	P-DLFRPM5060	919
66	24	P-DLFRPM6624	615
66	30	P-DLFRPM6630	680
66	36	P-DLFRPM6636	739
66	42	P-DLFRPM6642	802
66	48	P-DLFRPM6648	862
66	60	P-DLFRPM6660	1,032



Divi Linear Trim

## Specify


## Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Color Selection for Base Cover
- Raceway Divider Option (+50)
- Data Access Option (+15)

Permanent Monolithic Non-Powered Panels - Hard Surface are fabric covered hard surface panels. Panels may be ordered with power/data access base covers and/or raceway divider. Each panel includes all connection hinges needed for each panel. Features Divi Linear trim.

DIVI LINEAR HARD SURFACE PERMANENT MONOLITHIC  
POWERED PANELS

H	W	Model Number	List
42	24	P-DLFPPM4224	765
42	30	P-DLFPPM4230	805
42	36	P-DLFPPM4236	838
42	42	P-DLFPPM4242	872
42	48	P-DLFPPM4248	910
42	60	P-DLFPPM4260	1,030
50	24	P-DLFPPM5024	802
50	30	P-DLFPPM5030	856
50	36	P-DLFPPM5036	912
50	42	P-DLFPPM5042	971
50	48	P-DLFPPM5048	1,030
50	60	P-DLFPPM5060	1,173
66	24	P-DLFPPM6624	877
66	30	P-DLFPPM6630	940
66	36	P-DLFPPM6636	1,007
66	42	P-DLFPPM6642	1,059
66	48	P-DLFPPM6648	1,122
66	60	P-DLFPPM6660	1,286



Divi Linear Trim

## Specify

## Notes


- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Color Selection for Base Cover
- Raceway Divider Option (+50)

Permanent Monolithic Powered Panels - Hard Surface are fabric covered hard surface panels. Includes 8 wire 4 circuit powerway and power/data access base covers. Panels may be ordered with a raceway divider. Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. Each panel includes all connection hinges needed for each panel. Duplex outlets and electrical jumpers are specified separately. See "Electrical". Features Divi Linear trim.

Divi Linear Tackable Surface Permanent Monolithic Panels

DIVI LINEAR TACKABLE SURFACE PERMANENT MONOLITHIC  
NON-POWERED PANELS


H	W	Model Number	List
50	24	P-DLTRPM5024	650
50	30	P-DLTRPM5030	689
50	36	P-DLTRPM5036	744
50	42	P-DLTRPM5042	796
50	48	P-DLTRPM5048	847
50	60	P-DLTRPM5060	1,008
66	24	P-DLTRPM6624	734
66	30	P-DLTRPM6630	785
66	36	P-DLTRPM6636	842
66	42	P-DLTRPM6642	896
66	48	P-DLTRPM6648	951
66	60	P-DLTRPM6660	1,115



Divi Linear Trim

DIVI LINEAR TACKABLE SURFACE PERMANENT MONOLITHIC  
POWERED PANELS

H	W	Model Number	List
50	24	P-DLTPPM5024	940
50	30	P-DLTPPM5030	981
50	36	P-DLTPPM5036	1,030
50	42	P-DLTPPM5042	1,085
50	48	P-DLTPPM5048	1,133
50	60	P-DLTPPM5060	1,298
66	24	P-DLTPPM6624	1,010
66	30	P-DLTPPM6630	1,062
66	36	P-DLTPPM6636	1,115
66	42	P-DLTPPM6642	1,170
66	48	P-DLTPPM6648	1,226
66	60	P-DLTPPM6660	1,391



Divi Linear Trim

Specify	Notes
<ul style="list-style-type: none"> <li>Fabric Selection for Side A and B</li> <li>Paint Selection for Panel Trim</li> <li>Color Selection for Base Cover</li> <li>Raceway Divider Option (+50)</li> <li>Data Access Option (+15)</li> </ul>	<p>Permanent Monolithic Non-Powered Panels - Tackable Surface are fabric covered, sound absorbing tackable panels. Panels may be ordered with power/data access base covers and/or raceway divider. Each panel includes all connection hinges needed for each panel. Features Divi Linear trim.</p>



Specify	Notes
<ul style="list-style-type: none"> <li>Fabric Selection for Side A and B</li> <li>Paint Selection for Panel Trim</li> <li>Color Selection for Base Cover</li> <li>Raceway Divider Option (+50)</li> </ul>	<p>Permanent Monolithic Powered Panels - Tackable Surface are fabric covered, sound absorbing tackable panels. Includes 8 wire 4 circuit powerway and power/data access base covers. Panels may be ordered with a raceway divider. Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. Each panel includes all connection hinges needed for each panel. Duplex outlets and electrical jumpers are specified separately. See "Electrical". Features Divi Linear trim.</p>



## Divi Linear Quarter Glass Permanent Monolithic Panels

DIVI LINEAR QUARTER GLASS PERMANENT MONOLITHIC  
NON-POWERED PANELS



H	W	Model Number	List
50	24	P-DLQGWPRPM5024	1,037
50	30	P-DLQGWPRPM5030	1,136
50	36	P-DLQGWPRPM5036	1,238
50	42	P-DLQGWPRPM5042	1,340
50	48	P-DLQGWPRPM5048	1,437
50	60	P-DLQGWPRPM5060	1,631
66	24	P-DLQGWPRPM6624	1,195
66	30	P-DLQGWPRPM6630	1,320
66	36	P-DLQGWPRPM6636	1,446
66	42	P-DLQGWPRPM6642	1,573
66	48	P-DLQGWPRPM6648	1,697
66	60	P-DLQGWPRPM6660	1,946



Divi Linear Trim

DIVI LINEAR QUARTER GLASS PERMANENT MONOLITHIC  
POWERED PANELS

H	W	Model Number	List
50	24	P-DLQGWPPM5024	1,255
50	30	P-DLQGWPPM5030	1,362
50	36	P-DLQGWPPM5036	1,466
50	42	P-DLQGWPPM5042	1,567
50	48	P-DLQGWPPM5048	1,670
50	60	P-DLQGWPPM5060	1,873
66	24	P-DLQGWPPM6624	1,425
66	30	P-DLQGWPPM6630	1,554
66	36	P-DLQGWPPM6636	1,681
66	42	P-DLQGWPPM6642	1,811
66	48	P-DLQGWPPM6648	1,940
66	60	P-DLQGWPPM6660	2,197



Divi Linear Trim

## Specify

## Notes

- Style Selection for Glass Insert
  - Fabric Selection for Side A and B
  - Paint Selection for Panel Trim
  - Color Selection for Base Cover
  - Raceway Divider Option (+50)
  - Data Access Option (+15)
- Permanent Monolithic Non-Powered Quarter Glass Panels are fabric covered hard surface panels with an aluminum wrapped glass insert at the top section of the panel. Panels may be ordered with power/data access base covers and/or raceway divider. Each panel includes all connection hinges needed for each panel. 33" fabric height for 50" high panels, 49" fabric height for 66" high panels, 65" fabric height for 82" high panels. Features Divi Linear trim.

## Specify



## Notes

- Style Selection for Glass Insert
  - Fabric Selection for Side A and B
  - Paint Selection for Panel Trim
  - Color Selection for Base Cover
  - Raceway Divider Option (+50)
- Permanent Monolithic Quarter Glass Powered Panels are fabric covered hard surface panels with an aluminum wrapped glass insert at the top section of the panel. Includes 8 wire 4 circuit powerway and power/data access base covers. Panels may be ordered with a raceway divider. Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. Each panel includes all connection hinges needed for each panel. Duplex outlets and electrical jumpers are specified separately. See "Electrical". 33" fabric height for 50" high panels, 49" fabric height for 66" high panels, 65" fabric height for 82" high panels. Features Divi Linear trim.

## Divi Linear Base Raceway Shrouds, Wall Tracks and Wall Mounts


### DIVI LINEAR 90° 2-WAY BASE RACEWAY SHROUDS

Model Number	List	Raceway Divider
P-DLBS90	19	+8





### DIVI LINEAR 90° 3-WAY BASE RACEWAY SHROUDS

Model Number	List	Raceway Divider
P-DLBS3W	19	+8



### DIVI LINEAR END BASE RACEWAY SHROUDS

Model Number	List
P-DLSEOR	19



#### Specify

- Color Selection for Shroud Cover
- Raceway Divider Option


#### Notes

Base Raceway Shrouds are required to trim base raceways in order to cover data/electrical cable exposure.

90° 2-Way Base Raceway Shrouds are required to trim base raceways at 90° panel connections. 90° 3-Way Base Raceway Shrouds are required to trim base raceways at 90° 3-way panel connections. End Base Raceway Shrouds are required to trim base raceways at the end of panel runs.

### WALL TRACKS

H	Model Number	List
60	A-WTRK60	136



#### Specify


- Paint Selection

#### Notes

Wall Track mounts to fixed walls to provide slotted channel for panel hung items. Track will sit approximately 5" off floor when leveled with top of panels to accommodate wall cover base. Hardware for mounting wall track to walls is not included. Wall track may not be shared between shelf units or flipper door units. Two sticks of Wall Track are required for each unit being mounted.

### DIVI LINEAR WALL MOUNT KITS

H	Model Number	List
42	P-DLWMKIT42	82
50	P-DLWMKIT50	92
66	P-DLWMKIT66	120



#### Specify

- Paint Selection



#### Notes

Wall Mount Kits mount panel perpendicular to fixed wall. Specify according to the height of the panel to be mounted. Wall mount hardware to attach wall mount to wall is not included. Includes hinges.

## Divi Linear Post Filler Kits



## DIVI LINEAR 2-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPPF242	262
50	P-DLPPF250	268
58	P-DLPPF258	276
66	P-DLPPF266	280
82	P-DLPPF282	332
98	P-DLPPF298	381





## DIVI LINEAR 3-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPPF342	246
50	P-DLPPF350	254
58	P-DLPPF358	262
66	P-DLPPF366	271
82	P-DLPPF382	320
98	P-DLPPF398	366



## DIVI LINEAR 4-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPPF442	123
50	P-DLPPF450	132
58	P-DLPPF458	140
66	P-DLPPF466	147
82	P-DLPPF482	195
98	P-DLPPF498	240



## DIVI LINEAR END OF RUN POST FILLER

Panel H	Model Number	List
42	P-DLPFE42	245
50	P-DLPFE50	251
58	P-DLPFE58	260
66	P-DLPFE66	268
82	P-DLPFE82	312
98	P-DLPFE98	358



## Specify

- Paint Selection


## Notes

Post Fillers can be used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles or simply as an aesthetic piece. 2-way, 3-way, and end or run fillers include a base shroud. Post fillers are not needed for panel connection, stability, or structural integrity. Specify the height which corresponds to the tallest panel in the configuration. Available painted only.

## Lateral Pass Through Jumpers and Panel-to-Panel Jumpers

## LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
24	43	E-MW8W4PJ24	231
30	48	E-MW8W4PJ30	249
36	55	E-MW8W4PJ36	256
42	61	E-MW8W4PJ42	264
48	67	E-MW8W4PJ48	285




## Notes

Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels. Specify the jumper that corresponds to the width of the panel to be passed through.

## EXTENDED LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
24	45	E-MW8W4PJ24E	241
30	51	E-MW8W4PJ30E	253
36	57	E-MW8W4PJ36E	261
42	63	E-MW8W4PJ42E	269
48	69	E-MW8W4PJ48E	292




## Notes

Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels. Specify the jumper that corresponds to the width of the panel to be passed through.

## PANEL-TO-PANEL JUMPERS

L	Type	Model Number	List
18	Standard	E-MX8W4PTPC18	162
21	Extended	E-MX8W4PTPC21	170




## Notes

Panel-to-Panel Jumper connects any two adjacent powered panels connected in a straight line or at an angle. Order an Extended Panel-to-Panel Jumper to connect any two powered panels across the gap created by a 3-way or 4-way connection. 90°, 120° and 135° corners and straight panel-to-panel connections do not require an extended jumper.

## Duplex Outlets

## DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4DO1	56
2	E-MW8W4DO2	56
3	E-MW8W4DO3	56
4	E-MW8W4DO4	56




## Notes

Duplex Outlets are available at designated circuits 1 through 4. Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways. All duplex outlets have black faces. The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange. Outlets are screw mounted to powerway. Duplex outlets are standard 15 amp outlets.

## DUPLEX OUTLET HOLE COVERS

Model Number	List
E-UNWC	22




## Notes

Duplex Outlet Hole Covers are supplied with each powered panel to cover unused duplex outlet locations (six). 24"W panels only include three duplex outlet hole covers. Order extra hole covers separately only when required.

## CALIFORNIA TITLE 24 CONTROLLED DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4T24DO1	66
2	E-MW8W4T24DO2	66
3	E-MW8W4T24DO3	66
4	E-MW8W4T24DO4	66




## Notes

In California, 50 percent of all outlets in a systems panel cluster or benching cluster, for new construction, MUST be controlled outlets, even if there is no task lighting. Customers should plan on using circuits 2 and 3 for controlled circuits, and plan general load for all other items on circuits 1 and 4. If using 2 + 2 configuration, controlled circuits should be 1 and 2, and general load circuits on 4 and 5. Outlets must have the "controlled" symbol for identification purposes.

## Base In-Feeds and Ceiling In-Feeds

## SIDE MOUNTED BASE IN-FEEDS

Length	Model Number	List
72	E-UN8W4BIFS	364





## Notes

Side Mounted Base In-Feeds provide interface with building power at the base of the panel and mounts to powerway at jumper location. Each base in-feed is 6' in length, encased in "liquid tight". New York City code requires the use of a special base feed with an in-line junction box.

## NEW YORK CITY SIDE MOUNTED BASE IN-FEEDS

Length	Model Number	List
72	E-HM8W4BIFSNY	727




## Notes

New York City Side Mounted Base In-Feeds provide interface with building power and mounts to side of powerway. Each base in-feed is 6' in length, encased in "liquid tight". New York City code requires the use of a special base feed with an in-line junction box.

## RECEPTACLE MOUNT BASE IN-FEEDS

Length	Hand	Model Number	List
72	Left	E-UN8W4BIFL	392
72	Right	E-UN8W4BIFR	392





## Notes

Receptacle Mounted Base In-Feeds provide interface with building power and mounts to powerway at duplex outlet location. Each base in-feed is 6' in length, encased in "liquid tight". Note: New York City code requires the use of a special base feed with an in-line junction box.

## NEW YORK CITY RECEPTACLE MOUNT BASE IN-FEEDS

Length	Hand	Model Number	List
72	Left	E-HM8W4BIFLNY	762
72	Right	E-HM8W4BIFRNY	762




## Notes

New York City Receptacle Mounted Base In-Feeds provide interface with building power and mounts to powerway at duplex outlet location. Each base in-feed is 6' in length, encased in "liquid tight". New York City code requires the use of a special base feed with an in-line junction box.

## CEILING IN-FEEDS

Length	Model Number	List
144	E-UN8W4CIF	443




## Notes

Ceiling In-Feeds provide interface with building power from a suspended ceiling through a power pole shell. Each ceiling feed is 12' long. Power pole shells are ordered separately. Power/Data Pole Kits are sold and specified separately.

## Data Plate Kits, Power/Data Pole Kits and Hardwire Junction Boxes

## DATA PLATE KITS

Item	Model Number	List
6 Port Data Gang Plate	E-DP6GFPB	26
CAT 5e Jack	E-HRJ45-SM	93
CAT 6 Data Jack	E-HXJ6BK-SM	102
Hole Blank (10PK)	E-SFBB10-SM	62




## Notes

Snap-In Data Housing Plate for Hubbell Premise™ has six ports. Housing is black and snaps into standard AIS DiVi duplex outlet holes, which measure 1.86" x 3.012". Note: RJ-45 jacks can be used in place of RJ-11 jacks.

## DOUBLE CHANNEL POWER/DATA POLE KIT

Model Number	List
A-PPDV	577



## Specify


• Paint Selection

## Notes

Power/Data Pole Kit includes two 68" pole sections, two 68" covers, one pole coupler, two 68" dividers, four pole to panel mounting brackets, one ceiling shroud, one 72" perforated metal strip for attaching pole to ceiling grid, and mounting hardware. Order ceiling feeds separately. Designed for an 11' ceiling. For use at 2-way and 3-way locations only.

## HARDWIRE JUNCTION BOX

Model Number	List
E-DVJBCH	362




## Notes

Hardwire Junction Box allows standard, hard wired, single gang duplex outlets to be used in DiVi panels at each standard, modular duplex outlet location. Each outlet will require one junction box, and outlets cannot be placed back to back on a spine. Junction boxes do not include electrical connectors. Boxes are UL listed. Decora faced outlets cannot be used. Kit includes all hardware required to attach box to DiVi panel at duplex outlet location. Standard DiVi powered base covers are required. Order DiVi panels with standard powered base cover option. Boxes have standard 0.875" knockouts for electrical connectors. Kit includes one low profile metal face plate painted per specification. Junction boxes can be used with either 15 amp or 20 amp single gang outlets. Box is 3"H x 1.524"W x 7"L.

## In-Line Power/Data Pole Combination Kits


## 2-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP242	658
50	P-DLPFPP250	660
58	P-DLPFPP258	651
66	P-DLPFPP266	646
82	P-DLPFPP282	649
98	P-DLPFPP298	653




## 3-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP342	648
50	P-DLPFPP350	649
58	P-DLPFPP358	643
66	P-DLPFPP366	635
82	P-DLPFPP382	639
98	P-DLPFPP398	641



## 4-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP442	530
50	P-DLPFPP450	531
58	P-DLPFPP458	525
66	P-DLPFPP466	518
82	P-DLPFPP482	521
98	P-DLPFPP498	518



## END OF RUN IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPPE42	658
50	P-DLPFPPE50	660
58	P-DLPFPPE58	651
66	P-DLPFPPE66	646
82	P-DLPFPPE82	644
98	P-DLPFPPE98	653



## Specify

- Paint Selection

## Notes

In-Line Power/Data Pole Combination Kits (1.619"d x 1.860"w) include one in-line power/data pole kit and one post filler kit. 2-way, 3-way, and end or run kits include a base shroud. Specify the height which corresponds to the tallest panel in the configuration. Available painted only. Designed for an 11' ceiling.



## In-Line Power/Data Pole Retrofit Kits and Pole Dividers

## IN-LINE POWER/DATA POLE RETROFIT KITS

Panel H	Model Number	List
42	P-DLPFPP42	416
50	P-DLPFPP50	413
58	P-DLPFPP58	395
66	P-DLPFPP66	384
82	P-DLPFPP82	360
98	P-DLPFPP98	314



## IN-LINE POWER/DATA POLE DIVIDER

Panel H	Model Number	List
42	P-DVPFPPD42	211
50	P-DVPFPPD50	215
58	P-DVPFPPD58	214
66	P-DVPFPPD66	217
82	P-DVPFPPD82	219
98	P-DVPFPPD98	226



## Specify

- Paint Selection

## Notes

In-Line Power/Data Pole Retrofit Kit (1.619"d x 1.860"w) mounts to the top of post fillers which are already installed at 2-way, 3-way, or 4-way connections. Specify the height which corresponds to the tallest panel in the configuration. Available painted only. Does not include post filler. Designed for an 11' ceiling. Channel can accommodate 52 Cat 5 cables or 46 Cat 6 cables or 36 Cat 5 cables or 32 Cat 6 cables in tandem with a ceiling infeed.


## Notes

In-Line Power/Data Pole Divider is specified when electrical cables need to be segregated from data cables by a metal barrier.

## Height Adjustable Tables and Round Tables

## DAY-TO-DAY 2MM EDGE RECTANGULAR TABLES WITH HEIGHT ADJUSTABLE BASES

D	W	H	Model Number	List
24	42	29	T-RCR244229HLG2	2,351
24	48	29	T-RCR244829HLG2	2,467
24	54	29	T-RCR245429HLG2	2,510
24	60	29	T-RCR246029HLG2	2,525
24	66	29	T-RCR246629HLG2	2,541
24	72	29	T-RCR247229HLG2	2,557
30	42	29	T-RCR304229HLG2	2,373
30	48	29	T-RCR304829HLG2	2,525
30	54	29	T-RCR305429HLG2	2,544
30	60	29	T-RCR306029HLG2	2,564
30	66	29	T-RCR306629HLG2	2,584
30	72	29	T-RCR307229HLG2	2,603




## Specify

## Notes

- Laminate Selection for Worksurface
  - Color Selection for Edge
  - Color Selection for Base - Black, Metallic Silver or Satin White
- Features a 3-stage table base. Dimensions shown for Height Adjustable Tables are the nominal sizes. Actual sizes will be smaller to provide a 1" perimeter gap required for safety. Height adjustable tables available on glides only.

## E SERIES 2MM EDGE RECTANGULAR TABLES WITH HEIGHT ADJUSTABLE BASES

D	W	H	Model Number	List
24	42	29	T-RCR244229HG	2,151
24	48	29	T-RCR244829HG	2,267
24	54	29	T-RCR245429HG	2,310
24	60	29	T-RCR246029HG	2,325
24	66	29	T-RCR246629HG	2,341
24	72	29	T-RCR247229HG	2,357
30	42	29	T-RCR304229HG	2,173
30	48	29	T-RCR304829HG	2,325
30	54	29	T-RCR305429HG	2,344
30	60	29	T-RCR306029HG	2,364
30	66	29	T-RCR306629HG	2,384
30	72	29	T-RCR307229HG	2,403




## Specify

## Notes

- Laminate Selection for Worksurface
  - Color Selection for Edge
- Features a 2-stage table base. Dimensions shown for Height Adjustable Tables are the nominal sizes. Actual sizes will be smaller to provide a 1" perimeter gap required for safety. Height adjustable tables available on glides only. Available in Metallic Silver.

## DAY-TO-DAY 2MM EDGE ROUND TABLES WITH STEEL X-BASES

D	H	Model Number	List
36	29	T-RDR3629SXG	1,020



## Specify


## Notes

- Laminate Selection for Worksurface
- Color Selection for Edge
- Color Selection for Base

## Grommet Specifications


## RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38
C	Location 2	+38
D	Location 3	+38
E	Locations 2 and 3	+76
F	Locations 1, 2 and 3	+114
G	Locations 1 and 2	+76
H	Locations 1 and 3	+76




## CORNER GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1 (Default)	-
C	Location 1 and 2	+38
D	Location 1 and 3	+38
E	Locations 1, 2 and 3	+76

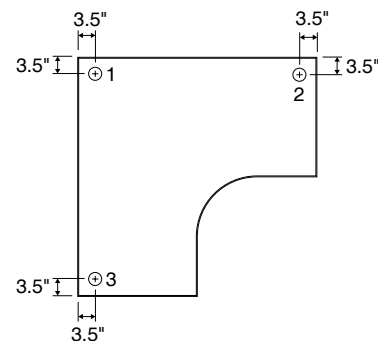

## RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38




## Rectangular and Curvilinear Corner Worksurfaces

## 24" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
24	24	W-WS2424	271
24	30	W-WS2430	324
24	36	W-WS2436	352
24	42	W-WS2442	383
24	48	W-WS2448	417
24	54	W-WS2454	464
24	60	W-WS2460	511
24	66	W-WS2466	581
24	72	W-WS2472	636

## 30" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
30	24	W-WS3024	324
30	30	W-WS3030	382
30	36	W-WS3036	416
30	42	W-WS3042	492
30	48	W-WS3048	534
30	54	W-WS3054	620
30	60	W-WS3060	620
30	66	W-WS3066	700
30	72	W-WS3072	761



## Specify


## Notes

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)

Worksurface support hardware is specified separately. Grommet holes with covers are specified as options. It is highly recommended that a center support be used on all worksurfaces greater than 48" width. When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support. Otherwise, a U-channel is recommended for additional center worksurface support. It is not recommended that 36", 42" and 48" deep worksurfaces be cantilevered to panels. If these size depths must be panel hung, it is highly recommended that an additional front support, such as a combination leg or full laminate support panel, also be specified. Worksurfaces have a thickness of 1 1/8".


## CURVILINEAR CORNER TYPE A

D1	W1	Model Number	List
24	36	W-WSCC2436	587
30	42	W-WSCC3042	781



## STANDARD CURVILINEAR CORNER TYPE B

D1	W1	Model Number	List
24	42	W-WSCC2442	709
24	48	W-WSCC2448	784
30	48	W-WSCC3048	894



## Specify

## Notes


- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)

Worksurface support hardware is specified separately. Rear corner grommet hole with cover is included. Additional grommet holes with covers are specified as options. Worksurfaces have a thickness of 1 1/8".

## Divi Bullpen Surfaces


## 24" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
24	24 1/8	1	W-WSDV2424	290
24	30 1/8	1	W-WSDV2430	342
24	36 1/8	1	W-WSDV2436	372
24	42 1/8	1	W-WSDV2442	403
24	48 1/8	1	W-WSDV2448	435
24	54 1/4	2	W-WSDV2454	531
24	60 1/8	1	W-WSDV2460A	531
24	60 1/4	2	W-WSDV2460B	531
24	66 1/4	2	W-WSDV2466	601
24	72 1/4	2	W-WSDV2472A	653
24	72 3/8	3	W-WSDV2472B	653
24	78 1/4	2	W-WSDV2478A	700
24	78 3/8	3	W-WSDV2478B	700
24	84 1/4	2	W-WSDV2484A	747
24	84 3/8	3	W-WSDV2484B	747



## 30" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
30	24 1/8	1	W-WSDV3024	342
30	30 1/8	1	W-WSDV3030	401
30	36 1/8	1	W-WSDV3036	448
30	42 1/8	1	W-WSDV3042	510
30	48 1/8	1	W-WSDV3048	549
30	54 1/4	2	W-WSDV3054	641
30	60 1/8	1	W-WSDV3060A	641
30	60 1/4	2	W-WSDV3060B	641
30	66 1/4	2	W-WSDV3066	719
30	72 1/4	2	W-WSDV3072A	782
30	72 3/8	3	W-WSDV3072B	782
30	78 1/4	2	W-WSDV3078A	943
30	78 3/8	3	W-WSDV3078B	943
30	84 1/4	2	W-WSDV3084A	1,092
30	84 3/8	3	W-WSDV3084B	1,092



## Specify

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)


## Notes

Worksurface support hardware is specified separately. Grommet holes with covers are specified as options. Bullpen Rectangular surfaces are designed to compensate for the gap created by natural panel creep for system specific (MWall or Divi) panels only. It is highly recommended that a center support be used on all workspaces greater than 48" wide. When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support. Otherwise a U-Channel is recommended for additional center worksurface support.

Rectangular Worksurfaces for Height Adjustable Tables

RECTANGULAR WORKSURFACES FOR HEIGHT ADJUSTABLE TABLES

D'	W'	Model Number	List
23	46	W-WS2346	417
23	58	W-WS2358	511
23	70	W-WS2370	636
29	46	W-WS2946	534
29	58	W-WS2958	620
29	70	W-WS2970	761




Specify	Notes
<ul style="list-style-type: none"><li>• Laminate Selection</li><li>• Color Selection for 2mm Edge</li><li>• Grommet Location</li><li>• Color Selection for Grommet Cover</li></ul>	Rectangular Worksurfaces for Height Adjustable Tables have a 1 1/8" thickness. Height adjustable worksurface support base is specified separately. Grommet holes with covers are specified as options. These worksurfaces are for use with height adjustable table bases only. Worksurfaces for Height Adjustable Tables require a 1" gap around to prevent pinch points. See example in Product Details.


## Height Adjustable Table Bases

## DAY-TO-DAY ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
48" - 72"	24"	Black	WFS-2L-3S24B	2,050
48" - 72"	24"	Metallic Silver	WFS-2L-3S24S	2,050
48" - 72"	24"	Satin White	WFS-2L-3S24W	2,050
48" - 72"	30"	Black	WFS-2L-3S30B	2,050
48" - 72"	30"	Metallic Silver	WFS-2L-3S30S	2,050
48" - 72"	30"	Satin White	WFS-2L-3S30W	2,050



Lowered




Raised

## Notes

- 3-stage Day-to-Day Height Adjustable Table Bases allow for quick and easy adjustment of worksurface height.
- Available in black, satin white or metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 21.54"H to 47.80"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface) for two leg and 350lbs (incl. work-surface) for three leg.
- Base width may be adjusted from 42"W to 72"W.
- 4 memory presets.
- Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.

## E SERIES ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
42" - 72"	24"	Metallic Silver	T-RB2L2S24	1,850
42" - 72"	30"	Metallic Silver	T-RB2L2S30	1,850




## Notes

- 2-stage E Series Electric Height Adjustable Table Bases on Glides allow for quick and easy adjustment of worksurface height.
- Available in metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 26.26"H to 45.94"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface).
- Base width may be adjusted from 42"W to 72"W. 4 memory presets. Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.


## A-Legs

## PANEL MOUNTED A-LEGS


H	D	Hand	Model Number	List
27	12	Left	WFS-ALW2712DVL	333
27	12	Left Shared	WFS-ALW2712DVLS	358
27	12	Right	WFS-ALW2712DVR	333
27	12	Right Shared	WFS-ALW2712DVRS	358
27	12	Freestanding	WFS-ALW2712FS	379
27	24	Left	WFS-ALW2724DVL	379
27	24	Left Shared	WFS-ALW2724DVLS	404
27	24	Right	WFS-ALW2724DVR	379
27	24	Right Shared	WFS-ALW2724DVRS	404
27	24	Freestanding	WFS-ALW2724FS	403
27	30	Left	WFS-ALW2730DVL	404
27	30	Left Shared	WFS-ALW2730DVLS	429
27	30	Right	WFS-ALW2730DVR	404
27	30	Right Shared	WFS-ALW2730DVRS	429
27	30	Freestanding	WFS-ALW2730FS	420




Panel Mounted Left Hand




Panel Mounted Left Hand Shared



Panel Mounted Right Hand



Panel Mounted Right Hand Shared



Freestanding

## Specify

- Paint Selection

## Notes


A-Legs are constructed from 1" x 2" painted steel. Legs have 1 1/2" leveling glides. A-Leg welded construction allows for attachment to the worksurface. Panel attachment brackets are included and installed at the factory for panel mounted legs. Panel locking bracket for panel attachment situations ships separate. Note that the brackets attach to each system specifically and allow for different heights due to different raceway heights.



## N-Legs and Pedestal-to-Panel Attachment Brackets

## 2.5 X 2.5 POST N-LEG

H	D	Model Number	List
27	24	WFS-NL22724	452
27	30	WFS-NL22730	458



## Specify

## Notes

- Paint Selection

## PEDESTAL-TO-PANEL ATTACHMENT BRACKET

Model Number	List
S-DVPMPB	181



## Specify

## Notes


- Paint Selection

Pedestal-to-Panel Attachment Brackets attach structural pedestals to panels. These brackets serve as a space filler and as a way to add stability to panels..Pedestal to panel attachment brackets may only be used when the nominal surface depth matches the nominal pedestal depth (24" Deep surface & 24" deep pedestal or 30" deep surface and 30" deep pedestal).

## Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels

## STANDARD CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Left	WPS-UNCT24L	72
24	18	Right	WPS-UNCT24R	72
24	18	Pair	WPS-UNCT24P	139
30	25.5	Left	WPS-UNCT30L	139
30	25.5	Right	WPS-UNCT30R	139
30	25.5	Pair	WPS-UNCT30P	276




## Notes

Standard Cantilevers provide cantilevered worksurface support from panel or wall track at either the left or right hand side of a worksurface. All worksurface support components fasten directly to worksurfaces with screws. Standard cantilevers may also be used as a center support. Cantilevers are painted black as a standard. It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

## SHARED CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Single	WPS-UNCT24S	103
24	18	Pair	WPS-UNCT24SP	203
30	25.5	Single	WPS-UNCT30S	203
30	25.5	Pair	WPS-UNCT30SP	409




## Notes

Shared Cantilevers provide cantilevered support from panel or wall track at the seam between two worksurfaces. All worksurface support components fasten directly to worksurfaces with screws. Shared Cantilevers are painted black as a standard. It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

## SIDE SUPPORT / REAR BRACKETS

Hand	Model Number	List
Left	WPS-SSSAL	51
Right	WPS-SSSAR	51
Pair	WPS-SSSA	100



## Notes

Side Support / Rear Brackets provide direct support from panel or wall track along the short side of rectangular worksurface or at rear of corner worksurface. All worksurface support components fasten directly to worksurfaces with screws. Side Support / Rear Brackets are painted black as a standard. Available in black only.

## FLAT PLATES &amp; U-CHANNELS

Item	Model Number	List
Flat Plate	WPS-FP	24
U-Channel	WPS-VC48	98



## Notes


Flat Plate is used to splice two worksurfaces together at front edge. The 3.5" x 1.5" plate has four holes per side for superior adaptability and rigidity. It is recommended that flat plates are also specified at the front edge helping splice the two worksurfaces together. Flat Plates are painted black as a standard.

U-Channel mounts to underside of longer worksurfaces to provide bracing where center support cantilever is not possible. All worksurface support components fasten directly to worksurfaces with screws. U-Channels are painted black as a standard.

## Frameless Up-Mount Glass Screens and Pre-Drilled Topcaps

## FRAMELESS UP-MOUNT GLASS SCREENS

H	W	Model Number	1/4th" Clear
8	24	A-FGUM0824	415
8	36	A-FGUM0836	469
8	42	A-FGUM0842	481
8	48	A-FGUM0848	492
8	60	A-FGUM0860	528
8	72	A-FGUM0872	572
12	24	A-FGUM1224	410
12	36	A-FGUM1236	422
12	42	A-FGUM1242	444
12	48	A-FGUM1248	466
12	60	A-FGUM1260	511
12	72	A-FGUM1272	555




## Notes

Frameless Up-Mount Glass Screens are designed to up-mount on worksurfaces and various other flat surfaces. Up-Mount Glass Screens include two mounting brackets which are available in a matte chrome finish only. Screens over 54" in length receive three mounting brackets for added stability. Glass screens are clear.

## PRE-DRILLED TOPCAPS

D	Model Number	List
24	P-DLFGTC24	81
36	P-DLFGTC36	81
42	P-DLFGTC42	81
48	P-DLFGTC48	81
60	P-DLFGTC60	81



## Specify

• Paint Selection


## Notes

Pre-Drilled Topcaps are pre-drilled for glass clamp screws to facilitate easy installation. Order topcaps separately.

## Mid-Height Shelf and Flipper Doors Units

## LINEAR MID-HEIGHT SHELF UNITS

H	W	D	Model Number	List
7.75	30	12	S-SHFLDV30	241
7.75	36	12	S-SHFLDV36	250
7.75	42	12	S-SHFLDV42	264
7.75	48	12	S-SHFLDV48	292
7.75	60	12	S-SHFLDV60	308



## Specify


- Paint Selection

## Notes

Linear Mid-Height Shelf Units provide low profile overhead storage. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive task lights. Unit includes two Linear Mid-height shelf ends, one shelf pan, and mounting hardware. Order shelf unit that corresponds to panel width.

## METAL / FABRIC DOOR FRONT TYPE C FLIPPER DOOR UNIT

Interior H	W	Interior D	Model Number	List
14.25	30	12	S-FDUDV30	615
14.25	36	12	S-FDUDV36	635
14.25	42	12	S-FDUDV42	648
14.25	48	12	S-FDUDV48	690
14.25	60	12	S-FDUDV60	836



## Specify

- Paint Selection


## Notes

Type C Flipper Door Unit - Metal Door Front provides binder height, lockable overhead storage. Door opens and stores above top cover pan. Flipper unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive task lights. All flipper doors are lockable with two supplied keys. Order flipper unit that corresponds to panel width.

## L Series Pedestals


## L SERIES STRUCTURAL BOX-BOX-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDBBFJ24	824
30	28	S-PEDBBFJ30	1,163



## L SERIES STRUCTURAL FILE-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDFFJ24	824
30	28	S-PEDFFJ30	1,163



## Specify


## Notes

- Paint Selection

L Series Structural Pedestals have a square front with rectangular pulls. Box drawers and file drawers have full depth, smooth riding ball bearing suspensions. All pedestals are lockable with two supplied keys. Lock cores are removable with lock removal keys. Master keys are also available. Extra lock core sets are available for keying pedestals alike. Pedestals come equipped for front to back letter-sized filing. Box-box-file pedestals include one box drawer pencil tray. Adjustable height is 27 1/2" to 29".


## L SERIES MOBILE BOX-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDBFMJ24V2	989




## L SERIES MOBILE BOX-FILE PEDESTALS WITH CUSHION

Surface D	Actual D	Model Number	List
24	22	S-PEDBFMJ24V2	1,311




## 12" WIDE L SERIES MOBILE BOX-FILE PEDESTALS

D	W	Model Number	List
24	12	S-PEDBFJ1224	655



## 12" WIDE L SERIES MOBILE BOX-FILE PEDESTALS WITH CUSHION

D	W	Model Number	List
24	12	S-PEDBFMJ1224	877



## Specify

## Notes


- Paint Selection
- Fabric Selection for Pedestal Cushion (Mirador Upholstery only)

L Series Mobile Pedestals have a square front with rectangular pulls. Box drawers and file drawers have full depth, smooth riding ball bearing suspensions. Mobile pedestals include counterweights that are field installed. All pedestals are lockable with two supplied keys. Lock cores are removable with lock removal keys. Master keys are also available. Extra lock core sets are available for keying pedestals alike. Pedestals come equipped for front to back letter-sized filing. 12" wide pedestals come equipped for side-to-side filing. Finished height of pedestal is 21 3/8" (box-file). Finished height of pedestal with cushion is 23 5/8". Pedestal cushion can be upholstered in Mirador upholstery fabric only.

L Series Laterals and Replacement Pulls

METAL FRONT L SERIES 2-DRAWER LATERAL FILES

Min H.	Actual W	Actual D	Model Number	List
27 1/2	30	18	S-LATJJ2D30	1,448
27 1/2	36	18	S-LATJJ2D36	1,552




Specify	Notes
• Paint Selection	L Series 2-Drawer Lateral files have full width to align with pedestals. File drawers have full depth, smooth riding ball bearing suspensions. All laterals are lockable with two supplied keys. Laterals accommodate letter, A4, and Legal sized filing and include front to back conversion bars for each drawer. Standard with rectangular pull.

REPLACEMENT PULLS


Type	Model Number	List
Silver Loop Pull	X-HAND-LOOPS	20
Silver Bar Pull	X-HAND-BARS	20
Rectangular Pull	X-HAND-RPS	20



Loop Pull



Bar Pull




Rectangular Pull

Notes
Replacements only. Pulls work for all metal and laminate storage units with the exception of roll out/pantry towers. For replacement handles for roll out/pantry towers use only bar pull.

## Task Lights and Task Light Cord Managers

## OVERHEAD LED TASK LIGHTS

Length	Model Number	List
24	A-LEDTL-61024	392
40	A-LEDTL-61540	581




## Notes

LED task lights are 1-1/4" wide, and 3/8" in thickness and come in 24 and 40 inch lengths. Brushed aluminum with black trim. Attachable to the underside of overhead cabinet via the built-in magnets, or mounted to non-metal surfaces using the adjustable mounting bracket. Feature 100 lm/w with warm white and white color temps and convenient one-touch On/Off and Touch-and-Hold dimmer. Power-in and power-switch are reversible. Power cord is 10' in length.

## TASK LIGHT CORD MANAGERS

H	Model Number	List
3	A-DVWMTL03	43
11	A-DVWMTL11	50
16	A-DVWMTL16	61




## Notes

Task Light Cord Managers engage to panel hanger frame slots. Managers are available in three heights: 3", 11" and 16". Use 16" to achieve a full height finished aesthetic for managing task light cords under full height shelves, flipper doors, or under half height shelves hung level with full height shelves on 65"/66"/67" high panels. Use 11" to achieve a full height finished aesthetic for managing task light cords under half height shelves on 50" high panels. Use 3" for managing cords above tackboards or double them up for any of the above situations when a full height manager is not required. Task Light cord managers are black only to match task light cords and are non-handed for use on either the left or right side of a panel. Hanger frames can accommodate only one task light cord manager and will not fit behind tackboards. Cord managers are painted black as standard.

Monitor Arms

SINGLE MONITOR ARM

Model Number	List
A-ERSMASB	618




Notes

Suitable for 10" - 28" size range LCD screens. Load capacity of 19lbs per arm. Features 180 degree rotation at the mounting base and extension. VESA monitor mount for 75mm and 100mm standard. Available mounting options include c-clamp, grommet or bolt through. Available in silver only. Single monitor arm features a snap-in/removable cord clip for wire management.

DUAL MONITOR ARM

Model Number	List
A-ERDMASB	1,136




Notes

Suitable for 10" - 28" size range LCD screens. Load capacity of 19lbs per arm. Features 180 degree rotation at the mounting base and extension. VESA monitor mount for 75mm and 100mm standard. Available mounting options include c-clamp, grommet or bolt through. Available in silver only. Single monitor arm features a snap-in/removable cord clip for wire management.

DUAL MONITOR ARM FOR SHALLOW DEPTH WORKSURFACES

Model Number	List
A-ERDMAM9	1,320



Notes


Suitable for LCD screens up to 27". Load capacity of 14.3 lbs. per monitor. Features 180 degree rotation at the mounting base and extension. Monitors mount with M4 screws to a VESA bracket. Mounts with c-clamp on the table edge or through a grommet hole. Available in silver only.



## Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats

## STANDARD EXTENDED KEYBOARD ARM

Model Number	List
A-KEYBZE	793




## Notes

Keyboard Arm / Trays mount to underside of worksurfaces to support standard computer keyboards. Keyboard platform area behind wrist rest measures 8 1/2" deep x 20" wide. All keyboard trays include a factory mounted, synthetic leather wrist rest.

## STANDARD MOUSE TRAY

Model Number	List
A-MSETS	139




## Notes

Mouse Tray mounts to either the left or right side of keyboard tray platform with screws to service both left and right handed users. Mouse tray has standard mouse pad surface and requires no additional mouse pad. Mouse area measures 7 1/4" x 7 1/4". Mouse tray swivels around vertical axis 270° and has 30° of tilt around the horizontal axis (15° above keyboard tray plane to 15° below plane, independent of keyboard tray tilt). Order mouse tray separately.

## PENCIL DRAWER

H	W	D	Model Number	List
2 1/4	21 1/4	16 1/4	A-PDRWP	202




## Notes

Pencil Drawer provides convenient, low profile storage of loose items. Constructed of rigid, durable PVC with black textured finish. Plastic slides mount underneath worksurfaces with screws provided. Pencil drawer measures 16 1/4" deep x 21 1/4" wide x 2 1/4" high. Note: Plan pencil drawer location around worksurface support elements.

## ANTI-FATIGUE MAT

W	D	Thickness	Model Number	List
34	20	3/4	A-HF342075	166




## Notes

Custom blended medium density polyurethane foam. High tear strength polyurethane outer membrane. Available in black only.

## Tackboards, Lock Cores and Keys

TACKBOARDS			
H	W	Model Number	List
12	24	A-TACKDV1224	196
12	30	A-TACKDV1230	206
12	36	A-TACKDV1236	216
12	42	A-TACKDV1242	227
12	48	A-TACKDV1248	242
12	60	A-TACKDV1260	315
15	24	A-TACKDV1524	199
15	30	A-TACKDV1530	212
15	36	A-TACKDV1536	219
15	42	A-TACKDV1542	234
15	48	A-TACKDV1548	246
15	60	A-TACKDV1560	323
19	24	A-TACKDV1924	254
19	30	A-TACKDV1930	271
19	36	A-TACKDV1936	283
19	42	A-TACKDV1942	299
19	48	A-TACKDV1948	315
19	60	A-TACKDV1960	338




## Specify

- Fabric Selection

## Notes

Tackboards are 7/8" thick and mount to wall track to provide vertical tackable surface for wall track applications and private offices. Tackboards are available in three different heights.

LOCK CORES AND KEYS		
Key Type	Model Number	List
Core with 2 keys	S-W1CORE1	14
Core with 2 keys (set of 2 keyed alike)	S-W1CORE2	24
Core with 2 keys (set of 3 keyed alike)	S-W1CORE3	36
Core with 2 keys (set of 4 keyed alike)	S-W1CORE4	48
Core with 2 keys (set of 5 keyed alike)	S-W1CORE5	59
Core with 2 keys (set of 6 keyed alike)	S-W1CORE6	70
Core with 2 keys (set of 7 keyed alike)	S-W1CORE7	81
Core with 2 keys (set of 8 keyed alike)	S-W1CORE8	94
Core with 2 keys (set of 9 keyed alike)	S-W1CORE9	104
Core with 2 keys (set of 10 keyed alike)	S-W1CORE10	116
Master Key	RS-W1MKEY	10
Core Removal Key	RS-W1CRKEY	10
Replacement Key	RS-WK _ _ _ (Key Number)	16



## Notes

Lock Cores & Keys are included with all AIS storage files and overhead flipper units, but may be ordered separately for keying stations alike or for replacement purposes. Keys and Lock Cores are available in #'s 226 through 425. When ordering keyed alike sets, be sure to also order an LL core removal key. The core removal key is needed to remove the existing core from the lock housing in order to replace with a new core. Order sets based on quantity of storage items to be keyed alike.

## Task and Side Chairs

⚠ **Note: All seating options on Divi Fast Track ship in 10 days with the complete workstation order.** ⚠

## BOLTON MID-BACK TASK CHAIR

Description	Model Number	List	Lumbar Support
Mid-Back Mesh Task Chair	4471	523	+36
Adjustable Lumbar Support	4400LUMBAR	36	-



Without Adjustable  
Lumbar Support



With Adjustable  
Lumbar Support

Weight: 32 lbs. Width: 26 Depth: 24 Height: 36.75 - 40.75 Seat Height: 17 - 21  
Arm Height: 7.5 - 10 Seat Depth: 17 - 21

## Notes

The Bolton Mid-Back Task Chair, a full featured task chair, has the versatility to fit any space. From the executive office to the front office, Bolton provides comfort and elegance with its thoughtful design. Bolton is highly versatile allowing users to choose the right configuration for their size, shape and tasks at hand. Synchro-tilt motion, adjustable seat height, height adjustable arms (1D arms), seat depth adjustment, tilt tension adjustment and upright back lock allow the user to fine-tune Bolton to their personal preference. Bolton ships ready to assemble. Upholstered with black mesh on the back and black seat fabric. Optional adjustable lumbar support available. Use 4400LUMBAR for adjustable lumbar support replacement.

## DEVENS TASK CHAIR

Description	Model Number	List
Devens Black Task Chair	4600	656
Devens Grey Task Chair	4630	736



Devens Black  
Task Chair



Devens Grey  
Task Chair

Weight: 35 lbs. Width: 27 Depth: 26 Height: 37 - 41.75 Seat Height: 16.75 - 21.5  
Seat Depth: 16.75 - 18.75 Seat Width: 19 Arm Height: 6.75 - 10.5 Lumbar Apex Height: 8 - 10

## Notes

The user friendly Devens with uncompromised comfort offers clean lines, outstanding fit and finish all resulting in a sophisticated and understated task chair at an outstanding price point. Seat height, seat depth, adjustable lumbar support and 4D arm adjustability along with a multiple position back lock allow the user to fine-tune Devens for their size and shape, tasks at hand and preference. Devens is equipped with an advanced automatic tension weight activated synchro-tilt mechanism. Upholstered with black mesh back and black seat fabric or graphite mesh back and grey seat fabric. Devens is BIFMA compliant and rated for users up to 300 pounds. Devens ships ready to assemble. Devens has a 24/7 10-year warranty.

## GRANITE TASK CHAIR

Description	Model Number	List
Mesh Back Task Chair	5200	379



Weight: 28 lbs. Width: 26 Depth: 23.5 Height: 32 Seat Height: 16.5 - 20  
Seat Depth: 17 - 21 Seat Width: 18 Arm Height: 7.5 - 10 Lumbar Apex Height: 8 - 10

## Notes

Granite seating with uncompromised comfort offers proper adjustability and robust construction at an outstanding price point. Features include tension adjustment, height adjustable seat, height adjustable arms, height adjustable lumbar support and upright back lock allowing the user to fine-tune Granite for optimal comfort and usability. Granite is available with a standard black seat and black mesh back. Granite is rated for users up to 250 pounds and is shipped ready to assemble.

## PAXTON SIDE CHAIR

Description	Model Number	List
Side Chair on Glides	3400	239



Weight: 15 lbs. Width: 23 Depth: 21 Height: 32 Seat Height: 18  
Seat Depth: 17.5 Seat Width: 18 Arm Height: 9 Lumbar Apex Height: 9


## Notes

Paxton, a perfect companion to the Bolton chair, is a stackable mesh back side chair with soft edges. It's thoughtfully designed seat cushion offers comfort and support. The lightweight side chair is ideally suited for use in cafeteria, training spaces, classrooms, waiting rooms, auditoriums or any area where extra seating is required. Paxton can also be used as a cost-effective side or guest chair. Paxton ships ready to assemble.

Volker Cubes

STANDARD VOLKER CUBE

H	W	D	Model Number	Grade A List
18	18	18	F-CUBE181818	549



Specify	Notes
• Fabric Selection (Mirador Upholstery only)	The Volker Cube can be easily and discretely tucked away when not in use, or effortlessly pulled out when ready to use. The Volker Cube features a sleek design with the upholstery fabric of choice to complete the design of your workspace. The cube features hubless casters allowing for ease of motion as well as adding an attractive design element. Volker Cubes can be upholstered in Mirador upholstery fabric only.



**National Showrooms:**

**Leominster**

AIS Headquarters  
25 Tucker Drive  
Leominster, MA 01453

---

**Chicago**

The Merchandise Mart  
Suite 1086  
Chicago, Illinois 60654

**New York**

AIS New York  
257 Park Avenue South  
New York, New York 10010

**Washington, D.C.**

AIS Washington, D.C.  
1400 I St, NW, Suite 750  
Washington, D.C. 20005

**GSA Sales**

GSA Contract 47QSM20D08Q4  
Multiple Award Schedule (MAS)  
Large Category: Furniture & Furnishings  
Subcategories: Office Furniture, Packaged  
Office Furniture and Furniture Services

**For additional information on AIS:**

Dealer Showrooms, Representative  
Directory, Project Case Studies, Online  
Catalog & Product Showcase  
Visit: **[www.ais-inc.com](http://www.ais-inc.com)**