

Kubota®



KUBOTA DIESEL TRACTOR

B

B2320/B2920 New Standard Tractors

Kubota's new B-Series standard tractors boast more power, comfort, and versatility to tackle a wide variety of tasks.



*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.

NEW STANDARD TRACTORS



USA loader is not available in Australia.

Take your performance and productivity to a whole new level with Kubota's new B-Series standard tractors.

The versatile B2320/B2920 tractors deliver the power, speed, and smooth HST performance you need to tackle large and small tasks around your property. These new B-Series tractors have it all—more horsepower, a new HST, more transmission speeds to choose from—so you can handle your toughest chores with ease.



Engine

23HP/29HP liquid-cooled diesel engines, with Kubota's E-TVCS (three-vortex combustion system), offer tremendous power, high torque, cleaner emissions, and low noise and vibration.



New 3-range HST

Our proven hydrostatic transmission provides the B-Series with smooth shifting and powerful performance for heavy-duty loader applications.



Powerful Category I 3-point Hitch

The 3-point hitch accepts a variety of implements for all of your different needs. The powerful hitch can handle rotary cutters, box blades, finishing mowers and more.



B2320/B2920

More Speeds

With an increased maximum speed and three range shift speeds (Hi/Med/Lo), the B2320/B2920 let you find the right speed to suit your task, for outstanding productivity.

Hydraulic Pump

The 31.4 l/min hydraulic pump capacity provides exceptional efficiency and power for implement operations.

Large-capacity Radiator

The B-Series features a large-capacity radiator to keep the engine cool on a long, hot workday, and keep you on the job.

KUBOTA B2920

Cruise Control (HST models only)

Kubota's cruise control allows you to set, increase/decrease, and override pre-set speeds quickly and conveniently.



Standard Loader Valve

Loader operations are more convenient with the standard-equipped 4-position valve and control lever. Integrated into the tractor, this ergonomically positioned valve lets you attach the front loader and other front implements quickly and easily.

Long Wheel Base

With a formidable, 1563 mm wheel base, the B-Series delivers increased stability during operation.



When it comes to operator comfort and easy operation, the B-Series is the best tractor in its class.

Kubota's B2320/B2920 tractors give you everything you need to get the job done in comfort and safety. They feature a luxurious high-back seat, ample operator space, a foldable ROPS for added protection, and much more.

150 mm longer



Headlights

Kubota's multi-reflective headlights let you see farther and better, so you can work effectively whenever and wherever you want.



Backlit Dash Panel

The easy-to-read dash panel features large numbers and a white background to help you easily keep track of vital tractor functions such as engine speed, engine temperature, fuel level, etc. The panel backlight activates when the headlights are turned on.



Lever Guides

The B-Series features large angled lever guides, for hassle-free shifting, fast control lever recognition and easy operation.



B2320/B2920



Slanted Bonnet

The slanted bonnet offers a clear view of front loader operations to improve operator productivity.




Parking Brake

The parking brake keeps your tractor where you want it—just pull the convenient lever and the tractor stays put.



100 mm wider

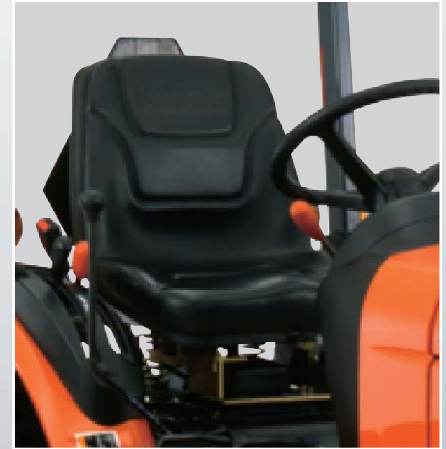

High-back Seat

Kubota's seat provides ample back and lumbar support, improving operator comfort during long hours of operation.

Wide Operating Platform

The large, ISO-mounted flat deck provides plenty of legroom and a wider step area for easier mounting and dismounting. Plus, the widely spaced fenders create plenty of room for the operator to work in comfort.

Wide Fenders

The extra-wide fender width increases your protection from mud and debris and enables integrated lever positioning for your convenience.



Foldable ROPS

For your safety, a foldable ROPS is standard equipment. It's perfect for travelling under areas with height restrictions, or parking your tractor in a garage.

MID-MOUNT MOWER




Kubota's mid-mount mower is the ideal choice for precision grass cutting. The suspended mower deck gives the operator 1/4" cutting control, for a clean cut, every time. Plus, this innovative mower is extremely easy to connect—just drive over it, attach, and you're ready to go.



Mower Decks

Kubota's 54"/60" mid-mount mower decks manicure lawns with precision, and their functional design allow them to be attached at the same time as the front loader.



Cutting Height Adjustment Dial

A simple twist of the convenient dial allows you to make height adjustments in 1/4" increments to set your preferred cutting level.



Suspended Mower Deck

The mid-mount mower can be raised to give ample clearance, eliminating hassles when moving from job to job or riding over curbs.



Self-aligning Lift Linkage


Mid-PTO

The mid-PTO shaft spline is tapered for easy attachment of mower.

Drive-over Attachment*

Attach the mower quickly and with ease. Simply drive the tractor over the mower to get it into position for fast attachment/detachment.

**Height of mower deck should be 3 inches or less.*

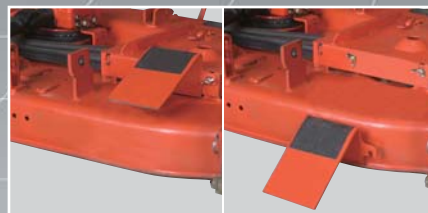

USA loader is not available in Australia.

TRACTOR SPECIFICATIONS

Model	B2320		B2920	
Engine				
Type	E-TVCS, liquid cooled, 3-cylinder diesel			
Make, Model	Kubota D1005		Kubota D1305	
PTO horsepower	HP (kW)	17.0 (12.7)	21.0 (15.7)	
Engine gross horsepower	HP (kW)	23.0 (17.2)	29.0 (21.6)	
Rated RPM	rpm			
Bore and stroke	mm	76 × 73.6	78 × 88	
Displacement	cc	1001	1261	
Air cleaner	Dual paper element			
Lubrication	Forced lubrication			
Cooling system	Pressurised radiator			
Radiator fan	Radial air flow			
Capacities				
Fuel tank	ℓ	25		
Cooling system	ℓ	4.4		
Engine oil	ℓ	3.0		
Transmission case	ℓ	15		
Drive train				
Clutch	Dry single plate			
Transmission	HST (3 range)			
Differential lock	Standard			
Final drive	Spur gear			
Brake	Multi-plate wet disc			
PTO	Transmission driven with one way clutch / HSD: Live			
Rear	rpm	540, 960		
Mid	rpm	2500		
Hydraulics				
Type	Open centre			
Pump	Dual pump			
Total pump output	ℓ/min	31.4		
Hydraulic outlet	Front outlet (w/ standard valve)			
3-point hitch	Category I			
Hydraulic control system	Quarter inching valve			
Lift capacity	at lift point	kg	615	
	24" behind LP	kg	480	
Steering	Power steering			
Standard tyre size				
Front	6-12		7-12	
Rear	9.5-16		11.2-16	
Travelling speeds (at rated engine rpm)				
Forward	km/h	0-18.9	0-20.2	
Reverse	km/h	0-15.2	0-16.2	
Dimensions				
Overall length (w/o 3P)	mm	2385	2415	
Overall width (min. tread)	mm	1145	1245	
Wheelbase	mm	1563		
Ground clearance	mm	305	325	
Turning radius with brake	m	2.1		
Weight	kg	670	705	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications. For complete operational information, the operator's manual should be consulted.

IMPLEMENTS SPECIFICATIONS

MID-MOUNT MOWER

Model		RCK54-29B	RCK60-29B
Type		Side discharge	
Number of blades		3	
Blade length	mm	475	523
Mounting method		Suspended	
Cutting width	mm	1372	1524
Cutting height	mm	25 to 127	
Adjustment of cutting height		Dial	
Weight (approx.)	kg	140	146

©2008 Kubota Corporation



KUBOTA Tractor Australia Pty Ltd

100 Keilor Park Drive, Tullamarine Vic., 3043
Freecall: 1800 334 653
Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>