


PUSHBUTTON ACCESS

ALARM LOCK

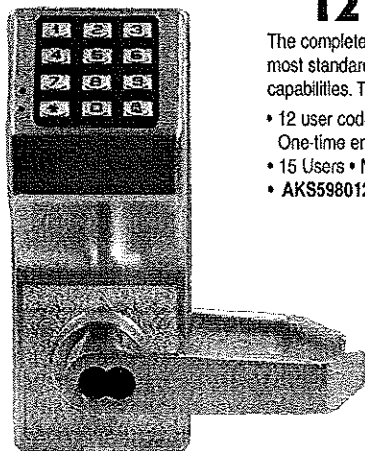


T2 TRILOGY DL2700 SERIES

The complete self-contained, battery-powered DL2700 is easy to install because it uses the same door prep (mounting holes) as most standard cylindrical knob sets. It can be used as a keyed or keyless lock system, with master key and unique master code capabilities. Trilogy models employ "Flex-Drive™" motor locking, there are no mechanical chambers to replace or solenoids to bind!

- 12 user codes • Programmable keypad: Passage function, Master and Management codes, One-time emergency access / service code, Programmable delay entry (5-20 seconds) or key bypass
- 15 Users • Non-handed, 12 button metal keypad, New clutch mechanism
- AKS5980126D-2-3/8" Latch

SPECIFICATIONS: GRADE 1


- Door:** 1-5/8" to 1-7/8" thick
- Backset:** 2-3/4"
- Dimensions:** 8-1/4" H x 3-1/4" W cast aluminum body
- Power:** 5 "AA" alkaline batteries, with low battery alert
- Keyway:** SC1 keyway
- Certification:** 3 hr. U.L. Fire Rated Deadlatch, Grade 1
Can be Hardwired: Relay output
- Finishes:** 3 (Brass), 5 (Antique Brass) or 26D (Dull Chrome)



LEVER KEY BYPASS

- SC1 keyway
- 6 pin tumbler
- Accepts U.S. Lock or Iico 1539 cylinder
- Finishes: 3, 5 or 26D

<u>INTERIOR USE</u>		
AK 2700 3	1/2	
<u>INTERIOR USE</u>		
AK 2700 5	1/2	
<u>INTERIOR USE</u>		
AK 2700 26D	1/2	
<u>WEATHERPROOF</u>		
AK 2700W 26D	1/2	



INTERCHANGEABLE CORE LEVER KEY BYPASS

- 6 & 7 pin
- Accepts Best, Falcon, Arrow and KSP interchangeable cores
- Finishes: 5 or 26D

<u>INTERIOR USE</u>		
AK 2700 IC 26D	1/2	
<u>INTERIOR USE</u>		
AK 2700 IC 5	1/2	
<u>WEATHERPROOF</u>		
AK 2700W IC 26D	1/2	



BALL KNOB

- 6 pin tumbler
- SC1 keyway
- Accepts Iico 1539 cylinder
- KD
- Reversible
- Finish: 26D Only


AK 2750 26D	1/2
-------------	-----

ELECTRIFIED DEADLOCK

SPECIFICATIONS

- **AK103:** Bolt projects & locks door only when powered.
24 VDC continuous duty solenoid, non-handed narrow stile case: 1-3/4" W x 6-3/4" L
- **AK104RA:** Bolt retracts when energized.
24 VAC intermittent duty, non-handed narrow stile case: 1-3/4" W x 6-3/4" L
- 5/8" diameter bolt and 5/8" bolt throw
- Includes 3 Strikes; Angle, Mortise and Flush
- To be used with AK241 and AK242 transformers
- Any switch • Finish: 32D (Brushed Stainless Steel)

<u>FAIL SAFE</u>		
<u>CONTINUOUS DUTY</u>		
AK 103	1/1	
<u>FAIL SECURE</u>		
<u>REVERSE ACTION</u>		
AK 104RA	1/1	




PUSHBUTTON ACCESS

ALARM LOCK

T3 TRILOGY® PROX LOCK


The complete self-contained, battery-powered DL3000 is easy to install because it uses the same door prep (mounting holes) as most standard cylindrical knob sets. It can be used as a keyed or keyless lock system, with master key and unique master code capabilities. Trilogy models employ "Flex-Drive™" motor locking, there are no mechanical chambers to replace or solenoids to bind!

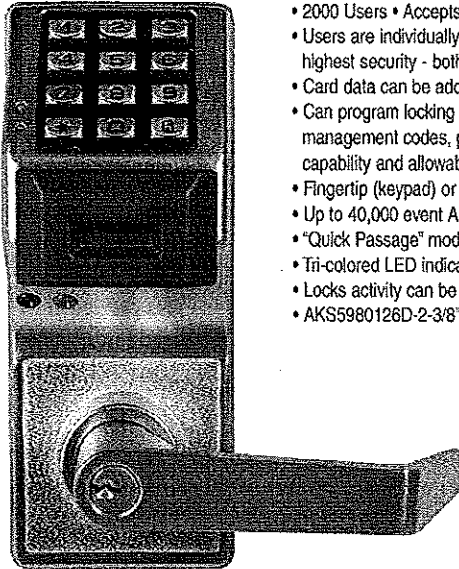

- 2000 Users • Accepts most HID Proximity cards and keyfobs including 26 - 48 bit formats
- Users are individually programmed to use a card only, keyfob only, code only, or for the highest security - both card or keyfob and code
- Card data can be added to software via the lock, card reader module or PC
- Can program locking modes, events schedules, group or individual user codes, master & management codes, passage & emergency or service code, lockout & remote override capability and allowable entry time (3, 10 or 15 seconds)
- Fingertip (keypad) or Windows® PC Programmable
- Up to 40,000 event Audit Trail with printed time/date-stamped log
- "Quick Passage" mode enabled with authorized user & function code
- Tri-colored LED indicator • Weatherproof
- Locks activity can be extracted by using AL-DTM or Alarm Lock DL-Windows® PC Software
- AKS5980126D-2-3/8" Latch

SPECIFICATIONS: GRADE 1

Door: 1-5/8" to 1-7/8" thick
 Backset: 2-3/4"
 Dimensions: 8-1/4" H x 3-1/4" W cast aluminum body
 Power: 5 "AA" alkaline batteries
 Keyway: SC1 keyway
 Certification: Grade 1 U.L. Listed
 Finish: 26D (Dull Chrome)

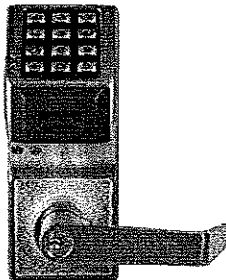

LEVER KEY BYPASS


- SC1 keyway
- IC Core
- 6 pin tumbler
- Accepts U.S. Lock or Iico 1539 cylinder
- Finish: 26D Only

SC1 KEYWAY

AK PDL3000 26D 1/2

IC CORE

AK PDL3000 IC 26D 1/2



PROXIMITY ACCESS CARDS

- HID Proximity cards
- Packed 100 per box

AK ALHID1326 1/1



PROXIMITY KEYFOB

- HID Proximity keyfobs
- Packed 10 per box

AK ALHID1346 1/1

PUSHBUTTON ACCESS



ALARM LOCK

WEATHERPROOF 12V/24V DIGITAL ACCESS KEYPADS

AK DK3000 26D & AK PDK3000 26D Features:

- 100% fingertip or PC programmable
- 2,000 user codes, master, manager, supervisor and basic
- Weatherproof, rugged all-metal 12-button keypad
- 2 High-Current rated 10A relays for entry, alarm zone shunning or lock release by real-time schedule
- Timed Egress input allows door open for 5, 10 or 15 seconds
- Ideal for use with 12V or 24V (AC or DC) electric door strikes, mag lock or Alarm Lock Remote Release Mag Lock Kit
- Wall mount or single gang box
- 40,000 Event Audit Trail: Query by PC of handheld printer or DTM Module
- Real time clock with time-zone adjustments, enables 500 scheduled or holiday events
- Remote-Release Feature/ Request-to-Exit Input
- Independent Tamper - Reports attempts to vandalize or remove DK3000 via an alarm system

AK DK3000 26D

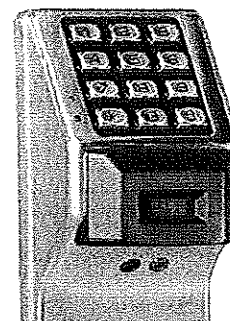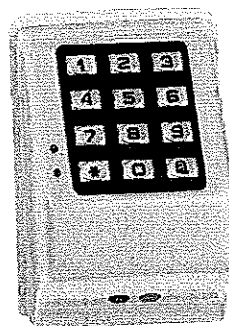

AK PDK3000 26D



AK PDK3000 26D only:

- Accepts most HID Proximity cards and keyfobs
- Users are individually programmed to use a card only, code only, or for the highest security - both card and code
- 2000 User codes: Master, manager, supervisor and users
- Real Time Clock for up to 40,000 Event Time/Date-Stamped Audit Trail
- Up to 500 Event Schedules (with Time Zone Support)
- Prox Card data can be added to software by uploading from keypad, by using AL-PRE or entering directly from computer using DL-Windows software

KEYPAD

AK DK3000 26D 1/1


PROX KEYPAD

AK PDK3000 26D 1/1

TRILOGY DL2800 DIGITAL LOCK WITH AUDIT TRAIL

- 2-3/4" Backset
- 1-5/8" - 1-7/8" door thickness
- Rugged clutch mechanism insures long life & durability
- 150 scheduled events, including 4 "quick schedules" for programming the 4 most common time schedules in one step
- 200 User codes: Master, Manager, Supervisor & Basic Users. Also one-time entry code
- Weather-resistant exterior performance
- Times entry allowance from 5-15 seconds
- Greater security with "Temporary Keypad Lockout" after 3 unsuccessful code-entry attempts
- Audit trail with Time/Date stamp for a printable record of all electronic activity
- Real time clock allows logging of events to within 1 second of accuracy
- Relay may be programmed to energize when one or more selected events occur
- 4 time-out functions allow a user to enable other users or unlock the lock for some time period without needing to return to the lock
- 1000 Event log
- Battery operated; uses 5 "AA" batteries
- 100% Fingertip programmable or PC programmable
- Windows-based software (Order # DL-WINDOWS software)
- Finish: 26D

AK DL2800 26D

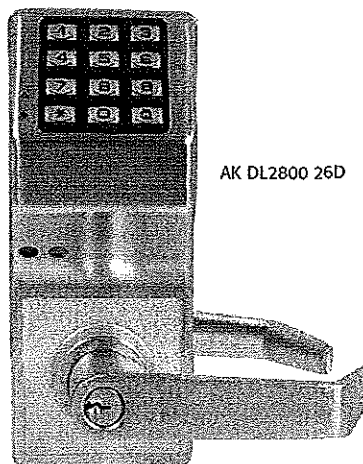

AK DL2800 IC26D



STANDARD

AK DL2800 26D 1/1

IC CORE


AK DL2800 IC26D 1/1

**ALARM LOCK**

PUSHBUTTON ACCESS

ALARM LOCK

TRIOLOGY EXIT TRIM FOR VON DUPRIN 99

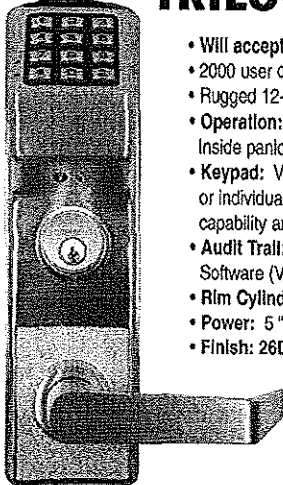

- Will accept standard rim cylinder • Fingertip and/or Windows programmable • Door Thickness: 1-3/4" standard
- 2000 user codes: Master, manager, supervisor and users • Real time clock for up to 40,000 event time/date stamped audit trail
- Rugged 12-button weather resistant metal keypad • Non-handed • Battery pack mounts to interior door, over or under panic bar
- **Operation:** Clutch mechanism permits turning lever without retracting latch. Access code, key bypass will allow lever to retract latch. Inside panic bar always provides instant egress. (Temperature Range: +150°F to -20°F)
- **Keypad:** Vandal-resistant all metal, weather-resistant 12-button programmable for multi-level access functions including group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time for 5 to 15 seconds.
- **Audit Trail:** Locks' entry activity log can be polled to the Data Transfer Module (AL-DTMII), any PC using Alarm Lock's DL-WINDOWS Software (Vsn.2.94 or higher), and/or can be on-site printed using the hand-held infrared printer (AL-IR1)
- **Rim Cylinder:** Requires separately available Cylinder Adapter Kit when using other than a standard rim cylinder
- **Power:** 5 "AA" alkaline batteries, (supplied) installed in Battery Pack. Audible low battery alert, visual and audible entry indicators
- **Finish:** 26D (Satin Chrome)

YOU MUST ORDER ADAPTER KIT
WHEN ORDERING UNIT, IF USING
ARROW IC CORE RATHER
THAN A STANDARD RIM CYLINDER

FOR VON DUPRIN 99 DEVICES - 26D FINISH


AK ET DL S1 26D V99

RIM CYLINDER ADAPTER KIT

ARROW 6 & 7 PIN IC CORE KIT

AK ET AR IC KIT

T3 TRILOGY DL3000 SERIES LEVER KEY BYPASS

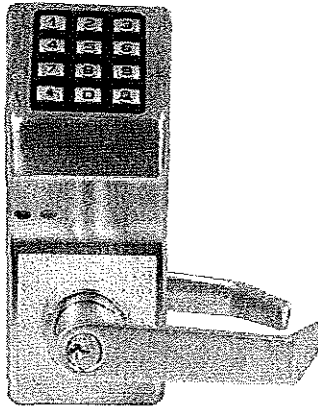


- 300 user codes: Master, Manager, Supervisor & Basic users • 4 Programming Levels • 4 user groups
- 2-3/4" backset • 3, 4, 5 or 6 Digit codes • 1-5/8" to 1-7/8" door thickness • 1600 Event log
- 1-time emergency or service code • Real time clock • Time zones • 150 scheduled events
- 4 "Quick Schedules" of the most common routines built-in • 100% fingertip programmable or PC programmable Alarm Lock DL-WINDOWS Windows® Software
- Passage mode enabled by Masters & Managers codes
- Optional Hand-held ALIR1 infrared printer may be used to print the event log and user code list
- ADA-Compliant leverset clutch design
- SC1 keyway • 6 pin tumbler
- Accepts US Lock or ILCO 1539 cylinder
- U.L. Listed Fire Rated, 3 hours, 1/2" throw, solid brass, deadlocking, reversible
- Uses 5 "AA" alkaline batteries • Finish: 26D
- AKS5980126D-2-3/8" Latch


AK 3000 26D 1/2

WEATHERPROOF
AK 3000W 26D 1/2


AK AL IR 1



AK AL PCI 2



AK AL DTM2



T3 AUDIT TRAIL ACCESSORIES

- **AL IR1: Infrared Printer.** Hand-held printer may be used to print event log and user code list
- **AL PCI: Personal Computer Interface Cable**
- **DL WINDOWS: Software Package for Personal Computer.** Alarm Lock's own Windows-format software for easy programming, scheduling and log viewing
- **AL DTM 2: Data Transfer Module.** Used to program multiple DL-3000 locks. Can be used to collect LOG information from up to 48 DL-3000 locks before returning to PC

HANDHELD INFRARED PRINTER

AK AL IR1 1/1

COMPUTER INTERFACE CABLE
WITH SOFTWARE

AK AL PCI 1/1

DATA TRANSFER MODULE
FOR T3 & PROX LOCK - 96 USERS

AK AL DTM2 1/1

PROX CARD ENROLLER

AK AL PRE 1/1

More Choices, One Supplier

103




ALARM LOCK

PUSHBUTTON ACCESS

ALARM LOCK

NARROW STILE ACCESS LOCK

- Aluminum door retrofit outside trim for Adams Rite® 4700, 4500, 4900 Series and MS1850S series locks.
- PIN code supports 100 users
- PIN/PROX supports 2000 users
- All-metal, vandal-resistant 12-button keypad supports 3-6 digit PIN codes
- Keypad (or PC) programmable. Quickly and easily add or delete users and enter "passage mode," service codes, group lock-out & group-enable
- Wide weatherproof operating range from -31° to 151°F (-35° to 60°C)
- Wireless standalone locks: Long-life, battery-operated; includes audible and visual low battery alert. (Uses standard off the shelf batteries.)
- Non-handed; fully field-reversible
- Key override; interchangeable cores supported (Corbin/Russwin, Yale, Schlage, Medeco)
- Mortise Cylinder, 1-1/4" supplied, (supports 1-1/8", 1-1/4" and 1-3/8")
- Compact styling 14-3/8" H x 1-5/8" D x 1-3/4" W
- Backsets 31/32", 1-1/8" and 1-1/2"; Stile thickness 1-3/4"
- 40,000 event audit trail in 1300 Series
- HID Prox ID cards, key fobs and prox tags supported in PDL 1300
- 1300 model has real time clock and PC programmable automatic lock/unlock scheduling for 500 events
- Finish: US26D

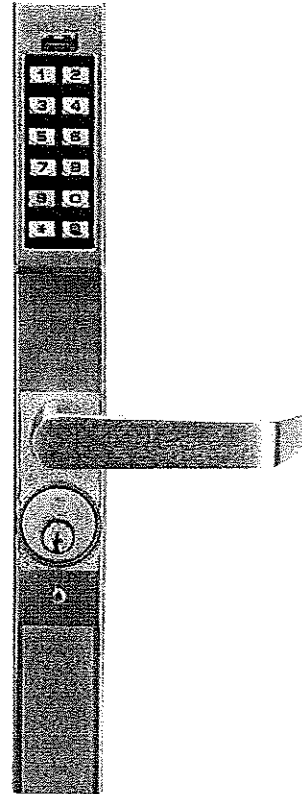

LEVER

AK DL1300 26D 1 1/1 **615.00 ea**

KNOB

AK DL1350 26D 2 1/1 **615.00 ea**

PROX LEVER

AK PDL1300 26D 1 1/1 **875.00 ea**

PIN W/LEVER

USE WITH AD4710, 4730, 4900

AK DL1200 26D 1 1/1

USE WITH ADMS 1850

AK DL1250 26D 2 1/1

HOW TO ORDER

DL 12 00 26D 1

MODEL TYPE

PDL Prox/PIN

DL Digital PIN

TRIOLOGY SERIES

12 2700 Series

13 3000 Series

TRIM

00 Lever

50 Knob

FINISH

26D Satin Chrome


MECHANICAL DEAD LATCH

1 Supports Adams Rite: 4710, 4730, 4900 Series

2 Supports Adams Rite: 4070, MS1850S, MS1850-S050, MS1950, MS1950-050

A-SERIES KEYPADS

ALARM LOCK

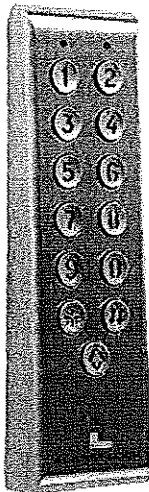


OUTDOOR ILLUMINATED MULLION KEYPAD

NEW!

- Self-contained • Mullion-style surface mount enclosure
- Narrow stile application • Illuminated keypad • Waterproof
- 150 user codes available • 3 to 6 digit user codes
- Keypad programmable • Non-volatile EEPROM memory
- Selectable audible keypad feedback
- Operates up to three outputs (2 relays & 1 open-collector) and can be used to trigger a door strike, an electromagnetic door lock, or any other relay-activated device.
- Dimensions: 1-3/4"W x 6-1/2"H x 1-1/8"D
- Voltage: 12 to 24VDC (polarized) or 12 to 24VAC voltage input
- Operating temperature: -13°F to 131°F, (-25°C to 55°C)

AK100IMWP

1/6




OUTDOOR SEALED ENVIRONMENT KEYPAD

NEW!

- Self-contained • Sealed electronics package for outdoor requirements
- Metal keypad buttons with Braille markings
- Vandal resistant • 150 user codes available
- 3 to 6 digit user codes • Keypad programmable
- Non-volatile EEPROM memory • Selectable audible keypad feedback
- Operates up to three outputs (2 relays & 1 open-collector) and can be used to trigger a door strike, an electromagnetic door lock, or any relay-activated device.
- Dimensions: 4"W x 4-3/4"H x 2"D
- Voltage: 12 to 24VDC (polarized) or 12 to 24VAC voltage input
- Operating temperature: -13°F to 131°F, (-25°C to 55°C)

AK100WP

1/6

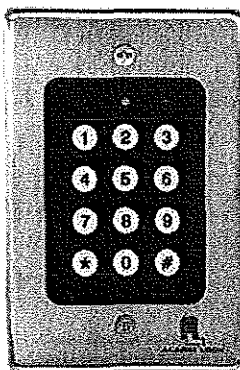

INDOOR STAINLESS STEEL KEYPAD

NEW!

- Self-contained • Stainless steel faceplate
- Mounts on a single gang box • 150 user codes available
- 3 to 6 digital user codes • Keypad programmable
- Non-volatile EEPROM memory
- Selectable audible keypad feedback
- Operates up to three outputs (2 relays & 1 open-collector) and can be used to trigger a door strike, an electromagnetic door lock, or any other relay-activated device
- Dimensions: 3"W x 4-3/8"H x 7/8"D
- Voltage: 12 to 24 VDC (polarized) or 12 to 24VAC voltage input
- Operating temperature: -13°F to 131°F, (-25°C to 55°C)


AKA100

1/6

EXIT LOCKS & ALARMS

ALARM LOCK

PG10



EXIT ALARM

- Used with existing locks - Non locking alarm
- Accepts 1-1/8" mortise cylinder inside, rim cylinder outside, long tailpiece recommended (not furnished)
- 6V battery pack included
- Test button
- 10" W x 8-1/2" H x 3-1/4" D - Surface mounted
- Finish: Aluminum

SHUT OFF W/KEY ONLY


AK PG10

1/10

BATTERY PACK

AK BP6

1/12

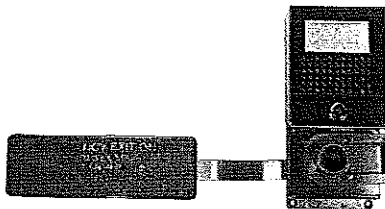

11A

EMERGENCY EXIT ALARM LOCK

AK 11A

1/4

- Provides full time locking of emergency exit doors
- Pressure on paddle allows exit & sounds alarm
- 1" throw safety deadbolt - Key resets alarm
- Complies with safety & fire codes - U.L. Listed
- 6V battery powered (AKBP6 battery pack furnished)
- Inside accepts standard rim cylinder (not furnished)
- Outside rim cylinder 3-1/2" minimum length tailpiece (not furnished)
- Mounting plate for easy installation on all doors
- Surface mounting, no mortising required

DOUBLE DOOR HOLDER

AK 44

1/1

DOUBLE DOOR STRIKE

AK K28


1/1

REPLACEMENT BATTERY

AK BP6

1/12

ELECTRONIC PANIC ALARM LOCK

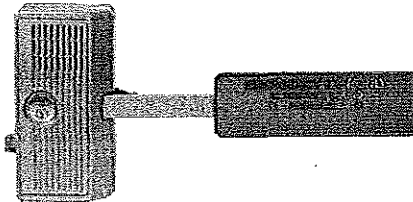

250

- 1" Deadbolt operated by inside / outside cylinder capability
- Slight pressure on bar allows exit & sounds alarm
- Does not relatch - have to lock manually
- Changeable 2 minute alarm cutoff or manual reset
- Can be used for single or double doors
- Disarming beep when retracted by key
- Retriggerable alarm after 2 min.
- Takes standard rim cylinder (not included)
- 18" H x 8-1/2" W x 3-1/4" D (24" W when using extended clapper plate)
- Non handed
- Low battery (9V) alert - Loud dual horns
- Finish: Aluminum

AK 250

1/4

RETROFIT PLATE FOR DETEX 230

AK AP230 MS

1/1

DOUBLE DOOR KEEPER

AK 732 28


1/1

DOUBLE DOOR HOLDER

AK 44

1/1

EMERGENCY PANIC BAR ALARM LOCK

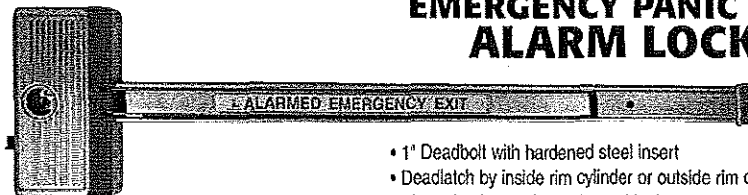

700

- 1" Deadbolt with hardened steel insert
- Deadlatch by inside rim cylinder or outside rim cylinder
- Disarming beep when retracted by key
- Slight pressure on bar allows exit & sounds loud dual horn
- Changeable 2 min. alarm cutoff or manual reset
- Does not relatch - have to lock manually
- For use with 3' narrow stile door or double doors
- 9 VDC alkaline battery operated, low battery alert
- Non handed with dogging function
- Finish: Aluminum

AK 700

1/5

DOUBLE DOOR KEEPER

AK 732 28

1/1

DOUBLE DOOR HOLDER


AK 44

1/1

MAGNETS/ALARMS/ACCESSORIES

ALARM LOCK


REMOTE RELEASE MAGNET

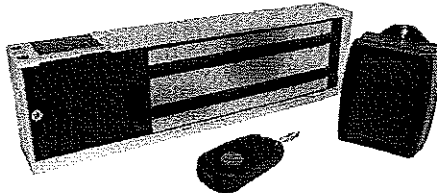

- 1200 lb. remote magnet • U.L. Listed
- Includes 12 VAC transformer
- Single button, dual LED infra-red transmitting
- Up to 1000 keyfobs can be programmed into a single magnet
- Remote controls release mag from either side of the door
- Remote controls feature single button operation with a positive "click" response
- 10-1/2" L x 3-3/8" H

AK RR PM1200 PAK 1/4

REMOTE KEYFOB
AK AL REMOTE 1/1




EXIT BUTTONS

- **PE2:** Square green illuminated exit button (standard switch plate)
- **PE2S:** Square green illuminated exit button (narrow switch plate)

STANDARD
AK PE2 1/28

NARROW
AK PE2S 1/28

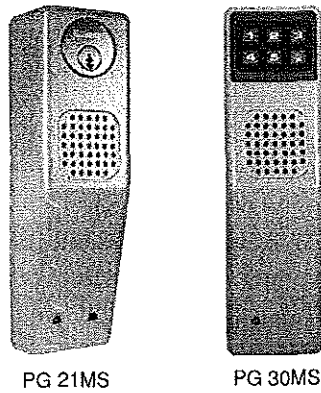

NARROW STILE DOOR ALARMS


- Used with existing locks - Non locking alarm
- **PG21MS** - Accepts 1-1/8" mortise cylinder inside, rim cylinder outside, long tailpiece recommended (not furnished)
- 9V battery included with low alert & flashing LED - 9-1/2" W x 2" H x 2-3/8" D - suitable for narrow stile doors
- Has programmable 15 sec. entry or delay, comes with two types of tamper proof switches
- **PG30MS** - Digital codes for Master, Management and Passage
- 3 Security levels for: High security, unattended applications, flexible control for delivery doors, etc.
- Audible low battery warning
- 3 Programmable 95 db siren styles: sweep, pulsed and steady
- Provisions for external reed-switch contacts for multiple door monitoring
- Dimensions: 9" W x 2-1/2" H x 2-3/8" D
- Finish: Aluminum

AUTO SHUT OFF / RESET
AK PG 21MS 1/10

PUSHBUTTON
AK PG 30MS 1/10

OUTSIDE KEYPAD FOR PG30MS
AK PG 30KPD 1/10


BATTERY PACK
AK BP6 1/12



ARMORED DOOR LOOP

- Brings electric current from hinge side of door frame to door
- 18" armored flexible cable
- End bracket anodized aluminum and conceal wire connections


AK 271 1/1



CURRENT TRANSFER

- Brings electric current from lock side of door frame to door
- Power flows when door is closed
- Face and strike plate are 161 template
- Stainless steel trim

AK 261 1/1



PLUG-IN TRANSFORMER


- **AK221:** 24 Volt AC 30 VA
- **AK241:** 24 Volt DC 500 MA Rectified
- 1/2 Amp

24 VAC
AK 221 1/1

24 VDC
AK 241 1/1

PADLOCKS & ACCESSORIES

ALMONT

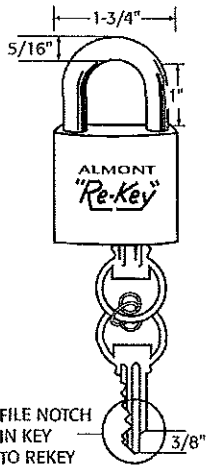

SOLID BRASS REKEYABLE PADLOCK

- Hardened steel alloy nickel and copper plated shackle
- Solid brass pin tumbler, 6 pin. Zero bitting
- Key is removable in locked position only
- Made in U.S.A.

KEYWAY #	MANUFACTURER	KEY BLANK
1	YALE	US21 Y1
2	KW1	US21 KW1
3	SCHLAGE C	US21 SC1
30	SCHLAGE C-K	US21 SC1
5	SEGAL 9	US21 SE1
5A	AR1	US21 AR1

* Must order reloading tool and upper pin retainer to service Almont padlocks

YALE	AT 1341	1/6
KW1	AT 1342	1/6
SCHLAGE C	AT 1343	1/6
SCHLAGE C-K	AT 13430	1/6
SEGAL 9	AT 1345	1/6
AR1	AT 1345A	1/6

RELOADING TOOLS



RELOADING TOOL



RETAINER PIN

- Simple to rekey
- Disassemble and reassemble all parts
- Remove key plug only - upper pins and springs remain
- Easy replacement of pins to master key
- Remove and replace shackles

TOOL NUMBER	MANUFACTURERS
1	YALE
2	KWIKSET
3	SCHLAGE
5	SEGAL

SPECIFY
TOOL #

RELOADING TOOL	
ATRL	1/1

RETAINER PIN	
ATRT 134	1/1


REPLACEMENT SHACKLES

- Shackles available in 7/8", 2", 3" and 4" lengths
- Replacement balls: Sold 12 in a bag

ITEM #	CLEARANCE
AT 1134 L1	7/8"
AT 1134 L2	2"
AT 1134 L3	3"
AT 1134 L4	4"

AT 1134 L1	1/1
AT 1134 L2	1/1
AT 1134 L3	1/1
AT 1134 L4	1/1

SHACKLE BALLS	
AT 2134	1/1



PEANUT CYLINDER PAIRS

- 3/4" mortise cylinder copper plated shackle
- Solid brass
- 1004M keyway
- For glass doors
- Finish: Satin Chrome (26D)


AT104 8	1/1
---------	-----



Altronix®

POWER SUPPLY/CHARGERS

ALTRONIX




TWO OUTPUT POWER SUPPLY/CHARGER WITH FIRE ALARM INTERFACE

NEW!

- 12VDC or 24VDC @ 1 amp supply current
- Two (2) Class 2 rated power limited outputs
- One (1) Fail-Safe/Fail-Secure lock output (switched)
- One (1) auxiliary power output (unswitched)
- Normally open access control trigger input
- Supervised Fire Alarm Disconnect (latching w/ reset or non-latching)

AXAL125UL

1/1




TWO OUTPUT POWER SUPPLY/CHARGER WITH FIRE ALARM INTERFACE

NEW!

- 12VDC or 24VDC @ 1.75 amp supply current
- Two (2) Class 2 rated power limited outputs
- One (1) Fail-Safe/Fail-Secure lock output (switched)
- One (1) auxiliary power output (unswitched)
- Auxiliary relay output
- Fire alarm disconnect (latching w/ reset or non-latching)

AXAL175ULX

1/1




SINGLE OUTPUT POWER SUPPLY CHARGER

NEW!

- 12VDC @ 4 amp or 24VDC @ 3 amp supply current
- AC fail, low battery and battery presence monitoring

AXAL400ULX

1/1



SINGLE OUTPUT POWER SUPPLY CHARGER

NEW!

- 24VDC & 12VDC @ 6 amp supply current
- AC fail, low battery and battery presence monitoring

AXAL600ULX


1/1

POWER SUPPLY/CHARGERS

ALTRONIX

MULTI-OUTPUT POWER SUPPLY/CHARGER WITH FIRE ALARM INTERFACE

NEW!




- 24 VDC & 12VDC @ 6 amp supply current
- Five (5) individual PTC protected Class 2 rated power limited outputs
- Fire Alarm Panel or Access Control System Trigger input N.O. or N.C. supervised dry trigger input and/or polarity reversal trigger input
- AC fail and low battery and battery presence monitoring

AXAL600ULM 1/1

ACCESS POWER CONTROLLER WITH POWER SUPPLY/CHARGER

NEW!

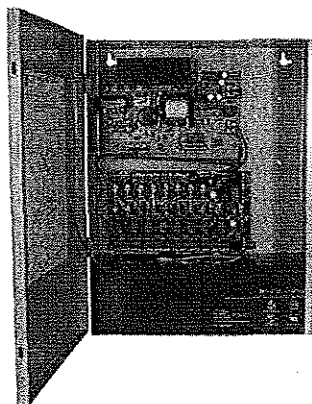


- 12VDC or 24VDC @ 6 amp supply current
- Sixteen access control system trigger inputs
- Output options
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs
 - b) Sixteen (16) form "C" 5 amp rated relay outputs
 - c) Any combination of the above
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the outputs

AXAL600ULACM 1/1

POWER SUPPLY/CHARGER WITH MULTI-OUTPUT ACCESS POWER CONTROLLER

NEW!

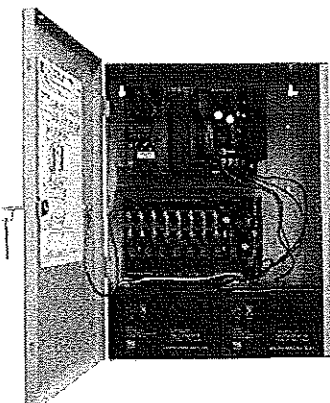

- 24 VDC @ 10 amp supply current
- Sixteen access control system trigger inputs
- Output options
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs
 - b) Sixteen (16) form "C" 5 amp rated relay outputs
 - c) Any combination of the above
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the outputs


AXAL1024ULACM 1/1

POWER SUPPLY/CHARGERS

ALTRONIX

PANIC DEVICE POWER CONTROLLER

NEW!




- Operates up to two (2) 24VDC Panic hardware devices individually or simultaneously
- One (1) 12VDC filtered regulated auxiliary output rated @ 1.5 amp continuous supply current
- One (1) 24VDC filtered regulated auxiliary output rated @ 1 amp continuous supply current.
- Two (2) delayed follower form "C" relay outputs
- Delay time is selectable .5 seconds or 1 second. Energized duration is 1 second.
- Two (2) programmable Fire Alarm Disconnect options.

AXSTRIKELT1 1/1

CCTV POWER SUPPLY

NEW!




- 24VAC @ 8 amp or 28VAC @ 7 amp (200VA) supply current
- Sixteen (16) fuse protected outputs
- Surge suppression
- Includes transformer & enclosure

AXALTV2416 1/1

CCTV POWER SUPPLY

NEW!




- 24VAC @ 4 amp or 28VAC @ 3.5 amp (100VA) supply current
- Eight (8) fuse protected outputs
- Surge suppression
- Includes transformer & enclosure

AXALTV248 1/1

CCTV POWER SUPPLY

NEW!




- 24VAC @ 4 amp or 28VAC @ 3.5 amp (100VA) supply current
- Four (4) fuse protected outputs
- Surge suppression
- Includes transformer & enclosure

AXALTV244 1/1

POWER SUPPLY/CHARGERS

ALTRONIX

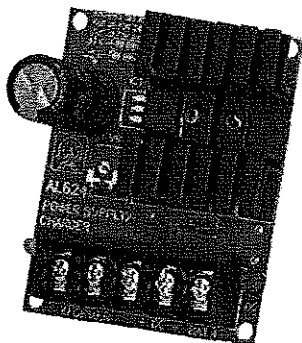


LINEAR POWER SUPPLY/ CHARGER

NEW!

- 6VDC, 12VDC or 24VDC selectable output.
- 6VDC or 12VDC @ 1.2 amp of continuous supply current or 24VDC @ .75 amp of continuous supply current.
- Filtered and electronically regulated outputs.
- Built-in charger for sealed lead acid or gel type battery backup.
- AC input and DC output LED indicators

AXAL624

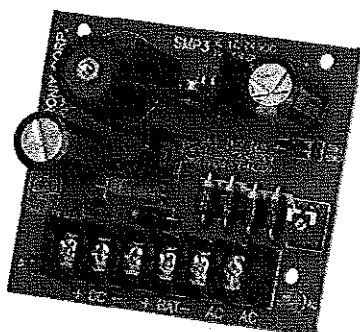


SWITCHING POWER SUPPLY/ CHARGER

NEW!

- 6VDC, 12VDC or 24VDC output @ 2.5 amp supply current
- Filtered and electronically regulated output

AXSMP3

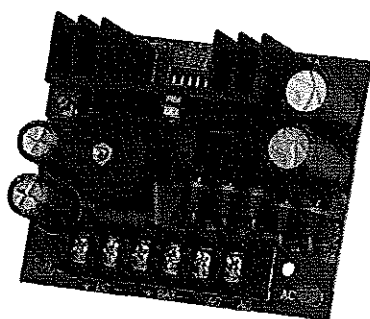

SWITCHING POWER SUPPLY/ CHARGER

NEW!

- 6VDC, 12VDC or 24VDC output @ 4 amp supply current
- Filtered and electronically regulated output

AXSMP5



SWITCHING POWER SUPPLY/ CHARGER


NEW!

- 12VDC or 24VDC output @ 10 amp supply current
- Filtered and electronically regulated output

AXSMP10

TIMERS/RELAYS

ALTRONIX

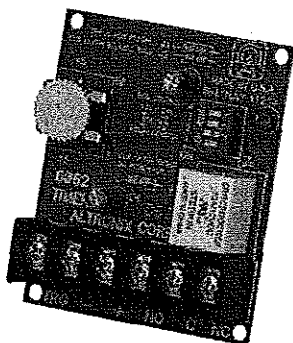


TIMER

NEW!

- 12VDC or 24VDC selectable operation
- Accurate time range adjustment from 1 sec. to 60 min.
- Triggers via positive DC (+) voltage, dry contact closure, or removal of contact closure
- Selectable relay activation at the start or end of the timing cycle.
- One (1) second momentary relay activation at the end of the timing cycle (eliminates the need to use two (2) timers for this function).

AX6062

1/1

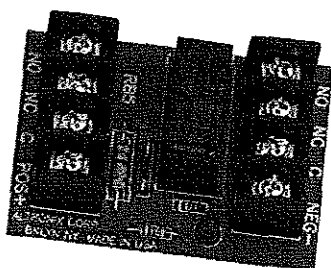


RELAY MODULE

NEW!

- 6VDC or 12VDC operation
- Coil draw of 120mA
- 5 amp / 120VAC / 28VDC DPDT contacts.

AXRB5

1/1

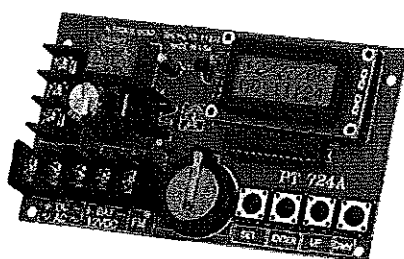


TIMER

NEW!

- 12 to 24 volt AC or DC operation
- 50 individual daily/weekly events
- Block programming capacity accommodates 350 events per week.
- Standard or Daylight Savings Time settings

AXPT724A

1/1

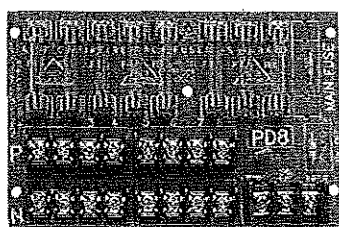

POWER DISTRIBUTION MODULE

NEW!


- Converts on input to eight (8) fuse protected outputs

AXPD8

1/1

POWER CONTROLLERS & SUPPLIES

ALTRONIX

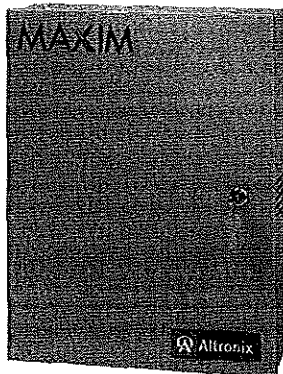


ACCESS POWER CONTROLLER

NEW!

- Output Power Options:
 - a) 5.7 amp @ 12VDC plus 5.7 amp @ 12VDC
 - b) 5.7 amp @ 24VDC plus 5.7 amp @ 24VDC
 - c) 5.7 amp @ 12VDC plus 5.7 amp @ 24VDC
- Sixteen access control system trigger inputs
- Output options:
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs
 - b) Sixteen (16) form "C" 5 amp rated relay outputs
 - c) Any combination of the above
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the outputs
- AVAILABLE DROP SHIP ONLY

AXMAXIM33

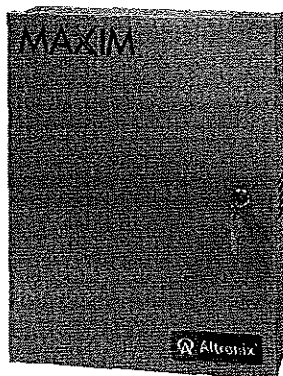


ACCESS POWER CONTROLLER W/POWER SUPPLIES

NEW!

- 24VDC @ 9.7 amp supply current
- Sixteen (16) access control system trigger inputs
- Output options:
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs
 - b) Sixteen (16) form "C" 5 amp rated relay outputs
 - c) Any combination of the above
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the outputs
- AVAILABLE DROP SHIP ONLY

AXMAXIM7

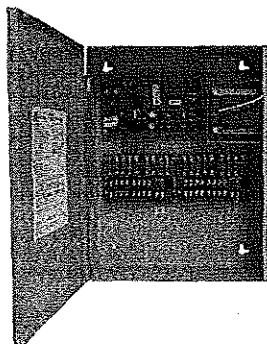


COMBINATION AC & DC WALL MOUNT

NEW!

- Eight (8) fused outputs 12VDC @ 3.5 amp supply current and eight (8) fused outputs 24VAC @ 3.5 amp supply current
- AC outputs have surge suppression
- DC outputs are filtered and electronically regulated
- AVAILABLE DROP SHIP ONLY

AXALTV1224C

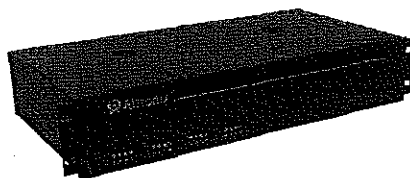

CCTV POWER SUPPLY


NEW!

- 24VAC output rated @ 12.5 amp or 28VAC @ 10 amp supply current
- Sixteen (16) fuse protected outputs
- Illuminated Power Disconnect Circuit Breaker with manual reset
- Modular 2U standard EIA 19" rack mount chassis
- AVAILABLE DROP SHIP ONLY

AXR2416300UL

COLORED ALUMINUM PADLOCKS

**AMERICAN
LOCK**

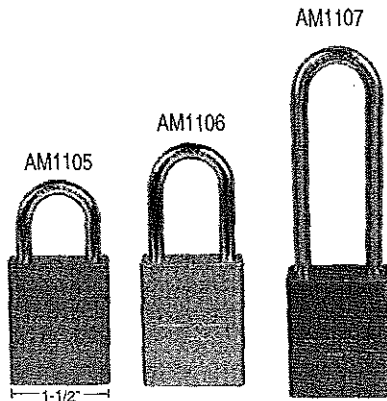


SPECIFY COLOR					
B	BLUE	R	RED	D	DURO
E	GREEN	G	GOLD	K	BLACK
O	ORANGE	P	PURPLE		

1-1/2" ALUMINUM BODY PADLOCKS

- Color coded security for use with lockout hasp
- 1/4" shackle diameter
- Solid aluminum body 3/4" thick
- 5 pin tumbler cylinder with AM3 keyway
- Hardened steel shackle & cover plate
- Double ball locking
- All padlocks KD unless KA specified
- Blue, Red and Duro Padlocks also available KA
- AM1107 available in blue or red in KD
- AM1107 available in duro or red in KA

SPECIFY COLOR	
1" CLEARANCE	
AM1105	1/8
1" CLEARANCE	
AM1105 KAA	1/8
1-1/2" CLEARANCE	
AM1106	1/8
1-1/2" CLEARANCE	
AM1106 KAA	1/8
3" CLEARANCE	
AM1107	1/8
3" CLEARANCE	
AM1107 KAA	1/8

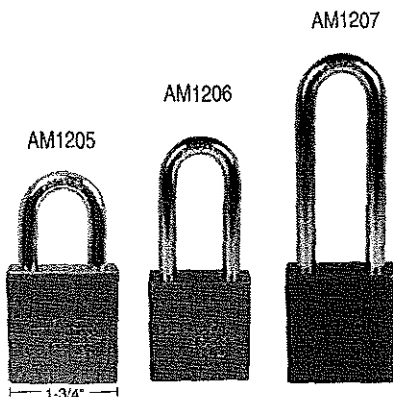


SPECIFY COLOR					
B	BLUE	R	RED	D	DURO
O	ORANGE	P	PURPLE		

1-3/4" ALUMINUM BODY PADLOCKS

- Solid aluminum body 3/4" thick
- 5/16" shackle diameter
- 5 pin AM3 keyway
- Hardened solid steel cylinder cover plate
- Easy-to-service
- Rekeyable and interchangeable cylinders
- Well suited for outdoor applications
- All padlocks KD unless KA specified
- Specify Color: B=Blue R=Red D=Duronotic O=Orange P=Purple
- Specify KAA or KD
- Duronotic Available KAA Only

SPECIFY COLOR	
1-1/8" CLEARANCE	
AM1205	1/8
1-1/8" CLEARANCE	
AM1205 KAA	1/8
2" CLEARANCE	
AM1206	1/8
2" CLEARANCE	
AM1206 KAA	1/8
3" CLEARANCE	
AM1207 D	1/8
5" CLEARANCE	
AM1209 D KAA	1/8

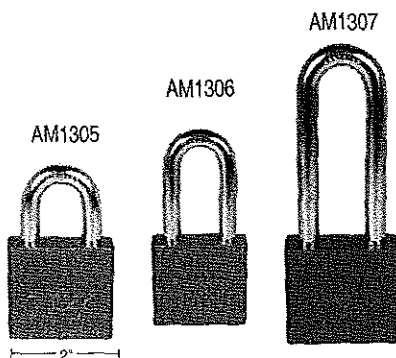

SPECIFY COLOR			
B	BLUE	D	DURO

2" ALUMINUM BODY PADLOCKS

- Solid aluminum body 3/4" thick
- 3/8" shackle diameter
- Maximum security 5 pin tumbler with AM3 keyway
- Hardened solid steel cylinder cover plate
- Easy-to-service
- Rekeyable and interchangeable cylinders
- Well suited for outdoor applications
- All padlocks KD unless KA specified
- Available in Blue and Duronotic Only
- Specify KAA or KD
- Duronotic Available KAA Only

SPECIFY COLOR	
1-1/8" CLEARANCE	
AM1305	1/8
1-1/8" CLEARANCE	
AM1305 KAA	1/8
2" CLEARANCE	
AM1306 (KD)	1/8
2" CLEARANCE	
AM1306 KAA	1/8
3" CLEARANCE	
AM1307D KAA	1/8


SOLID STEEL PADLOCKS

AMERICAN
LOCK


5100 SERIES 1-1/2" SOLID STEEL PADLOCKS

- 1-1/2" case, Triple Satin Chrome Finish
- Hardened chrome plated shackle 1/4" diameter
- Removable brass cylinders for fast servicing
- Hardened steel cover plate for cylinder protection
- Two brass keys included
- 5 pin tumbler security-AM3 keyway
- Rekeyable for added security
- Double steel ball locking mechanism
- Specify KA# XJ12, XJ23, XJ34, XJ56 or KD


AM5102



AM5101



AM5100




1" CLEARANCE	SPECIFY KA #	
AM5100 KD		1/8
AM5100 KA		1/8
1-1/2" CLEARANCE		
AM5101 KD		1/8
AM5101 KA		1/8
3" CLEARANCE		
AM5102 KD		1/8
AM5102 KA		


5200 SERIES 1-3/4" SOLID STEEL PADLOCKS

- 1-3/4" case, Triple Satin Chrome Finish
- Hardened chrome plated shackle 5/16" diameter
- Removable brass cylinders for fast servicing
- Hardened steel cover plate for cylinder protection
- Two brass keys included
- 5 pin tumbler cylinder-AM3 keyway
- Rekeyable for added security
- Double steel ball locking mechanism
- Specify KA# XJ12, XJ23, XJ34, XJ45 or KD


AM5202

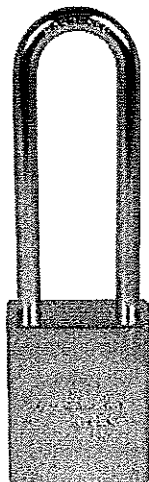

AM5201

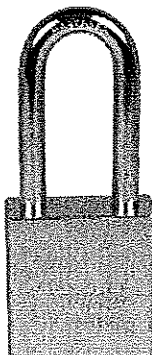

AM5200




1-1/8" CLEARANCE	SPECIFY KA #	
AM5200 KD		1/8
AM5200 KA		1/8
2" CLEARANCE		
AM5201 KD		1/8
AM5201 KA		1/8
3" CLEARANCE		
AM5202 KD		1/8
AM5202 KA		1/8

SOLID STEEL PADLOCKS

AMERICAN
LOCK

5260 SERIES 2" SOLID STEEL PADLOCKS



- 2" case, Triple Satin Chrome Finish
- Hardened chrome plated shackle 3/8" diameter
- Removable brass cylinders for fast servicing
- Hardened steel cover plate for cylinder protection
- Two brass keys included
- 5 pin tumbler cylinder-AM3 keyway
- Rekeyable for added security
- Double steel ball locking mechanism
- Specify KA# XJ12, XJ23, XJ34, XJ45 or KD

SPECIFY
KA #

1-1/8" CLEARANCE

AM5260 KD 1/6

AM5260 KA 1/6


2" CLEARANCE

AM5261 KA 1/6

3" CLEARANCE

AM5262 KA 1/6

700 SERIES EXTRA HEAVY DUTY PADLOCK

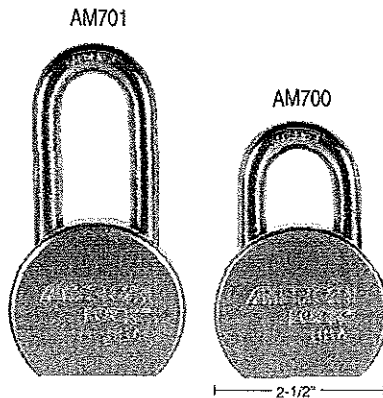

- Case hardened chrome plated, boron alloy steel shackle 7/16" diameter
- Removable brass cylinders for fast servicing
- Hardened steel cover plate for cylinder protection
- Two brass keys included
- 5 pin tumbler cylinder-AM3 keyway
- Specify KA# XJ12, XJ23, XJ34, XJ45, XJ56 or KD

SPECIFY
KA #

1-1/16" CLEARANCE

AM700 KD 1/6

AM700 KA 1/6


2" CLEARANCE

AM701 KD 1/6

AM701 KA 1/6

AMERICAN ORIGINAL PARTS

AM4746010



AM4761010


- Replacement security nuts fasten cylinder plate in
- Replacement security screws thread through padlock body into security nuts

SECURITY NUTS/25pkg

AM 474 6010 1/1

SECURITY SCREWS/25pkg

AM 476 1010 1/1

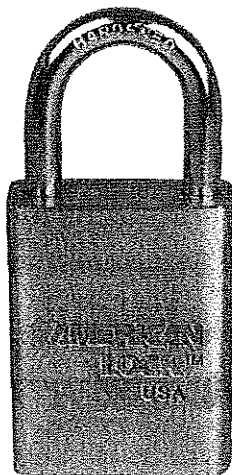BRASS BODY PADLOCKS**AMERICAN
LOCK****5500 SERIES
1-1/2"
SOLID BRASS BODY
PADLOCK**


- Maximum security outdoors and in harsh environments
- 1/4" shackle diameter
- 5 pin cylinder - AM3
- Most models rekeyable
- Case hardened
- Available KAA (XJ12) or KD

1" SHACKLE**AM5530 KAA**

1/6

1" SHACKLE**AM5530 KD**

1/6

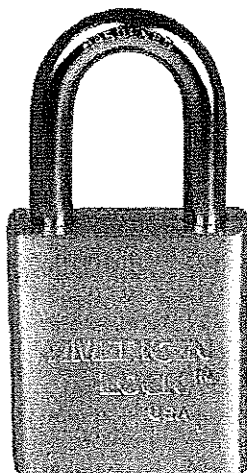**5560 SERIES
1-3/4"
SOLID BRASS BODY
PADLOCK**


- Maximum security outdoors and in harsh environments
- 5/16" shackle diameter
- 5 pin cylinder - AM3
- Most models rekeyable
- Case hardened
- Available KAA (XJ12) or KD

1-1/8" SHACKLE**AM5560 KAA**

1/6

1-1/8" SHACKLE**AM5560 KD**

1/6

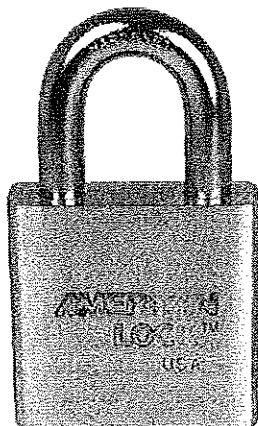**5570 SERIES
2"
SOLID BRASS BODY
PADLOCK**

- Maximum security outdoors and in harsh environments
- 3/8" shackle diameter
- 5 pin cylinder - AM3
- Most models rekeyable
- Case hardened
- Available KAA (XJ12) or KD

1-1/8" SHACKLE**AM5570 KAA**


1/6

1-1/8" SHACKLE**AM5570 KD**

1/6

IC CORE & COMBINATION PADLOCKS

AMERICAN
LOCK

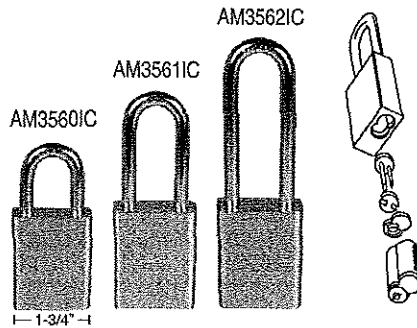

1-3/4" CASE INTERCHANGEABLE CORE PADLOCK

- Accepts Best, Arrow, Falcon, Eagle, KSP & Lockwood
- 5, 6 & 7 Pin
- Best type cores
- Extruded brass body
- Furnished less cylinder
- Hardened shackle 5/16" diameter

1-1/8" SHK CLEARANCE


AM3560 IC 1/6

2" SHK CLEARANCE

AM3561 IC 1/6

3" SHK CLEARANCE

AM3562 IC 1/6

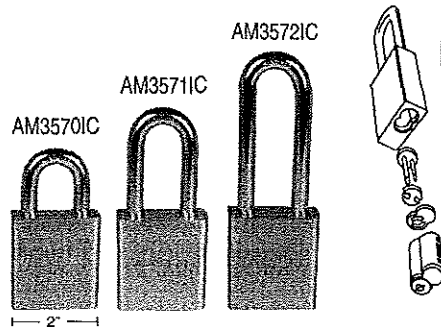

2" CASE INTERCHANGEABLE CORE PADLOCK

- Accepts Best, Arrow, Falcon, Eagle, KSP & Lockwood
- 5, 6 & 7 Pin
- Best type cores
- Extruded brass body
- Furnished less cylinder
- Hardened shackle 3/8" diameter

1-1/8" SHK CLEARANCE


AM3570 IC 1/6

2" SHK CLEARANCE

AM3571 IC 1/6

3" SHK CLEARANCE

AM3572 IC 1/6




COMBINATION PADLOCK

- Stainless steel outer case, hardened steel shackle
- Rotating dial with 40 numbers and 3 number combinations
- Blue dial standard (red, green or black also available)
- Scrambler automatically spins dial away from last number when lock is snapped shut
- 2" case diameter with 7/8" shackle clearance

CARDED

AM400H CC 1/6



KEY CONTROL COMBINATION PADLOCK

- Stainless steel outer case, hardened steel shackle
- Rotating dial with 40 numbers and 3 number combinations
- Blue dial standard (red, green or black also available)
- Scrambler automatically spins dial away from last number when lock is snapped shut
- 2" case diameter with 7/8" shackle clearance

KEY CONTROL MK425

AM400K 1/100

CONTROL KEY

AM400KEY A425 1/1

KEY CONTROL MKA30

AM401K 1/100

CONTROL KEY



AM401KEY A30 1/1

TUBULAR KEY PADLOCKS

AMERICAN
LOCK

SOLID STEEL TUBULAR KEY PADLOCKS


- 7 pin tubular (round key) cylinder with anti-drill features
- Keyable to American Lock, Chicago (Ace) and Fort (Gem) cam locks and inner cylinder (popout) locks
- Double ball locking design
- Chrome-plated hardened solid steel body
- Comes with two nickel-plated keys
- Chrome-plated hardened steel shackles
- Available keyed alike or keyed different
- Interchangeable shackles (with American Lock 5000 or US27600 Series padlocks)
- Virtually unpickable with most conventional tubular cylinder picking tools
- Cylinder can be serviced using American Lock TCR-2 Service Kit
- Accepts US21 137B

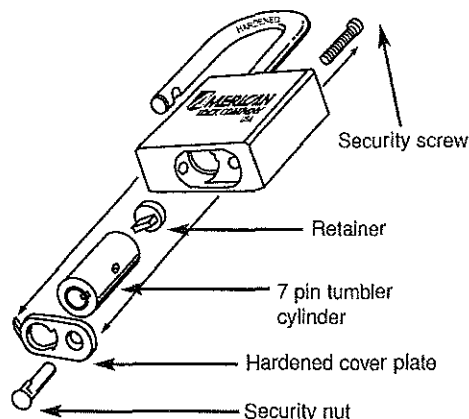

1-3/4" STEEL BODY TUBULAR KEY PADLOCK

- 5/16" shackle diameter
- Specify KAA (00764), KAB (00889) or KD
- AM7201 and AM7202 available KAA only


<u>1-1/8" SHK CLEARANCE</u>	<u>SPECIFY</u>
AM7200	KA# 1/8
AM7200KD	1/8
<u>2" SHK CLEARANCE</u>	
AM7201 KAA	1/8
<u>3" SHK CLEARANCE</u>	
AM7202 KAA	1/8

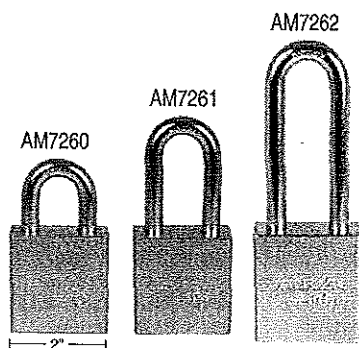

2" STEEL BODY TUBULAR KEY PADLOCK

- 3/8" shackle diameter
- Specify KAA (00764), KAB (00889) or KD
- AM7261 and AM7262 available KAA & KAB only

<u>1-1/8" SHK CLEARANCE</u>	<u>SPECIFY</u>
AM7260	KA# 1/8
AM7260KD	1/8
<u>2" SHK CLEARANCE</u>	
AM7261	1/8
<u>3" SHK CLEARANCE</u>	
AM7262	1/8



2-1/4" STEEL BODY TUBULAR KEY PADLOCK

- 7/16" shackle diameter
- Specify KAA (00764), KAC (00605) or KD
- AM7301 available KAA only

<u>1-1/8" SHK CLEARANCE</u>	<u>SPECIFY</u>
AM7300	KA# 1/8
AM7300KD	1/8
<u>2" SHK CLEARANCE</u>	
AM7301 KAA	1/8

AMERICAN LOCK® PADLOCKS

AMERICAN
LOCK



2000 SERIES

- Cylinder: Brass 6 pin with mushroom design
- To be used with AM535CC hasp
- Specify KAA (13373), KAB (13380) or KD
- Finish: Satin Chrome

AM2000KD

SPECIFY
KAA OR KAB

AM2000

1/6

REPLACEMENT CYL.

AMPT2001 KAA

1/1

REPLACEMENT CYL.

AMPT2001 KD

1/1




2500 SERIES

- Hardened solid steel, triple plated body and internal mechanism resists attack
- Stainless steel lock springs and fasteners resists corrosion
- Rotating cover plate and stainless steel cylinder pins, prevents drilling of cylinder
- Recessed, domed head shackle pin resists attack
- Easy access, front keyway for simple opening
- 2-7/8" diameter • 1-1/2" thick • Rekeyable
- KA 8437

AM2500 KA

1/24

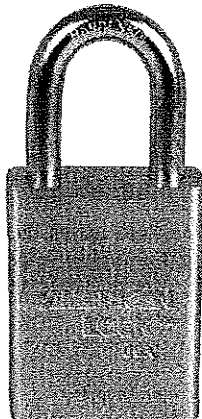

MULTI-CYLINDER SYSTEM PADLOCKS

- Accepts Schlage, Medeco, Ilco, and US1539 cylinders
- Only a Phillips screwdriver is needed to complete cylinder placement
- Solid one piece extruded brass body
- Double ball locking
- Bolts included
- AM 3600: 5/16" shackle diameter
- AM 3700: 3/8" shackle diameter
- Less cylinder
- Cylinders sold 6 per pack

1-3/4" BODY

1-1/8" CLEARANCE

AM3600 WO

1/6

2" CLEARANCE

AM3601 WO

1/6

2" BODY

1-1/8" CLEARANCE

AM3700 WO

1/6

SCHLAGE/ASSA DRIVER

AM SCH 6

1/1

MEDECO DRIVER


AM MED 6

1/1

ILCO DRIVER

AM LOR 39

1/1



SHROUDED PADLOCK


- Shackle: Case hardened boron alloy steel with shrouded case
- Shackle Clearance: 1"
- Takes Key Blank: AMPT748
- Specify KAA or KD
- Triple Satin Chrome Finish

AM748 KD

1/6

AM748 KAA

1/6



SOLID HARDENED STEEL BLADE TUMBLER PADLOCK

- Shackle: Hardened boron alloy steel
- Corrosion resistant, plated solid steel body
- Replacement Blank #AMBKB
- 10 Blade tumbler • Shackle diameter: 7/16"
- AMH11: Available KAA only

1-1/16" CLEARANCE

AMH10

SPECIFY
KAA OR KAB

1/6

AMH10KD

2" CLEARANCE


AMH11 KAA

1/6

More Choices, One Supplier

HASPS

AMERICAN
LOCK

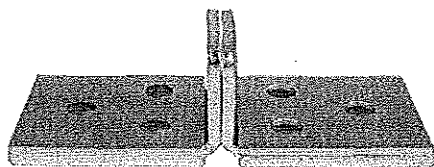


ANGLE HASP

- Carded
- For vending machines
- All hardened
- Used with AM2000 padlock

AM535CC

1/6



800 SERIES HASP

- 6 square hole • 8-1/2" L x 4-1/2" W
- Zinc nickel plated hasp
- For use with 2000 & 2500 series padlocks

WHITE POWDER COAT
AM800W

1/14




STRAIGHT BAR HASP

- Carded
- Case hardened steel
- Rust proof plated

AM825CC

1/6

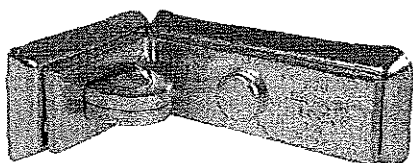

90° ANGLE BAR HASP

- Carded
- Case hardened steel
- Rust proof plated

AM850CC

1/6



SINGLE HINGE HASP

- Carded
- Case hardened steel
- Rust proof plated

AM875CC

1/6




DOUBLE HINGE HASP

- Carded
- Case hardened steel
- Rust proof plated

AM885CC

1/6



LOCKING BOLT

- 3/4" hardened steel
- throw fully adjustable
- Chrome plated

AM895

1/6

PIN KITS AND ACCESSORIES

AMERICAN
LOCK



PADLOCK SERVICE KIT

- For servicing all American Lock pin tumbler changeable cylinder padlocks with hardened steel cover plates for 700, 1000 and 5000 series
- Contains: Bottom pins 1-8, Master pins 1-6, Large and small tumbler springs, shackle balls, cylinder retaining screws, cover plates, retainers for 5100, 5300, 700, 5200, 5260, 5560 and 5570 series padlocks, compatible Master Lock cylinder and keys, 6 pin American padlock cylinder, 5 pin American padlock cylinder, and snap rings

AM SK8

1/1

AMERICAN LOCK REPLACEMENT PINS

MASTER PINS

AM3681050	#2 Master wafer	1/1
AM3681010	#3 Master wafer	1/1
AM3681020	#4 Master wafer	1/1
AM3681030	#5 Master wafer	1/1
AM3681040	#6 Master wafer	1/1

- Top quality precision brass pins
- 100 per poly bag

TOP & MUSHROOM PINS


AM3664010	Top pin	1/1
AM365301	Mushroom pin	1/1

SPRINGS

AM3054010	Tumbler spring	1/1
-----------	----------------	-----

BOTTOM PINS

AM368201	#1 Bottom pin	1/1
AM368202	#2 Bottom pin	1/1
AM368203	#3 Bottom pin	1/1
AM368204	#4 Bottom pin	1/1
AM368205	#5 Bottom pin	1/1
AM368206	#6 Bottom pin	1/1
AM368207	#7 Bottom pin	1/1
AM368208	#8 Bottom pin	1/1



AMPTC12

AMERICAN ORIGINAL CYLINDERS

- 6 pin keyed 5 cylinders for American Padlocks
- 2 keys per cylinder
- American Keyway Specify: KAA (XJ12) or KD
- Master keyway: 0 Bitted
- M1 keyway sold 6 only
- AM4680220: 10 per Bag

AMERICAN KKY 6 PIN

AMPT C12 KD 1/1

AMERICAN KKY 6 PIN

AMPT C12 KAA 1/1

M1 KKY ZERO BITTED

AMPT M1 0B 1/1

COVER PLATE FOR PTM1

AM4680220 1/1



AMBKB

AMERICAN ORIGINAL KEY BLANKS

- Top quality key blanks are perfectly machined to assure a perfect fit in American padlocks
- Solid brass
- Sold in boxes of 50

AMBKB	Double bitted	1/6
AMPTKB 1	5 pin	1/6
AMPTKB 2	6 pin	1/6
AMPT748	Model 748 only	1/6

U.L. FIRE SAFES

AMSEC


ELECTRONIC U.L. HOME FIRE SAFES

- Easy operation allows fast access to safe
- Combinations from 4 to 8 digits
- Digital lock requires 4 "AA" batteries
- LED lamp indicates battery status
- After 4 incorrect input attempts, lock will not accept another combination for 15 minutes
- For additional specifications see U.L. Home Fire Safes

• G (Granite) Stocked in East Coast

• S (Sandstone) Stocked in West Coast

• UL1511 & UL1511E
Sandstone also stocked in New York

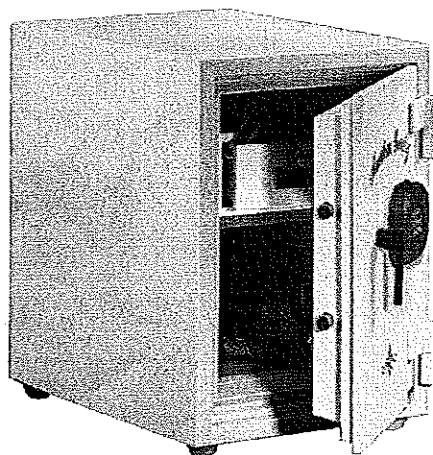

Truck Shipment Only

SPECIFY
G OR S

ACUL 1511 E

- Interior: 1 Adj. Shelf
- Cubic capacity: 2,070 • Weight: 215 lbs.
- Inside Dimensions: 15" x 11-1/2" x 12"
- Outside Dimensions: 21-1/2" x 17" x 18"

SPECIFY
G OR S

ACUL 1812 E

- Interior: 1 Adj. Shelf
- Cubic capacity: 2,775 • Weight: 260 lbs.
- Inside Dimensions: 18-1/2" x 12-1/2" x 12"
- Outside Dimensions: 25" x 18" x 18"

SPECIFY
G OR S

ACUL 1812XD E

- Interior: 1 Adj. Shelf
- Cubic capacity: 3,931 • Weight: 310 lbs.
- Inside Dimensions: 18-1/2" x 12-1/2" x 17"
- Outside Dimensions: 25" x 18" x 23"

SPECIFY
G OR S

ACUL 2018 E

- Interior: 2 Adj. Shelves
- Cubic capacity: 6,480 • Weight: 480 lbs.
- Inside Dimensions: 20" x 18" x 18"
- Outside Dimensions: 30-1/4" x 25-1/2" x 25-1/2"


DIAL U.L. HOME FIRE SAFES

- U.L. Listed Class 350°
2 Hour fire & impact rating
- Lifetime fire replacement warranty
- 3-1/2" thick recessed door
- Internal anchor bolt hole w/hardware
- U.L. Listed Group II key changeable combo lock. With auxiliary spring loaded re-lock device activated by severe attack
- Durable sandstone textured finish with accented brass plated dial, decorative emblems & plush interior

• G (Granite) Stocked in East Coast

• S (Sandstone) Stocked in West Coast

• UL1511 & UL1511E Sandstone
also stocked in New York

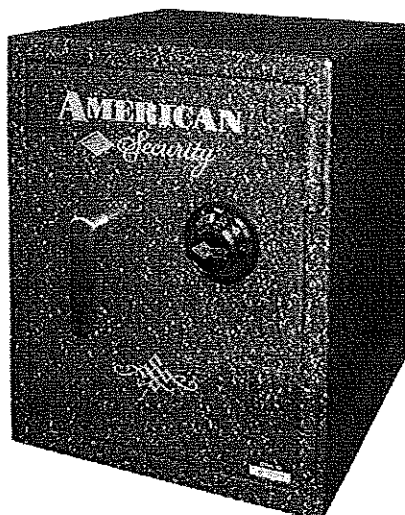

Truck Shipment Only

SPECIFY
G OR S

ACUL 1511

- Interior: 1 Adj. Shelf
- Cubic capacity: 2,070 • Weight: 215 lbs.
- Inside Dimensions: 15" x 11-1/2" x 12"
- Outside Dimensions: 21-1/2" x 17" x 18"

SPECIFY
G OR S

ACUL 1812

- Interior: 1 Adj. Shelf
- Cubic capacity: 2,775 • Weight: 260 lbs.
- Inside Dimensions: 18-1/2" x 12-1/2" x 12"
- Outside Dimensions: 25" x 18" x 18"

SPECIFY
G OR S

ACUL 1812 XD

- Interior: 1 Adj. Shelf
- Cubic capacity: 3,931 • Weight: 310 lbs.
- Inside Dimensions: 18-1/2" x 12-1/2" x 17"
- Outside Dimensions: 25" x 18" x 23"


SPECIFY
G OR S

ACUL 2018

- Interior: 2 Adj. Shelf
- Cubic capacity: 6,480 • Weight: 480 lbs.
- Inside Dimensions: 20" x 18" x 18"
- Outside Dimensions: 30-1/4" x 25-1/2" x 25-1/2"

FIRE & BURGLARY SAFES**AMSEC****IMPORTED
ELECTRONIC
RESIDENTIAL
FIRE SAFES**

- Digital electronic lock
- No key override, thumbturn only
- Hidden cylinder for forgotten combinations
- Side locking bolt work, 5/8" x 1-1/4" steel bolt prevents door removal during forced entry or if door hinges are removed
- 2 tone brown baked enamel finish

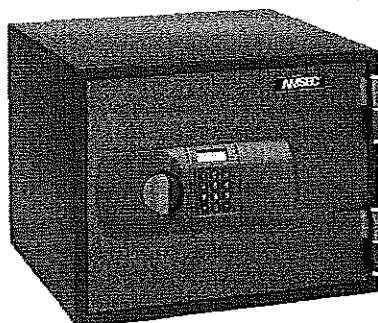**AC ES 1013**

- Inside Dimensions: 9-1/4" x 13-1/4" x 9-7/8"
- Outside Dimensions: 13-1/8" x 17" x 14-5/8"
- Cubic Capacity: 1.195 cu. inches
- Weight: 88 lbs.

*Truck Shipment Only***IMPORTED
RESIDENTIAL
FIRE SAFES**


- 3 wheel changeable combination lock
- No key override, thumbturn only
- Side locking bolt work, 5/8" x 1-1/4" steel bolt prevents door removal during forced entry or if door hinges are removed
- 2 tone brown baked enamel finish

**AC FS 1310**

- Inside Dimensions: 13-1/4" x 9-1/4" x 9-7/8"
- Outside Dimensions: 17" x 13" x 14-5/8"
- Cubic Capacity: 1.195 cu. inches
- Weight: 88 lbs.

*Truck Shipment Only***U.L. LISTED
FIRE RATED
BURGLARY SAFES**

- Granite finish, plush velour interior
- B-Rate heavy duty construction
- 1 hour fire label and residential security container burglary label
- Door- 3-1/2" thick door consisting of 1/2" steel plate with additional back liner filled with a unique fire resistant material
- Body- 2" thick body consisting of 1/8" outer and inner steel plates creating a single structure enclosing a unique fire resistant material
- Three massive 1" locking bolts
- S & G U.L. Listed Group II lock, with spring loaded auxiliary re-lock device
- A massive 1/4" steel hard plate
- Recessed anchor bolt hole and mounting hardware provided

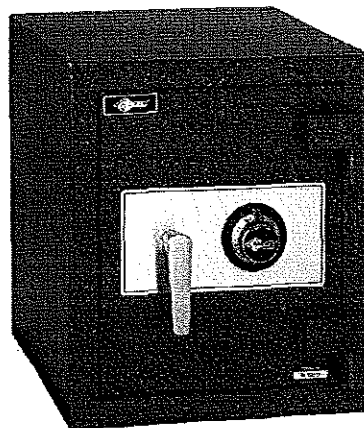*Truck Shipment Only***AC BF 1512**

- Inside Dimensions: 15" x 12" x 13"
- Outside Dimensions: 19" x 16" x 18-3/4"
- Door Clearance: 15" x 12"
- Cubic Capacity: 2,340
- Weight: 280 lbs.

AC BF 1716

- Inside Dimensions: 17" x 16-1/2" x 16"
- Outside Dimensions: 21" x 20-1/2" x 21-3/4"
- Door Clearance: 17" x 16-1/2"
- Cubic Capacity: 4,488
- Weight: 400 lbs.

AC BF 3416

- Inside Dimensions: 34" x 16-1/2" x 16"
- Outside Dimensions: 38" x 20-1/2" x 21-3/4"
- Door Clearance: 34" x 16-1/2"
- Cubic Capacity: 8,976
- Weight: 640 lbs.

FLOOR / AMVAULT SAFES


AMSEC

TUBULAR BODY FLOOR SAFES

WITH "C" RATE ROUND
LIFT OUT DOOR

- Manipulation resistant U.L. Listed Group II lock
- 7-1/4" clear opening, 1-3/4" solid steel
- 3 bolt locking
- Waterproof high impact molded resin dust cover
- Silver dials
- B rate body
- **UPS SHIPPABLE**


AC C5
w/Dust Cover

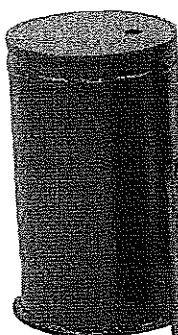

AC C7



AC C3

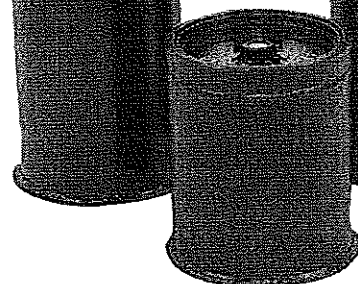

AC C3 U

- Inside Dimensions: 8-1/4" x 5-3/4"
- Outside Dimensions: 8-3/4" x 9"
- Cubic Capacity: 280 • Weight: 44 lbs.

AC C5 U

WITH SLOTTED HEAD

AC C5 S U

- Inside Dimensions: 8-1/4" x 10"
- Outside Dimensions: 8-3/4" x 13-1/2"
- Cubic Capacity: 510 • Weight: 51 lbs.

AC C7 U


WITH SLOTTED HEAD

AC C7 S U

- Inside Dimensions: 8-1/4" x 16"
- Outside Dimensions: 8-3/4" x 19"
- Cubic Capacity: 785 • Weight: 59 lbs.

AMVAULT TL-15 RATED COMPOSITE SAFES

- U.L. Listed Group II key changeable combination lock
- High quality parchment textured finish
- 2 hour, 350° factory fire rating
- Tested at temperatures up to 1850°
- **Tool resistant** against attack by common mechanical and electrical hand tools
- **Truck Shipment Only**

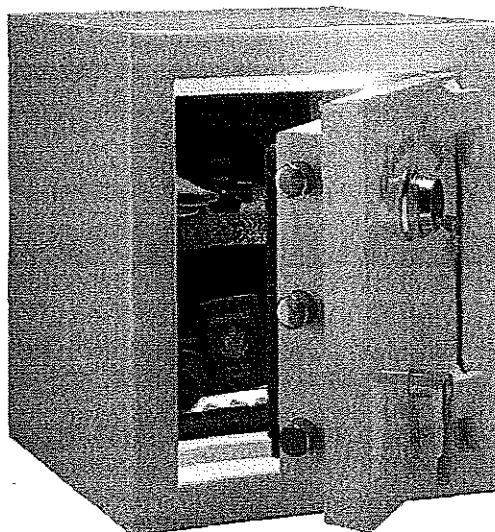

AC CE1814 SHOWN

AC CE1814

- Inside Dimensions: 18" x 14" x 12"
- Outside Dimensions: 25" x 21" x 21-1/2"
- Cubic Capacity: 3,110
- Weight: 816 lbs.
- 1 interior shelf

AC CE2518

- Inside Dimensions: 25" x 18" x 16"
- Outside Dimensions: 32" x 25" x 25-1/2"
- Cubic Capacity: 7,258
- Weight: 1236 lbs.
- 2 interior shelf


AMSEC®

MINI SAFES

AMSEC

MINI SECURITY SAFES WITH ELECTRONIC LOCK

- Formed door jamb to resist sledgehammer attack
- "B" rate construction
- ESL 10 electronic lock
- **UPS SHIPPABLE**

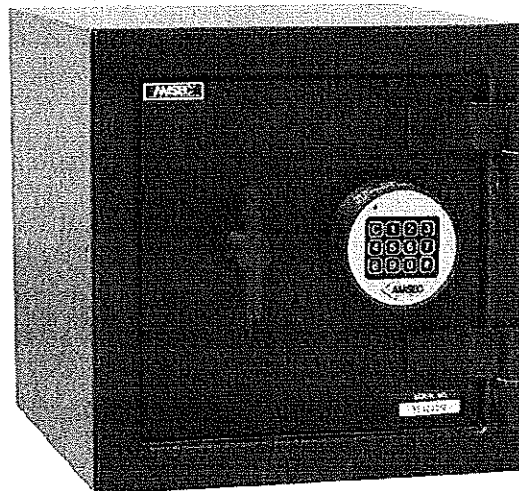

ELECTRONIC LOCK

AC MS 1414 E U

- Inside Dimensions: 13-3/4" x 13-3/4" x 11"
- Outside Dimensions: 14" x 14" x 14"
- Door Clearance: 9-3/4" x 9-3/4"
- Cubic Capacity: 2,080 • Weight: 61 lbs.

MINI-SAFES

- Formed B rate heavy duty steel plate body construction
- Lock and relocks protected by a large carburized hardplate
- Group II combination lock
- Attractive black textured finish
- Four anchor bolt holes standard
- **UPS SHIPPABLE**



COMBINATION LOCK

AC MS 1414C U

- Inside Dimensions: 13-3/4" x 13-3/4" x 11"
- Outside Dimensions: 14" x 14" x 14"
- Door Clearance: 9-3/4" x 9-3/4"
- Cubic Capacity: 2,080 • Weight: 61 lbs.


More Choices, One Supplier

FLOOR SAFES

AMSEC

RECTANGULAR FLOOR SAFES WITH ROUND LIFT OUT DOOR

- C rate door, manipulation proof
- U.L. Listed Group II
- key changeable lock
- 7-1/4" clear opening,
- 1-3/4" solid steel
- 3 drive bolt locking
- B rated body
- *Truck Shipment Only*




AC B17

- Inside Dimensions: 12" x 12-1/2" x 10"
- Outside Dimensions: 13" x 13" x 15"
- Cubic Capacity: 1,690 • Weight: 110 lbs.

MINI BRUTE FLOOR SAFES

- New black matte & brass plated face on dial
- Door: 1/2" solid steel plate,
- 6-5/8" x 6-5/8" opening
- S & G U.L. Listed
- Group II lock
- Dead bar hinge
- prevents door removal
- Reversible lift out door
- B rate body and door
- Flush cover plate
- *UPS SHIPPABLE*

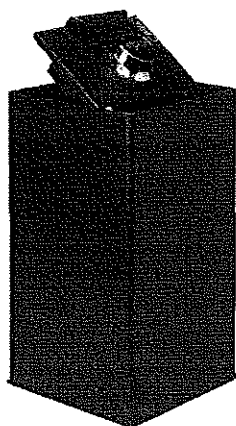

AC B700U SHOWN

AC B400U

- Inside Dimensions: 7-5/8" x 7-5/8" x 6-3/4"
- Outside Dimensions: 8-1/2" x 8-1/2" x 10-1/4"
- Cubic Capacity: 363
- Weight: 37 lbs.

AC B700U

- Inside Dimensions: 7-5/8" x 7-5/8" x 11-3/4"
- Outside Dimensions: 8-1/2" x 8-1/2" x 15-1/4"
- Cubic Capacity: 683
- Weight: 46 lbs.

SUPER BRUTE FLOOR SAFES

- New black matte & brass plated face on dial
- Door: 3/4" thick A36 solid steel plate,
- 10-3/4" x 11-1/8" opening
- S & G U.L. Listed
- Group II lock
- Dead bar hinge prevents door removal
- Reversible lift out door
- B rate body
- Flush cover plate
- *Truck Shipment Only*



AC B1500 SHOWN

AC B1500

- Inside Dimensions: 11-7/8" x 13-1/4" x 8-3/4"
- Outside Dimensions: 12-3/4" x 14-1/8" x 11-3/4"
- Cubic Capacity: 1,377
- Weight: 90 lbs.

AC B2200

- Inside Dimensions: 11-7/8" x 13-1/4" x 14"
- Outside Dimensions: 12-3/4" x 14-1/8" x 17-1/2"
- Cubic Capacity: 2,203
- Weight: 100 lbs.

AC B2900


- Inside Dimensions: 11-7/8" x 13-1/4" x 18-1/4"
- Outside Dimensions: 12-3/4" x 14-1/8" x 21-3/8"
- Cubic Capacity: 2,872
- Weight: 115 lbs.

ELECTRONIC SOLID STEEL SAFES

AMSEC

SOLID STEEL BURGLARY SAFES

- Burglary resistant safe with digital electronic locking system
- Can be bolted to the wall or floor (Mounting bolts not included)
- Key override system
- Dual live bolts made of heavy gauge steel
- **UPS SHIPPABLE**

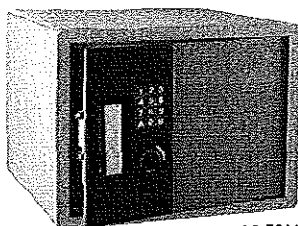

AC ES913 SHOWN

AC ES1114

- Inside Dimensions: 11-1/2" x 14-5/8" x 10-3/4"
- Outside Dimensions: 12-3/16" x 14-7/8" x 12-3/4"
- Weight: 52 lbs.


AC ES913

- Inside Dimensions: 9-1/2" x 13-1/2" x 8-13/16"
- Outside Dimensions: 9-7/8" x 13-3/4" x 10-3/8"
- Weight: 38 lbs.

HOTEL & RESIDENTIAL ELECTRONIC SAFES

- Heavy duty construction
- Two bolt motorized locking system
- Large LED display • 4 digit combination
- ADA approved keypad • Electronic override
- 4 "AA" alkaline batteries
- Power by-pass cable (9v battery required)
- 15 minute lock-out feature
- 2 anchor holes with mounting hardware
- Guest instruction label included
- **UPS SHIPPABLE**

AC HRC 916 E SHOWN

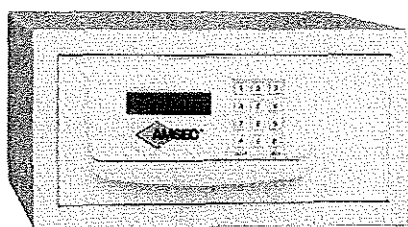

4 DIGIT COMBO

AC HR 916 E


4 DIGIT COMBO & CARD ACCESS

AC HRC 916 E

- Inside Dimensions: 8" x 15-3/4" x 11"
- Outside Dimensions: 9" x 16" x 14" (add 1" for keypad)
- Weight: 36 lbs.

SOLID STEEL ELECTRONIC TOP OPENING SAFES

- Top opening solid steel burglary safe with digital electronic locking system
- Can be bolted in as a wall safe, to a shelf, nightstand or inside a desk drawer
- Approximately .40 cubic feet of storage space
- Key lock override system, dual live bolts
- Excellent for protecting valuables, handguns or laptop computers
- **UPS SHIPPABLE**




AC ES411

- Inside Dimensions: 4-1/8" x 11-5/8" x 13-3/4"
- Outside Dimensions: 5" x 11-7/8" x 14"
- Weight: 18 lbs.

SOLID STEEL ELECTRONIC WALL SAFES

- Burglary resistant wall safe with digital electronic locking system
- Designed to be installed between 16" o.c. studs
- Approximately .50 cubic feet of storage space
- Key lock override system • Dual live bolts
- Made of heavy gauge steel
- Shelves and mounting screws included
- **UPS SHIPPABLE**




AC WES 2113

- Inside Dimensions: 21-1/2" x 13-5/8" x 2-7/8"
- Outside Dimensions: 22-1/6" x 15-1/8" x 4-1/2"
- Weight: 40 lbs.

ELECTRONIC LOCK FIRE RATED WALL SAFES

- 1 Hour JIS fire rating, insuring the inside temperature never exceeded 350°
- Extra deep interior with convenient pull-out tray
- Easy to operate electronic lock
- High-tech design with a 3 to 5 digit easy change electronic keypad
- 5/8" thick door with attractive two-tone sage finish
- Equipped with side locking boltwork mechanism incorporating a large 1-1/4" rectangular steel locking bolt
- **TRUCK ONLY**



AC WES 1310

- Inside Dimensions: 13-1/4" x 9-1/4" x 9-7/8"
- Outside Dimensions: 17" x 13" x 14-5/8"
- Door Clearance: 13-1/4" x 7-3/4"
- Cubic Capacity: 1.195 • Weight: 88 lbs.

AMSEC®

SMITH & WESSON SAFES & KEY PADS

AMSEC


HOME SECURITY SAFES

- 12 gauge solid steel body • Massive 1-1/8" recessed door constructed of a 1/4" solid steel plate and a fire insulating material • Equipped with a 3 wheel combination lock protected by a drill resistant hard plate
- 3-way bolt works with five 1-1/4" diameter chrome plated steel locking bolts (2020 has 4 active locking bolts) • Each safe offers 4 precut anchor holes • Features rich velour back cover and fire walls with durable American oak wood finish interior
- Deep blue textured finish with bold zinc die cast polished chrome Smith & Wesson logo • Spy proof dial and chrome "L" handle
- Exterior hinges
- Fire protection of 1200°F for a period of 30 minutes



ACSW2020 1/1

- 20"H x 20"W x 20"D outside dimensions
- 6 bolts
- 1 shelf • 165 lbs.



ACSW3020 1/1

- 30"H x 20"W x 20"D outside dimensions • 8 bolts
- 2 shelf • 225 lbs.

HANDGUN SAFES

- AMSEC "SBE" electronic push button lock is fast and easy to use
- Easy to change combination with programmable override code for lost combinations • 9VDC battery provides over 5000 openings with a low battery indicator • External auxiliary battery connection
- Tamperproof penalty lockout protects against manipulation attempts
- LED status and beeper can be programmed on / off
- Smith & Wesson deep blue finish with chrome hardware
- Interior cushioned with foam lining to protect gun from scratches
- Constructed of 18 gauge steel body
- Strong, pry resistant custom brass locking bolt
- Bolt holes provided to anchor safe




ACSWPBI 1/1

- 8"H x 12"W x 3"D outside dimensions
- 7.5 lbs

DIGITAL KEYPAD RETRO FIT KIT

- ESL Series Group II Electronic Locks
- Replaces most mechanical operation locks, easy to install and operate
- 1 user combination, factory reset code for lost combinations • (2) 9V battery in keypad, 15 minute penalty lockout after 4 incorrect entries
- Electronics are sealed to prevent moisture related failures • Audible beep and flash for every keystroke • Fits all UL, ULBF Series. Also B1500 Brute & front, top load & wide body depository safes

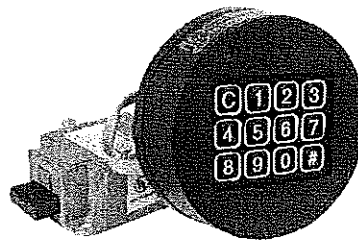


The ESL10 is a basic keypad lock for home and office applications.

AC ESL 10

DIGITAL TIME DELAY SAFE LOCK


- Time delay mode • Multiple user mode
- Dual control mode • Armored car override
- External A/C power • Control port



AC ESL 20

UNDER COUNTER & FIRE SAFES**UNDER
COUNTER
SAFES**

- 1/4" thick solid steel plate hinged door
- Install vertically or horizontally
- ACK1-Medeco commercial keyway lock
- Medeco key blank: MEK105400
- ACK2-dual flat steel keys
- Renter's Key: S & G 9500-019
- Guard Key: S & G 9591-0007
- Full width slot over door
- B rate body

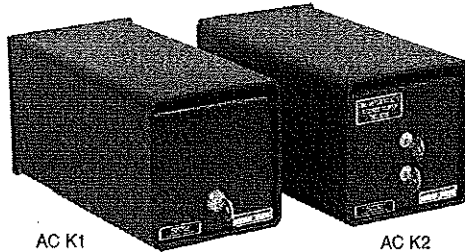

AC K1


AC K2

SINGLE KEY LOCK**AC K1**DUAL KEY LOCK**AC K2**

- Inside Dimensions: 5-5/8" x 5-5/8" x 10"
- Outside Dimensions: 6" x 6" x 12"
- Cubic capacity: 316
- Weight: 19 lbs.

**FIRE
RESISTANT
SAFES**


- Protects valuable records from fires up to 1550° for 30 minutes
- Includes key lock with steel latch and convenient carrying handle
- DC62 designed to fit hanging file folders with tabs (Folder not included)
- **UPS SHIPPABLE**

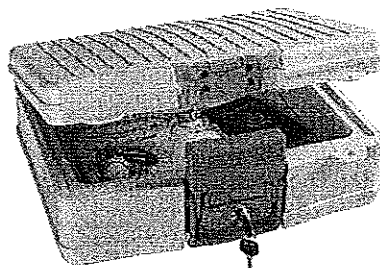

AC DC23

AC DC23

- Inside Dimensions: 3-1/2" x 13-3/4" x 8-1/2"
- Outside Dimensions: 5-5/8" x 16-1/8" x 12-1/2"
- Weight: 22 lbs.



AC DC62

AC DC62


- Inside Dimensions: 10-1/4" x 12-1/4" x 8-1/2"
- Outside Dimensions: 12-3/16" x 15-3/4" x 12-1/2"
- Weight: 44 lbs.

DEPOSITORY & WALL SAFES

AMSEC

FRONT LOADING DEPOSITORY SAFES

- Door: 1/2" A36 solid steel
- U.L. Listed S & G
Group II combination lock
- Recessed doors resist prying
- Metal shear point handle
- 4 anchor bolt holes
- 9-3/4" x 9-3/4" door opening
- 3" D x 4" W x 10-1/2" L
front load hopper
with anti-fish baffle
- *Truck Shipment Only*

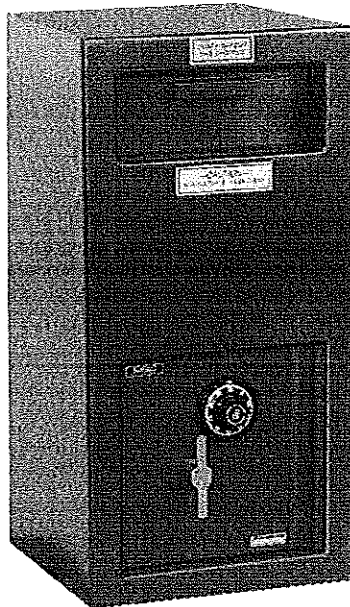

COMBINATION

AC DSF 2014 C

- Inside Dimensions: 10" x 13-3/4" x 11"
- Outside Dimensions: 20-1/4" x 14" x 14"
- Cubic Capacity: 1,513 • Weight: 93 lbs.

KEY CONTROL

AC DSF 2714 K


COMBINATION

AC DSF 2714 C

- Inside Dimensions: 18-1/2" x 13-3/4" x 11"
- Outside Dimensions: 27-1/4" x 14" x 14"
- Cubic Capacity: 2,798 • Weight: 110 lbs.

WALL SAFES

- Designed for installation
between 16" o.c. wall studs
- Flange allows easy
installation without
the need for
unnecessary replastering
- U.L. Listed Group II
key changeable
combination lock

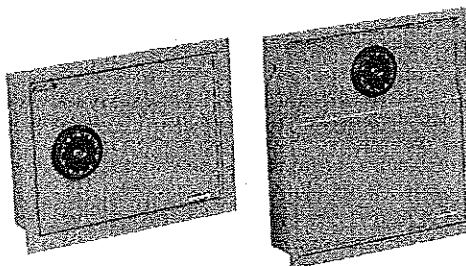

AC WS 1014

- Inside Dimensions: 10" x 13-3/4" x 3-1/2"
- Outside Dimensions: 12-1/4" x 15-3/4" x 4"
- Cubic Capacity: 481
- Weight: 26 lbs.

UPS SHIPPABLE

DEPOSITORY & WALL SAFES


MANUFACTURERS LIST PRICE

ITEM #	PACKED	REGULAR	DEALER
		40	50

AMSEC

WALL SAFES

- 1 hour JIS fire rating
- Extra deep interior, with a convenient pull-out tray
- Three wheel changeable combination lock
- Each safe is equipped with side locking boltwork mechanism incorporating a large 1-1/4" rectangular steel locking bolt
- Two 1-1/4" rectangular steel deadbolts
- Impressive 5/8" thick door
- *Truck Shipment Only*

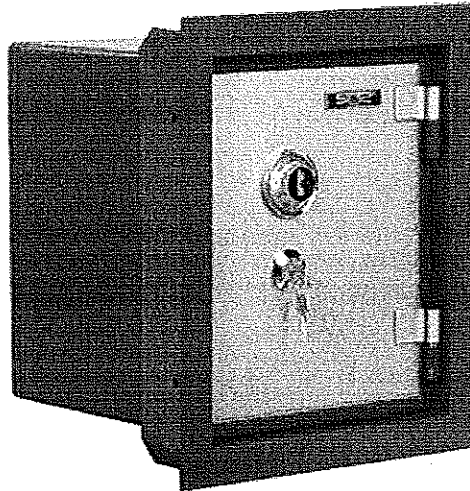


AC WFS 1310

- Inside Dimensions: 13-1/4" x 9-1/4" x 9-7/8"
- Outside Dimensions: 17" x 13" x 14-5/8"
- Cubic Capacity: 1,195
- Weight: 88 lbs.

REPAIR & REPLACEMENT HEADS FOR ROUND BODY LIFT-OUT DOOR

- "C" RATE LIFT-OUT DOOR FEATURES:
- Manipulation resistant, unitized U.L. Listed Group II key changeable lock. Protected by a revolving carburized hardplate
- Removable dial and drive/drill resistant spindle preventing damage from burglary attack and additional protection from hold-up
- Door-7-1/4" clear opening is 1-3/4" solid steel
- Door is securely locked by three bolts
- **Repair Kit includes:** wheel pack & spindle, dial & dial ring, handle lock cover, drive wheel, cams fence, springs & washers

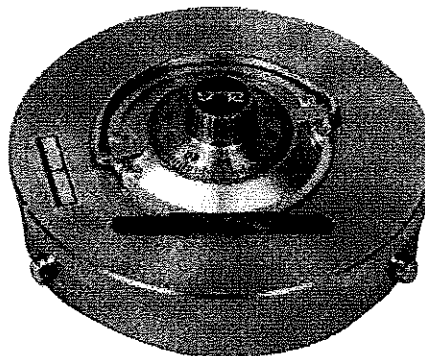

SLOTTED SAFE HEAD SHOWN

SLOTTED SAFE HEAD
ACMO 118 06

STANDARD ROUND
COMBO SAFE HEAD
ACMO 118 02


STAR ROUND
DOOR REPAIR KIT
ACMO 12700

GUN SAFES

AMSEC

FIRE RATED GUN SAFES

- Black textured finish with bold zinc die cast polished brass logos, rich velour back cover and fire walls with durable American Oak wood finish interior
- Brass spy-proof dial and "L" handle
- External hinges easily provide full access to the safe
- Offers fire protection of 1200°F for a period of 45 minutes
- Designed to maintain an interior temperature of less than 350°F
- Palusol™ door seal expands up to 8 times its original thickness when exposed to high temperatures sealing safe contents from harm
- High strength unitized 12 gauge solid steel body
- Massive 1-3/4" recessed door constructed of a 1/4" solid steel plate and fire insulating material
- Equipped with a Group II, key-changeable combination lock with brass spy-proof dial and ring
- 3-way bolt work with 5 active 1-1/4" diameter chrome-plated steel locking bolts and three 1-1/4" deadbolts
- Each safe offers 4 precut anchor holes and 1 precut electrical access hole

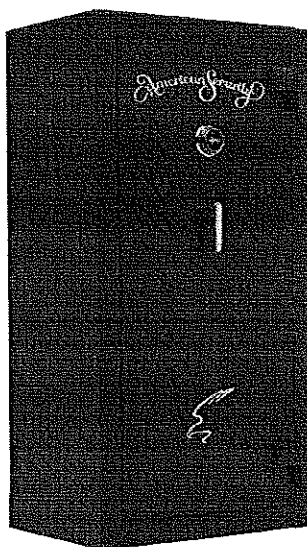


**Truck
Shipment
Only**

AC 6032 WF

- Inside Dimensions: 58-1/4" x 28-1/4" x 15-7/16"
- Outside Dimensions: 59-1/4" x 30" x 21"
- Weight: 610 lbs.

11 GUN SAFE FIRE LINED

- Interior features an attractive American Oak wood finish with carpeted back cover and walls, includes one adjustable shelf and an eleven-gun storage rack
- Brass spy-proof dial with decorative brass "L" handle
- Durable black powder coated finish
- Sleek style is designed to fit into a closet.
- Mercury Class I fire at 1000°F, for a period of 20 minutes. Designed to maintain an interior temperature of less than 350°F.
- Fire-resistant door seal
- High strength unitized 12 ga. Body and 1/4" thick solid steel recessed door
- 3-way boltwork with five active 1" diameter chrome-plated locking bolts
- Equipped with a 3 wheel combination lock protected by a drill-resistant hard plate
- 2 pre-cut anchor holes with mounting hardware included, and 2 pre-cut electrical access holes

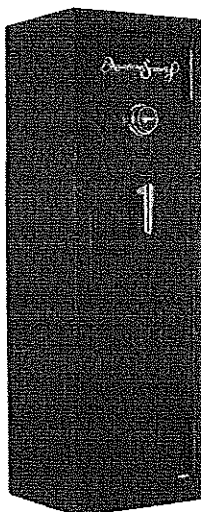

AC 5517 F


1/1

- Inside Dimensions:
- Outside Dimensions: 55-1/4"H x 17-3/4"W x 16"D
- Weight: 252lbs

MORTISE LOCKS

ARROW

AM & BM SERIES MORTISE LOCKS

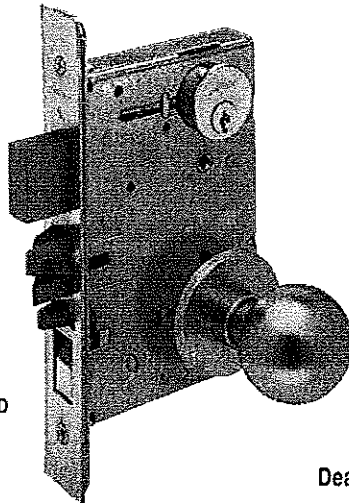

ENTRY
Function Shown
ARA 11 HBHD 26D

Door Thickness: Regularly furnished for 1-3/4" doors

Backset: 2-3/4" only

Case: 4-3/16" x 6-1/16" x 1" heavy wrought steel

Cylinder: Mortise locks furnished less cylinder.

1-1/4" cylinders ordered separately

Specify Cam: AR001 (Yale) Storeroom, Classroom and Office

AR002 (Cloverleaf) Entry & Hotel

US1550R (Cloverleaf) for use with US1501 & US1502 Cyl.

AR003 Cam for inside cylinder of double cylinder mortise lock

AR004 Exit Devices & Alarmed Units


AR18 Adams Rite

Latch Front: ANSI. Armored, brass, bronze, 8" x 1-1/4"


Deadbolt: Brass. Full 1" throw. 1/2" x 1-1/8"

Deadlocking Latchbolt: Brass US26D 1/2" throw. Deadlocks latchbolt when door is closed


HTG TRIM



HBHD TRIM



XH TRIM




Strike Plates: 1-1/4" x 4-7/8", AR46326D - New style only (Straight) -

non-handed - for 12, 17 & 22 function,
AR46026D non-handed for all functions

Hand: Fully reversible

Spindles: AR 16 385A for knobs & AR 17 386A for levers

Packed: 10 per case




PASSAGE

Latchbolt by knob or lever either side.
Unkeyed - Always open

ARA01 HBHD 26D 1/10

ARB01 XH 26D 1/10



ENTRY


Latchbolt by knob or lever either side except when outside knob or lever is locked by stopworks in face or deadbolt is projected. Deadbolt by key outside and turnpiece inside. Turning inside lever will retract latchbolt and deadbolt simultaneously.

ARA11 HTG 26D 1/10

ARA11 HTG 3 1/10

ARA11 HBHD 26D 1/10

ARB11 XH 26D 1/10




STOREROOM

Latchbolt by knob or lever from inside and by key outside. The outside knob or lever is rigid. Auxiliary latchbolt deadlocks latchbolt. *Strike plates are handed. Please specify hand when ordering.

ARA12 HTG 26D 1/10

ARA12 HBHD 26D 1/10

ARB12 XH 26D 1/10




CLASSROOM

Latchbolt by knob or lever either side except when outside is locked or unlocked by outside key cylinder. Auxiliary latchbolt deadlocks latchbolt. *Strike plates are handed. Please specify hand when ordering.

ARA17 HTG 26D 1/10

ARA17 HBHD 26D 1/10

ARB17 XH 26D 1/10



OFFICE

Latchbolt by knob or lever either side except when outside knob or lever is locked by stopbutton in the front, then by key outside. Auxiliary latchbolt deadlocks latchbolt. *Strike plates are handed. Please specify hand when ordering.

ARA22 HTG 26D 1/10

ARB22 XH 26D 1/10



C SERIES ORION SOLAR & VIRGO LEVERSETS


ARROW

SERIES

C SERIES GRADE 2 TUBULAR LEVERSETS

Recommended for use on all residential single and multi-family housing units as well as interior light commercial applications.

SOLAR - SC

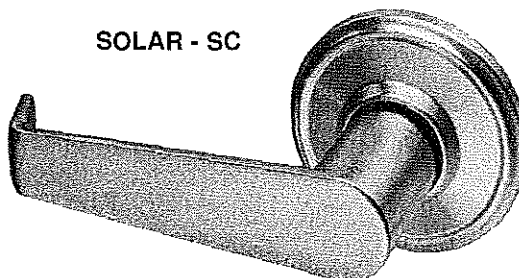

SPECIFICATIONS

FEATURES




- Tubular Design
- 5 Year Mechanical & Finish Warranty
- BHMA Certified

FINISHES

- 3 Polished Brass
- 5A Antique Brass
- 26D Dull Chrome

- Door Thickness: 1-3/8" to 1-3/4"
- Backset: 2-3/8" - 2-3/4" adjustable latch
- Latch: Brass front. Supplied standard with 1" x 2-1/4" square corner. Also packed with 1" x 2-1/4" radius corner and 1-1/8" x 2-1/4" square corner latch fronts
- Cylinder: Brass cylinder. 6 pin keyed 5. Accepts US1539
- Keyway: SC1
- Keying: KA4
- Strike: 1-5/8" x 2-1/4" full lip strike
- Certification: ANSI: A156.2 Series 4000 Grade 2
- Mounting: Knobsets are supplied with exposed screws on inside rose. Lever sets are supplied with concealed screws under inside rose.
- Fits standard 2-1/8" door prep
- Packed: 20 Per Case

TRIM DESIGN



HOW TO ORDER

AR C11 SC 5A

MANUFACTURER PREFIX

SERIES

FUNCTION

- 01 Passage
- 02 Privacy
- 11 Entry
- 12 Storeroom
- 08 Dummy

FINISH

- 3 Polished Brass
- 5A Antique Brass
- 26D Dull Chrome

TRIM DESIGN


- SC (Solar Lever)
- VC (Virgo Lever)
- OC (Orion Lever)

RESIDENTIAL SOLAR LEVERSETS

C SERIES GRADE 2 RESIDENTIAL LEVERSETS

FEATURES






- Tubular Design
- 5 Year Mechanical & Finish Warranty
- Solid Brass 6 Pin keyed 5 cylinder (SC1)
- Clutch Feature on Entry and Storeroom levers
- Packed 20 per case
- BHMA Certified

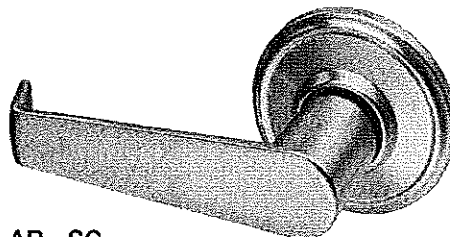


SOLAR - SC

SPECIFY WHEN ORDERING

Finishes: 3, 26D or 5A Hand: Non-Handed

	<p align="center">PASSAGE</p> <p align="center">Latchbolt operated by lever either side.</p>	<p><u>BRASS</u> ARC01 SC 3 1/20</p> <p><u>DULL CHROME</u> ARC01 SC 26D 1/20</p> <p><u>ANTIQUE BRASS</u> ARC01 SC 5A 1/20</p>
	<p align="center">PRIVACY</p> <p align="center">Latchbolt operated by lever either side except when inside turnbutton locks outside. Unlocked by rotating button or by using tool outside.</p>	<p><u>BRASS</u> ARC02 SC 3 1/20</p> <p><u>DULL CHROME</u> ARC02 SC 26D 1/20</p> <p><u>ANTIQUE BRASS</u> ARC02 SC 5A 1/20</p>
	<p align="center">ENTRY</p> <p align="center">Latchbolt operated by lever either side except when outside lever is locked by turnbutton inside. When outside lever is locked, latchbolt operated by key outside or turning inside lever. Inside button must be manually released.</p>	<p><u>BRASS</u> ARC11 SC 3 1/20</p> <p><u>DULL CHROME</u> ARC11 SC 26D 1/20</p> <p><u>ANTIQUE BRASS</u> ARC11 SC 5A 1/20</p>
	<p align="center">STOREROOM</p> <p align="center">Outside lever always rigid. Latchbolt operated by key in outside lever, or by turning inside lever.</p>	<p><u>BRASS</u> ARC12 SC 3 1/20</p> <p><u>DULL CHROME</u> ARC12 SC 26D 1/20</p> <p><u>ANTIQUE BRASS</u> ARC12 SC 5A 1/20</p>
	<p align="center">DUMMY TRIM</p> <p align="center">Rigid trim for one side of door only. Used as pull or to match active trim.</p>	<p><u>BRASS</u> ARC08 SC 3 1/20</p> <p><u>DULL CHROME</u> ARC08 SC 26D 1/20</p> <p><u>ANTIQUE BRASS</u> ARC08 SC 5A 1/20</p>



REPLACEMENT LATCHES

- 2-3/8" - 2-3/4" adjustable backset
- For Arrow C Series knobs & levers
- AR501 & AR511 Specify Finish: 3, 5A or 26D
- AR505 & AR515 in 3 finish only

	SPECIFY FINISH
<u>SPRINGLATCH</u> AR 501	1/24
<u>DEADLATCH</u> AR 511	1/24
<u>DRIVE-IN SPRINGLATCH</u> AR 505 3	1/24
<u>DRIVE-IN DEADLATCH</u> AR 515 3	1/24




RESIDENTIAL VIRGO LEVERSETS

ARROW

C SERIES GRADE 2 RESIDENTIAL LEVERSETS






FEATURES


- Tubular Design
- 5 Year Mechanical & Finish Warranty
- Solid Brass 6 Pin keyed 5 cylinder (SC1)
- Clutch Feature on Entry and Storeroom levers
- Not available in 5A • Packed 20 per case
- BHMA Certified

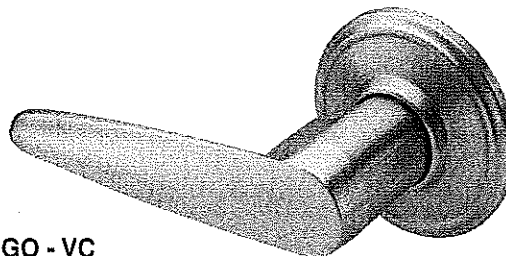

VIRGO - VC

SPECIFY WHEN ORDERING

		Finishes: 3 or 26D Hand: Non-Handed
	PASSAGE Latchbolt operated by lever either side.	<u>BRASS</u> ARC01 VC 3 1/20 <u>DULL CHROME</u> ARC01 VC 26D 1/20
	PRIVACY Latchbolt operated by lever either side except when inside turnbutton locks outside. Unlocked by rotating button or by using tool outside.	<u>BRASS</u> ARC02 VC 3 1/20 <u>DULL CHROME</u> ARC02 VC 26D 1/20
	ENTRY Latchbolt operated by lever either side except when outside lever is locked by turnbutton inside. When outside lever is locked, latchbolt operated by key outside or turning inside lever. Inside button must be manually released.	<u>BRASS</u> ARC11 VC 3 1/20 <u>DULL CHROME</u> ARC11 VC 26D 1/20
	STOREROOM Outside lever always rigid. Latchbolt operated by key in outside lever, or by turning inside lever.	<u>BRASS</u> ARC12 VC 3 1/20 <u>DULL CHROME</u> ARC12 VC 26D 1/20
	DUMMY TRIM Rigid trim for one side of door only. Used as pull or to match active trim.	<u>BRASS</u> ARC08 VC 3 1/20 <u>DULL CHROME</u> ARC08 VC 26D 1/20



REPLACEMENT LATCHES

- 2-3/8" - 2-3/4" adjustable backset
- For Arrow C Series knobs & levers
- AR501 & AR511 Specify Finish: 3, 5A or 26D
- AR505 & AR515 in 3 finish only

		SPECIFY FINISH
<u>SPRINGLATCH</u>		
AR 501	1/24	
<u>DEADLATCH</u>		
AR 511	1/24	
<u>DRIVE-IN SPRINGLATCH</u>		
AR 505 3	1/24	
<u>DRIVE-IN DEADLATCH</u>		
AR 515 3	1/24	


RESIDENTIAL ORION LEVERSETS

NEW!

C SERIES RESIDENTIAL LEVERSETS

FEATURES

- Tubular Design • 5 Year Mechanical & Finish Warranty
- Solid Brass 6 Pin keyed 5 cylinder (SC1)
- Clutch Feature on Entry and Storeroom levers
- Not available in 5A • Packed 20 per case • BHMA Certified

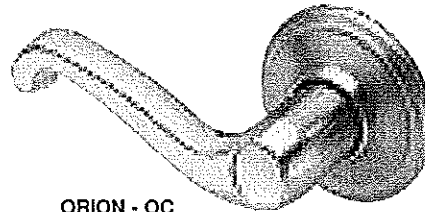


ORION - OC

SPECIFY WHEN ORDERING

Finishes: 3 or 26D Hand: Non-Handed

	<p>PASSAGE</p> <p>Latchbolt operated by lever either side.</p>	<p>ARC01 OC 3L 1/20</p> <p>ARC01 OC 3R 1/20</p> <p>ARC01 OC 5AL 1/20</p> <p>ARC01 OC 5AR 1/20</p>
	<p>PRIVACY</p> <p>Latchbolt operated by lever either side except when inside turnbutton locks outside. Unlocked by rotating button or by using tool outside.</p>	<p>ARC02 OC 3L 1/20</p> <p>ARC02 OC 3R 1/20</p> <p>ARC02 OC 5AL 1/20</p> <p>ARC02 OC 5AR 1/20</p>
	<p>ENTRY</p> <p>Latchbolt operated by lever either side except when outside lever is locked by turnbutton inside. When outside lever is locked, latchbolt operated by key outside or turning inside lever. Inside button must be manually released.</p>	<p>ARC11 OC 3L 1/20</p> <p>ARC11 OC 3R 1/20</p> <p>ARC11 OC 5AR 1/20</p> <p>ARC11 OC 5AL 1/20</p>
	<p>DUMMY</p> <p>Rigid trim for one side of door only. Used as pull or to match active trim.</p>	<p>ARC08 OC 3L 1/20</p> <p>ARC08 OC 3R 1/20</p> <p>ARC08 OC 5AL 1/20</p> <p>ARC08 OC 5AR 1/20</p>

REPLACEMENT LATCHES



- 2-3/8" - 2-3/4" adjustable backset
- For Arrow C Series knobs & levers
- AR501 & AR511 Specify Finish: 3, 5A or 26D
- AR505 & AR515 in 3 finish only

<u>SPRINGLATCH</u>	<u>SPECIFY FINISH</u>	
AR 501		1/24
<u>DEADLATCH</u>		
AR 511		1/24

<u>DRIVE-IN SPRINGLATCH</u>		
AR 505 3		1/24
<u>DRIVE-IN DEADLATCH</u>		
AR 515 3		1/24




DEADLOCKS

ARROW

SEE US1690 FOR
COMPLETE AVAILABILITY

D60 SERIES EXTRA HEAVY DUTY DEADLOCK

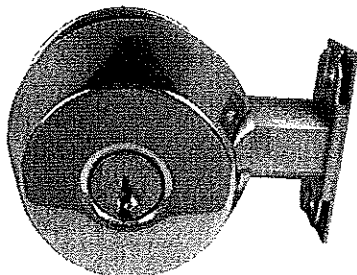


Door Thickness: 1-3/8" to 1-3/4" standard, up to 2-1/4" available
Housing: Solid one piece housing for all door thicknesses.
 Concealed screws on double cylinder functions
Thru-Bolting: Double thru-bolting, top to bottom and side to side
Deadbolt: 1" throw, solid steel deadbolt with hardened steel pin insert.
 A 1" dia. bore in the edge of door is required
Strikes: Two supplied, measuring 1-1/8" x 2-3/4", supplied with
 4 screws, 2 each 3" long hardened steel & two each 3/4" wood screws
Certification: BHMA Certified
Cylinder: Solid brass Arrow keyway. Drilled for 6 pin, keyed 5
Key Blank: ARK2
Packed: 12 locks per case

SPECIFY WHEN ORDERING

Arrow D Series Deadbolts Supplied in U.S. Lock Packaging Manufactured By Arrow

Backset: 2-3/8" standard, 2-3/4" available
Finishes: 3, 5A, 26D or 10B



SINGLE CYLINDER


Deadbolt by outside key or inside thumbturn.

US1680 DT DP3: Thick door pack

AR D61

1/12

5A & 10B Finish



DOUBLE CYLINDER

Deadbolt by key either side.

US1680 DT DP3: Thick door pack


AR D62

1/12

5A & 10B Finish

SEE USN1680 FOR
COMPLETE AVAILABILITY

E60 SERIES HEAVY DUTY DEADLOCK



Door Thickness: 1-3/8" to 1-3/4" standard, up to 2-1/4" available
New Door Prep: 1-1/2" or 2-1/8" bore. 1" diameter bore in edge of door required
Cylinder: Solid brass 6 pin cylinder keyed 5
Keyway: SC1 or AR1
Housing: Solid one piece housing for all door thicknesses. Concealed screws
 on double cylinder functions. Full 1/4" steel thru-bolts
Deadbolt: 1" throw, solid steel deadbolt with hardened pin insert
Strikes: Supplied with 2 strikes, standard
 & reinforced 1-1/8" x 2-3/4"
Certification: BHMA Certified
Packed: 1 per box, 24 boxes per case


SPECIFY WHEN ORDERING

Arrow E Series Deadbolts Supplied in U.S. Lock Packaging Manufactured By Arrow

Keyway: AR1 or SC1

Backset: 2-3/8", 2-3/4" or drive-in

Finishes: 3, 26D, 10 or 5A



SINGLE CYLINDER


Deadbolt by outside key or inside thumbturn.

See US1680 Series for additional keyways and finishes

US1680 DT DP3: Thick door pack

AR E61

1/24



DOUBLE CYLINDER


Deadbolt by key either side.

See US1680 Series for additional keyways and finishes

US1680 DT DP3: Thick door pack

AR E62

1/24



STANDARD

DRIVE IN



REPLACEMENT BOLTS

- For Arrow D & E series • 1" throw
- 2-3/8" Bolt: 1" x 2-1/4" faceplate
US1690BT equal to Arrow 141
- 2-3/4" Bolt: 1-1/8" x 2-1/4" faceplate
US1692BT equal to Arrow 144
- Specify Finish: US3 & 26D
- Drive In Bolt: 1" diameter US1691BT equal
to Arrow 145 US1693BT equal to Arrow 146
- Finish: 26D Only

SPECIFY
FINISH

2-3/8" STANDARD

US1690BT

1/10

2-3/4" STANDARD

US1692BT

1/10

2-3/8" DRIVE IN

US1691BT 26D


1/10

2-3/4" DRIVE IN

US1693BT 26D

1/10

D60 SERIES EXTRA HEAVY DUTY INTERCHANGEABLE CORE DEADLOCK

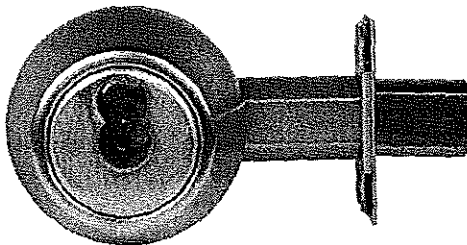


FURNISHED LESS CORE

- Door Thickness:** 1-3/8" to 1-3/4" standard, up to 2-1/4" available
- Housing:** Solid one piece housing for all door thicknesses
Concealed screws on double cylinder functions
- Thru-Bolting:** Double thru-bolting, top to bottom and side to side
- Deadbolt:** 1" throw, solid steel deadbolt with hardened steel pin insert.
A 1" dia. bore in the edge of door is required
- Strikes:** Two supplied, measuring 1-1/8" x 2-3/4", supplied with 4 screws, 2 each 3" long hardened steel & two each 3/4" wood screws
- Certification:** Certified in accordance to the standard of ANSI A156.5 auxiliary locks & BHMA Certified
- Cylinder:** Accepts 6 or 7 pin Interchangeable cores sold separately.
Arrow, Best Falcon, KSP
- Hand:** Reversible
- Packed:** 12 per case

SPECIFY WHEN ORDERING

Backset: 2-3/4" standard or 2-3/8" available
Finishes: 3 or 26D




SINGLE CYLINDER

Deadbolt by outside key or inside thumbturn.

ARD61CR121A: Prong for D & E Series IC Deadbolt

AR D61 IC2 1/12




DOUBLE CYLINDER

Deadbolt by key either side.

ARD61CR121A: Prong for D & E Series IC Deadbolt

AR D62 IC2 1/12

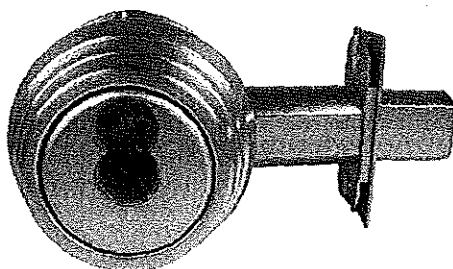


FURNISHED LESS CORE

- Door Thickness:** 1-3/8" to 1-3/4" standard, up to 2-1/4" available
- Housing:** Solid one piece housing for all door thicknesses.
Concealed screws on double cylinder functions
- Thru-Bolting:** Full 1/4" steel thru-bolts
- Deadbolt:** 1" throw, solid steel deadbolt with hardened steel pin insert
- Strikes:** Two supplied, measuring 1-1/8" x 2-3/4", supplied with 4 screws, 2 each 3" long hardened steel & two each 3/4" wood screws
- Cylinder:** Interchangeable core deadlocks are available for use with 6 or 7 pin interchangeable core, in Arrow or competitive keyways
- Hand:** Reversible
- Certification:** Certified in accordance to the standard of ANSI A156.5 auxiliary locks & BHMA Certified
- Packaging:** 24 per case
- Finishes:** US3 or US26D

SPECIFY WHEN ORDERING

Finishes: US3 or US26D




SINGLE CYLINDER DEADLOCK

Deadbolt by outside key or inside thumbturn.

ARD61CR121A: Prong for D & E Series IC Deadbolt

2-3/8"
AR E61 IC 1/24
2-3/4"
AR E61 IC2 1/24



DOUBLE CYLINDER DEADLOCK

Deadbolt by key either side.

2-3/8"
AR E62 IC 1/24
2-3/4"
AR E62 IC2 1/24




HEAVY DUTY H SERIES LOCKSETS

ARROW



H SERIES GRADE 1 LOCKSETS







Door Thickness: 1-3/8" to 2" standard
Backset: 2-3/4" standard
Cylinder: Solid Brass AR 600 HD 6 pin cylinder keyed 5
Keyway: AR1 or IC (less core)
Latchbolt: Brass, 1/2" throw 1" diameter bore required
Latchfront: Brass, bronze or stainless steel fronts 2-1/4" x 1-1/8" beveled 1/8" in 2"
Strikes: 1-1/4" x 4-7/8" ASA
U.L. Listed: For "A" labeled or lesser doors
Certification: Meets ANSI 156.2, Grade 1 Series 4000, requirements. Conforms to Federal Specs. FFH-106C, Type 161. BHMA Certified
Packed: 12 per case
Finishes: 26D & 3 (Entry TB knob only)

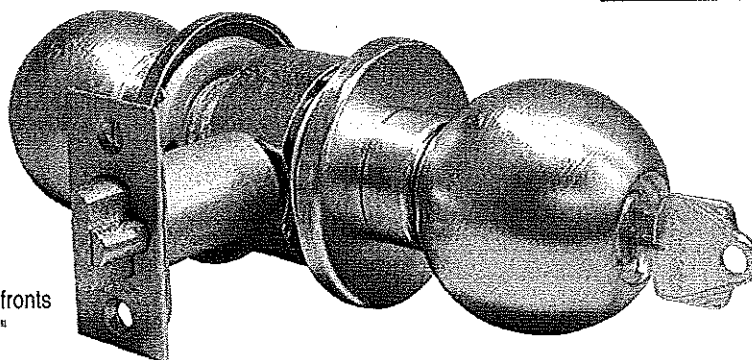

KNOB DESIGN



	<p align="center">PASSAGE</p> <p align="center">Latch by knob either side.</p>	<p>ARH01 BD 26D 1/12</p> <p>ARH01 TB 26D 1/12</p>
	<p align="center">ENTRY</p> <p align="center">Latch by knob either side except when pushing turnbutton locks outside knob. Unlocked by turning inside knob or using key outside. Turning inside button keeps outside knob locked. Key will retract.</p>	<p>ARH11 BD 26D 1/12</p> <p>ARH11 TB 26D 1/12</p> <p>ARH11 TB 3 1/12</p> <p>FOR IC CORE</p> <p>ARH11 TB IC 26D 1/12</p>
	<p align="center">STOREROOM</p> <p align="center">Latch by inside knob. Outside knob always rigid. Key will retract latch. Inside knob always free.</p>	<p>ARH12 BD 26D 1/12</p> <p>ARH12 TB 26D 1/12</p> <p>FOR IC CORE</p> <p>ARH12 TB IC 26D 1/12</p>
	<p align="center">CLASSROOM</p> <p align="center">Latch by knob either side except when key locks outside knob. Key will unlock knob.</p>	<p>ARH17 BD 26D 1/12</p> <p>ARH17 TB 26D 1/12</p> <p>FOR IC CORE</p> <p>ARH17 TB IC 26D 1/12</p>




MK SERIES LOCKSETS

SERIES

MK SERIES GRADE 2 LOCKSETS

Recommended for use on all residential, light commercial and institutional applications where normal traffic is anticipated.

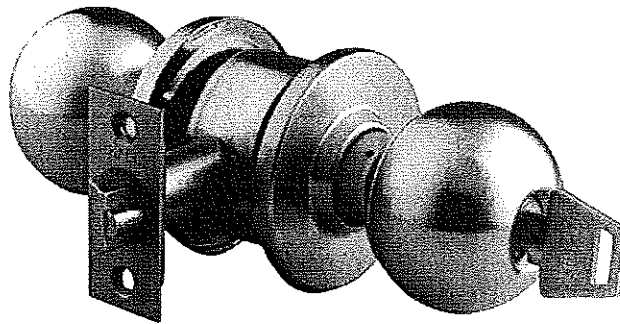

ARROW


FEATURES

- Cylindrical design - no exposed parts
- Unconditional warranty


FINISHES

- 3 Polished Brass
- 5A Antique Brass
- 26D Dull Chrome
- 26 Polished Chrome
- 10B Oil Rubbed Bronze


KNOB DESIGN



**U.S. Lock's
Plymouth Design**



**U.S. Lock's
Tulip Design**



**U.S. Lock's
Ball Design**

SPECIFICATIONS

- Door Thickness:** 1-3/8" to 1-3/4"
- Backset:** 2-3/8" standard, 2-3/4" available
- Latch Bolt:** Brass 1/2" throw
Solid brass extruded rod. Deadlocking latch.
Latch units are interchangeable
- Latch Front:** Solid brass and bronze 2-1/4" x 1"
- Cylinder:** Brass cylinder. 6 pin keyed 5
- Tailpiece:** AR100144 - Original replacement for M-L-H-Q
- Keyways:** AR1 or SC1
- Keying:** KA4
- Certification:** ANSI: A156.2 Series 4000 Grade 2. U.L. Listed, BHMA
- Installation:** Cross bore for housing 2-1/8". Edge bore for latch unit 1" diameter. Mortise for latch front as required. Adjust outside rose to door thickness on visual indicator
- Packed:** 24 per case

HOW TO ORDER

AR M11 TA 2 26D

MANUFACTURER PREFIX

SERIES

FUNCTION

- | | |
|------------------|----------------------|
| 01 (N) Passage | 14 Service Station |
| 02 (L) Privacy | 15 (H) Hotel |
| 03 Communicating | 17 (R) Classroom |
| 08 (DK) Dummy | 31 (S) Communicating |
| 11 (A) Entry | 32 (C) Public Entry |
| 12 (D) Storeroom | 33 (W) Asylum |

KNOB DESIGN

- TA (Plymouth)
- DD (Tulip)
- BD (Ball)

FINISH

- 3 Polished Brass
- 5A Antique Brass
- 26D Dull Chrome

Ball Design Only

- 26 Polished Chrome
- 10B Oil Rubbed Bronze

BACKSET

- BLANK 2-3/8"
- 2 2-3/4"

More Choices, One Supplier



MK SERIES LOCKSETS


ARROW

MK SERIES GRADE 2 LOCKSETS

U.S. LOCK 2030 SERIES LOCKSETS ARE MANUFACTURED EXCLUSIVELY FOR U.S. LOCK BY ARROW. WE INDICATE ARROW'S FUNCTION NUMBER NEXT TO THE DESCRIPTION.

SPECIFY WHEN ORDERING

Knob Style: P (TA), T (DD) or B (BD)
Backset: 2-3/8" or 2-3/4"
Keyway: AR1 or SC1
Finishes: US3, 5A, 26D & 10B



ENTRY (11)

Latch by knob either side except when
pushing turnbutton locks outside knob.
Unlocked by turning inside knob or using key outside.
Turning inside button keeps outside knob locked.
Key will retract latch.

2-3/8" BACKSET
US2030A 1/24

2-3/4" BACKSET
US2032A 1/24

2-3/8" BACKSET
ARM11BD 10 1/24

2-3/4" BACKSET
ARM11BD 2 10 1/24

2-3/8" BACKSET
ARM11BD 26D 1/24

2-3/4" BACKSET
ARM11BD 2 26D 1/24


2-3/8" BACKSET
ARM11BD 3 1/24

2-3/4" BACKSET
ARM11BD 2 3 1/24

2-3/8" BACKSET
ARM11TA 10 1/24

2-3/4" BACKSET
ARM11TA 2 10 1/24

2-3/8" BACKSET
ARM11TA 3 1/24



STOREROOM (12)

Latch by inside knob. Outside knob always rigid.
Key will retract latch.

2-3/8" BACKSET
US2030D 1/24

2-3/4" BACKSET
US2032D 1/24

2-3/8" BACKSET
ARM12BD 26D 1/24

2-3/4" BACKSET
ARM12BD 2 26D 1/24



MK SERIES LOCKSETS

ARROW


MK SERIES GRADE 2 LOCKSETS

FEATURES

- Cylindrical design - no exposed parts
- 1-3/8" to 1-3/4" door thickness
- 2-3/8" standard backset, 2-3/4" available
- Brass 6 Pin keyed 5 cylinder
- Keyed KA4
- AR1 or SC1 keyway
- Packed 24 per case
- BHMA Certified

FINISHES





- 3 Polished Brass
- 5A Antique Brass
- 26D Dull Chrome
- 26 Polished Chrome
- 10B Oil Rubbed Bronze

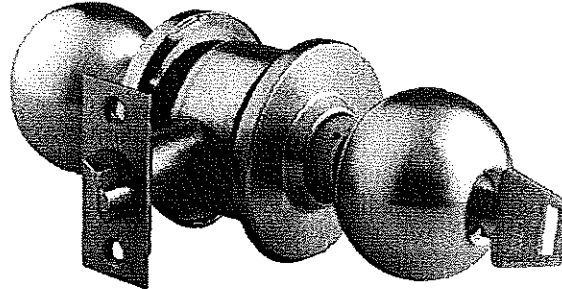

SPECIFY WHEN ORDERING

- Knob Style: P (TA), T (DD) or B (BD)
- Backset: 2-3/8" or 2-3/4"
- Keyway: AR1 or SC1
- Finishes: US3, 5A, 26D & 10B

U.S. LOCK 2030 SERIES LOCKSETS ARE MANUFACTURED EXCLUSIVELY FOR U.S. LOCK BY ARROW. WE INDICATE ARROW'S FUNCTION NUMBER NEXT TO THE DESCRIPTION.

	<p>PASSAGE (01)</p> <p>Latch by knob either side.</p>	<p><u>2-3/8" BACKSET</u> US2030N 1/24</p> <p><u>2-3/4" BACKSET</u> US2032N 1/24</p> <p><u>2-3/8" BACKSET</u> ARM01BD 10 1/24</p> <p><u>2-3/4" BACKSET</u> ARM01BD 2 10 1/24</p>
	<p>PRIVACY (02)</p> <p>Latch by knob either side except when inside pushbutton locks outside knob. Unlocked by turning inside knob, closing door or turning outside emergency slot.</p>	<p><u>2-3/8" BACKSET</u> US2030L 1/24</p> <p><u>2-3/4" BACKSET</u> US2032L 1/24</p> <p><u>SPLIT FINISH - BALL KNOB</u> US2030L B 3X26 1/24</p> <p><u>SPLIT FINISH - PLY. KNOB</u> US2030L P 326 1/24</p>
	<p>COMMUNICATING (03)</p> <p>Latch by knob inside knob only. Blank rose outside.</p>	<p><u>2-3/8" BACKSET</u> ARM03 TA 3 1/24</p> <p><u>2-3/8" BACKSET</u> ARM03 TA 26D 1/24</p>
	<p>DUMMY (08)</p> <p>No Latch.</p>	<p>US2030DK 1/72</p>




MK SERIES LOCKSETS

ARROW

MK SERIES GRADE 2 LOCKSETS

FEATURES

- Cylindrical design - no exposed parts
- 1-3/8" to 1-3/4" door thickness
- 2-3/8" standard backset, 2-3/4" available
- Brass 6 Pin keyed 5 cylinder
- Keyed KA4 • AR1 or SC1 keyway
- Packed 24 per case
- BHMA Certified

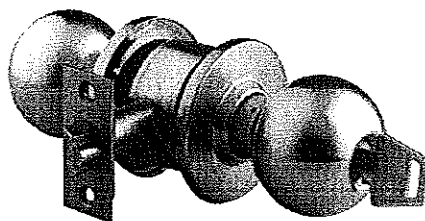


U.S. LOCK 2030 SERIES LOCKSETS ARE MANUFACTURED EXCLUSIVELY FOR U.S. LOCK BY ARROW. WE INDICATE ARROW'S FUNCTION NUMBER NEXT TO THE DESCRIPTION.

FINISHES

- 3 Polished Brass
- 5A Antique Brass
- 26D Dull Chrome
- 26 Polished Chrome
- 10B Oil Rubbed Bronze

SPECIFY WHEN ORDERING


Knob Style: P (TA), T (DD) or B (BD)
Backset: 2-3/8" or 2-3/4"
Keyway: AR1 or SC1
Finishes: US3, 5A, 26D & 10B



SERVICE STATION (14)

Latch by knob either side except when pushbutton locks outside knob.
Unlocked by turning inside knob closing door, or using key outside except when fixed in locked position by turning coin slot in inside knob. Key will retract latch.

2-3/4" BACKSET
ARM14TA 2 26D 1/24



CLASSROOM (17)


Latch by knob either side except when key locks outside knob.
Key will unlock knob.

(AR1 Keyway Only)

2-3/8" BACKSET
US2030R 1/24

2-3/4" BACKSET
US2032R 1/24

2-3/8" BACKSET
ARM17BD 26D 1/24



DOUBLE CYLINDER

(S) Communicating: Latch by knob either side except when key locks its own knob

(31)

(C) Public Entry: Latch by knob either side except when outside knob is locked by inside key. Outside key will retract latch.

(32)

(W) Asylum: Both knobs always rigid - key in either knob will retract latch

(33)

(AR1 Keyway Only)

2-3/8" BACKSET
US2030S 1/24

2-3/4" BACKSET
US2032S 1/24

2-3/8" BACKSET
US2030C 1/24

2-3/4" BACKSET
US2032C 1/24

2-3/8" BACKSET
US2030W 1/24

2-3/4" BACKSET
US2032W 1/24





STANDARD DUTY I.C. LOCKS

MK SERIES GRADE 2 INTERCHANGEABLE CORE LOCKSETS




ARROW

- Door Thickness:** 1-3/8" to 1-3/4"
- Latch Bolt:** 1/2" throw. Solid brass extruded.
Latch units are interchangeable
- Latch Front:** Solid brass and bronze 2-1/4" x 1"
- Strike:** ASA Strike 1-1/4" x 4-7/8"
- Cylinder:** I.C. Lock furnished less cylinder.
Will accept Arrow, Best, KSP
and Falcon 6 pin cylinders,
7 pin adapter standard
- Certification:** Grade 2 ANSI: A156.2 Series 4000.
U.L. Listed, BHMA
- Backset:** 2-3/4" standard, 2-3/8" available
- Finishes:** 3 (Brass), 26D (Dull Chrome) or
10 (Bronze)
- Packed:** 24 per case

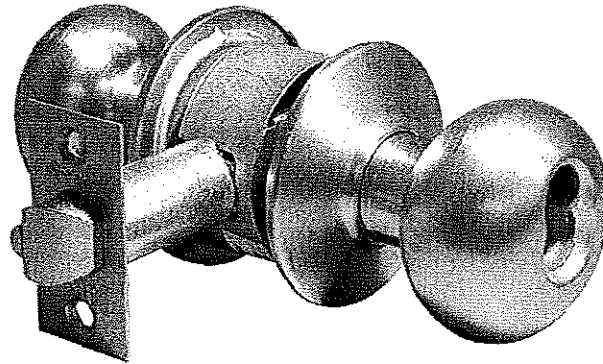


TA KNOB DESIGN



ENTRY

Latch by knob either side except when pushing turnbutton locks
outside knob. Unlocked by turning inside knob or using
key outside. Turning inside button keeps outside knob locked.
Key will retract latch.


- ARM11TA | 2 3 1/24
- ARM11TA | 2 10 1/24
- ARM11TA | 2 26D 1/24



STOREROOM

Latch by inside knob. Outside knob always rigid.
Key will retract latch.


- ARM12TA | 2 3 1/24
- ARM12TA | 2 26D 1/24




CLASSROOM

Latch by knob either side except when key locks outside knob.
Key will unlock knob.

- ARM17TA | 2 26D 1/24



US2010 ASA



US2030 S20

REPLACEMENT STRIKES

- Wood screws furnished
- For Arrow M Series & US2030 series
- ASA strikes also available in 10B
- Specify Finish: 3 or 26D

ASA STRIKE
US2010 ASA 1/10

FULL LIP
US2030 S20 1/10

TAILPIECE FOR
H.L.M. & Q SERIES
AR100 144 1/10




STANDARD DUTY SIERRA LEVERSETS

ARROW


MK SERIES GRADE 2 SIERRA LEVERSETS



UL LISTED



Door Thickness: 1-3/8" to 1-3/4"
 Latch Bolt: 1/2" throw. Solid brass extruded.
 Latch units are interchangeable
 Solid brass and bronze 2-1/4" x 1-1/8"
 Latch Front:
 Strike: ASA Strike 1-1/4" x 4-7/8"
 Cylinder: Solid brass 6 pin cylinder, pinned 5
 Keyway: AR1 or IC (Less core)
 Certification: Grade 2 ANSI: A156.2 Series 4000. U.L. Listed, BHMA
 Installation: Cross bore for housing 2-1/8" through bore latch unit 7/8" diameter.
 Mortise for latch front is required
 Packed: 12 per case

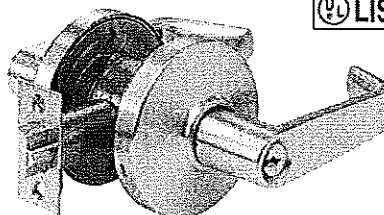

SIERRA DESIGN

SPECIFY WHEN ORDERING

Keyway: AR1 or IC (Less Core)
 Backset: 2-3/4" Standard, 2-3/8" Available
 Finishes: 3, 26D or 10B


	PASSAGE Latch by lever either side.	ARM01SR 2 3 1/12 ARM01SR 2 26D 1/12 ARM01SR 2 10B 1/12
	PRIVACY Latch by lever either side except when inside pushbutton locks outside lever. Unlocked by turning inside lever, closing door or turning outside emergency slot.	ARM02SR 2 3 1/12 ARM02SR 2 26D 1/12 ARM02SR 2 10B 1/12
	ENTRY Latch by lever either side except when pushing turnbutton locks outside lever. Unlocked by turning inside lever or using key outside. Turning inside button keeps outside lever locked. Key will retract latch.	ARM11SR 2 3 1/12 ARM11SR 2 26D 1/12 ARM11SR 2 10B 1/12 FOR IC CORE ARM11SR I 2 3 1/12 FOR IC CORE ARM11SR I 2 26D 1/12
	STOREROOM Latch by inside lever. Outside lever always rigid. Key will retract latch.	ARM12SR 2 3 1/12 ARM12SR 2 26D 1/12 ARM12SR 2 10B 1/12 FOR IC CORE ARM12SR I 2 26D 1/12
	SERVICE STATION Latch by lever either side except when pushbutton locks outside lever. Unlocked by turning inside lever closing door, or using key outside except when fixed in locked position by turning coin slot in inside lever. Key will retract latch.	ARM14SR 2 26D 1/24
	CLASSROOM Latch by lever either side except when key locks outside lever. Key will unlock lever.	ARM17SR 2 3 1/12 ARM17SR 2 26D 1/12 FOR IC CORE ARM17SR I 2 26D 1/12
	ASYLUM Both Levers always rigid. Either key will retract latch.	ARI KEYWAY ARM33SR 2 26D 1/12 FOR IC CORE ARM33SR I 2 26D 1/12
	NEW! COMMUNICATING Dead locking latch bolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently. Do not use on doors in rooms that have no other entrance.	FOR IC CORE ARM31SR I 2 26D 1/12 ARM31SR 2 26D 1/12
	CLASSROOM INTRUDER Dead locking latch. Latch by either lever unless outside lever is locked by key. Key in either lever locks or unlocks outside lever. Inside lever always operable.	ARM37SR 26D 1/12



Q SERIES LEVERSETS

Q SERIES GRADE 1 CYLINDRICAL LEVERS

Door Thickness: 1-3/4" - 2" standard
Backset: 2-3/4" standard
Cylinder: 6 Pin Keyed 5 solid brass
Keyway: SC1 or IC (less core)
Latchbolt: Brass, 1/2" throw for all keyed and non-keyed sets
Thru Bolt: Universal positions
Strikes: 1-1/4" x 4-7/8" ASA strike
U.L. Listed: For 3 hour, A label
Certification: Meets ANSI 156.2, Series 4000 Grade 1 requirements, BHMA
Keys: Two keys - KD
Packed: 10 per case
Finishes: 26D (Dull Chrome) or 3 (Brass)

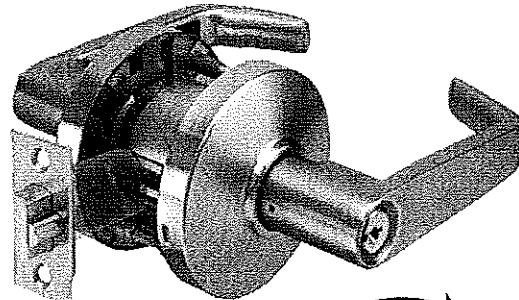

OverDrive™ - Freewheeling lever action occurs when latch retraction mechanism disengages from lever handle when lever is locked

ARROW

	PASSAGE Latch by lever either side.	AR Q01 SR 3 1/10 AR Q01 SR 26D 1/10
	PRIVACY Latch by lever either side except when inside pushbutton locks outside lever. Unlocked by turning inside lever, closing door or turning outside emergency slot.	AR Q72 SR 3 1/10 AR Q72 SR 26D 1/10
	ENTRY Latch by lever either side except when pushing turnbutton locks outside lever. Unlocked by turning inside lever or using key outside. Turning inside button keeps outside lever locked. Key will retract latch.	AR Q81 SR 3 1/10 AR Q81 SR 26D 1/10 FOR IC CORE AR Q81 SR IC 3 1/10 AR Q81 SR IC 26D 1/10
	STOREROOM Latch by inside lever. Outside lever always rigid. Key will retract latch. Inside always free.	AR Q82 SR 3 1/10 AR Q82 SR 26D 1/10 FOR IC CORE AR Q82 SR IC 26D 1/10
	CLASSROOM Latch by lever either side except when key locks outside lever. Key will unlock lever. Inside always free.	AR Q87 SR 3 1/10 AR Q87 SR 26D 1/10 FOR IC CORE AR Q87 SR IC 26D 1/10
	ASYLUM Both Levers always rigid. Either key will retract latch.	AR Q93 SR 26D 1/10
	CLASSROOM INTRUDER Dead locking latch. Latch by either lever unless outside lever is locked by key. Key in either lever locks or unlocks outside lever. Inside lever always operable.	AR Q37 SR 26D 1/10

More Choices, One Supplier 800-826-4000




W SERIES LEVERSETS

ARROW

W SERIES GRADE 1 CYLINDRICAL LEVERS

Door Thickness: 1-3/4" standard
Backset: 2-3/4" standard
Cylinder: Solid brass 6 pin cylinder keyed 5
Keyway: SC1 keyway
Latchbolt: Brass, 1/2" throw for all keyed and non-keyed sets
Prep: 2-1/8" diameter bore required only
Strikes: 1-1/4" x 4-7/8" ASA strike
U.L. Listed: For 3 Hour "A" labeled or lesser doors
Certification: Meets ANSI 156.2, Series 4000, Grade 1 requirements. Conforms to Federal Specs. FF-H-106C, Type 161, BHMA
Keys: Two Keys - KD
Packed: 12 per case
Finish: 26D


Patented Thru-Bolt Design within Chassis for easy installation. No additional holes required.

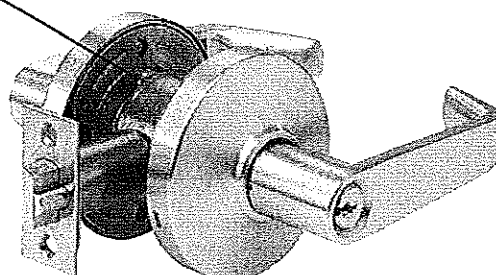

OverDrive™ - Freewheeling lever action occurs when latch retraction mechanism disengages from lever handle when lever is locked



	PASSAGE Latch by lever either side.	AR W01 SR 26D 1/12
	PRIVACY Latch by lever either side except when inside pushbutton locks outside lever. Unlocked by turning inside lever, closing door or turning outside emergency slot.	AR W72 SR 26D 1/12
	ENTRY Latch by lever either side except when pushing turnbutton locks outside lever. Unlocked by turning inside lever or using key outside. Turning inside button keeps outside lever locked. Key will retract latch.	AR W81 SR 26D 1/12
	STOREROOM Latch by inside lever. Outside lever always rigid. Key will retract latch. Inside always free.	AR W82 SR 26D 1/12
	CLASSROOM Latch by lever either side except when key locks outside lever. Key will unlock lever. Inside always free.	AR W87 SR 26D 1/12
	CLASSROOM INTRUDER Dead locking latch. Latch by either lever unless outside lever is locked by key. Key in either lever locks or unlocks outside lever. Inside lever always operable.	AR W37 SR 26D 1/12



GRADE 1 DEADLATCHES & 5" LINK

- Also for Sierra applications
- Beveled
- 1/2" throw
- U.L. Listed
- Finishes: 26D or 3

Q SERIES - 2-3/4" B.S.

AR161 26D 1/10


Q SERIES - 2-3/4" B.S.

AR161 3 1/10



IC CYLINDERS AND CORES


ARROW



INTERCHANGEABLE CORE KEYING KIT & ACCESSORIES

- Includes all parts to service Arrow, Best, Falcon interchangeable core systems
- *Parts can be ordered separately
- Kit contains:
 - Bottom Pins: #RB100 thru RB109
 - Top Pins: #RB102 thru RB119
 - Springs: #100CR-107 Caps: #100CR-111
 - Capping Tool: #IC207

IC KIT	
AR IC 200	1/1
KEY GAUGE	
AR IC 205	1/1
PIN EJECTOR	
AR IC 206	1/1
CAPPING PIN	
AR IC 208	1/1

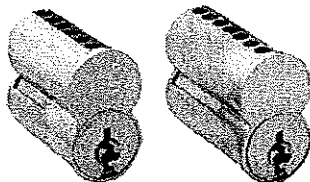

6 PIN CORE 7 PIN CORE
7 PIN KNOB TAILPIECES

H SERIES KNOBS	
AR CH 744	1/100
M SERIES KNOBS	
AR CM 744	1/100

6 & 7 PIN LEVER TAILPIECES

6 PIN - H-M-Q-W SERIES	
AR CL 644	1/100
7 PIN - H-M-Q-W SERIES	
AR CL 744	1/100

6 AND 7 PIN INTERCHANGEABLE CORES

- Designed to fit:
 - Arrow H, M & Q Series Cylindrical Locksets & Levers - ANSI Grades 1 & 2
 - Arrow D Series Deadlocks
 - Mortise Locks - ANSI Grade 1
 - Cylinders - Mortise & Rim
 - Padlocks
- Replaces Best, Falcon and KSP
- Combined cores are KD and MK
- Finishes: 26D (Dull Chrome) & 4 (Dull Brass) - 6 Pin A only

Best keyways: A, B, C, D, E, F, G, H, J, K, L, M, & Q
Arrow keyways: 1C & 1D

Prices on key blanks reflect box quantities.
A 20% upcharge will be incurred on broken boxes.

SPECIFY
KEYWAY & FINISH

6 PIN UNCOMBINED	
AR 100 UC	1/20
7 PIN UNCOMBINED	
AR 710 UC	1/20
6 PIN COMBINED	
AR 100CR 1C 26D	1/20
CUT MASTER KEY	
AR C MK 1C	1/1
CUT CONTROL KEY	
AR C CON 1C	1/1
IC KEY BLANKS - NICKEL SILVER	
AR K11 1C	1/50
AR K11 1D	1/50



Arrow Mortise Cylinder Shells
Supplied in U.S. Lock Packaging

1-1/8" TAPERED IC MORTISE CYLINDER

- Accepts Arrow, Best Falcon, KSP and U.S. Lock RC Cores
- Accepts 6 pin cores only
- For use on storefront applications
- Adams Rite cam
- Specify Finish: 10B or 26D

SPECIFY
FINISH

1-1/8" TAPERED	
US 1501 IC A	1/10



Arrow Mortise Cylinder Shells
Supplied in U.S. Lock Packaging

1-1/8" & 1-1/4" STANDARD IC MORTISE CYLINDER

- Accepts Arrow, Best Falcon, KSP and U.S. Lock RC Cores
- Furnished less core and accepts 6 pin cores
- 1-1/4" Cylinder will also accept 7 pin core
- Riveted Yale cam
- Specify Finish: 3 or 26D

SPECIFY
FINISH

1-1/8" MORTISE	
US 1501 IC Y	1/10
1-1/4" MORTISE	
US 1502 IC Y	1/10



Arrow Rim Cylinder Shells
Supplied in U.S. Lock Packaging

INTERCHANGEABLE CORE RIM CYLINDER

- Accepts Arrow, Best Falcon, KSP and U.S. Lock RC Cores
- US1565 IC Available in 3 or 26D Finish
- US1567 IC Available in 10B or 26D Finish

SPECIFY
FINISH


FOR 6 PIN CORES ONLY	
US 1565 IC	1/10
FOR 6 & 7 PIN CORES ONLY	
US 1567 IC	1/10

More Choices, One Supplier



LATCHES & PARTS


ARROW



M SERIES / 2030 SERIES SPRINGLATCH

- Comes in 2-3/4" or 2-3/8" backset
- 1" standard face or 1-1/8" wide face
- 2030SL equal to ARROW 101
- 2032SL equal to ARROW 104
- Not for use with Sierra M Series
- Specify Finish: 3 or 26D


SPECIFY FINISH	
2-3/8" - 1" FACE	US2030SL
2-3/4" - 1" FACE	US2032SL
2-3/4" - 1-1/8" FACE	US2032SL W
	1/10



M SERIES / 2030 SERIES DEADLATCH

- Comes in 2-3/4" or 2-3/8" backset
- 1/2" throw
- 2030DL equal to ARROW 111
- 2032DL equal to ARROW 114
- 2032DLWU equal to ARROW 124 (UL)
- Not for use with Sierra M Series
- Specify Finish: 3 or 26D

SPECIFY FINISH	
2-3/8" - 1" FACE	US2030DL2
2-3/4" - 1" FACE	US2032DL2
2-3/4" - 1-1/8" FACE	US2032DL W
	1/10

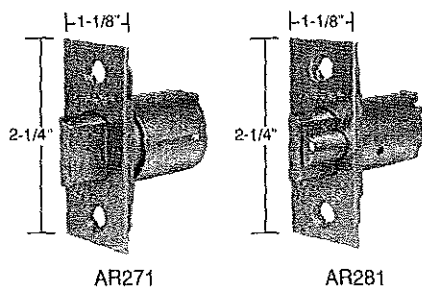

SIERRA SPRINGLATCH

- 1/2" throw • M Series Sierra
- For levers only, not knobs
- Specify Finish: 3, 10B or 26D
- AR274 available in 26D Only

SPECIFY FINISH	
2-3/8" - FLAT	AR271
2-3/4" - BEVELED	AR274 26D
	1/10

SIERRA DEADLATCH

- 1/2" throw • M Series Sierra
- For levers only, not knobs
- Specify Finish: 3, 10B or 26D
- AR284 available in 3 & 26D


SPECIFY FINISH	
2-3/8" - FLAT	AR281
2-3/4" - BEVELED	AR284
	1/10



M SERIES / 2030 SERIES DRIVE-IN DEADLATCH

- 2-3/4" or 2-3/8" backset
- 2031DL is equal to Arrow 119
- 2033DL is equal to Arrow 120

2-3/8" DRIVE-IN	US2031DL2 26D	1/10
2-3/4" DRIVE-IN	US2033DL2 26D	1/10



REPLACEMENT DEADBOLT STRIKES

- 2-Hole and 4-Hole strikes included
- Wood screws furnished
- Specify Finish: 3 or 26D

SPECIFY FINISH	
E SERIES	US1680SP
	1/24




ORIGINAL KEY BLANKS

- Packed 50 per box • Nickel silver
- Prices reflect box quantity,
A 20% upcharge is incurred on broken boxes.

5 PIN	AR K5A	1/50
6 PIN	AR K6A	1/50

EXIT & ALARM DEVICES

ARROW

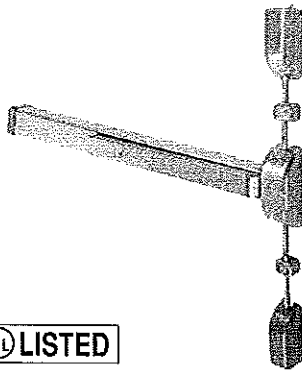

S1150 VERTICAL ROD DEVICE

- For 1-3/4" thick doors
- Non-ferrous alloy covers & chassis
- 3-1/2" minimum stile requirement
- End Cap: All metal endcap
- Reversible Hand, packed LHRB standard
- Vertical Rods furnished standard for 90° doors
- Allen type dogging, key furnished as standard
- Re-designed push pad and head
- Finish: AL (Powder Coat Aluminum)


DOORS 32"-36"

ARS1150 36 AL

1/1



* For Rim Device & Trims see US2876 section



AR130 AL
SHOWN

ARCHITECTURAL EXIT ALARM

- Non-ferrous alloy cover & base: 8-3/8" x 2" x 2-5/8"
- Non-handed for In or Outswinging doors 4" min. stile
- Magnet activated tamper-proof design
- 90 decibel alarm sounds for 2 minutes, shuts off & rearms automatically
- Accepts 1-1/8" mortise cylinder inside, rim cylinder outside. Order separately
- Key operated to arm & disarm unit
- 9 Volt battery powered
- Finish: Sprayed Aluminum

PUSHBUTTON,
LOW BATTERY TEST


AR110 AL

1/4

15 SEC. ARM DELAY
LED INDICATOR
LOW BAT. CHIRP

AR130 AL

1/4



ARCHITECTURAL EXIT ALARM

- Reversible - packed RHRB with S35 strike
- Accepts 1-1/8" mortise cylinder - inside arming & disarming
- 9 Volt battery - solid state electronics - dual horns
- Dimensions- Cover: 12-3/4" x 2" x 2-5/8". Paddle: 3-1/4" projection, 10-3/8" length - non-ferrous metal
- For outswinging doors 1-3/4" thick with 4" stile
- Alarm sounds for 2 minutes, auto shutoff / rearm & relatches
- LED indicator flashes beyond alarm, reset by key inside
- Low battery "Chirp"
- Accepts outside cylinder and CNP trim
- Finish: Sprayed Aluminum

ALUMINUM

AR330 AL

1/4

NARROW STILE
MOUNTING PLATE


ARS74 AL

1/4

CYLINDER X PULL

ARSF03 AL

1/1

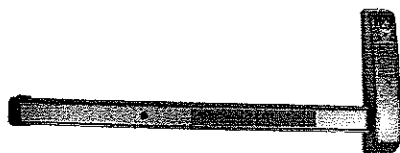

AR430 S AL SHOWN

ARCHITECTURAL EXIT ALARM

- Dimensions- Cover: 12-3/4" x 2" x 2-5/8"
- Paddle & chassis of non-ferrous metal - U.L. Listed
- 9 Volt battery - solid state electronics - dual horns
- LED indicator flashes beyond alarm, reset by key inside
- Accepts outside cylinder and CNP trim
- Fits outward swinging doors 1-3/4" thick with 4" stile
- Accepts 1-1/8" mortise cylinder inside arming & disarming
- Alarm sounds for 2 minutes, auto shut off & rearm
- Rolled steel touch bar (field sizeable) - reversible
- 3/4" latchbolt is monitored by sensor switch
- Low battery "Chirp"
- Finish: Sprayed Aluminum

30"-36"

AR430 S AL

1/4

37"-48"

AR430 L AL

1/4

NARROW STILE
MOUNTING PLATE

ARS75 AL

1/4

CYLINDER X PULL

ARSF03 AL

1/1

ASSA®

DEADLOCKS


ASSA

SERIES

TWIN 6000 / V-10 SERIES HIGH SECURITY DEADLOCK

Recommended for all commercial, industrial and residential applications. Unique dual locking mechanism with interchangeable side bar provides key control and serviceability.

Keys can be duplicated without a special machine or adapters.

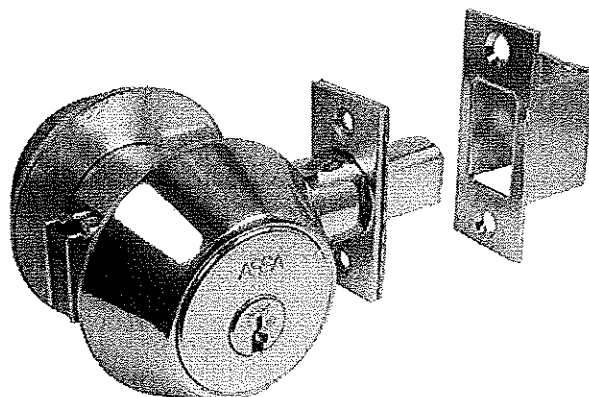

FEATURES

- Solid brass and steel construction
- Tamper-proof high security design provides protection against attack including: picking, drilling & prying
- SNS (sub-assembled, no side bar)


SPECIFICATIONS

- Door Thickness:** Installs on doors up to 2-1/2" thick
- Backset:** 2-3/4" standard, 2-3/8" available
- Keyway:** 6 pin SNS - no sidebar, no pins, no keys
- Cylinder:** 6000 - High Security 6 pin - pick resistant with case hardened, drill resistant inserts
- Cylinder:** V-10 - New patented High Security 6 pin - pick resistant with case hardened, drill resistant inserts
- Reversible Strike:** High security strike with four, 4" screws
- Finishes:** 605 and 626
- Certifications:** U.L. 437 Rated
- Bolt:** Hardened, 1" throw with Hardhat™
- Anti "Ice-pick" protector shield

FINISHES

- 605 Polished Brass
626 Dull Chrome



HOW TO ORDER

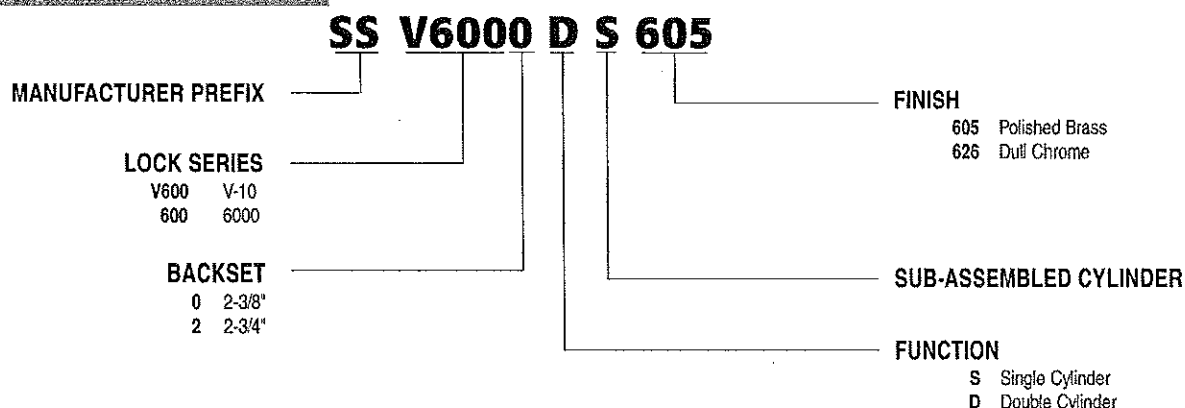

SERIES


6000 / V-10 SERIES HIGH SECURITY DEADLOCK

- SNS (sub assembled, no side bar)
- Packed individually
- Specify 605 or 626 Finish
- V-10 available in 626 Finish Only

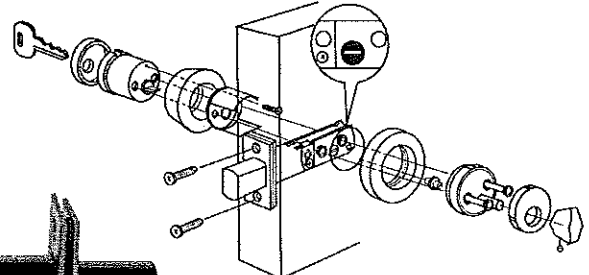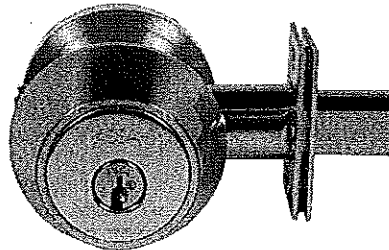

SPECIFY WHEN ORDERING


Backset: 2-3/8" or 2-3/4"
Finishes: 605 or 626



SINGLE CYLINDER

Key locks and unlocks bolt outside - thumbturn inside.


2-3/8" BACKSET
SS6000S S 1/1
2-3/4" BACKSET
SS6002S S 1/1
V-10 2-3/4" BS 626
SSV6002S S 1/1



DOUBLE CYLINDER

Key locks and unlocks deadbolt from both sides.

2-3/8" BACKSET
SS6000D S 1/1
2-3/4" BACKSET
SS6002D S 1/1
V-10 2-3/4" BS 626
SSV6002D S 1/1



STANDARD BOLTS

- 2-3/8" or 2-3/4" backset
- 2-1/4" x 1-1/8" face
- Specify Finish: 605 (Brass) or 626 (Dull Chrome)

SPECIFY
FINISH

2-3/8" BOLT
SS907 003 1/1
2-3/4" BOLT
SS907 001 1/1



DRIVE-IN BOLT

- 2-3/8" or 2-3/4" backset
- Chrome Finish only

2-3/8" DRIVE-IN BOLT
SS907 004 625 1/1
2-3/4" DRIVE-IN BOLT
SS907 002 625 1/1



SPACER RING

- For installation of deadlock on 1-3/8" doors
- Specify Finish: 605 (Brass) or 626 (Dull Chrome)

SPECIFY
FINISH


SS806 268 1/1

ASSA®

CYLINDERS / PADLOCKS

ASSA

HIGH SECURITY CYLINDERS



TWIN 6000 / V-10 SERIES ARROW & SCHLAGE KEY-IN-KNOB CYLINDERS

- Retrofits Schlage or Arrow standard and heavy duty knob & lever locks improving security and key control. Six pin, two tailpieces, side pins and springs included
- SNS (sub-assembled, no side bar)
- Schlage knob assembly also used for deadbolt applications
- Specify Finish: 605 (Brass) or 626 (Dull Chrome)

SPECIFY
FINISH

6000 SERIES - SCHLAGE
SS65611 S

1/1

6000 SERIES - ARROW
SS65691 S

1/1


V-10 SERIES - SCHLAGE
SSV65611 S

1/1

V-10 SERIES - ARROW
SSV65691 S

1/1

HIGH SECURITY CYLINDERS



TWIN 6000 / V-10 SERIES ARROW DEADBOLT CYLINDERS

- Retrofits U.S. Lock and Arrow standard and heavy duty six pin deadlocks improving security and key control. Two tailpieces, side pins and springs included
- SNS (sub-assembled, no side bar)
- Specify Finish: 605 (Brass) or 626 (Dull Chrome)

SPECIFY
FINISH

6000 SERIES - ARROW
SS65692 S

1/1

V-10 SERIES - ARROW
SSV65692 S

1/1



HIGH SECURITY CLASS 3 PADLOCK

- SNS (sub-assembled, no side bar)
- Key retaining
- Rustproof case hardened steel shackle: 7/16" dia. x 1-1/4" clearance
- Hardened steel case: 2-9/16" W x 7/8" thick
- Nickel process finish
- Keys to any Assa system

HIGH SECURITY PADLOCKS

6000 SERIES
SS65391 SNS

1/1



HIGH SECURITY CLASS 2 PADLOCK

- SNS (sub-assembled, no side bar)
- Key retaining
- Rustproof case hardened shackle: 5/16" dia. x 1-1/16" clearance
- Brass Case: 1-7/8" W x 7/8" thick
- Chrome Plated Finish

6000 SERIES
SS65191 SNS

1/1

6000 SERIES - 2" CLEARANCE
SS65191L SNS

1/1


V-10 SERIES
SSV65191 SNS

1/1

HIGH SECURITY CYLINDERS

ASSA

HIGH SECURITY CYLINDERS



TWIN 6000 / V-10 SERIES RIM CYLINDERS


- Replaces original cylinders in most common locks
- Recommended for commercial and residential applications
- SNS with horizontal tailpiece
- For use with rim panic devices and jimmy-proof deadbolts
- Screws and mounting plate are available as an option
- Housing is provided with both threaded and taps for rim mounting
- Specify Finish: 605 (Brass), 624 (Duronotic) or 626 (Dull Chrome)
- SSV6551 SH - Not Available in 624 Finish

SPECIFY
FINISH

6000
SS6551 SH 1/1

V-10
SSV6551 SH 1/1

HIGH SECURITY CYLINDERS



TWIN 6000 / V-10 SERIES 1-1/8" MORTISE CYLINDERS

- Replaces original cylinders in most common locks
- Recommended for commercial and residential applications
- SNS with Adams Rite or Yale cam
- Works as both mortise or rim cylinder
- Can be assembled utilizing different cams
- Mortise cams and rim tails have universal fittings
- Specify Finish: 605 (Brass), 624 (Duro), 625 (Chrome) or 626 (Dull Chrome)

SPECIFY
FINISH

6000 - A/R CAM
SS6551 1S 1/1

6000 - YA CAM
SS6551 5S 1/1


SS6551 5S AVAILABLE IN 605 OR 626 ONLY

V-10 - A/R CAM
SSV6551 1S 1/1

V-10 - YA CAM
SSV6551 5S 1/1

SSV6551 5S AVAILABLE IN 605 OR 626 ONLY

TWIN 6000 / V-10 SERIES 1-1/4" MORTISE CYLINDERS



- Replaces original cylinders in most common locks
- Recommended for commercial and residential applications
- SNS with Yale cam
- Can be assembled utilizing different cams
- Not tapped for rim installation
- Specify Finish: 605 (Brass) or 626 (Dull Chrome)


HIGH SECURITY CYLINDERS

SPECIFY
FINISH


6000 - YA CAM
SS6552 5S 1/1

V-10 - YA CAM
SSV6552 5S 1/1

IC CORE MORTISE / RIM HOUSING



MORTISE HOUSING



CORE

- 6 pin w/ Adams Rite cam
- The Assa interchangeable core cylinder provides security and the ability to re-key instantly
- The Assa IC physical security is strengthened with strategically placed, case-hardened drill inserts
- Two independent locking mechanisms within each cylinder render the cylinder virtually pick-proof
- U.L. Listed
- Finish: 626 (Dull chrome)

IC HOUSING
SS6060 11 626 1/1

6000 - CORE
SS70600 S IC 1/1

V-10 - CORE
SSV70600 S IC 1/1

ASSA®

PIN KITS & CYLINDER PINS

ASSA



ASSA PIN KIT

- 100 of each size: Bottom, master & driver pins
- 500 tumbler springs
- 50 side pins
- 100 Phillips cam screws
- 25 rim/mortise cover strips
- Mini kit contains 50 of each size pin
- For owners of PK2 Kit who want to upgrade to V-10 add items:
SS353838, SS807165 & SS807164 to PK2 Kit

HIGH SECURITY PIN KITS

V-10 & 6000 KIT

SS PK1 1/1

6000 MINI KIT

SS PK4 1/1

INTERCHANGEABLE CORE

SS PK IC 1/1

CYLINDER CAP STRIPS

SS 868141 1/1

TWIN 6000 / V-10 SERIES REPLACEMENT PINS

• Stainless steel

BOTTOM PINS

- Size 1-9
(#1 = longest pin & #9 = smallest pin)
- Also use corresponding drivers when keying

BOTTOM #1
SS 867 078 1/1

BOTTOM #2
SS 867 079 1/1

BOTTOM #3
SS 867 080 1/1

BOTTOM #4
SS 867 081 1/1

BOTTOM #5
SS 867 082 1/1

BOTTOM #6
SS 867 083 1/1

BOTTOM #7
SS 867 084 1/1

BOTTOM #8
SS 867 085 1/1

BOTTOM #9
SS 867 086 1/1

MASTER PINS

- Size 1-8
- Master pins are placed over the bottom pins according to bitting requirements in Master keyed cylinders

MASTER #1
SS 867 070 1/1

MASTER #2
SS 867 071 1/1

MASTER #3
SS 867 072 1/1

MASTER #4
SS 867 073 1/1

MASTER #5
SS 867 074 1/1

MASTER #6
SS 867 075 1/1

MASTER #7
SS 867 076 1/1

MASTER #8
SS 867 077 1/1

CYLINDER SPRING
SS 867 065 1/1

CYLINDER CAP STRIPS
SS 868 141 1/1

SPOOL DRIVER PINS

- Size 1-9
- Must correspond to the length of the bottom and Master pins



1-2
SS 867 066 1/1

3-4
SS 867 067 1/1

5-6
SS 867 068 1/1

7-8-9
SS 867 069 1/1

6000 SERIES SIDE BAR PINS & SPRINGS

SIDE BAR PINS
SS 867 015 1/1

SIDE BAR SPRING
SS 867 088 1/1

SIDE PIN SPRING
SS 867 087 1/1

V-10 SERIES SIDE BAR PINS & SPRINGS

SIDE BAR PINS
SS 353 838 1/1

SIDE BAR SPRING
SS 807 164 1/1

SIDE PIN SPRING
SS 807 165 1/1

KEY BLANKS & ACCESSORIES

ASSA

TWIN 6000 / V-10 SERIES SIDE BARS




- All side bars are reversible
- 370 side bar exclusive U.S. Lock side bar
- Reverse 370 bar and becomes 371 side bar
- One side bar can provide 2 high security keyways
- Place the side bar so that the shelves (lug) correspond to the deep waists of the side pins.
- Press the side bar into the groove so that it can be fully depressed into the cylinder plug

**U.S. LOCK'S
HIGH SECURITY
STOCKED SIDE BARS**


6000 & V-10 SIDEBAR
SS 267008 370

1/25

TWIN 6000 / V-10 SERIES KEY BLANKS



6000
SERIES



V-10
SERIES

- V-10 uses new side pins & is a new patented key blank
- Side bar code is cut at factory
- Assa code cards available for HPC1200
- Nickel silver

**U.S. LOCK'S
HIGH SECURITY
STOCKED KEY BLANKS**

6000 SERIES KEY BLANK
SS 867091 370

1/1

SS 867091 371

1/1


V-10 SERIES KEY BLANK
SS 250694 370

1/1

SS 250694 371

1/1

CYLINDER ACCESSORIES



HORIZONTAL
& VERTICAL
RIM TAILPIECE KIT

SS867450



LAZY CAM RIM
TAILPIECE KIT

SS867451

SLOTTED REPLACEMENT RIM
CYLINDER SCREWS-100/BAG

SS868138

BACKPLATE FOR RIM CYLINDER
WITH 2 SCREWS

SS900209

ASSA LOCK LUBRICANT

SS802631

FOR ASSA CODE CARD AND CUTTER SEE HPC SECTION



ADAMS RITE CAM
SS867445



CORBIN
CLOVER CAM
SS867446



CORBIN RUSSWIN
BEAVER TAIL CAM
SS867447



SARGENT CAM
SS867452



YALE CAM
SS872610



SCHLAGE L CAM
SS867453



SEGAL CAM
SS805412




PHILIP'S CAM SCREWS-
100/BAG
SS867090

ATLANTIC SPECIALTY

NOVELTIES

ATLANTIC
SPECIALTY




CLIP-ON BELT KEY HOLDER

- Split ring
- All metal
- 12 per display card

STAINLESS STEEL
AS49

1/18




SNAP-ON BELT KEY HOLDER

- 1-1/4" split key ring
- Assorted colors
- 12 per display card

TOP GRAIN COWHIDE
AS53

1/12




SLIP-ON BELT KEY HOLDER

- Riveted swivel hook cannot open accidentally
- Assorted colors
- 12 per display card

HEAVY DUTY LEATHER
AS54

1/12




2 POST KEY CASE

- Silver border
- I.D. imprints
- 12 per display card

TOP GRAIN COWHIDE
AS600

1/12



6 SWIVEL HOOK SNAP KEY CASE

- Silver trim
- 12 per display card

GENUINE LEATHER
AS700

1/12



SWIVEL HOOK KEY CASES

- Fully lined
- Inside pockets
- All around zipper
- 12 per display card

6 HOOK
AS950


1/12

12 HOOK
AS956

1/10

TRANSPONDER DETECTOR/KEY MACHINES

MANUAL KEY MACHINE




- Unique design ensures parallel jaw alignment • Four-way reversible jaws securely clamp residential, commercial, padlock and automotive keys including double sided versions • Offset carriage for improved feel and viewing during operation
- "L" style jaw handles make key gripping easy and hard alloy handles reduce both inner and outer part wear
- Jaws rest directly on jaw pin for improved tolerance • Lateral carriage lever eases the cutting process
- Wide spacing between jaws accommodates new, longer and larger headed keys • Great size for mobile or small workplace; weighs only 37lb. • Available in 12V/220V for mobile use • Quick, easy and precise machine calibration
- Specifications: Length - 17", Depth - 10", Height - 11", 1/4hp 1680 rpm 110V/60 Hz, Cutter - 63mm high speed steel

BAB101FJ

1/1

**BIANCHI
USA**

SEMI-AUTOMATIC KEY MACHINE

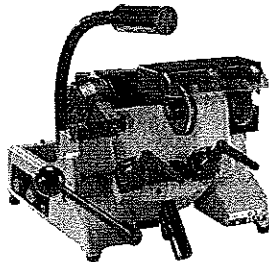


- Adjustable "gooseneck style" light illuminates key cutting area • Unique one-piece jaw alignment system
- Micro-switch activated cutter start • 57lb cast iron machines reduces vibration and improves cut inconsistency and cutter life
- Hard alloy "L" style jaw handles make key gripping easy • Micrometric depth and spacing calibration • Key gauges automatically clear as the carriage moves forward • Spring-loaded carriage rides on roller bearings for smooth, easy movement • Four-way reversible jaws securely clamp residential, commercial padlock and automotive keys including double-sided versions • Large, transparent cutter shield and offset carriage improve viewing during cutting • Independent large red brush button and soft-touch brush button • Specifications: length - 13", depth - 17", height - 11", motor - 1/4 hp 1680rpm, 110V/60Hz, cutter - 80mm high speed steel

SEMI-AUTOMATIC KEY MACHINE

BAB104	1/1
<u>REPLACEMENT BELT</u>	
BAB1122	1/1
<u>REPLACEMENT LIGHT BULB</u>	
BAB1126	1/1
<u>REPLACEMENT POWER CORD</u>	
BABA011	1/1

SEMI-AUTOMATIC KEY MACHINE

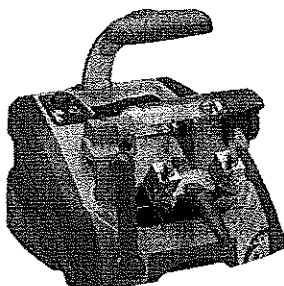

- Microswitch activation with improved spring loaded carriage design, ergonomic handles and smooth balanced operation
- Unique one-piece jaw alignment system features a locking mechanism preventing accidental carriage release • Four-way reversible jaw securely clamp residential, commercial, padlock and automotive keys including single and double sided versions • Heavy duty cast iron body dramatically reduces vibration and noise improving both cut consistency and cutter life
- Micrometric tracer adjustment for quick, easy and accurate depth calibration • Updated design features ergonomic handles and levers, removable chip tray and upper storage tray • Large transparent cutter shield and offset carriage improve viewing during cutting • Independent brush button for soft touch deburring brush • Overhead light with drop down magnifying glass illuminates key cutting area • Weight: 55 lbs. • Cutter: 80 mm high speed steel • Motor: 1/4hp, 1680 rpm
- Measurements: 15" deep, 18" wide and 17" high


BAB106

1/1

FINGERPRINT IDENTIFICATION

BIOSCRIPT


FINGERPRINT TERMINAL WITH KEYPAD & LCD DISPLAY

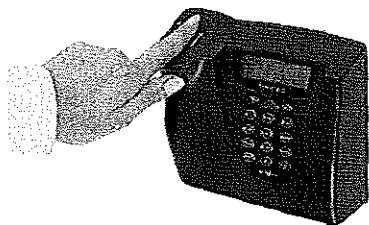

- Dual factor solution combining a self-contained fingerprint module and PIN • Self-contained unit stores 3550 fingerprint templates • Generates and maintains a time-stamped log of up to 4000 transactions
- Verifies a user in less than 1 second • Length: 142.9mm (5.625"), width: 168.3mm (6.625"), depth: 66.7mm (2.625") • Voltage: 9-24VDC • Flat surface, triple-gang mountable. Wall mount plate will accept #6 screws or bolts. Clearance hole diameter is 0.155". Trim plate included to cover triple-gang box • Includes VeriAdmin software free of charge • Red, amber and green LED and tone signals • Flexible communication options supporting Wiegand formats up to 64 bits • Ethernet port for LAN communication

BIVSTATIONA


ONE-TOUCH FINGERPRINT IDENTIFICATION WITH KEYPAD AND LCD FOR PROGRAMMING

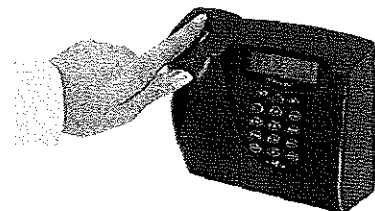

- Dual factor solution combining a self-contained fingerprint module and PIN • Self contained unit stores 3550 fingerprint templates • Embedded 1:500 algorithm for searching capability • Generates and maintains a time-stamped log of up to 4000 transactions • Verifies a user in less than 1 second • Length: 142.9mm (5.625"), width: 168.3mm (6.625"), depth: 66.7mm (2.625") • Voltage: 9-24VDC • Flat surface, triple-gang mountable. Wall mount plate will accept #6 screws or bolts. Clearance hole diameter is 0.155". Trim plate included to cover triple-gang box • Includes VeriAdmin software free of charge • Red, amber and green LED and tone signals
- Flexible communication options supporting Wiegand formats up to 64 bits • Ethernet port for LAN communication

BIVSTATIONAS


ONE-TOUCH FINGERPRINT IDENTIFICATION

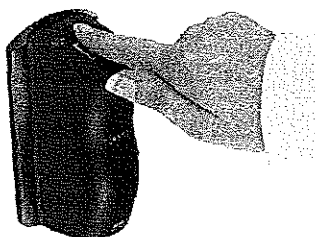

- Self contained unit stores 500 templates • Fingerprint reader with searching capability
- Eliminate cards, keys and PINs • Finger only access • Identifies users in less than 2 seconds
- Length: 130mm (5.12"), width: 50mm (1.97"), depth: 65.5mm (2.5") • Voltage: 9-24VDC
- Flat surface, single-gang or multi-gang mountable. Wall mount plate will accept #6 screws or bolts. Clearance hole diameter is 0.155". Trim plate included to cover single-gang box
- Includes VeriAdmin software free of charge • Red, amber and green LED and tone signals
- Flexible communication options supporting Wiegand formats up to 64 bits

BIVPASSA

DUAL-FINGERPRINT AND PROXIMITY CARD READER

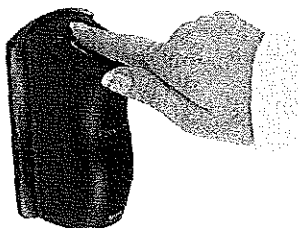


- Dual factor solution combines a self-contained fingerprint module and an HID proximity reader in one modern package. • Self-contained unit stores 4000 fingerprint templates • Integrated HID proximity card reader
- Verifies a user in less than 1 second • Length: 130mm (5.12"), width: 50mm (1.97"), depth: 65.5mm (2.5")
- Voltage: 9-24VDC • Flat surface, single-gang or multi-gang mountable. Wall mount plate will accept #6 screws or bolts. Clearance hole diameter is 0.155". Trim plate included to cover single-gang box
- Includes VeriAdmin software free of charge • Red, amber and green LED and tone signals
- Flexible communication options supporting Wiegand formats up to 64 bits

BIVPROXA

CAMDEN DOOR CONTROLS

CAMDEN

MPROX STAND ALONE SINGLE DOOR PROXIMITY READER

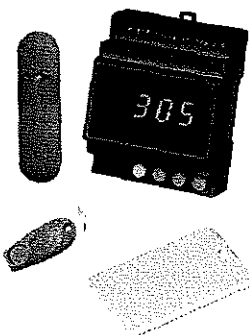

- Up to 999 users • Jamb mount proximity reader • 12/24V AC/DC operation
- Up to 200 feet (70 meters) between reader and controller
- Request to exit input (N/O) • Form C relay - 5 amps • Bi-color LED and sounder • Door open time: 1-80 seconds or latching • Presence input (parking, man-trap applications)

MPROX consists of two parts; a vandal & weather resistant mullion mount proximity reader and a small programmer / controller which is installed on the secure side of the facility. The system has a capacity of 999 users, cards and fobs can be individually or batch enrolled / deleted. All programming is done through the controller and reader - there is no need for computers or software to enroll or delete cardholders.

PROXIMITY READER

CMCV601


PROX CARD

CMCVCSA

KEYFOB

CMCVKTA

PUSH TO OPEN



- Mounts in double gang box • Durable stainless steel construction
- All-active design requires minimal actuation force and meets ADA requirements
- UL/CSA approved SPST N/O switches rated 3 AMPs @ 120 VAC minimum
- Architectural finish • Heavy duty • 4" x 4"


BLACK

CMCM25103

HANDICAP

CMCM25104

SURFACE MOUNT SWITCH BOX




- Heavy duty cast aluminum faceplate and box
- Surface mounted
- For use with 1"-1-1/4" mortise cylinder (sold separately)
- Complete units include faceplate, choice of switch, cylinder lock ring, 2 socket/slotted screws and 2 tamperproof screws

MOMENTARY

CM1000SPST

SINGLE GANG DIECAST KEY SWITCHES



- Heavy duty key switches
- Flush mounted
- Heavy duty cast aluminum faceplate and box
- For use with 1"-1-1/4" mortise cylinder (sold separately)
- Complete units include faceplate, choice of switch, cylinder lock ring, 2 socket/slotted screws and 2 tamperproof screws

MOMENTARY

CM1120SPDT

MAINTAINED

CM1130SPDT

NARROW STYLE KEY SWITCHES



- Heavy duty key switches
- Narrow style
- Heavy duty cast aluminum faceplate and box
- For use with 1"-1-1/4" mortise cylinder (sold separately)
- Complete units include faceplate, choice of switch, cylinder lock ring, 2 socket/slotted screws and 2 tamperproof screws

MOMENTARY

CM2020SPDT

MAINTAINED

CM2030SPDT

LOCK In The Value.

CAMDEN

DOOR CONTROLS


CAMDEN



COMPLETE SPACE SHIP ENCLOSURE FOR PUSH TO OPEN

- Vandal and weather resistant enclosure for 4" round switches • Patented 2 piece construction • RF ready
- Components
- CM49A - Flush enclosure only
- CM49AK - Flush enclosure adapter plate gasket
- CM49B - Surface mount enclosure only
- CM49C - Adapter plate required for mounting CM 49 to double gang and 4 x 4 boxes
- CM49G - Gasket for CM49A or CM49B
- Switch plate sold separately

CMCM49



SINGLE GANG KEY SWITCHES

- Accepts standard mortise cylinder 1" - 1-1/4"
- Heavy duty stainless steel faceplate
- Locators prevent cylinders from spinning
- Fits standard in-wall single gang box
- Tamper proof screws supplied
- Indoor/outdoor application
- UL/CSA approved switches
- Wide range of switch configurations
- 1 or 2 switches may be installed. Left and/or right operation.

SPDT MOMENTARY
CMCM1220

SPDT MAINTAINED
CMCM1230



SINGLE GANG PIEZO PUSHBUTTON

- 4-1/2" x 2-3/4"
- Stainless steel face plate
- Contact rating: 0-24V AC/DC
- Maximum current draw: 200ma
- Temperature: -40°C to 125°C (-40°F to 275°F)
- Environmental protection: IP68
- Actuation Force: 3-5N
- Red Button
- 1-1/2" button momentary N/O and N/C

CMCM9480R



MUSHROOM EXIT SWITCH

- Stainless steel one gang faceplate
- Free Spinning heavy duty button
- 1-5/8" diameter red button engraved EXIT

MOMENTARY, RED
CM420E



ALL-ACTIVE JAMB SWITCH

- ADA compliant
- Mounts in aluminum jamb, or surface box (sold separately)
- Stainless steel construction • SPST momentary switch
- Durable 4 stud design and rubber dampers for quiet operation
- Supplied with mounting hardware

CM252

PUSH TO OPEN

CM253

PUSH TO OPEN

CM254

SURFACE MOUNT BOX

CM23



CAMDEN DOOR CONTROLS

CAMDEN

ALL ACTIVE ROUND SWITCHES



- 6" round design
- Mounts to one gang, two gang, or 4 square in-wall boxes
- Optional surface mount enclosure (CM69S)
- ADA compliant
- Stainless steel construction
- SPDT momentary switch
- Durable 4 stud design and rubber dampers for smooth and quiet operation
- Supplied with mounting hardware

CM602



PUSH TO OPEN

CM603

PUSH TO OPEN




CM604

ROUND SURFACE MOUNT ENCLOSURE

CM69S

VANDAL RESISTANT SWITCHES



- All metal construction
- Heavy duty, 1/4" thick aluminum plate
- DPDT switches, momentary or maintained
- Indoor or outdoor usage
- Low profile
- Can withstand attack of all types, even direct hammer blows
- Includes faceplate, 7/8" steel button and security screws

SINGLE GANG, DPDT MOMENTARY

CM9080

STAND-ALONE PIEZO KEYPADS



- 200 user codes, 100 million combination
- Water and vandal resistant
- Virtually indestructible
- Lifetime warranty
- One piece aluminum housing
- Visual & audible feedback during programming
- Eeprom memory
- Heavy-duty form C relay
- 12-24VDC, 12VAC

7-1/4"H X 1-3/4"W X 15/16"D
SURFACE MOUNT, JAMB WIDTH

CM626S


5-1/4"H X 3-5/16"W X 3/4"D
SURFACE MOUNT

CM634

5-1/4"H X 3-5/16"W X 3/4"D
ILLUMINATED

CM6341

TIMERS



- 8 Daily & weekly schedules
- Internal memory backup
- Easy to program/setup
- Extremely compact size - 2-3/8" x 2-3/8" 1-1/4"
- Can automatically activate/de-activate electric locks, magnets, automatic doors or control lighting or energy management devices


7 DAY PROGRAMMABLE TIMER, 12V AC/DC

CMCX24712

7 DAY PROGRAMMABLE TIMER, 24V AC/DC

CMCX24724

POWER TRANSFER CABLE




- 12" length
- 1/4" inside diameter
- Molded end caps
- US26 finish

ARMORED TRANSFER CABLE

CMPTS14


LOCK In The Value.

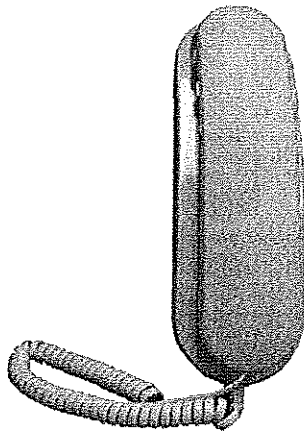DOOR PHONES**CAP-COM****ROOM PHONE UNIT
WITH DOOR STATUS LED**

- Volume adjustment button on handset • Remote door strike activation on handset
- Uses standard wall outlet & plug in power pack • Install on wall with 2 screws in under a minute

CARP1



1/1

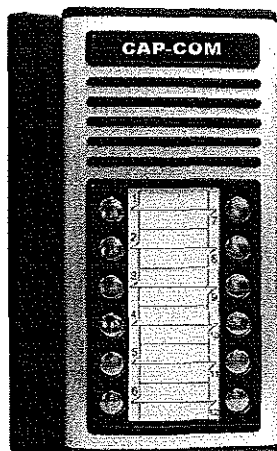**12 BUTTON WEATHER RESISTANT
DOOR PHONE UNIT**

- Communicates with up to 12 apartments with RP1 room phone • Door position Switch alerts tenants of a propped open door • Quick easy installation • Powers standard 12 VDC electric strike
- Powered by included standard wall transformer • Tough weatherproof extruded aluminum housing
- Paper directory insert protected by clear cover

CADP12



1/1

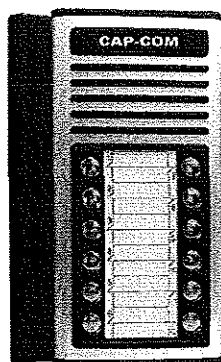**12 BUTTON
WEATHER RESISTANT
DOOR PHONE
WITH 4 PREPROGRAMMED
RP1 ROOM PHONE KIT**

- Includes everything you need to provide wireless entry intercom service for 4 apartments
- You provide the wire, door strike & hardware for remote release
- Kit includes DP12, 4 RP1's, suppressor kit, surface door position switch & power supplies

CA4PLEXKIT



1/1

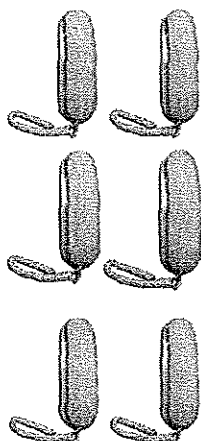

**12 BUTTON
WEATHER RESISTANT
DOOR PHONE
WITH 6 PREPROGRAMMED
RP1 ROOM PHONE KIT**

- Includes everything you need to provide wireless entry intercom service for 6 apartments
- You provide the wire, door strike & hardware for remote release
- Kit includes DP12, 6 RP1's, suppressor kit, surface door position switch & power supplies


CA6PLEXKIT 1/1

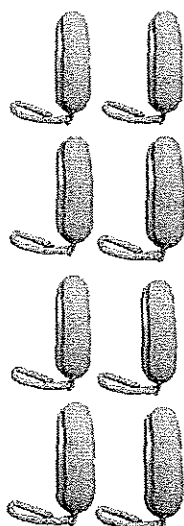

**12 BUTTON
WEATHER RESISTANT
DOOR PHONE
WITH 8 PREPROGRAMMED
RP1 ROOM PHONE KIT**

- Includes everything you need to provide wireless entry intercom service for 8 apartments
- You provide the wire, door strike & hardware for remote release
- Kit includes DP12, 8 RP1's, suppressor kit, surface door position switch & power supplies


CA8PLEXKIT 1/1



**12 VDC 1A
SCREW TERMINAL
POWER SUPPLY**

- Allows longer power supply wire runs, from 8-100' on 18Ga wire

CAPS112 1/1



HIGH SECURITY TRANSFORMER COVER

- Tamper-proof steel security housing with cover for all CAP-COM power supplies
- Screws over standard 110 VAC duplex outlet
- 1/2 inch knockouts for conduit or strain claps on all 4 sides

CAPSC2

1/1




SURFACE MOUNT DOOR POSITION SWITCH

- Surface mount open-loop magnetic connection to DP Door Phone Master unit
- Additional DPSS switches can be added in parallel for reporting door status from multiple doors

CADPSS

1/1




RECESSED-MOUNT DOOR POSITION SWITCH

- 3/4" recessed mount open-loop magnetic switch for connection to DP door phone master unit
- Additional DPSS switches can be added in parallel for reporting door status from multiple doors

CADPSR

1/1




LOCKING HARDWARE SUPPRESSOR KIT

- Eliminates inductive surges when power is released from electric door strike
- Extends the life of the electric strike door relay on CAP-COM DP units

CASUPPKT

1/1





HANDHELD PROGRAMMER UNIT

- Handheld programmer unit is a must for installing contractors and large end-user groups
- Allows quick, easy programming of DP series Door Phone Units and RP Series room phones
- Pin pad keypad

CAPROG1

1/1

PADLOCKS & ACCESSORY LOCKS



400 SERIES KEYLESS PADLOCK


- Case hardened steel shackle that resists sawing
- Double-locking shackle for extra protection against prying • All brass internal mechanisms for non-corrosive durability • 10,000 possible combinations
- Packed 5 per box

1" SHACKLE CLEARANCE


CCK436 1/5

2-1/4" SHACKLE CLEARANCE

CCK437 1/5



CCK0437
SHOWN



400 SERIES MARINE PADLOCK


- 1" Solid brass shackle • Solid brass body
- Corrosion resistant • Double-locking shackle for extra protection against prying • All brass internal mechanisms for strength and durability

1" SHACKLE CLEARANCE

CCK0436 1/5

2-1/4" SHACKLE CLEARANCE

CCK0437 1/5




500 SERIES KEYLESS PADLOCK

- Hardened steel shackle that resists sawing
- Double-locking shackle for extra protection against prying • Heavy pressure cast body for security and value • 10,000 possible combinations
- Height of shackle "A": 1"

1" SHACKLE CLEARANCE

CCK500 1/5



SUPER SESAMEE

- Industrial strength combination lock
- Resists hammer and re-bar attacks
- Hardened steel full metal jacket
- Hardened steel full metal jacket shroud
- Weather resistant black electrocoating
- 7/16" chrome plate molybdenum shackle
- Shackle pull strength: 2,750 pounds
- All brass inner mechanism • Four all brass dials
- 10,000 changeable combinations • Packed 5 per box

1" SHACKLE CLEARANCE

CCK636


2" SHACKLE CLEARANCE

CCK637

SHROUDED SHACKLE

CCK646

COMBINATION CABINET DOOR LOCK



- Wood or metal application
- D900: Includes both side and end throw latches
- D901: Includes exterior trim plate
- D900 - .075 to .105 door thickness
- D901 - 5/8" to 7/8" door thickness
- Easily resettable combinations
- Easy to read numbered buttons
- Easy to use molded thumb turn
- Numerous combinations available
- Retrofits existing pushbutton locks
- User friendly installation instructions
- User friendly mounting templates
- Mechanical no batteries needed
- Easily adapted to door and drawers
- Latex free for hospital and Medical Center use
- Lost combination reset function • 5 per box

FOR SHEET METAL CABINET DOOR

CCD900US26D

FOR WOOD CABINET DOOR


CCD901US26D

FOR WOOD CABINET DOOR

CCD901US4

PADLOCKS & ACCESSORY LOCKS

CCL

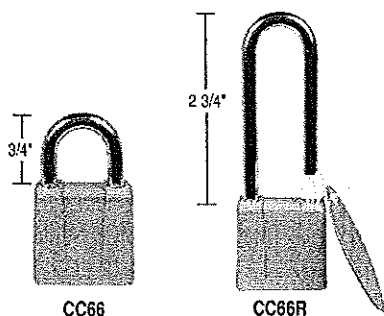


HUSKI PADLOCK

- Solid pressure cast gold textured finish
- Hardened steel chrome plated shackle
- Available KA only
- KA# CAT30-Key blank: S1000V or US21CO26

CC66 KA 1/10

WITH ALUMINUM TAG
CC66R KA 1/10

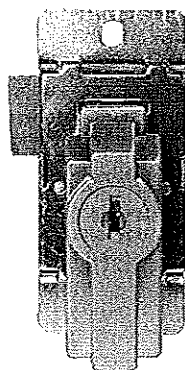


RH SHOWN

PANELBOARD LOCK

- Handed-disc tumbler
- Lift lever-retract latch
- Key blank: S1000V or US21CO26
- 2 keys supplied
- Includes hardware
- KA only - KA# CAT60
- Finish: 26D

LH KEYED ALIKE
CC15767LH KAA 1/25

RH KEYED ALIKE
CC15767RH KAA 1/25

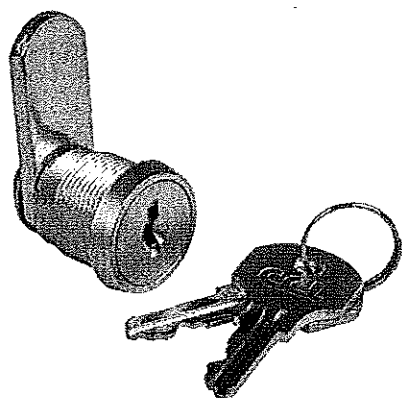

DISC TUMBLER CAM LOCKS

- Pressure cast
- 90° & 180° operation stop cams included
- Key removable in locked position only 90° - both in 180°
- 2 cams: one straight, one 1/4" offset - 2 keys
- KA# CAT30
- Key blank: S1000V or US21CO26
- Specify KA or KD
- Finish: 26D

SPECIFY
KA OR KD


5/8" LENGTH
CC15751 1/25

7/8" LENGTH
CC15752 1/25

1-1/4" LENGTH
CC15760 1/25



CAM LOCKS & PUSHLOCKS



COMBINATION CAM LOCK

- Replaces any 3/4" diameter cam lock
- Installs easily in metal or wood
- Secures cabinets, chests, drawers, security boxes, lockers and more
- 26D trim black face
- Packed 10 per box

5/8" LENGTH
CCK2113


1/10

7/8" LENGTH
CCK3113

1/10

1-1/8" LENGTH
CCK4113

1/10




DISC TUMBLER SLIDING DOOR LOCK

- 7/8" diameter hole and 7/8" cylinder length
- Removable key locked or unlocked
- US4 • KA# CAT30
- Key blank: S1000V or US21CO26
- Available KAA only

KEYED ALIKE
CC02069A KAA

1/25




PIN TUMBLER SLIDING DOOR LOCK

- 7/8" hole diameter
- 7/16" throw and 7/8" length • US4
- 2 keys - CCL Key blank: 5862C-R1

KEYED DIFFERENT
CC02290A KD

1/10



PIN TUMBLER SLIDING DOOR LOCK

- 1" mounting hole diameter
- 7/8" or 1-1/8" length with 15/32" throw
- KA# 4T37526 (Key blank: IL1003A)
- KAA only - 2 keys supplied

7/8" LENGTH
CC02291A KAA

1/10


1-1/8" LENGTH
CC02291C KAA

1/10



CABINET LOCKS

CCL




7/8" DISC TUMBLER DRAWER LATCHBOLT

- 7/8" diameter hole
- 7/8" length, 1/2 mortise
- US4 Finish
- Unlocked key retaining
- 2 keys - Key blank: S1000V or US21CO26
- Specify KA or KD

SPECIFY
KA OR KD

CC02065.5A

1/25




7/8" PIN TUMBLER DRAWER DEADBOLT

- 7/8" mounting hole - 1/2 mortise
- Brass construction 7/8" length
- KA# 4T37526
- 2 keys - Key blank: IL1003A
- Key removable in 2 positions
- Specify KAA or KD

SPECIFY
KAA OR KD

CC0666A

1/10



DISC TUMBLER DRAWER DEADBOLT

- 7/8" hole diameter • Full surface
- 7/8" or 1-1/8" length • US4 Finish
- KA# CAT30
- 2 keys - Key blank: S1000V or US21CO26
- Removable key locked & unlocked
- Specify KAA or KD


SPECIFY
KAA OR KD

7/8" LENGTH
CC02066A

1/25

1-1/8" LENGTH
CC02066C

1/25



DISC TUMBLER DRAWER DEADBOLT

- 7/8" diameter hole, 7/8" length - US4 Finish
- Surface or 1/2 mortise mount
- Removable key locked or unlocked
- KA #CAT30
- 2 keys - Key blank: S1000V or US21CO26
- Specify KAA or KD


SPECIFY
KAA OR KD

CC02068A

1/25

SWITCH / VENDING LOCKS

ACE II® 7 PIN TUMBLER SWITCH LOCKS



- Maintaining contact switch operated by manually rotating inserted key 90° clockwise from open to closed position
- Momentary contact switch locks feature spring return from closed position
- Contact configuration: SPST
- 7 amps (resistive) @ 125 Volts AC
7 amps @ 28 Volts DC
- Standard Finish: Bright Chrome
- Two keys are furnished per lock
- Switches are U.L. recognized
- Specify KAA or KD

SPECIFY
KAA OR KD

MOMENTARY
CH 4073 70 1/10

MAINTAINED ON/OFF
CH 4073 2 1/10

DOUBLE BITTED SWITCH LOCKS




- 2174 70: Single pole, single throw/OFF only, key removable in OFF position only
- 2174 2: Single pole, single throw, key removable in ON/OFF position
- Key blank: CG1
- Specify KAA (to 2001), KAB (to 2007) or KD

SPECIFY
KAA OR KD

MOMENTARY
CH 2174 70 1/10

ON & OFF
CH 2174 2 1/10

ACE II® 7 PIN TUMBLER SCREW TYPE VENDING LOCK

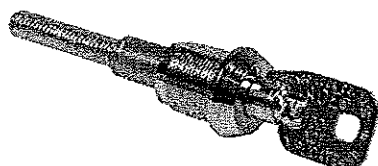


- Patented Ace II® lock assembly in 3/4" dia.
- Barrel with two flats - 5/8" across
- 360° key rotation with keypull every 180° (12 and 6 O'Clock)
- Two keys furnished per lock
- Includes body nut • Specify KAA or KD

SPECIFY
KAA OR KD

CH SA 4107 1/10

ACE II® "T" HANDLE CYLINDER LOCK



- 7 pin tumbler
- Brass locking bolt
- Set screw hole for anti-pull feature when used in "T" Handle with set screw feature
- Standard Finish: Chrome
- Furnished with 2 keys each
- Meets NAMA dimensional standards
- Specify KA or KD


SPECIFY
KAA OR KD

CH 4255 19RL 1/10

FRONT VIEW



SIDE VIEW




DUST CAP

- Protect switch locks and cam locks from the elements
- Chrome plated zinc die cast cover
- Stainless steel mounting ring
- Permanently installed rubber seal
- Positive spring closure to insure seal integrity
- Sold in packs of 5

CH 99655 1/1

TUBULAR CAM LOCKS & KITS

CHICAGO
LOCKS




ACE® CAM TYPE UNIVERSAL FUNCTION LOCKS

- Patented Ace II® assembly
- All brass construction
- Center plug contains anti-drill pin for added security
- **Standard Finish: Polished Nickel**
- Furnished with straight locking cams which can be mounted vertically or horizontally and also a 1/4" offset cam. Cams are 1/8" thick x 3/4" wide
- Two keys furnished per lock
- Specify KAA or KD

SPECIFY
KAA OR KD


19/32"	
CH 4198	1/25
11/16"	
CH 4153	1/25
15/16"	
CH 4152	1/25
1-3/32"	
CH 4160	1/25



ACE® LOCKING CAMS SERVICE KIT

- Provides all the parts needed to service locks in one compact container
- No more wasted trips back to the shop to find forgotten tumblers & springs
- Contains large selection of locking cams, nuts and washers


CH 99629 1/1



ACE® TUMBLER KEYING KIT

- Provides all the parts needed to service & re-key Ace tubular type locks in one compact container
- No more wasted trips back to the shop to find forgotten tumblers & springs
- Also includes assembly pin & depth key


CH 99630 1/1



SINGLE BITTED SERVICE KIT

- Provides all the parts needed to service single bitted disc tumbler locks in one compact container
- No more wasted trips back to the shop to find forgotten tumblers, springs, retaining clips, crescent rings & hex nuts

CH 99094 1/1




DOUBLE BITTED SERVICE KIT

- Provides all the parts needed to service double bitted tumbler locks in one compact container
- No more wasted trips back to the shop to find forgotten tumblers, springs, key blanks, washers, retaining rings & hex nuts

CH 99095 1/1

CABINET LOCKS & KEY BLANKS




INSULATED FILE CABINET LOCK

- 4 pin tumbler
- Packaged less screws
- 26D Finish
- Key blank: CHKP2
- Specify KAA (5x75) or KD

SPECIFY
KAA OR KD

CH EXP 19DC 1/10




1-3/4" FILE CABINET LOCKS

- 4 pin tumbler
- Packaged with screws
- 26D Finish
- Key blank: CHKP1
- Specify KAA (1x20), KAB (3x5) or KD

SPECIFY
KAA OR KD

ROUND BOLT
CH 5001 LP 1/10




2" FILE CABINET LOCKS

- 4 pin tumbler
- Packaged with screws
- 26D Finish
- Key blank: CHKP1
- Specify KAA (1x20), KAB (3x5) or KD

SPECIFY
KAA OR KD

RECTANGULAR BOLT
CH 5002 LP 1/10



CH 1974

METAL DESK DRAWER LOCK

- 2 keys per lock
- 5 disc tumbler
- Removable plug feature
- Steel locking bolt
- 26D Finish
- Key blank: CHK5
- Specify KAA (1289), KAB (1454) or KD

SPECIFY
KAA OR KD

STANDARD CAM
CH 1974 1/25

NARROW CAM
CH 1975 1/25

CH K100MH 1/50
CH K101H 1/50
CH K102H 1/50
CH K103H 1/50
CH K104H 1/50
CH K137 (ACE) 1/50



ORIGINAL KEY BLANKS

- 50 per box
- Solid Brass

* WE ALSO STOCK A FULL LINE OF
ORIGINAL ILLINOIS KEY BLANKS




CH KP1 1/50
CH KP2 1/50
CH KP9 1/50
CH K4 1/50
CH K4W 1/50
CH K5 1/50
CH K35 1/50


ELECTRONIC CABINET LOCK

NEW!


COMPX
SECURITY




CXEL2004KP




CXEL2004MS



CXEL2004MSKP



CXEL2004PR



CXEL2004PRKP

eLock[®] ELECTRONIC ACCESS CONTROL

- Stand alone access control for cabinetry • Can be used for drug & supply cabinets, key control boxes, medical & personnel records cabinets, etc. • Keyless system
- 250 user/supervisor codes, giving 250 users an individual access method - PIN, magstripe ID card, or proximity ID card • Reads magstripe Track 2 and HID[®] cards eliminating the need to buy new cards • Surface mounted • Audit trail of last 1500 access attempts with date, time and user name • Motor driven latching mechanism
- 4-AA battery pack mounts remotely; alkaline batteries recommended: not included
- "Jump Start" 9-volt battery power port allows the user, with valid credential, to access the CompX eLock[®] when the batteries are exhausted, located on the bottom of the lock
- Audible alarm bolt system • Compatible with 12-volt electric door strikes • Low battery indicator • Standard RJ11 communications port for audit trail download • Gear-driven spring bolt mechanical latch • Non-volatile memory • Adding or deleting users can be done right at the unit or through the optional LockView[®] software

• Features of the LockView[®] Software

- Add, edit, view and delete users/supervisors and their credentials
- Add, edit and delete CompX eLock[®]
- Assign access rights between users/supervisors and CompX eLock[®] in the database
- USB connection required
- Download, view, save, print, archive and delete audit trails
- Dual credential access available
- Programmable lockout feature
- Set real time clock
- Time based access restrictions
- Create user groups
- Windows[™] based

NUMERIC KEYPAD

CXEL2004KP 1/1

MAGSTRIPE

CXEL2004MS 1/1

MAGSTRIPE/KEYPAD

CXEL2004MSKP 1/1

PROXIMITY READER/HID

CXEL2004PR 1/1

PROXIMITY/KEYPAD

CXEL2004PRKP 1/1

LOCKVIEW SOFTWARE


CXEL2004LV 1/1

CODELOCKS

control + convenience

PUSHBUTTON LOCKS

CODELOCKS




MECHANICAL PUSHBUTTON LOCK

- Pushbutton lock with 13 keys & 8191 possible combinations
- Deadbolt • Dual backset
- 1-3/8"–2-3/4" door thickness
- Hex knob • Non-handed
- Residential duty, light commercial duty
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL
CLCL210KSS 1/6

POLISHED BRASS
CLCL210KPB 1/6




MECHANICAL PUSHBUTTON LOCK

- Pushbutton lock with 13 keys & 1 code
- Passage set button • Surface bolt latchbolt
- Dual backset • 1-3/8"–2-3/4" door thickness
- Hex knob • Non-handed
- Residential duty, light commercial duty
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL
CLCL250KSS 1/6

POLISHED BRASS
CLCL250KPB 1/6




MECHANICAL PUSHBUTTON LOCK

- Medium duty mechanical pushbutton lock
- Latchbolt • 2-3/8" backset • 1-3/8"–2-3/4" door thickness
- Full lever non-handed
- 13/12 keys & 8191/4095 combinations
- Codes: 1 master non-sequential 3/4/5/6/7 digits
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL
CLCL415SS 1/6

POLISHED BRASS
CLCL415PB 1/6




MECHANICAL PUSHBUTTON LOCK

- Heavy duty mechanical pushbutton lock
- Latchbolt • 2-3/4" backset
- 1-3/8"–2-3/4" door thickness
- Full lever non-handed • Passage mode
- 12/11 keys 2047/1023 combos
- Codes: 1 master non-sequential 3/4/5/6/7 digits
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL
CLCL515SS 1/6

POLISHED BRASS
CLCL515PB 1/6



ELECTRONIC PUSHBUTTON LOCK

- Heavy duty electronic pushbutton lock
- Uses 4AA batteries • Latchbolt
- 2-3/4" backset • 1-3/8"–2-3/4" door thickness
- Full lever non-handed • 12 keys, 1,100,000 plus combos • 1 master 90 users 1 shot code 4/5/6 digits • 4AA
- 500,000 cycles • CL3H fire rated
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL
CLCL5010SS 1/6

POLISHED BRASS
CLCL5010PB 1/6


More Choices, One Supplier

CODELOCKS

control + convenience

PUSHBUTTON LOCKS

CODELOCKS



ELECTRONIC PUSHBUTTON LOCK

- Medium duty electronic pushbutton lock
- Latchbolt • 2-3/8" backset • 1-3/8"-2-3/8" door thickness
- Full lever non-handed • 10 keys 1,100,000+ combos
- 1 master 90 users 1 shot code 4/5/6 digits
- 4AA batteries • 500,000 cycles • Passage mode
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL


CLCL4010SS

1/6

POLISHED BRASS

CLCL4010PB

1/6



ELECTRONIC PUSHBUTTON LOCK

- Medium duty electronic pushbutton lock
- Latchbolt • 2-3/8" backset • 1-3/8"-2-3/8" door thickness
- Hex knob • 10 keys 1,100,000+ combos
- 1 master 90 users 1 shot code 4/5/6 digits
- 4AA batteries
- 500,000 cycles
- Finish: Stainless Steel & Polished Brass

STAINLESS STEEL

CLCL2010SS


1/6

POLISHED BRASS

CLCL2010PB

1/6

NEW!




CABINET LOCK

- Electronic 5-key cam lock with 4 digit codes • Easy retrofit for lockers, cabinets and cupboards • All codes are 4 digits long • Three code levels: master, sub master, user • Code change hierarchy, "Master Keying" capable • Master changes all codes • Sub master changes sub and user codes • User code changes user code • User code can be set to repeat (default) or single use mode • Concealed programming key (lock must be open to program) • Includes 2 cam styles
- Fits standard cam lock prep • 2 AAA cells; 15,000 cycles; 9V external battery jump start
- Finish: Powder Coated Silver, die cast Zinc body

CLCL1005SG

1/1

NEW!



DUAL KEYPAD WITH PASSAGE MODE

- Double sided keypad • Medium duty mechanical pushbutton lock • Latchbolt • 2-3/8" backset
- 1-3/8" - 2-3/4" door thickness • Full lever non-handed
- 13/12 keys, 8191/4095 combinations per side
- Codes: 1 master non-sequential 3/4/5/6/7 digits
- Finish: Stainless Steel and Polished Brass

POLISHED BRASS

CLCL415BBPB

1/1

STAINLESS STEEL

CLCL415BBSS

1/1

NEW!

DEADLATCHES FOR CL400/500

2-3/8"

CLLB60PB

1/10

2-3/8"

CLLB60SS

1/10

2"

CLLBFR70PB

1/10

2"

CLLBFR70SS


1/10

GRADE 1 LEVERSETS

SERIES

CL3300 SERIES LEVER

Ideal for demanding high-use commercial, industrial and institutional applications including schools, universities, municipal buildings, airports & offices.

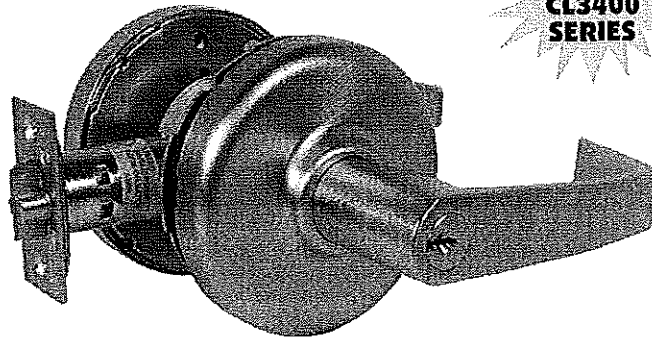

**REPLACES
CL3400
SERIES**

**CORBIN
RUSSWIN**

FEATURES

- Patented Lever release design for vandal resistance
- Cast Levers
- Anti-rotation throughbolts
- Independent return springs prevents lever sag
- Exceeds ANSI Grade 1 requirements


FINISH

626 Dull Chrome

SPECIFICATIONS

- Door Thickness:** 1-3/4" to 2" standard
Backset: 2-3/4" standard
Cylinder: Brass 6 pin L4 Keyway Russwin
Latchbolt: Brass, chrome plated, 1/2" throw with nylon anti-friction insert standard
Strikes: ANSI curved lip standard, 4-7/8" x 1-1/4" lip to center
Certification: ANSI: Meets A156.2, Series 4000 Grade 1. Meets A117.1 Accessibility Code. Federal: Meets FF-H-106C. UL/ULC: All locks with 1/2" throw latchbolt U.L. Listed 3 hour fire rated "A" label doors
Handing: Field reversible
ADA: Lever locks comply with ADA
Warranty: Five-year limited warranty
Finish: BHMA 626 - Satin Chromium Plated
NZD Lever: Die cast zinc
NZD Rose: Wrought

LEVER DESIGN

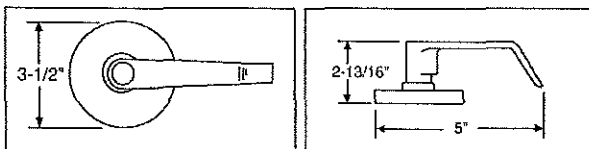

HOW TO ORDER

CR CL33 20 626

MANUFACTURER PREFIX

LOCK SERIES
3300 Lever Series
Grade 1

FINISH

626 Dull Chrome

FUNCTION

- 10 Passage
- 20 Privacy
- 51 Entry
- 55 Classroom
- 57 Storeroom

More Choices, One Supplier

GRADE 1 LEVERSETS


CORBIN
RUSSWIN






SERIES


CL3300 SERIES LEVER

- Packed 6 per case
- 626 finish standard
- 2-3/4" Backset
- Stocked Keyway - L4

REPLACES
CL3400
SERIES

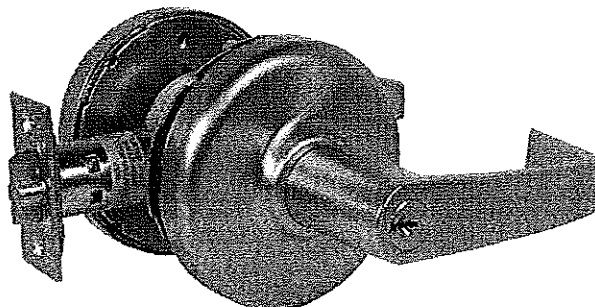

	PASSAGE Latchbolt by lever either side. Both levers always free.	CR CL3310 626 1/6
	PRIVACY Throw-off latchbolt by lever either side. Outside lever locked by pushbutton. Outside lever unlocked by emergency release tool outside, by rotating inside lever or by closing door. Inside lever always free.	CR CL3320 626 1/6
	ENTRY Deadlocking latchbolt by lever either side, except when turnbutton locks outside lever. Turning inside lever unlocks outside lever. Pushing in and turning button locks outside lever, requiring key at all times. Turning inside lever does not unlock outside lever until button is manually turned to unlocked position. Inside lever always free.	CR CL3351 626 1/6
	STOREROOM Deadlocking latchbolt by key in outside lever or by rotating inside lever. Outside lever always rigid. Inside lever always free.	CR CL3357 626 1/6
	CLASSROOM Deadlocking latchbolt by lever either side, except when key outside locks outside lever. When outside lever is locked, latchbolt is operated by key outside or by rotating inside lever. Inside always free.	CR CL3355 626 1/6



KEY IN LEVER CYLINDER

- For CL3300 Series Levers
- "O" bitted
- 6 pin solid brass
- Inactive keyways: Many older Corbin Russwin keyways are designated inactive. No new systems shall be established on these keyways. Available upon special order to support existing keying systems
- Finish: 626 (Dull Chrome)

SPECIFY
KEYWAY

CR33 2000 1/1

AVAILABLE KEYWAYS
59A1 59C1 L4
60 D1 981


CYLINDRICAL LOCKSETS

**CORBIN
RUSSWIN**

SERIES

CK4200 SERIES

Ideal for demanding high-use commercial, industrial and institutional applications including schools, universities, municipal buildings, airports & offices.

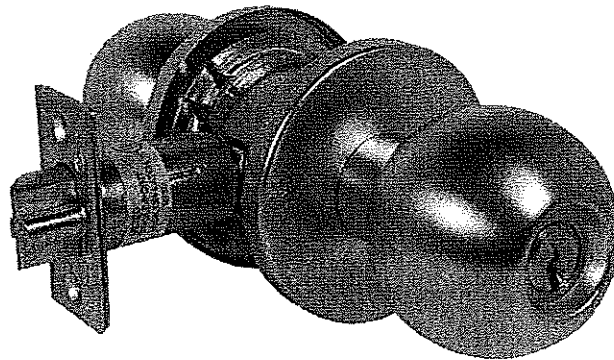


FEATURES

- Highest quality materials
- Precision manufacturing ensures strength, durability and quiet operation
- Patented "Lock-on" rose liners and thimble increase security and prevent lock from loosening

FINISH

626 Satin Chromium Plated

KNOB DESIGN



SPECIFICATIONS

Door Thickness:	1-3/4" to 2" standard
Backset:	2-3/4" standard
Cylinder:	Corbin Russwin Brass 6 pin D1 keyway. Other keyways available
Latchbolt:	Brass, chrome plated, 5/8" throw with nylon insert
Strikes:	ANSI curved lip standard, 4-7/8" x 1-1/4" x 1-1/4"
Certification/Compliance:	ANSI: Meets A156.2, Series 4000 Grade 1. Meets FF-H-106C. UL/ULC: All locks with 1/2" throw latchbolt U.L. Listed for A label and lesser class single doors, 4" x 8"
Handing:	Field reversible
Front:	Wrought brass, bronze or stainless steel, 2-1/4" x 1-1/8"
Warranty:	One-year limited warranty
Finish:	BHMA 626 - Satin Chromium Plated

HOW TO ORDER

CR CK42 10 G 626

MANUFACTURER PREFIX

LOCK SERIES

FUNCTION

- 10 Passage
- 51 Entry
- 55 Classroom
- 57 Storeroom

FINISH

626 Satin Chromium Plated

KNOB DESIGN

G Global


GRADE 1 LOCKSETS

**CORBIN
RUSSWIN**


SERIES

CK4200 SERIES

- Packed 6 per case
- Global knob standard
- 626 finish standard, 630 Satin Stainless Steel available
- 2-3/4" backset
- Grade 1 Extra Heavy Duty
- Stocked Keyway - D1

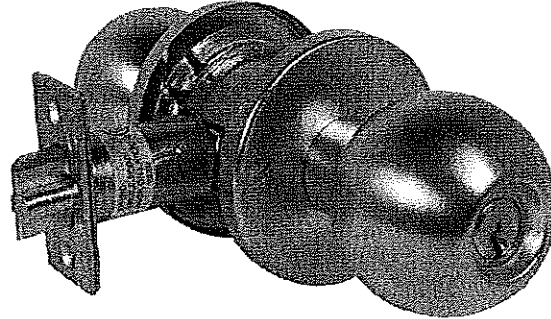

	<p>PASSAGE</p> <p>Latchbolt by knob either side. Both knobs always free.</p>	CR CK4210 G 626 1/6
	<p>ENTRY</p> <p>Deadlocking latchbolt by knob either side except when turnbutton locks outside knob. Key outside retracts latchbolt. Outside knob unlocked by turnbutton. Inside knob always free.</p>	CR CK4251 G 626 1/6 CR CK4251 GRC 630 1/6
	<p>STOREROOM</p> <p>Deadlocking latchbolt by key in outside knob Outside knob always rigid. Inside knob always free.</p>	CR CK4257 G 626 1/6
	<p>CLASSROOM</p> <p>Deadlocking latchbolt by knob either side, except when key outside locks outside lever. When outside knob is locked, latchbolt is operated by key outside or by rotating inside knob. Inside always free.</p>	CR CK4255 G 626 1/6




REPLACEMENT PLUGS

- For heavy-duty and extra-heavy Corbin Russwin knob locksets
- Finish: 626 (Dull Chrome)

SPECIFY KEYWAY:
59A1, 60, 77, L4, 6D1, 852, 981

CRPL SPECIFY KEYWAY 1/10



REPLACEMENT DEADLATCH

- Deadlocking for CK4200 only
- 2-1/4" x 1-1/8" beveled square corner front
- 2-3/4" Backset
- Finish: 626 (Dull Chrome)



CR486 F89 626 1/1

GRADE 1 MORTISE LOCKSETS








SERIES

ML2000 SERIES LUSTRA & NEWPORT MORTISE LOCKSETS

- 1-3/4" door thickness • 2-3/4" backset
- Handed; quick reversible. The lockset can be re-handed without disassembling the lock case
- Lockcase is heavy gauge chrome plated steel, 5-7/8" x 4" x 15/16"
- Armored front: Wrought brass or bronze, attached by machine screws to lockcase front
- Latchbolt: 2-piece mechanical with anti-friction insert, 5/8" x 1" x 3/4" throw
- One-piece stainless steel deadbolt, 19/32" x 1-1/4" x 1" throw
- ANSI straight lip standard strike, wrought brass or bronze, 4-7/8" x 1-1/4" x 1-1/8" lip to center
- 6 pin cylinder, L4 keyway
- Classroom function requires a regular or straight Cam A02. All other functions require a standard clover Cam A01
- 2 nickel silver keys • Finish: 626 (Satin Chrome)

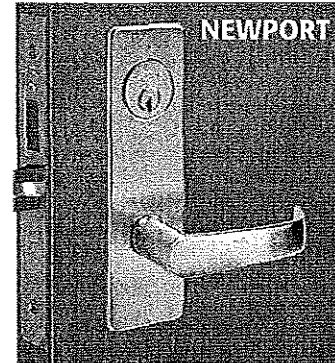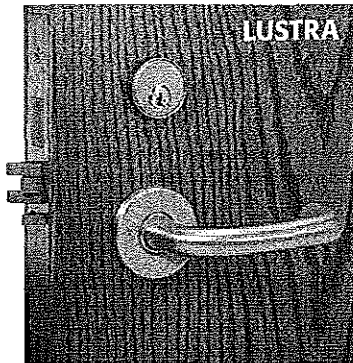


**CORBIN
RUSSWIN**

	PASSAGE Latchbolt by lever either side. Both levers always free.	LUSTRA CRML 2010 LWA 626 1/6 NEWPORT W / ESCUTCHEON CRML 2010 NSM 626 1/6
	PRIVACY Latchbolt by lever either side. Deadbolt by thumbturn inside or by emergency release tool outside.	LUSTRA CRML 2020 LWA 626 1/6 NEWPORT W / ESCUTCHEON CRML 2020 NSM 626 1/6
	ENTRANCE / APARTMENT Latchbolt lever either side, unless outside lever is locked by toggle-action stop or by projection deadbolt. Deadbolt by key outside or by thumbturn lever inside. Inside lever simultaneously retracts latchbolt and deadbolt; outside lever remains locked. Auxiliary latch deadlocks latchbolt.	LUSTRA CRML 2067 LWA 626 1/6 NEWPORT W / ESCUTCHEON CRML 2067 NSM 626 1/6
	ENTRY Latchbolt by key outside or by lever either side, unless outside lever is locked by toggle-action stop. Auxiliary latch deadlocks latchbolt. Inside lever always free.	LUSTRA CRML 2051 LWA 626 1/6 NEWPORT W / ESCUTCHEON CRML 2051 NSM 626 1/6
	CLASSROOM Latchbolt by lever either side, unless outside lever is locked by key outside. Auxiliary latch deadlocks latchbolt. Inside lever always free.	LUSTRA CRML 2055 LWA 626 1/6 NEWPORT W / ESCUTCHEON CRML 2055 NSM 626 1/6
	STOREROOM Latchbolt by lever inside or by key outside. Outside lever always rigid. Auxiliary latch deadlocks latchbolt. Inside lever always free.	LUSTRA CRML 2057 LWA 626 1/6 NEWPORT W / ESCUTCHEON CRML 2057 NSM 626 1/6
	ENTRANCE / APARTMENT Latchbolt by key outside or by grip either side, unless outside grip is locked by toggle-action stop. Deadbolt by key outside or by thumbturn lever inside. Inside always free.	LUSTRA CRML 2048 LWA 626 1/1 NEWPORT W / ESCUTCHEON CRML 2048 NSM 626 1/1

More Choices, One Supplier

GRADE 1 DOOR CLOSERS

**CORBIN
RUSSWIN**

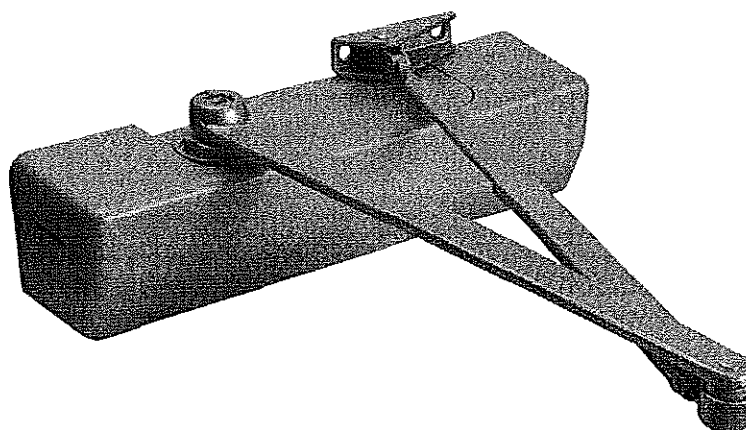

GRADE 1 DOOR CLOSER



- Multi-sized, fully adjustable sizes 1 thru 6
- Non-handed
- Cast-iron with seamless cold headed steel spring tube
- Standard heavy duty forged steel arm
- Latching speed valve standard
- Up to full 180° opening standard for regular, top jamb and parallel arm mountings
- Standard non-metallic cover
- Grade 1
- ADA approved
- Finish: Silver Aluminum
- Packed 4 per case

CRDC6200689 1/8

PARALLEL ARM NON-HOLD OPEN

CR688F95689 1/8


- Regular arm mounting (pull side) and top jamb mounting (push side)
- Non-hold open arm standard

PARALLEL ARM HOLD OPEN

CR688F77689 1/8

- Mounted on push side
- Combines regular arm with parallel arm mounting bracket

ACCESSORIES

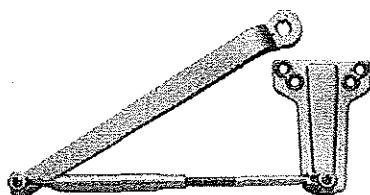

- Brackets for the DC6200
- Silver Aluminum

PARALLEL ARM HOLD OPEN

CR509F49689 1/8

PARALLEL ARM NON-HOLD OPEN

CR188F41689 1/8

RIM EXIT DEVICE CORES & CYLINDERS

1-1/2 HOUR FIRE RATED RIM EXIT DEVICE

- Standard 36" bar fits 31"-36" door width, 42" bar fits 37"-42" door width
- For doors 1-3/4" thick • 2-3/4" backset and non-handed with minimum width 5" stile
- 2-1/2" low profile for barrier-free access projection
- 3/4" stainless steel pullman type with stainless steel deadlocking latch
- Thru-bolted lever, knob and pull trims available
- All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware, exit devices, lever trims and pulls comply with ADA with Grade 1 performance
- Finish: 689 (Painted Silver Aluminum)



See US2870 Series for available trims


36" DEVICE - ALUMINUM

CR82 36B 689 1/1

42" DEVICE - ALUMINUM

CR82 42B 689 1/1

RIM CYLINDER



- For push bar exit devices, cross bar exit devices and all rim mounted locks
- 2" door standard • 6 pin
- Finish: Dull Chrome Only


SPECIFY
KEYWAY

CR3000 1/1

AVAILABLE KEYWAYS

59A1	961	60
59C1	981	67
6D1		77
6D2		L4

1-1/8" MORTISE CYLINDER



- For mortise locks and mortise exit devices
- 6 pin solid brass
- Clover Leaf Cam standard on Corbin keyways
- Yale Cam standard on Russwin keyways
- CR AO2: Russwin Cam (YA6 type) available separately
- CR AO3: Adams Rite Cam available separately
- Finish: Dull Chrome Only


SPECIFY
KEYWAY

CR1000 18 1/1

AVAILABLE KEYWAYS

59A1	60	77	981
6D1	67	961	L4

REMOVABLE CORES



FOR SIMPLEX 1000 SERIES

- Ideal for commercial & institutional applications
- All operating keys (change, master, grand master) operate the lock normally. To rekey, use the special control key (required to remove and install a core)
- 6 pin standard • Two nickel silver keys furnished standard per core
- Finish: Dull Chrome Only

SPECIFY
KEYWAY

CORE
CR8000 1/1

AVAILABLE KEYWAYS

6D1	59A1	60	981	L4
-----	------	----	-----	----

I.C. CONTROL KEY FOR ABOVE

SPECIFY
KEYWAY

CRKEY CON 1/1

NOTE: Control key must be ordered to install core

KEY BLANKS & DOOR CLOSER

ORIGINAL CORBIN/RUSSWIN KEY BLANKS

SPECIFY
KEY SECTION

CRKEY

1/50

CORBIN RUSSWIN/
DESIGN HARDWARE

5 PIN

<u>U.S. ITEM #</u>	<u>KEYWAY</u>
CRKEY L4 5	L4
CRKEY 5D1 R	D1
CRKEY 60 5	60
CRKEY 67 5	67
CRKEY 97 5	97
CRKEY 5 981 R	981
CRKEY 9812	981

6 PIN

<u>U.S. ITEM #</u>	<u>KEYWAY</u>
CRKEY L4 6	L4
CRKEY 57A1 6	57A1
CRKEY 59A1 6	59A1
CRKEY 59A2 6	59A2
CRKEY 59B1 6	59B1
CRKEY 59C1 6	59C1

6 PIN

<u>U.S. ITEM #</u>	<u>KEYWAY</u>
CRKEY 59C2 6	59C2
CRKEY 59D1 6	59D1
CRKEY 59D2 6	59D2
CRKEY 6 D1 R	D1
CRKEY 6 D2 R	D2
CRKEY 6 D3 R	D3
CRKEY 6 D4 R	D4
CRKEY 6 7N R	7N
CRKEY 6 8N R	8N
CRKEY 6 10N R	10N
CRKEY 60 6	60
CRKEY 67 6	67
CRKEY 67 A16	67A1
CRKEY 6 981 R	981
CRKEY 77 6	77
CRKEY 852R	852



PRICES REFLECT BOX QUANTITIES.

A 20% UPCHARGE WILL BE INCURRED ON BROKEN BOXES.

COMPREHENSIVE ALL-IN-ONE CLOSER

D Design Hardware

- Meets ANSI A156.4 Grade 1 standards • UL Listed • Non handed
- Adjustable spring power from size 1 to 6 • Includes patented mounting plate that can replace a wide variety of door closers without drilling new holes in the door
- Heavy duty aluminum closer body • Back check control standard
- Latch speed & sweep speed controls • Parallel arm bracket included
- Through bolts included for 1-3/4" doors • Wood and machine screw fasteners
- Molded cover included • Finish: Aluminum and Dark Bronze
- Lifetime Warranty • 4 per case; Available clear pack only



ALUMINUM
DH316RAL
DARK BRONZE
DH316RBZ

1/4

1/4

FINGERPRINT LOCKS

CFS-1850 STANDALONE FINGERPRINT DOOR LOCK



- Entry by Fingerprint or PIN & Fingerprint • Mechanical key override • Machined aluminum lock body • UL Listed Grade 1 latch Cylindrical or Mortise • Fire rated ADA compliant handle, non handed • High performance 500dpi optical scanner for dependable accurate scanning • Audible and visible operational indicators • Retains stored fingerprints & PINs even if batteries expire • Storeroom mode in normal operation, the lock is always locked from outside and free to exit from inside • Temporary open passage mode can be set by authorized user • Enrollment at lock as standalone or via optional PC data kit.
- CFS-1850C model includes sliding front cover and 9V emergency power terminals.

SPECIFICATIONS

- Dimensions: 14.17" H x 3.31" W x 1.65" D
- Lock body case Machined Aluminum and high strength plastic trim
- Powered by 8 AA batteries
- Capacity: 100 Fingerprint only (1:1) or 1,000 PIN & Fingerprint (1:1)
- Sensor type: 500DPI Optical Sensor, Enrollment time 2 seconds,
- Verification 1 second or less

W/ CYLINDRICAL 2-3/4" GRADE 1 LATCH

CV CFS 1850 C 1/1

W/ MORTISE GRADE 1 LATCH

CV CFS 1850 M 1/1

W/ CYLINDRICAL 2-3/4" GRADE 1 LATCH

CV CFS 1851 C 1/1

W/ MORTISE GRADE 1 LATCH

CV CFS 1851 M 1/1


AUDIT TRAIL ONLY PC DATA KIT (1,000 EVENT CAPACITY)

CV 001850 40 1/1

PC ENROLLMENT & AUDIT TRAIL DATA KIT

CV 001850 30 1/1

FINGERPRINT LOCK WITH LATCH/ AUDIT TRAIL ONLY DATA KIT

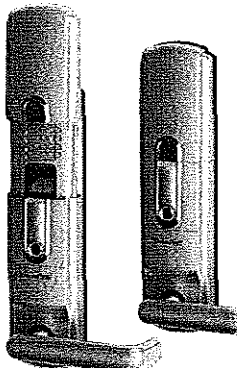

- Quick and easy registration • One-touch entry • Panic function for exit
- Emergency key • Password function • External backup battery source • Manual exit knob for emergency • Auto locking: selectable feature
- Two steps finger recognition • Unique cover slide w/fingerprint activation switch
- Power supply: 8AA batteries (1 year use) 12V 1.2A AC/DC adaptor • Resolution: 500dpi
- 7 segment display • Verification speed: <1 seconds • False acceptance rate: <0.0001%
- False rejection rate: < 0.0001% • Enrollment: 99 fingerprints (auto ID shared)
- Outside housing: ZINC alloy • Dimensions: 2.75" W x 11.42" H x 1.57" D
- Temperature: -4°F-158°F • Humidity: <85% • Color: Silver (other color option - based on quantity)
- Matching: 1:1 • Latch design
- 2-3/4 Backset

STANDALONE FINGERPRINT LOCK WITH LATCH

CVCFS1700C 1/20

AUDIT TRAIL ONLY DATA KIT

CV170050 1/20

DEADBOLTS & CONTROL UNIT

CREATIVE VISION/
CYPHER LOCK



FINGERPRINT DEADBOLT

- No data kits available • High performance and durable optical sensor
- Powered by 1.5V x 4AA alkaline batteries • External 9V terminal for secondary/dead battery access
- User capacity: 99 fingerprints • Enrollment/verification time: Less than 1 second
- Dual security function: Fingerprint or fingerprint w/pln • Buzzer, chime and LED indicators
- Automatic locking: forced open/closed mode • Material: Zinc alloy die-casting except for the battery cover
- Non-handed • Surface mount type • Inside mechanical open/close plus hard lock closed position

SPECIFICATIONS

- Inside body: 2-3/4" W x 6-5/16" H x 1-7/16" D
- Outside body: 3-1/16" W x 6-5/16" x 1-1/2" D
- Optical lens
- Enrollment time: Less than 1 second
- User capacity: 99 fingerprints
- Operating temperature: -4°F - 167°F; -20°C - 75°C
- Finishes: Satin Silver & Polished Gold Trim
- Material: zinc alloy die-casting
- 4AA size alkaline batteries

SATIN SILVER


CVCFS100S

1/20

POLISHED GOLD TRIM

CVCFS100G

1/20



VIDEO ENTRY KIT B&W

- White 4" B/W TFT-LCD screen • Expandable up to 1 camera with 4 monitors • Easy 3 button operation: view/talk/unlock
- Vandal resistant camera standard version • Weather resistant camera • Superior quality B/W CCD camera • Clear high quality video and audio • Surface or flush mountable camera
- Minimum 0.1 Lux.


CAMERA, MONITOR, & POWER SUPPLY

CVOAS200M

1/20

CYPHER LOCK

ACCESS CONTROL UNIT

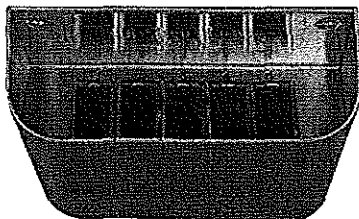


- Pushbutton lock
- Raised stainless steel enclosure shields the recessed buttons from the view of onlookers—spy proof feature
- Change entry code as frequently as you wish
- To program—there are 10 numbered plugs in the controller that correspond to the ten numbers on the pushbutton panel. Select the 4 digit combination and simply insert those 4 numbered plugs in sequence into the 4 upper sockets on the control panel. The remaining 6 plugs are randomly inserted into the lower row of sockets. Programming takes less than 15 seconds, no tools required.
- 6, 12, or 24V AC/DC • Hostage and error alarms

CICYP1000

1/6

MODEL 230 EXIT CONTROL LOCK

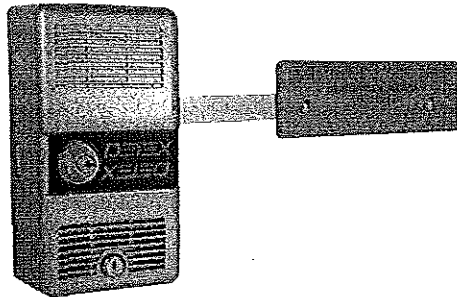

- 5-3/4" W x 3-3/4" D x 10-3/8" H with 18" paddle bar
- Power: 9V battery
- 5 year warranty
- Accepts 5 or 6 pin rim cylinder inside
- Combination door lock and exit alarm for emergency exits in factories, hospitals, dormitories, stores, libraries and laboratories
- Deadbolt locking outside, emergency exit from inside when paddle is depressed and alarm will sound

EXIT LOCK

DT 230D 1/4

9V CONVERSION KIT

DT ECL 21 11K 1/1

KEY CYLINDER FOR COVER

DT PP 5572 1/1

ADJ. SURFACE DBL. DR. KEEPER

DT 435K 1/1

NARROW STYLE ADAPTER PLATE

DT ECL 475 1/1


EXTENDED ALARM

DT ECL 2105K 1/1

EMERGENCY EXIT SIGN

DT ECL 2109 1/4


SURFACE MOUNTED EXIT ALARM



- Low cost, self-contained door alarm with piezo horn that sounds to warn unauthorized use of door
- Surface mount • Fits into standard 4 x 4 double switch/outlet box • Available with field selectable options
- Patented cam assembly automatically adjusts for different sizes of cylinders without the use of spacers
- Accepts 5, 6 and 7 pin standard and interchangeable core mortise with Yale cam • 9 VDC battery powered with optional AC/DC external power • Tamper switch monitors cover manipulation
- Tamper resistant housing and cover protect electronics and battery from manipulation
- Extended bypass allows alarm to remain bypassed when door is open and automatically re-arm upon door closing
- Low battery alert • LED visual arming indicators
- Field selectable 2 minute auto re-arm

DT EAX 2500S 1/6

BRATCH ECL-600 FIRE-RATED EXIT CONTROL LOCK

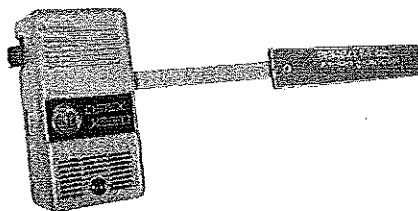

- 5-3/4" W x 3-3/4" D x 10-3/8" H
- Push plate and bar dimensions: 2-1/2" H x 24-1/8" W
- Standard 9 volt battery operates a high-decibel Piezo horn
- Deadbolt and deadlocking latchbolt retract simultaneously when the paddle bar is pushed to exit
- Rugged, attack-resistant housing with corrosion-resistant alloy lock body—mountable on either left or right side of the door
- Proven durability built into a saw-resistant 1" deadbolt in addition to a fire-rated, 13/16" throw, stainless steel deadlocking latchbolt. The deadlocking latchbolt firmly engages a second strike every time the door is closed
- ECL 600 includes 1" latch bolt with automatic relatching
- 3 hour fire-rating, meets building and safety codes as listed fire exit hardware
- Non-handed • Accepts 5 or 6 pin rim cylinder inside/outside
- For emergency exits in all commercial and institutional applications • Deadbolt locking outside, emergency exit from inside when paddle is depressed and alarm will sound
- Die-cast aluminum alloy housing with Detex Grey Vein 3 finish


DT ECL 600 1/1



EXIT ALARMS

VALUE SERIES EXIT ALARMS

- 100+ decibel alarm
- Accommodates 5, 6 & 7-pin standard and IC core cylinders (mortise only) with a standard Yale cam inside, rim cylinder outside
- Tamper-resistant housing protects electronics, battery and hardware
- Durable design with stainless steel self latching bolt
- Controls foot traffic, deters unauthorized exits, prevents loss & meets building code requirements • Delayed arming feature
- Field selectable manual rearming or auto-rearming
- Low battery alert • Remote bypass capability
- Fits 2" stile doors with semi mortise strike

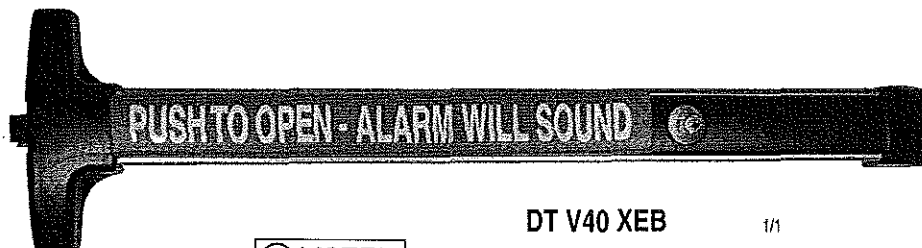

UL LISTED



DTV40 XEB

- Powered by standard 9-volt battery

DTV40 XEB W

- Weatherized materials & electronics provide protection in all climates

DTV40 XEM

- Electronic delayed egress panic device with Maglock
- Powered by standard 12-volt AC power (transformer included) with 9-volt battery backup
- Internal logic controller electronics
- Must be tied into the fire alarm (sprinkler system, smoke detection, etc.) that allows a system override and immediate exit, during a fire emergency situation
- Secure 2-point locking with 15 second delayed egress through the tandem holding force of the (1400 lb.) exit device and the (1500 lb.) electromagnetic lock
- V40XEM package includes: Value Series Exit Device, 1500 lb. Electromagnetic Lock, surface armored cable loop, 24VAC transformer & code compliant auxiliary signage

DT V40 XEB

1/1

WEATHERIZED ALARM

DT V40 XEB W

1/1

WEATHERIZED ALARM - 48"

DT V40 XEB W48

1/1

DT V40 XEB 48

1/1

DELAYED EGRESS WITH MAGNETIC LOCKING DT V40 XEM

1/1

OUTSIDE PULL TRIM

DT 03PRN 628

1/1

NARROW STILE DOOR KIT

DT 1018 791

1/1

LEVER TRIM CLASS FUNCTION

DT 08BRN 628

1/1

SURFACE MOUNT EXIT ALARM

- 2.10" Wide x 2.375" Deep x 7.70" Long, Weight 1.4lbs • Power: Standard 9 volt battery
- Low-cost, self-contained door alarm with piezo horn that sounds to warn of unauthorized use of a door • Surface door mount only. Easy to install using ordinary tools.
- Patented plastic template allows for foolproof alignment of internal magnetic door contact and an accurate installation • Now available with field selectable options • Tapered cover allows for installation on narrow stile doors, 2" minimum. • An intelligent circuit that automatically senses the "handing" of the alarm location on the door • Patented cam assembly automatically adjusts for different sizes of cylinders without the use of spacers • Mortise cylinder required with standard Yale cam for inside key control • Rim cylinder required for outside key control
- Alarm can only be silenced by proper key control • Modern graphics on cover to demonstrate key rotation and operation • Improved electronic circuits for longer battery life, LED functions
- Tamper resistant housing with cover lock, protects electronics and battery from manipulation
- Extended bypass, now a standard feature, allows alarm to remain bypassed when the door is open and automatically rearm upon door closing • The EAX-500 package includes: EAX-500 Exit Alarm, Peel & stick door sign, magnetic door frame sensor, key stop and plastic template
- Approximate 100dB piezo alarm • Mortise cylinder key switch alarming • 9 volt battery powered
- Low battery alert • Manual arming, disarming & rearming • LED visual arming indicators
- Audible arming indicators • Outside key control compatible • Alarm accepts 5, 6 and 7 pin standard and interchangeable core mortise cylinders with a standard Yale cam
- Field selectable 2-minute auto rearm • Finish: Gray



SWITCH ASSEMBLY FOR OUTSIDE KEY CONTROL

DT EA523

1/1

EXIT ALARM

DT EAX500

1/8


KEY CYLINDER FOR COVER

DT PP 5572

1/1


EXIT DEVICE & REMOVABLE MULLION**PANIC DEVICE**

- **Advantex:** For new or retrofit capability allows the unit to replace other manufacturer's equipment
- The first panic hardware device designed by and for locksmiths for applications in schools, universities and hospitals
- Pushpad and outer housing made of finished stainless steel wrap over heavy ribbed aluminum extrusion
- Features high-performance installation and simple retrofit without templates
- Backplate accepts a provided strike locator for perfect backset and precise alignment with the strike, allowing quicker and more efficient installation
- **Advantex** exceeds Life Safety, ADA, Ca. Title 19 and BHMA Gr. 1 requirements
- U.L. Listed • Convenient dogging
- Accepts Daytona Lever Trim
- **Finish: 630 (Stainless Steel)**

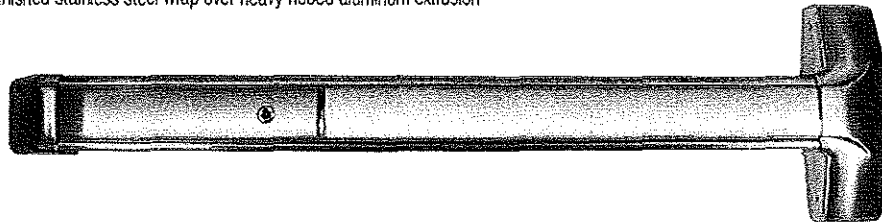**ADVANTEX**

36" PANIC EXIT DEVICE
DT 1001 BP1 630 1/1

(Retrofits Von Duprin 98, 99 Series)

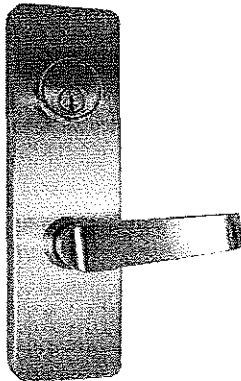DETEX**ADVANTEX DAYTONA
LEVER TRIM**

- Classroom function • Packed less cylinder
- Covers standard 161 prep
- Thru-bolted • Clutch Mechanism
- Reversible
- Accepts 1-1/8" to 1-1/4" mortise cylinder with Yale cam
- **Finish: 626 (Dull Chrome)**
- Order trims separately

KEYED PULLED TRIM
DT 03PR 628 1/1

RETROFITS VON DUPRIN
DT 08DA BP1 626 1/1

**KEYED REMOVABLE
MULLION**

- For use on standard and fire rated pairs of doors • 8' length - easy to field-cut to length
- Shims provided for accurate fit • Easy installation - no drilling of the mullion tube • Base anchors included
- U.L. and Warnock Hersey listed for 3 hour life rated pairs of doors
- 11 gauge 2" x 3" steel mullion for strength and durability • Operated by standard rim cylinder
- Self-latching - no need to reinsert the key to engage the mullion tube



8 FT. FIRE RATED
DT F90KR 1/1



DOMINO ENGINEERING
CORPORATION



/ **FRANKLIN**

KEYLESS ENTRY & KNOBS



DOMINO ENGINEERING
CORPORATION

KEYLESS ENTRY SYSTEM

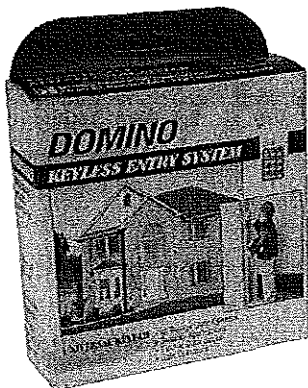

- Universal keypad
- All garage door openers, electric locks, security applications & gate operators
- Inside control box
- Features a 1 to 6 digit user code
- Easy programming
- Vandal resistant
- Weatherproof cover
- Lighted keypad
- Personalized user code
- Low power warning / Battery saver
- Comes with 3 "AAA" batteries
- Instant stop
- Additional pushbutton


DOSC GD 1S

1/15


6' EXTENSION CABLE

DOEC6

1/15



FK1100 CS

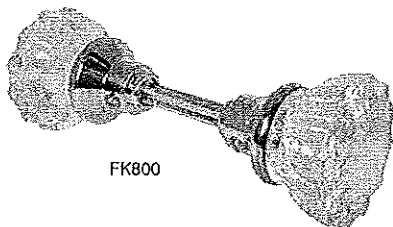

FK800

FRANKLIN

REPLACEMENT KNOBS

- Various knob designs
- 2" or 2-1/4" diameter
- Threaded spindle & set screws
- Finish: Polished Brass
- Glass faceted

2" DIA. PLYMOUTH

FK1100 CS

1/48

2-1/4" DIA. PLYMOUTH


FK2100 BL

1/50

GLASS KNOB

FK800

1/48

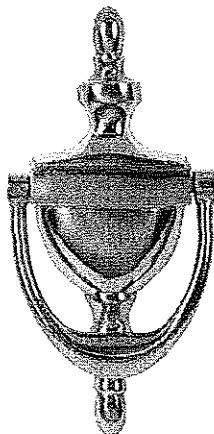

SOLID BRASS DOOR KNOCKER

- Classic design door knocker
- Hand polished
- Lacquered brass finish
- Furnished with screws, installation template and washers

FK202 BL

1/12

DON-JO

A.D.A. SIGNS

DON-JO



MEN'S/HANDICAP


- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign

BROWN

DJ HS 9060 01 1/10

BLUE

DJ HS 9070 01 1/10



MEN'S ROOM

- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign

BROWN

DJ HS 9060 02 1/10

BLUE

DJ HS 9070 02 1/10



RESTROOMS


- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign

BROWN

DJ HS 9060 03 1/10

BLUE

DJ HS 9070 03 1/10



WOMEN'S ROOM

- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign

BROWN

DJ HS 9060 04 1/10

BLUE

DJ HS 9070 04 1/10



WOMEN'S/HANDICAP

- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign

BROWN

DJ HS 9060 05 1/10

BLUE

DJ HS 9070 05 1/10



HANDICAP ACCESSIBLE

- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign

BROWN

DJ HS 9080 2 1/10

BLUE

DJ HS 9070 06 1/10



NO SMOKING

- 6" x 9"
- A.D.A. Compliant
- Brown with White Raised Print
- Blue with White Raised Print
- Braille Translation on Sign


BROWN

DJ HS 9060 22 1/10

BLUE

DJ HS 9070 22 1/10

LATCH PROTECTORS




LATCH PROTECTOR FOR OUTSWINGING DOORS

- Backset 1-1/8" • 2-5/8" x 12" x 1/8"
- Aluminum entrance doors
- Reversible • Fits Adams Rite lock
- Finishes: SL (Silver) or DU (Duronotic)

SILVER
DJ LP 312 SL 1/5

DURONOTIC
DJ LP 312 DU 1/5




NARROW LATCH PROTECTOR FOR OUTSWINGING DOORS

- Use with locks or escutcheon
- 3-1/2" wide or less • 1-1/2" x 10"
- Concealed fastener
- Finishes: SL (Silver) or PC (Prime Coat)

SILVER
DJ NLP 210 SL 1/5

PRIME COAT
DJ NLP 210 PC 1/5




LATCH PROTECTOR

- Works with up to 3-3/4" rose
- Fits most heavy-duty key-in-lever locks
- Concealed welded studs with fasteners
- Individually polybagged
- Finishes: BP (Brass Plated) or SL (Silver Coated)

STEEL BRASS PLATED
DJ BLP 207 BP 1/10


SILVER COATED
DJ BLP 207 SL 1/10



LATCH GUARD WITH ANTI-SPREAD PIN

- Solid steel pin prevents spreading of door from frame
- Pin is welded on back leaving no visible point of attack from outside • 3" x 11"
- Extra large cut out accepts up to 3-1/2" rose
- Fits 2-3/4" and 2-3/8" backsets
- Dull Chrome Plated


DJ PLP 211 26D 1/10



7" LATCH PROTECTOR

- 2-3/4" x 7"
- Fasteners include washers, carriage bolts and cap nuts
- Specify Finish: DU (Duro Coated) or SL (Silver Coated)

SPECIFY
FINISH
DJ LP 207 1/10




SHORT LATCH PROTECTOR FOR OUTSWINGING DOORS

- Plastic coated baked finish
- May be used on metal doors using ASA strike • 2-1/2" x 6"
- Finishes: BC (Brass) or SL (Silver)

BRASS
DJ SLP 206 BC 1/10

SILVER
DJ SLP 206 SL 1/10



LATCH PROTECTOR FOR OUTSWINGING DOORS

- 1-3/4" x 11-1/4"
- Fits Folger Adams Electric Strike 310 & 710 models
- Finish: 630

DJ FLP 111 630 1/10

LATCH PROTECTORS



10" NARROW LATCH PROTECTOR

- Narrow commercial type for outswinging doors
- DJNLP110630 – 1-1/2" x 10" for mortise locks
- DJNLP106630 – 1-1/2" x 6" for key-in knobs
- 12 (.104) gauge steel
- 630 finish
- 10 per box

1-1/2" x 10"

DJ NLP 110 630 1/10

1-1/2" X 6"

DJ NLP 106 630 1/10



10" LEVER LATCH PROTECTOR

- For key-in lever locks with up to 3-3/4" escutcheons
- 3-1/4" x 10"
- 12 (.104) gauge steel
- Works with up to 3/4" rose
- Concealed welded studs with fasteners
- Finishes: BP – Brass Plated, SL – Silver Coated
- 10 per box

1-1/2" x 10"

DJ BLP 210 BP 1/10

1-1/2" X 6"


DJ BLP 210 SL 1/10



7" LATCH PROTECTOR

- For outswinging doors
- 2-3/4" x 7"
- 12 (.104) gauge steel
- Furnished with carriage bolts, washers & acorn cap nuts for safety and strength
- 10 per box

DJ LP 107 630 1/10



7" ALUMINUM DOOR LATCH PROTECTOR

- Solves pull handle interference
- Fits over cylinder – lock removal NOT required
- Hand carriage bolt and rivet supplied
- No specific tools required
- 3/8" offset
- Center of cylinder hole is 2-1/2" from end of plate
- 2-5/8" x 7" x 1-1/8"
- 12 (.104) gauge steel
- Package display size – 4" x 12"
- Finishes: DU – Duro Coated, SL – Silver Coated

DURO RHR

DJ GLP 307 DURHR 1/10

DURO LHR

DJ GLP 307 DULHR 1/10

SILVER RHR

DJ GLP 307 SLRHR 1/10

SILVER LHR

DJ GLP 307 SLLHR 1/10



MORTISE & ELECTRONIC STRIKE PROTECTOR


- Works w/electric Strikes and Mortise Locks, keyless locks and exit devices
- 2-5/8" x 10"
- 12 (.104) gauge steel
- 10 per box
- Finishes: DU – Duro Brown, SL – Silver Coated

DJ MELP 210 SL 1/10

DJ MELP 210 DU 1/10

LATCH PROTECTORS


DON-JO



INTERLOCK

- Protects latch on inswinging doors
- One way screws
- Interlocks door and frame
- 6" for use with Key-in-knob and deadbolt locks
- 12" for use with Mortise Locks, Simplex 1000 series, Alarm Lock DL-2500, Card Access Systems, etc.
- Finishes: SL (Silver Coated) or BP (Brass)


6"	DJ ILP 206 BP	1/10
6"	DJ ILP 206 SL	1/10
12"	DJ ILP 212 BP	1/10
12"	DJ ILP 212 SL	1/10



LATCH PROTECTOR FOR OUTSWINGING DOORS

- 3" x 11" • Furnished with carriage bolts, washers and acorn cap nuts
- Heavy gauge steel
- Finishes: BP (Brass), DU (Duronotic) or SL (Silver Coated)


BRASS	DJ LP 211 BP	1/10
DURONOTIC	DJ LP 211 DU	1/10
SILVER	DJ LP 211 SL	1/10



ANGLE LATCH PROTECTOR FOR OUTSWINGING DOORS

- Solid steel • 6" for key on knob
- 10" for mortise locks • Reversible
- 1-1/2" sheet metal screws • Silver Finish only


6" LENGTH	DJ ALP 206 SL	1/10
10" LENGTH	DJ ALP 210 SL	1/10



LATCH PROTECTOR FOR ALUMINUM DOORS

- 3/8" offset
- 2-5/8" x 7" x 1/8" dimensions
- Lock removal not required
- Solves pull handle interference
- Reversible
- Finishes: DU (Duronotic) or SL (Silver Coated)

DURONOTIC	DJ LP 307 DU	1/10
SILVER	DJ LP 307 SL	1/10




LATCH PROTECTOR FOR ELECTRIC STRIKES

- Completely encases the keeper for maximum protection
- Designed to fit most electric strikes
- Available with cylinder hole only
- 3-1/2" x 8", 12 gauge steel
- Specify finish: DU (Duronotic) or SL (Silver Coated)

DURONOTIC	DJ ELP 208 DU	1/10
SILVER	DJ ELP 208 SL	1/10

STRIKES & KICK PLATES


DON-JO



THIMBLE STRIKE

- Flanged Tabs and 1-1/2" screws for extra strength
- Used when installing a deadbolt in a metal door & frame application
- Individually polybagged
- Chrome • 1" Diameter

DJ TS 100 CP 1/10



2-1/4" EXTENDED FULL LIP STRIKE

- Width of strikes are measured from center of screw to end of lip
- Solid Brass or Stainless Steel Finishes
- Packed 10 per box

SOLID BRASS Worn


DJ EL 102 3 2"

STAINLESS STEEL

DJ EL 102 32D 2"

SOLID BRASS


DJ EL 103 3 3"



2-3/4" EXTENDED FULL LIP STRIKE

- Width of strikes are measured from center of screw to end of lip
- Brass Plated Finish
- 2" Width

DJ EL 202 BP 1/10



2-3/4" EXTENDED T-STRIKE

- Width of strikes are measured from center of screw to end of lip
- Packed 10 per box • 2" Width
- Solid Brass Finish only

Worn

DJ ETS 102 3 2"

DJ ETS 125 3 2-1/2"

DJ ETS 103 3 3"



ARMOR STRIKES

- 1-3/4" fits full width of door stop
- 18" long
- Reinforce, repair or renovate damaged or worn out wood
- Works with deadlock or key-in-knob set
- Door frame repair kits
- Specify Finish:
- SL (Silver) or BP (Brass)
- Will take 3-5/8" & 4" CC (Double Hole)

SPECIFY
FINISH

SINGLE HOLE
DJ AST 21341 1/10

DOUBLE HOLE
DJ AST 21342 1/10



KICK PLATES

- 8" x 34" x .032 thick
- Crush resistant package
- Finishes: 3 or 32D


BRASS
DJ KP 834 3 1/5

STAINLESS STEEL
DJ KP 834 32D 1/5

(SEE U.S. LOCK SECTION 2400 SERIES KICK PLATES FOR ADDED SAVINGS)

FILLER PLATES

DON-JO



ADAPTER RING

- Allows for use of Grade 1 key-in-levers on 1-3/8" thick doors
- (.125") Aluminum
- Sold in pairs

DJ AR 335 28

1/5



HINGE CUT-OUT FILLER PLATE

- 4-1/2" x 1-5/8" template size
- For door frame
- Prime Coat Finish

DJ FF 45

1/10



MORTISE CUT-OUT CONVERSION

- 8" x 1-1/4" • 86 cut out to 161
- Conversion plate, mortise lock to key-in-knobs
- Steel Primed Coated

DJ CV 86

1/10



BLANK LATCH FACE FILLER PLATES

- Screws furnished
- Primed
- Packed 10 per box

1" FACE
DJ EF 160

DIMENSIONS


2-1/4" x 1"

STANDARD FACE
DJ EF 161

2-1/4" x 1-1/8"

MORTISE LOCKS
DJ EF 86

8" x 1-1/4" x 3/16"



HOLE FILLER PLATES

- Covers up to 2-1/8" hole
- Standard 161 prep
- Order latch and frame fillers separately
- Available Finishes: PC, SL or BP

DJ BF 161 BP

1/10

DJ BF 161 PC

1/10

DJ BF 161 SL

1/10



FLUSH BOLT CUT-OUT

- Heavy gauge steel • 6-3/4" x 1"

DJ EF 634

1/10



DJ FS 260 PC



DJ BTS 160 PC

STRIKE FILLER PLATES


- ASA cutout: 4-7/8" x 1-1/4"
- T-Strike cutout: 2-3/4" x 1-1/8"
- Steel Prime Coated

ASA STRIKE FILLER PLATE
DJ FS 260 PC


1/10

T-STRIKE FILLER PLATE
DJ BTS 160 PC

1/10



DJ FPK 161



DJ FPK 86

FILLER PLATE KITS

- Combination of the most popular filler plates packaged together for easy handling
- DJFPK161 is for key-in-knobs and package contains round holes filler plate 2-1/4" x 1-1/8" edge filler, 4-7/8" strike filler
- DJFPK86 is for Mortise locks and package contains 8-1/4" x 1-1/4" edge filler, 4-7/8" strike filler

KEY-IN-KNOB
DJ FPK 161


1/10

MORTISE LOCKS
DJ FPK 86

1/10

WRAP-AROUNDS

DON-JO



SIMPLEX 1000 PLATE

The Classic Wrap-around

Works with the Simplex 1000 series

- Fully reversible • Can be used for LH or RH units • Backset: 2-3/4"
- Thickness: 1-3/4"
- Finish: Stainless Steel Only

STAINLESS STEEL
DJ CW 15S

1/10




2-1/8" & 1-1/2" BORE LOCKSET & DEADLOCK PLATE

- For installing double-lock combination locksets with 1-1/2" hole (top), 2-1/8" hole (bottom) with 4" centers • Backset: 2-3/4"
- Thickness: 1-3/4"
- Finish: Stainless Steel Only

STAINLESS STEEL
DJ CW 484S

1/10



2-1/8" BORE LOCKSET & DEADLOCK PLATE

- For installing double-lock combination locksets with 2-1/8" holes on top and bottom with 4" centers
- Specify Finish: S (Stainless Steel) or PB (Polished Brass)
- DJCW942: Backset: 2-3/8" - Thickness: 1-3/4"
- DJCW943: Backset: 2-3/4" - Thickness: 1-3/4"


SPECIFY
FINISH

DJ CW 942

1/10

DJ CW 943

1/10



PUSHBUTTON WRAP-AROUNDS

- For use with Unican 4000 series • 2-3/4" backset • 5" x 15"
- For use with Kaba Mas Powerlevers • 1-3/4" door thickness
- Stainless Steel Finish

KABA SIMPLEX 4000 SERIES


DJ CW 4000 4 S

1/1

KABA MAS POWERLEVER

DJ CW 16 S

1/10



COBRA WRAP-AROUND PLATES

- Fits Schlage Cobra locks • Dimensions: 5" x 12"
- 2-3/4" backset • For 1-3/4" door
- Finishes: 605 & 630

BRASS

DJ 17 CW 605

1/10

STAINLESS STEEL

DJ 17 CW 630

1/10



SIMPLEX WRAP-AROUND

- 5" x 15", 2-3/4" backset x 1-3/4" door
- Available in S-Stainless Steel
- Designed specifically for the Simplex 5000

SIMPLEX 5000

DJ 5000 SCW

1/10



SECURITRON SABLE WRAP-AROUND

- 5" x 15", 2-3/4" backset x 1-3/4" door
- Available in S-Stainless Steel
- Designed specifically for the Securitron Sable

SECURITRON SABLE

DJ 28 SCW

1/10