RUGGED, RELIABLE, AND READY



## MAHINDRA IMPLEMENTS

**ESSENTIAL WINTER TOOLS** 



# TABLE OF CONTENTS

Intro	3
Front-Mounted Snow Blowers	4
Rear-Mounted Snow Blowers	E
Front-Mounted Snow Blades	8
Skid-Steer Snow Blades	10
Skid-Steer Snow Pushers	12
Front-Mounted Rotary Brooms	14

[1] 2018 Data including all Mahindra group brand sales.





## TOUGH TRACTORS. TRIED-&-TRUE TOOLS.

Mahindra is one of the fastest growing tractor brands in North America and the World's No. 1 selling farm tractor.<sup>[1]</sup> We put our heart and soul into customer service, quality, and value.

Mahindra implements are a superior choice. They're engineered to be as tough as our tractors, with value-packed features, then field-tested to ensure they meet the strictest standards. We overbuild them for years of uninterrupted performance so you can focus on transforming the property you own into the land you love!

In this guide, we've taken the time to eliminate the guesswork by matching all current-selling tractors to available implements. But if you are a novice, no worries! There are 500 Mahindra dealers ready to guide you toward the right tool.





## FRONT-MOUNTED, TRACTOR-POWERED SNOW BLOWERS

MAINTAINING DRIVEWAYS, PARKING LOTS, AND ROADS

Mahindra front-mounted snow blowers, powered by a rear PTO-connected belt drive system, allow operators to quickly blow powdery and wet snow at a great distance and in one pass. Commercial-duty models are used in airports, churches, hospitals, city roads, schools, and shopping centers, while residential-duty blowers rapidly clear home driveways and sidewalks. Consider adding on a cab, snowdrift cutters, headlights, and a remote-controlled spout deflector.

#### **FEATURES & BENEFITS**

- Stout auger and impeller, with shear bolt protection and heavyduty gear box, aggressively chops and disperses snow and ice
- 10- and 12-gauge housing with double-walled bottom base and reversible and replaceable scrape blade help protect snowblower housing against damage
- 44-to 66-inch models Include long-lasting, zero-maintenance 2-inch timing belt to eliminate vibration and minimize noise

dra

- Adjustable and replaceable skid shoes for gliding over various terrains with ease
  - For most models, easily switch to blade or broom using an interchangeable mounting frame



BLOWER FEATURES	48-1	NCH	56-INCH	66-INCH	78-INCH
Connector Type	Fixed-mount; Belt Drive				Fixed-mount; Chain
Frame Connector	Interchangea	angeable with blade or	r broom		
Tractor PTO Power (hp)	14 - 22	14	- 25	19 - 31	46 - 49
Box Width (in)	4	8	56	66	78
Box Height (in)	21	27	23	27	28
Housing (ga)			10 & 12		
Gear Box		Hea	avy-duty; Maintenance-	free	
4-Blade Impeller Diameter (in)	14	18	14	18	26
Drive Type	2-ind	ch Belt Drive; No mair eliminates vibration	ntenance, no adjustme ns, & reduces noise	ents,	Chain
Scraper Bar Blade		3/8 thick x 3 tall; Ha	rdox 400 Steel; Reve	rsible and replaceable	
Skid Shoes		Ad	ljustable and replacea	ole	
Spout Deflection	1	Manual; Optional elect	ric (remote controlled	)	Hydraulic
Chute Rotation	Manual		Hydr	aulic	
Warranty	1-year residential 2-year 1-year light commercial or resider			ercial or residential	2-year light commercial or residential
SKU No.	BEREMXSB48	BERSB48C [2][3]	BERSB56R [2]	BERSB66 [2]	BER2500SB78
TRACTOR COMPATIBILITY	48-1	NCH	56-INCH	66-INCH	78-INCH
eMax 20S	×				
eMax 22L		х	×		
eMax 25L		х	Х		
Max 25XL		х	×		
Max 26XLT		х	Х		
1626				×	
1635				Х	
1640				Х	
2638				Х	
2645					
2660					Х

<sup>[2]</sup> Requires tractor fitting kit

<sup>[3]</sup> Requires Ag tires



## REAR-MOUNTED TRACTOR-POWERED SNOW BLOWERS

MAINTAINING DRIVEWAYS, PARKING LOTS, AND ROADS

Mahindra rear-mounted snow blowers, PTO-powered using a 3-point connection, allow operators to blow powdery and wet snow quickly at a great distance and in one pass. Commercial-duty models can be used in airports, churches, hospitals, city roads, schools, and shopping centers, while residential-duty blowers rapidly clear home driveways and sidewalks. Consider adding on a cab, snowdrift cutters, headlights, and a remote-controlled spout deflector.



BLOWER FEATURES	48-INCH		56-1	NCH	64-INCH	72-INCH	78-INCH
Connector Type	3-point						
Category	1						
Tractor PTO Power (hp)		14	- 25		18 - 40	25 - 40	46 - 54
Housing (ga)				10 & 12		,	
Box Width (in)	4	8	5	i6	64	72	78
Box Height (in)	2	7	2	:3	2		28
Gear Box			Heavy-	duty; Maintenan	ice-free		
Timing Belt Drive	2-inc elim	h; No maintena ninates vibration	nce, no adjustm is, & reduces n	nents, oise		_	
Chain Drive		_	_		Self-t	ensioning with (	guard
4-Blade Impeller Diameter (in)		2	2			26	
Scraper Bar Blade		3/8 thic	k x 3 tall; Hardo	ox 400 Steel; Re	eversible and re	placeable	
Skid Shoes			Adjus	table and replac	ceable		
Spout Deflection	Manual		Remote- rolled		Manual		Hydraulic
Chute Rotation	Hydraulic		Remote- rolled		Hydraulic		
Parking Stand				Standard			
Warranty			2-year light	t commercial or	residential		
SKU No.	BER3PTSB48H	BER3PTSB48E	BER3PTSB56E	BER3PTSB56H	BER3PTSB64R	BER3PTSB72R	BER3PTSB78H
TRACTOR COMPATIBILITY	48-1	NCH	56-1	NCH	64-INCH	72-INCH	78-INCH
eMax 20S	X	X					
eMax 22L	X	X	X	X			
eMax 25L	X	X	X	X			
Max 25XL	X	Х	Х	X			
Max 26XLT	Х	X X X		Х			
1626					Х	X	
1635					Х	Х	
1640					×	X	
2638					Х	х	
2645							
2660							Х




**CLEAR DRIVEWAYS AND PARKING LOTS** 

Mahindra front-mounted snow blades are ideal for moving vast amounts of snow and ice quickly. A hydraulic-powered blade pivots left and right, and stays firm to the ground, improves efficiency while leaving behind strategically placed windrows. Our snow blades are excellent at back dragging, too, getting very close to curbs, garages, or other structures.

- Controls at your fingertips for lifting, lowering, and 25° left or right blade rotation using hydraulic loader valves
- Equipped with trip spring protection system to help prevent blade and tractor damage
- Heavy-duty steel, adjustable and replaceable skid shoes, and reversible and replaceable scraper bar for long product life
- Optional side plates for containing snow in straight push scenarios like narrow alleys or sidewalks
- Easily switch to blower or broom using an interchangeable mounting frame

BLADE FEATURES	54-INCH 62-INCH			72-INCH			
Connector Type	Fixed-Mount; Interchangeable with blower or broom						
Tractor Power (hp)	19	24 2			6	39	37
Blade Width (in)	54		62			72	
Blade Height (in)	17			22	2.5		
Blade Thickness			12-gauge; 1/4	-inch rear plate	reinforcements	1	
Scraper Bar Blade			Rever	rsible and replac	ceable		
Angle (°)			2	25 left / 25 righ	nt		
Angle & Lift Power			Hydra	aulic via loader v	/alves		
Trip Mechanism				Double Springs			
Skid Shoes			Adjus	table and replac	ceable		
Parking Stand				Standard			
Warranty	1-year residential		2-y	ear light comme	ercial or resider	ntial	
SKU No.	BER20BL54	BEREMXBL62	BERMXBL62A	BERMXBL62B	BER1526BL72	BER15BL72	BER2538BL72
TRACTOR COMPATIBILITY	54-INCH		62-INCH			72-INCH	
eMax 20S	Х						
eMax 22L		Х					
eMax 25L		x					
Max 25XL		x					
Max 26XLT		x					
1626					Х		
1635							
1640						Х	
2638						Х	

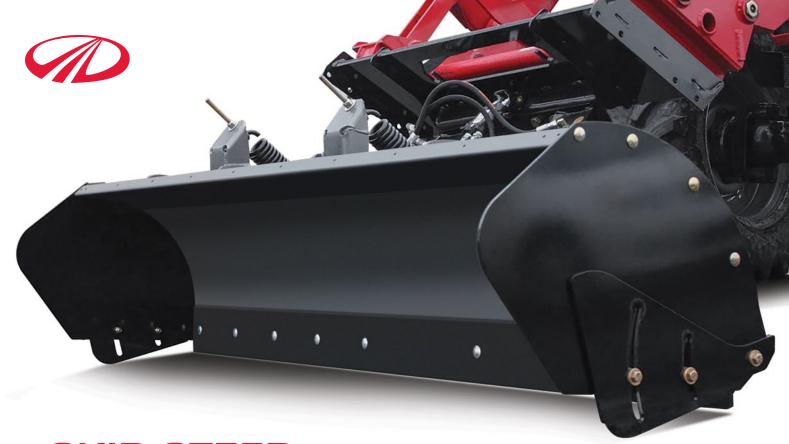

### SKID-STEER SNOW BLADES

CLEAR BARNS, DRIVEWAYS, PARKING LOTS, AND ROADS

Mahindra skid-steer snow blades are stellar performers at farms, churches, neighborhoods, shopping centers, and other venues that operate many front attachments. Not just for snow, these blades remain firm on the ground at all times, removing vast amounts of aggregate in a single pass while leaving behind strategically placed windrows. Use for back dragging, too, getting very close to curbs, garages, or other structures.

- Adjustable V-Blade locks into straight, V, and scoop configurations at angles up to 30° in frontward and backward directions
- For straight blades, five manual locking positions range from 0° to 25° left and right
- Equipped with trip spring protection system to help prevent blade and tractor damage
- Heavy-duty steel, adjustable and replaceable skid shoes, and reversible and replaceable scraper bar for long product life
- Scraper blades float and tilt 5° helps maintain ground contour contact
- Shown here with optional side plates to help channel aggregate and reduce windrowing

BLADE FEATURES	62-INCH	72-INCH	84-INCH
Connector Type			
Tractor Power (hp)	19 - 44 22 - 44		70 - 125
Blade Width (in)	62	72	84
Blade Height (in)	22	2.5	32
Blade Thickness (ga)	10 & 12; 1/4-inch rea	ar plate reinforcements	7
Side Plates	-	_	Optional
Scraper Bar Blade		Reversible and replaceable	
Operating Angles (°)	0 - 25 left &	. O - 25 right	O - 35 left & O - 35 right
Rotation Power	Ma	nual	Hydraulic
Warranty	1-year light-comme	ercial or residential	1-year
SKU No.	BERBLLD62MSSL	BERBLLD72MSSL	ATISB84114H
TRACTOR COMPATIBILITY	62-INCH	72-INCH	84-INCH
eMax 20S	X		
eMax 22L	X	X	
eMax 25L	X	Х	
Max 25XL	Х	Х	
Max 26XLT	X	X	
1626	X	X	
1635	×	×	
1640	X	×	
2638	X	×	
2645			
2660			
2670			
3640			
3650			
4540 2WD / 4WD			
4550 4WD			
6065 / 6075			×
7085 / 7095			×
8090 / 8100			X
9110 / 9125			×



PUSH, BACK DRAG, AND STACK SNOW OR OTHER DEBRIS

If you want to avoid making windrows, a Mahindra skid-steer snow push is your best bet to contain, push and stack snow. What's more, its commercial-duty enclosed design has no moving parts that can break or malfunction. It's quicker at clearing snow in a parking lot than its snow plow cousin, and is great for moving other materials, too, including manure and food in feedlots. Snow pushes can be found working around farms, parking lots, city and side streets, and other venues that operate many skid-steer attachments.

- Strong steel housing, durable skid shoes and reinforced side plates capture and remove even the heaviest snow without leaving windrows or spillover
- Reversible and replaceable steel cutting edge designed to clear snow on concrete and asphalt
- Optional pull back kits for back dragging snow from buildings, fences and confined areas
- Optional marker kits for increased plow edges visibility

PUSH FEATURES	62-INCH	72-INCH				
Connector Type	Skid-Steer					
Tractor Power (hp)	19 - 44	22 - 44				
Max Tractor Weight (lb)	35	00				
Housing Width (in)	62	72				
Housing Depth (in)	3	0				
Housing Height (in)	2	2				
Skid Shoes	Adjustable an	d replaceable				
Cutting Edge	Reversible and r	replaceable steel				
Markers Kit	Opti	onal				
Pull Back Kit (Back Dragging)	Opti	onal				
Warranty	2-year re	esidential				
SKU No.	BERSP62R	BERSP72R				
TRACTOR COMPATIBILITY	62-INCH	72-INCH				
eMax 20S	Х					
eMax 22L	Х	X				
eMax 25L	Х	Х				
Max 25XL	Х	Х				
Max 26XLT	Х	Х				
1626	Х	Х				
1635	Х	X				
1640	Х	X				
2638	Х	Х				



## FRONT-MOUNTED TRACTOR-POWERED ROTARY BROOMS

#### SWEEP PARKING AREAS, AND RAKE OR DETHATCH LAWNS

Mahindra front-mounted rotary brooms, powered by a rear PTO-connected belt drive system, are superb at rapidly sweeping snow and debris from parking lots, driveways, and walkways. What's more, they can be hydraulically adjusted for proper down force whether raking leaves and dethatching lawns, extending brush life. You'll see them operating at airports, churches, hospitals, schools, and shopping centers and in and around equine facilities, estates, and neighborhoods.

- We offer rotary brooms for compact, compact-utility tractors and utility tractors
- Stay comfy and seated when hydraulically adjusting brush down force pressure or angling the broom left or right
- Easily switch to blower or blade using an interchangeable mounting frame
- 1-year light commercial-duty warranty for peace-of-mind



BROOM FEATURES	60-INCH				66-INCH			
Connector Type	Fixed-Mount; Interchangeable with blower or blade							
Tractor PTO Power (hp)	15 - 17	20	22	19 - 22	26 - 28	28 - 30	30 - 31	
Broom Length x Height (in)		60 x 24			66 :	¢ 24		
Brush Material			S	Stiff polypropylen	е			
Brush Lift Pressure			Hydr	aulic via loader	valve			
Angle Power			Hydr	aulic via loader	valve			
Wheels Diameter (in)			Н	eavy-duty; Pivoti	ng			
Parking Stand				Standard				
Warranty			1-ує	ear light comme	rcial			
SKU No.	BEREMXBR60	BERMXBR60A	BERMXBR60B	BER1526BR66	BER1635BR66	BER15BR66	BER2538BR66	
TRACTOR COMPATIBILITY		60-INCH			66-1	NCH		
eMax 20S								
eMax 22L	Х							
eMax 25L	Х							
Max 25XL		X						
Max 26XLT			X					
1626				Х				
1635					Х			
1640						X		
2638							Х	





#### Mahindra USA, Inc.

9020 Jackrabbit Road, Suite 600 Houston, Texas 77095 877-449-7771

#### mahindrausa.com mahindracanada.com

Mahindra USA, Inc., reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were made to verify the information contained in it. Some items shown may be optional and some machinery shown may not be available at all dealers. Mahindra disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety, and product information, consult your local Mahindra dealer and the product operation manual. Engine power (hp/kw) and other specifications are based on various standards and best practices. This brochure is intended for the United States and its territories only. For more information visit our website.

MAH11062020