

Condensed Valve Catalog

Materials: PVC, CPVC, PP, PPn, ABS, PVDF

Sizes: 1/4" to 24"

- + Ball Valves
- + Check Valves
- + Diaphragm Valves
- + 3-Way Valves
- + Butterfly Valves
- + Globe Valves
- + Metering Valves
- + Needle Valves
- + Line Strainers
- + Pressure Regulating Valves



Did you know that we...

- + can adapt a full line of third-party actuators to our valves?
- + can adapt our comprehensive actuator line to non-GF valves?
- + can install a variety of valve accessories to meet most industry specifications such as explosion-proof and hazardous area?

Yes, we can.

For more information, please contact your nearest GF distributor.



- The fluid to be handled and the required flow rate.
- The requirements for valve control and/or flow shut off as demanded by the service conditions.
- The ability of the valve to withstand the maximum

working pressure and temperature.

- The chemical resistance of the valve from attack by corrosion or erosion.
- Actuator requirements, if any.
- Maintenance, repair or replacement requirements

Because of these factors and many other variables, we work together with the customer to determine the particular valve best suited for the application.

Criteria for the Selection of GF Plastic Valves

Type	Medium to be transported				Function requirements					
	Free of foreign bodies	Containing solid particles or crystals	Viscous	Gaseous	Adjustable (i.e. for throttling)	Position indicator	Permits inline cleaning (pigging)	Leakproof under vacuum	Pressure surge behavior	Seal materials available
Diaphragm valve	+	+	+ / 0	+ / 0	+	+	-	0	0	EPDM, FPM, PTFE, NBR
Ball valve	+	0 / -	+	+	+ / 0	+	+	+	+	EPDM, FPM
Y-Globe valve	+	0	+	0	+	0	-	0	-	PE, PTFE
Butterfly valve	+	+ / 0	+ / 0	+	+ / 0	+	-	+	+	EPDM, FPM
+ = recommended				0 = conditionally suitable				- = not recommended		



Description	Type Number		Range of Nominal Sizes					Available Seal Materials	Pressure in psi (water 68°F)
	Manually Operated	Actuated	Material of Base						
			PVC	CPVC	PP	PVDF	ABS		
Ball valve	546	104, 107, 131–133, 231–233	¾"–4"	¾"–4"	¾"–4"	¾"–4"	¾"–4"	EPDM, FPM	150, 232 psi*
Ball valve	375	—	¾"–4"	½"–2"	½"–2" (PP-n)	—	—	EPDM, FPM	150, 232 psi*
Ball valve COLORO	353, 355	—	½"–2"	—	—	—	—	EPDM, FPM	150, 232 psi*
3-way ball valve (vertical in PVC, ABS only)	543	185–188, 125–128, 285–288	¾"–2"	¾"–2"	¾"–2"	¾"–2"	¾"–2"	EPDM, FPM	150 psi**
Control ball valve	546	Optional	½"–2"	½"–2"	½"–2"	½"–2"	—	EPDM, FPM	150, 232 psi*
Metering ball valve	523	Optional	¾" & ½"	¾" & ½"	¾" & ½"	¾" & ½"	on request	EPDM, FPM	150 psi
Laboratory ball cock	324	—	¼"	—	—	—	—	EPDM	150 psi
Diaphragm valve	514	Diastar 6,10/10 Plus	½"–2"	½"–2"	½"–2"	½"–2"	½"–2"	EPDM, FPM, PTFE	150 psi** †
	515	Diastar 10/10 Plus	—	—	½"–2"	½"–2"	½"–2"	EPDM, FPM, PTFE	150 psi** †
	517	Diastar 10/10 Plus	½"–2"	½"–2"	½"–2"	½"–2"	½"–2"	EPDM, FPM, PTFE	150 psi**
	317	Diastar 025	2½"–6"	2½"–4"	2½"–6"	2½"–6"	—	EPDM, FPM, PTFE	150 psi**
Diaphragm valve	519	Diastar 10/10 Plus	20×20 mm – 110×63 mm	PVDF, PP	—	—	—	EPDM, FPM, PTFE	150 psi
Butterfly valve	567	140, 240	2"–16"	2"–12"	2"–24"	2"–12"	2"–8"	EPDM, FPM, PTFE	150 psi
Butterfly valve	578	144, 244	2"–12"	2"–12"	2"–12"	2"–12"	2"–12"	EPDM, FPM, PTFE	150 psi
Butterfly valve	365	Optional	2"–12"	coated metal body with PFA coated disk, lug style				PTFE, FPM	150 psi
Butterfly valve	563	Optional	2"–12"	—	—	—	—	EPDM	150, 90 psi
Butterfly valve	VFA	Optional	2½"–8"	—	—	—	—	EPDM	150, 90 psi
Cone check valve	561, 562	—	¾"–4"	¾"–4"	¾"–4"	¾"–4"	¾"–4"	EPDM, FPM	150, 232 psi
Vent/Bleed valve	591, 595	—	¾"–4"	¾"–4"	¾"–4"	¾"–4"	¾"–4"	EPDM, FPM	—
Wafer check valve	369	—	1½"–12"	—	Optional	Optional	—	EPDM, FPM	90 psi
Y-Check valve	304	—	½"–3"	—	Optional	—	—	EPDM, FPM	150 psi
Y-Globe valve	301	—	½"–3"	—	—	—	—	PE, PTFE	150 psi
Line strainer	306	—	½"–3"	—	Optional	—	—	EPDM, FPM	150 psi
Needle valve	522	—	—	—	½"	¼"–½"	—	PTFE	150 psi

* PVC, CPVC, PVDF socket (232 psi), PP socket (150 psi), threaded all materials (150 psi), ABS (150 psi)

** Reduced pressure ratings on 4" Diastar (120 psi), 6" Diastar (90 psi) and 6" Type 317 (105 psi)

† 232 pressure rating on special configuration

Manual Valves

End Connections A: solvent cement socket B: NPT threads C: solvent cement spigot D: flanges E: socket, butt and spigot; fusion ends available in PP and PVDF F: lug G: wafer					
	Ball Valve Type 546	Ball Valve Type 375	COLORO Compact Ball Valve Type 355	COLORO Ball Valve Type 353	Metering Ball Valve Type 523
	True union ball valve. Maintenance free. Guaranteed performance. Tested 50,000 cycles. Can be converted to actuated in-line. Handle extension, silicone-free and Control Ball feature are available options.	True union ball valve, O-ring seat backing provides constant torque. PTFE seats. Tested 10,000 cycles with clean fluids. True union ends, NSF approved. (CPVC & PPn ½"-2")	Unrestricted bore for optimum flow. Sturdy monobloc construction resists field breakage. Short laying length and low profile require minimum installation space. PTFE seats. O-ring seat backing provides constant torque. True union ends.	Unrestricted bore for optimum flow. Sturdy monobloc construction resists field breakage. Short laying length and low profile require minimum installation space. PTFE seats. O-ring seat backing provides constant torque.	Precise control at low flow conditions. Indicator scale allows fine adjustment. PTFE seats.
	Material	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP-n	PVC	PVC, CPVC, PP, PVDF (ABS, on request)
	Seal Material	EPDM, FPM	EPDM, FPM	EPDM	EPDM, FPM
Size Range	¾"-4"	½"-6"	½"-2"	½"-2"	¾", ½"
End Connection	A B D E	A B D	A B	A	A B D E
Body and Seal Materials PVC Polyvinyl Chloride CPVC Chlorinated Polyvinyl Chloride PP Polypropylene PVDF Polyvinylidene fluoride ABS Acrylonitrile Butadiene Styrene FPM Fluorine Rubber EPDM Ethylene Propylene Rubber PTFE Polytetrafluoroethylene FPM seals are made of Viton® or equal materials. Viton® is a registered trademark of DuPont Dow Elastomers.					
	Diaphragm Valve Type 514	Diaphragm Valve Type 515	Diaphragm Valve Type 517	Diaphragm Valve Type 317	Zero Static Diaphragm Valve Type 519
	Ergonomic, easily removable handwheel. Standard lockable handle. Suitable for slurries and abrasive media.	Ergonomic, easily removable handwheel. Standard lockable handle. Suitable for slurries and abrasive media. Excellent for throttling control.	Ergonomic, easily removable handwheel. Standard lockable handle. Suitable for slurries and abrasive media. Excellent for throttling control.	Ergonomic, easily removable handwheel. Optional lockable handle. Suitable for slurries and abrasive media. Excellent for throttling control.	Shortest possible branch geometry for zero dead leg. Molded body. High purity versions available.
	Material	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PP-n, PVDF	PVC, CPVC, PP, PVDF	PP, PP-n, PVDF
	Seal Material	EPDM, FPM, PTFE/EPDM, PTFE/FPM	EPDM, FPM, PTFE/EPDM, PTFE/FPM	EPDM, FPM, PTFE/EPDM, PTFE/FPM	EPDM, FPM, PTFE/EPDM, PTFE/FPM
Size Range	½"-2"	½"-2"	½"-2"	2½"-6"	20×20-100×63mm
End Connections	A B E	E	D	D	E

Manual Valves



**3-Way Ball Valve
Type 543**

Vertical and horizontal styles available. L and T-ports for diverting of mixing fluid. Long working life. O-ring seat backing provides constant torque. PTFE seats.



**Butterfly Valve
Type 578**

Lug style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. $\frac{3}{16}$ " stainless steel inserts.



**HP Butterfly Valve
Type 365**

PTFE-lined lug style butterfly valve with PFA-encapsulated disc. Manufactured for high-purity applications. Actuated versions available.



**Butterfly Valve
Type 563 Aqua**

Wafer style valve, double eccentric design allows for lower operating torque and less wear. Glass filled polypropylene outer body.



Butterfly Valve VFA

Low torque valve specifically for water applications.



**Butterfly Valve
Type 567**

Wafer style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Glass filled polypropylene outer body.

PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PVDF, ABS	Coated ductile iron	PVC	PVC	PVC, CPVC, PP, PVDF, ABS
EPDM, FPM	EPDM, FPM, PTFE	PTFE/PFA	EPDM	EPDM	EPDM, FPM, PTFE
$\frac{3}{8}$ "–2"	2"–12"	2"–12"	2"–12"	2½"–8"	2"–24"
A B D E	F	F	G	G	G



**Y-Globe Valve
Type 301**

Good flow characteristics. Bonnet nut facilitates exchange of components. Easy replacement of disc and seat assembly.



**Ventilating and Bleed
Valve Type 591/595**

Used where containers and pipes have to be aerated and/or vented. Especially good for avoiding vacuums and discharging air pockets.



**Y-Check Valve
Type 304**

Excellent flow characteristics. Minimum pressure loss. Mount horizontally or vertically. Efficient at low working pressures.



**Cone Check Valve
Type 561
Type 562 (spring)**

Check for vertical or horizontal installation. Can be used as foot valve when used with Type 050 screen. Good sealing at low head pressure.



**Wafer Check Valve
Type 369**

The valve is available in versions with or without springs. The spring loaded version works well in vertical and horizontal installations where many check valves may not.





**Line Strainer
Type 306**











Protects equipment from solid particles. Screens available in four mesh sizes. Transparent PVC enables easy visibility of screen collection.

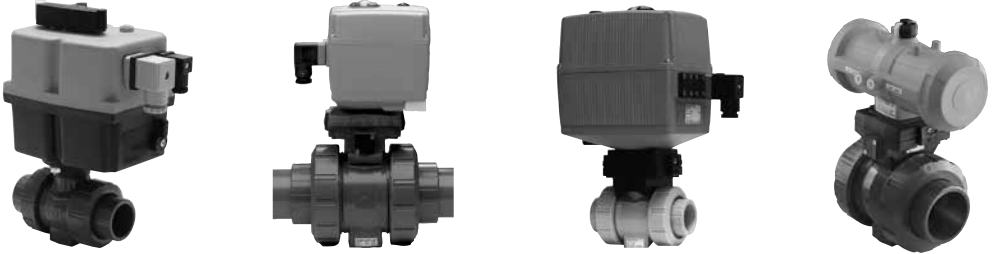PVC (transparent)	PVC, CPVC, PP, PVDF, ABS	PVC (transparent)	PVC, CPVC, PP, PVDF, ABS	PVC (PP & PVDF optional)	PVC (transparent)
PE, PTFE	EPDM, FPM	EPDM, FPM	EPDM, FPM	EPDM, FPM	EPDM, FPM
$\frac{1}{2}$ "–3"	$\frac{3}{8}$ "–4"	$\frac{1}{2}$ "–3"	$\frac{3}{8}$ "–4"	1½"–12"	$\frac{1}{2}$ "–3"
C	A B D E	C	A B D E	D	C









Manual Valves

End Connections A: solvent cement socket B: NPT threads C: solvent cement spigot D: flanges E: socket, butt and spigot fusion ends available in PP and PVDF F: lug				
	Needle Valve Type 522, Angle and Globe Body Styles	Laboratory Ball Cock Valve Type 324	Rotameters	Type 546 True Union Ball Valve Pre-assembled to a Solvent Cement Socket Tee
	Precise control with fine adjustment. Broad chemical resistance with rugged construction. Working pressures up to 200 psi at 73°F.	Specially designed for laboratory use. Long working life. PTFE seats.	All plastic construction. For water, air and corrosive applications. Flow ranges from 0.01–132 GPM. Accuracy 3% of full scale. Available with high/low limits and 4–20mA output.	Many other options and size configurations available within Type 546 ball valve, including FPM seals, PP and PVDF material.
	Material	PP, PVDF	PVC	PSU, PA or PVC tube PVC, CPVC, PP, PPn, ABS, PVDF ends
	Seal Material	PTFE	EPDM	EPDM, FPM
				
Body and Seal Materials PVC Polyvinyl Chloride CPVC Chlorinated Polyvinyl Chloride PP Polypropylene PVDF Polyvinylidene fluoride ABS Acrylonitrile Butadiene Styrene FPM Fluorine Rubber EPDM Ethylene Propylene Rubber PTFE Polytetrafluoroethylene FPM seals are made of Viton® or equal materials. Viton® is a registered trademark of DuPont Dow Elastomers.	Pressure Reducing Valve Type 582	Pressure Retaining Valve Type 586		
	High Precision, Modular, 100% molded design insures consistent quality	High Precision, Modular, 100% molded design insures consistent quality		
	Functions	Pressure Reducing Valve (regulating)	Pressure Retaining Valve (back pressure)	
	Material	PVC, CPVC, PP, PVDF	PVC, CPVC, PP, PVDF	
	Seal Material	PTFE with FPM or EPDM	PTFE with FPM or EPDM	
	Size Range	½"–2"	½"–2"	
	End Connections	A B D E	A B D E	

Actuated Valves

End Connections A: solvent cement socket B: NPT threads C: solvent cement spigot D: flanges E: socket, butt and spigot fusion ends available in PP and PVDF F: lug Actuator Types Functions Control Time Voltage/Air Pressure Material Seal Material Size Range End Connection				
				
	Ball Valve with Electric Actuator Type 104 Low cost economic actuated on/off ball valve. Standard with manual override.	Ball Valve with Electric Actuator Type 107 Low cost economic actuated on/off ball valve. Standard with manual override.	Ball Valve with Electric Actuator Type 130-133 Premium electric actuator for long service life. Used for process control application.	Ball Valve with Pneumatic Actuator Type 231-233 Lightweight, glass-filled polypropylene actuator with pre-tensioned safety springs.
	EA 04	EA 11	EA 21/EA 31	PA 11/PA 21/PA 30/PA 35/PA 40/PA 45
	Open/Close	Open/Close	Open/Close Process control	Open/Close Process control
	9S/90° at nom. torque	5S/90° at nom. torque	5S/90° at nom. torque	1 sec
	110, 220, 24V, 50-60Hz	110-220V, 50-60Hz	24/110-220V, 50-60Hz	101.5 psi max
	PVC, CPVC, ABS	PVC, CPVC, ABS	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PVDF, ABS
	EPDM, FPM	EPDM, FPM	EPDM, FPM	EPDM, FPM
	3/8"-2"	3/8"-2"	3/8"-4"	3/8"-4"
	A B D	A B D	A B D E	A B D E
Body and Seal Materials PVC Polyvinyl Chloride CPVC Chlorinated Polyvinyl Chloride PP Polypropylene PVDF Polyvinylidene fluoride ABS Acrylonitrile Butadiene Styrene FPM Fluorine Rubber EPDM Ethylene Propylene Rubber PTFE Polytetrafluoroethylene FPM seals are made of Viton® or equal materials. Viton® is a registered trademark of DuPont Dow Elastomers.				
				
	Control Ball Valve made from Type 546 Excellent flow control utilizing a characterized ball. Low pressure loss.	3-way Ball Valve with Pneumatic Actuator Type 285-288 Glass filled polypropylene. Corrosion resistant, lightweight, pneumatic actuation.	3-way Ball Valve with Electric Actuator Type 185-187 Premium electric actuator for long service life. 100% duty cycle rating.	3-way Ball Valve with Electric Actuator Type 125-128 Low cost economic actuated two position 3-way valve.
	Electric/Pneumatic	PA11/21	EA21	EA11
	Flow control	Fail Safe to Close Fail Safe to Open Double Acting Process control	On/Off Process control	On/Off
	Positioner	1 sec.	5S/90° at nom. torque	5S/90° at nom. torque
	24/110-220V (electric), 105 psi (pneumatic)	105 psi max	24/110-220V, 50-60Hz	100-220V, 50-60Hz
	PVC, CPVC, PP, PVDF	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PVDF, ABS	PVC
	EPDM, FPM	EPDM, FPM	EPDM, FPM	EPDM, FPM
	1/2"-2"	3/8"-2"	3/8"-2"	3/8"-2"
	A B D E	A B D E	A B D E	A B D

Actuated Valves

End Connections A: solvent cement socket B: NPT threads C: solvent cement spigot D: flanges E: socket, butt and spigot fusion ends available in PP and PVDF F: lug G: wafer				
	Butterfly Valve with Electric Actuator Type 140 Wafer style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Glass filled polypropylene outer body.	Butterfly Valve with Electric Actuator Type 144 Lug style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Stainless steel inserts.	Butterfly Valve with Pneumatic Actuator Type 240 Wafer style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Glass filled polypropylene outer body.	Butterfly Valve with Pneumatic Actuator Type 244 Lug style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Stainless steel inserts.
	Actuator Types	EA31, EA42	EA31, EA42	PA30, PA35, PA40, PA45, PA50, PA55
	Functions	Open/Close Process control	Open/Close Process control	Fail Safe to Close Fail Safe to Open Double Acting
	Control Time	EA31: 15 sec. EA42: 25 sec.	EA31: 15 sec. EA42: 25 sec.	0.5–1 sec. 0.5–1 sec.
Voltage/Air Pressure	24/110–220V, 50–60Hz	24/110–220V, 50–60Hz	105 psi max.	105 psi max
Material	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PVDF, ABS	PVC, CPVC, PP, PVDF, ABS
Seal Material	EPDM, FPM, PTFE/FPM	EPDM, FPM, PTFE/FPM	EPDM, FPM, PTFE/FPM	EPDM, FPM, PTFE/FPM
Size Range	2"–24"	2"–12"	2"–24"	2"–12"
End Connection	G	F	G	F
Body and Seal Materials PVC Polyvinyl Chloride CPVC Chlorinated Polyvinyl Chloride PP Polypropylene PVDF Polyvinylidene fluoride ABS Acrylonitrile Butadiene Styrene FPM Fluorine Rubber EPDM Ethylene Propylene Rubber PTFE Polytetrafluoroethylene FPM seals are made of Viton® or equal materials. Viton® is a registered trademark of DuPont Dow Elastomers.				
	Butterfly Valve with Electric Actuator Type 563 Wafer style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Glass filled polypropylene outer body.	Butterfly Valve with Electric Actuator Type VFA Low-torque valve specifically for water applications.	Butterfly Valve with Pneumatic Actuator Type 563 Wafer style valve, double eccentric design allows for lower operating torque and less wear. Wetted material matches piping system. Glass filled polypropylene outer body.	Butterfly Valve with Pneumatic Actuator Type VFA Low-torque valve specifically for water applications.
	Actuator Types	EA21, EA31, EA42	EA21, EA31, EA42	PA21, PA30, PA35, PA40, PA45, PA50, PA55
	Functions	Open/Close Process control	Open/Close Process control	Fail Safe to Close Fail Safe to Open Double Acting
	Control Time	EA21: 6 sec. EA31: 15 sec. EA42: 25 sec.	EA21: 6 sec. EA31: 15 sec. EA42: 25 sec.	0.5–1 sec. 0.5–1 sec.
Voltage/Air Pressure	24/110–220V, 50–60Hz	24/110–220V, 50–60Hz	105 psi max.	105 psi max
Material	PVC	PVC	PVC	PVC
Seal Material	EPDM	EPDM	EPDM	EPDM
Size Range	2"–12"	2½"–8"	2"–12"	2½"–8"
End Connections	G	G	G	G

Actuated Valves

End Connections A: solvent cement socket B: NPT threads C: solvent cement spigot D: flanges E: socket, butt and spigot fusion ends available in PP and PVDF F: lug					
	Diaphragm Valve with DIASTAR 6 Pneumatic Actuator	Diaphragm Valve with DIASTAR 10 and 10Plus Pneumatic Actuator	Diaphragm Valve with DIASTAR 025 Pneumatic Actuator	Zero Static Valve with DIASTAR 10 and 10Plus Pneumatic Actuator High Purity	
	Compact, lightweight, and economical. Preloaded springs for safety.	Rugged GF PP actuation, Lightweight, compact design. Preloaded springs for safety. Long life, excellent throttling characteristics.	Rugged GF PP actuation, Lightweight, compact design. Preloaded springs for safety. Long life, excellent throttling characteristics.	Rugged GF PP actuation, Lightweight, compact design. Preloaded springs for safety. Long life, excellent throttling characteristics.	
	Actuator Types	DIASTAR 6	DIASTAR 10/10 Plus	DIASTAR 025	DIASTAR 10/10 Plus
	Functions	Fail Safe to Close	Fail Safe to Close Fail Safe to Open Double Acting	Fail Safe to Close Fail Safe to Open Double Acting	Fail Safe to Close Fail Safe to Open Relief
Control Time	approx 3 sec	approx 3 sec	approx 3 sec	approx 3 sec	
Voltage/Air Pressure	105 psi max.	105 psi max.	105 psi max.	105 psi max.	
Material	PVC, CPVC, ABS	PVC, CPVC, PP, PP-n, PVDF, ABS	PVC, CPVC, PP, PVDF	PP, PP-n, PVDF	
Seal Material	EPDM	EPDM, FPM, PTFE/ EPDM, PTFE/FPM	EPDM, FPM, PTFE/ EPDM, PTFE/FPM	EPDM, FPM, PTFE/ EPDM, PTFE/FPM	
Size Range	½"–2"	½"–2"	2½"–6"	20×20–110×63 mm	
End Connection	A B D	A B D E	D	E	
Body and Seal Materials PVC Polyvinyl Chloride CPVC Chlorinated Polyvinyl Chloride PP Polypropylene PVDF Polyvinylidene fluoride ABS Acrylonitrile Butadiene Styrene FPM Fluorine Rubber EPDM Ethylene Propylene Rubber PTFE Polytetrafluoroethylene FPM seals are made of Viton® or equal materials. Viton® is a registered trademark of DuPont Dow Elastomers.					

Actuated Accessories



AS-i

AS-Interface (Actuator Sensor Interface) is an industrial standard, specially developed for field bus connection of actuators and sensors. The AS-Interface complements advanced fieldbus systems ideally and is used in place of conventional parallel cables. It is suitable for simple open-close applications.



Position Feedback Limit Switches

For feedback of valve status. Available in dry contact (silver or gold), PNP, NPN, EExd.



Pneumatic Positioners

Positioners for pneumatic ball, butterfly and diaphragm valves. 4–20 mA input signal.



Positioner Type PE25

Can be internally mounted into existing GF electric actuators to provide functions. 4–20 mA or 0-10V input signal.



Pilot Solenoid Valve

On/Off control for pneumatic valves. 100% duty cycle rating. PV 94 and PV 95 for direct mount. MNL532 and 5470 for Namur mount




Accessories

Manual override
Fail Safe Unit
Limit switches
Intermediate position for 3-way valves
Potentiometer
Speed Control
Heating Element
Positioner
Stroke Limiter

The New Pressure Regulating Valve and the New 578 Valve

The innovative modular 5 series pressure regulating valve (PRV) has a modular design allows users to easily change configurations. The valve can be changed from a back-pressure valve to a reducing valve by simply changing out the cartridge. Springs can be added or removed to meet optimum pressure ranges. In addition, the modular design allows for easy and quick maintenance for scheduled shutdowns. An online tool is available, making sizing a breeze. All sizes are molded, which eliminates inconsistencies found in machined valves. The Type 586 is the pressure-retaining or back-pressure valve; it maintains back pressure and can act as a pressure relief valve. The Type 582 valve is the pressure reducing version.

- No re-torquing needed
- Modular
- Online tool makes sizing a breeze
- 100% molded design means consistent quality

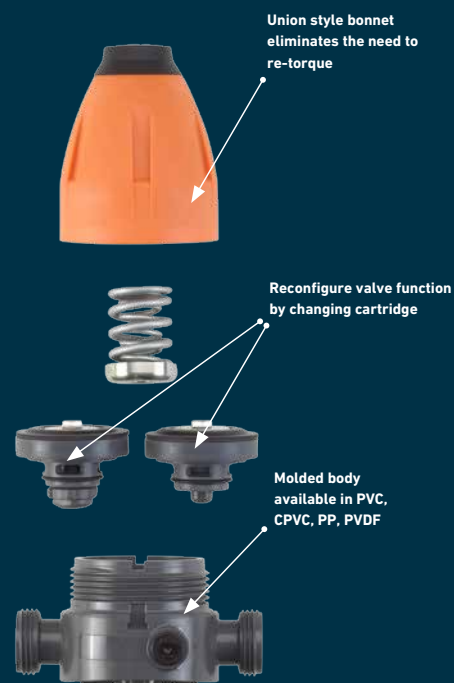

The 578 butterfly valve has stainless steel threaded inserts allowing it to be installed in end-of-line service. This means maintenance can be performed on one side of the valve while having full pressure on the other. In addition, the valve has all the advantages of our double eccentric butterfly valves. The double eccentric design is superior to the traditional boot design because it has about half the required torque and is not susceptible to swelling over time. This all translates to a product that is more user-friendly and has a longer life span.



No problematic boot



GF Piping Systems

Our sales companies and representatives ensure local customer support in over 100 countries.

Argentina / Southern South America

Georg Fischer Central Plastics
Sudamérica S.R.L.
Buenos Aires, Argentina
Phone +5411 4512 02 90
gfcentral.ps.ar@georgfischer.com

Australia

George Fischer Pty Ltd
Riverwood NSW 2210 Australia
Phone +61(0)2 9502 8000
australia.ps@georgfischer.com
www.georgfischer.com.au

Austria

Georg Fischer
Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43(0)2782 856 43-0
austria.ps@georgfischer.com
www.georgfischer.at

Belgium / Luxembourg

Georg Fischer NV/SA
1070 Bruxelles/Brüssel
Phone +32(0)2 556 40 20
be.ps@georgfischer.com
www.georgfischer.be

Brazil

Georg Fischer Sist. de Tub. Ltda.
04795-100 São Paulo
Phone +55(0)11 5525 1311
br.ps@georgfischer.com
www.georgfischer.com.br

Canada

Georg Fischer Piping Systems Ltd
Mississauga, ON L5T 2B2
Phone +1(905)670 8005
Fax +1(905)670 8513
ca.ps@georgfischer.com
www.georgfischer.ca

China

Georg Fischer Piping Systems Ltd
Shanghai 201319
Phone +86(0)21 3899 3899
china.ps@georgfischer.com
www.georgfischer.cn

Denmark / Iceland

Georg Fischer A/S
2630 Taastrup
Phone +45 (0)70 22 19 75
info.dk.ps@georgfischer.com
www.georgfischer.dk

Finland

Georg Fischer AB
01510 VANTAA
Phone +358 (0)9 586 58 25
Fax +358 (0)9 586 58 29
info.fi.ps@georgfischer.com
www.georgfischer.fi

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33(0)1 41 84 68 84
fr.ps@georgfischer.com
www.georgfischer.fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49(0)7161 302-0
info.de.ps@georgfischer.com
www.georgfischer.de

India

Georg Fischer Piping Systems Ltd
400 076 Mumbai
Phone +91 224007 2001
in.ps@georgfischer.com
www.georgfischer.in

Italy

Georg Fischer S.p.A.
20063 Cernusco S/N (MI)
Phone +3902 921 861
it.ps@georgfischer.com
www.georgfischer.it

Japan

Georg Fischer Ltd
556-0011 Osaka,
Phone +81(0)6 6635 2691
jp.ps@georgfischer.com
www.georgfischer.jp

Korea

Georg Fischer Piping Systems
271-3 Seohyeon-dong Bundang-gu
Seongnam-si, Gyeonggi-do
Seoul 463-824
Phone +82 31 8017 1450
Fax +82 31 8017 1454
kor.ps@georgfischer.com
www.georgfischer.kr

Malaysia

George Fischer (M) Sdn. Bhd.
40460 Shah Alam, Selangor Darul Ehsan
Phone +60 (0)3 5122 5585
my.ps@georgfischer.com
www.georgfischer.my

Mexico / Northern Latin America

Georg Fischer S.A. de C.V.
Apodaca, Nuevo Leon
CP66636 Mexico
Phone +52 (81)1340 8586
Fax +52 (81)1522 8906
mx.ps@georgfischer.com
www.georgfischer.mx

Middle East

Georg Fischer
Piping Systems (Switzerland) Ltd.
Dubai, United Arab Emirates
Phone +971 4 289 49 60
gcc.ps@georgfischer.com
www.export.georgfischer.com

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31(0)578 678 222
nl.ps@georgfischer.com
www.georgfischer.nl

New Zealand

Georg Fischer Ltd
13 Jupiter Grove, Upper Hutt 5018
PO Box 40399, Upper Hutt 5140
Phone +64(0)4 527 9813
nz.ps@georgfischer.com
www.gfps.com/nz

Norway

Georg Fischer AS
1351 Rud
Phone +47(0)67 18 29 00
no.ps@georgfischer.com
www.georgfischer.no

Poland

Georg Fischer Sp. z o.o.
05-090 Sekocin Nowy
Phone +48(0)22 31 31 0 50
poland.ps@georgfischer.com
www.georgfischer.pl

Romania

Georg Fischer
Piping Systems (Switzerland) Ltd.
020257 Bucharest - Sector 2
Phone +40(0)21 230 53 80
ro.ps@georgfischer.com
www.export.georgfischer.com

Russia

Georg Fischer
Piping Systems (Switzerland) Ltd.
Moscow 125047
Tel. +7 495 258 60 80
ru.ps@georgfischer.com
www.georgfischer.ru

Singapore

George Fischer Pte Ltd
11 Tampines Street 92, #04-01/07
528 872 Singapore
Phone +65 6747 0611
sgp.ps@georgfischer.com
www.sg.piping.georgfischer.com

Spain / Portugal

Georg Fischer S.A.
28046 Madrid
Phone +34(0)91 781 98 90
es.ps@georgfischer.com
www.georgfischer.es

Sweden

Georg Fischer AB
117 43 Stockholm
Phone +46(0)8 506 775 00
info.se.ps@georgfischer.com
www.georgfischer.se

Switzerland

Georg Fischer
Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41(0)52 631 30 26
ch.ps@georgfischer.com
www.piping.georgfischer.ch

Taiwan

Georg Fischer Co., Ltd.
San Chung Dist., New Taipei City
Phone +886 2 8512 2822
Fax +886 2 8512 2823
www.georgfischer.tw

United Kingdom / Ireland

George Fischer Sales Limited
Coventry, CV2 2ST
Phone +44(0)2476 535 535
uk.ps@georgfischer.com
www.georgfischer.co.uk

USA / Caribbean

Georg Fischer LLC
Irvine, CA 92618
Phone +1(714) 731 88 00
Toll Free 800 854 40 90
us.ps@georgfischer.com
www.gf piping.com

Vietnam

George Fischer Pte Ltd
136E Tran Vu, Ba Dinh District, Hanoi
Phone +84 4 3715 3290
Fax +84 4 3715 3285

International

Georg Fischer
Piping Systems (Switzerland) Ltd.
8201 Schaffhausen/Switzerland
Phone +41(0)52 631 30 03
Fax +41(0)52 631 28 93
info.export@georgfischer.com
www.export.georgfischer.com

www.gfps.com

The technical data is not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification.
Our General Terms of Sale apply.

GF Piping Systems

Tel. (714) 731-8800, Toll Free (800) 854-4090, Fax (714) 731-6201

us.ps@georgfischer.com, www.gf piping.com



Item #110 (8/15)

© Georg Fischer LLC 2015
Printed in USA