

DAWSONS-TECH[®]

OVER 35 YEARS OF EXPERIENCE

AN ISO 9001 COMPANY

METAL GASKET FACE SEAL FITTINGS



***Most Cost Effective, World Class Quality
Flow Control Solutions for Wide Range
of Industries and Applications***

www.dawsonstech.com

THE COMPANY

DAWSONS-TECH is an ISO 9001:2015 certified manufacturing company offers wide range of **Consistent and Reliable World Class Quality Flow Control Components** used in Fluid / Gas Control systems in a wide range of Industries.

MANUFACTURING :


DAWSONS-TECH established its comprehensive state of art manufacturing and testing facility installing various CNC Turning Centre and CNC Turnmill Centre, Vertical Machining Centre, etc. with the highly motivated and dedicated team of employees in place. This facilitate us to design and manufacture our product range under stringent quality checks and measurements that ensures **“A TOTAL CUSTOMER SATISFACTIONS WITH ZERO DEFECT PRODUCTS”**.

QUALITY:

DAWSONS-TECH persues not only performance of its products but also ensures **“TOTAL QUALITY CONTROL MANAGEMENT SYSTEMS IN ACCORDANCE TO ISO 9001:2015”** which is achieved by alerting and educating each and every employee, the importance of quality and by implementing the quality control procedures at every stage of production to final inspection from incoming raw material to finish products.

CERTIFICATIONS :

DAWSONS-TECH believes in total quality management systems which has earned us following certifications:

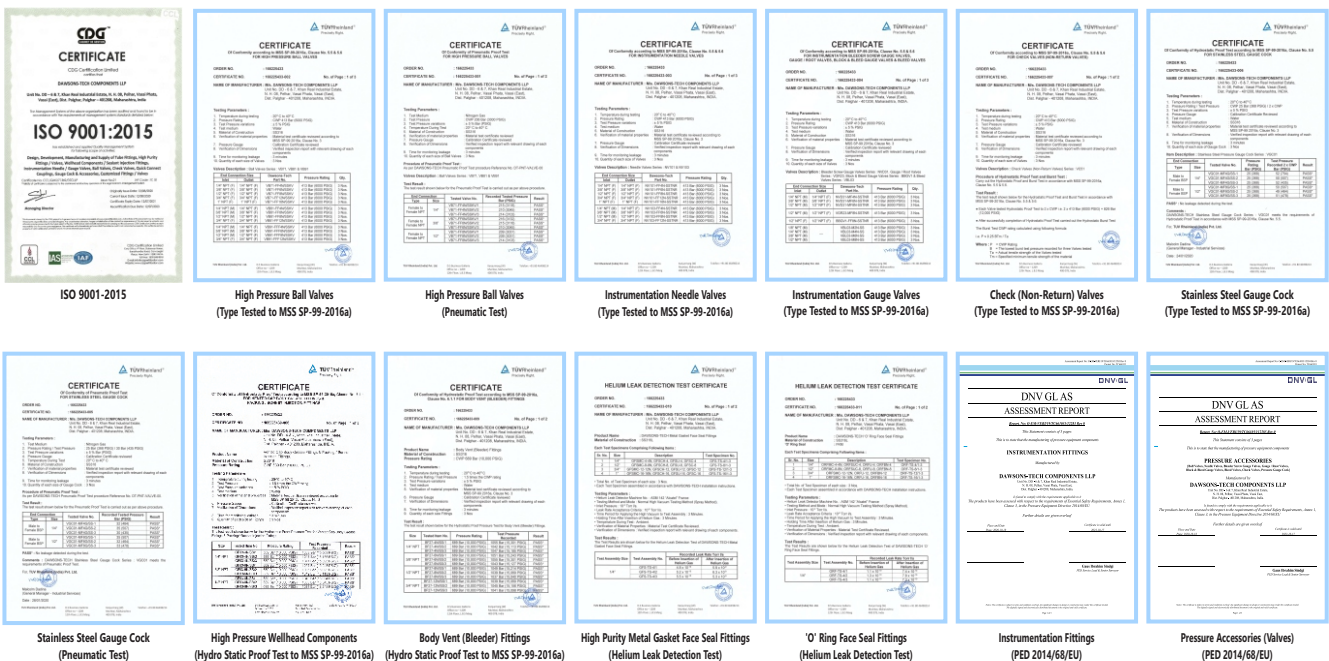

RESEARCH & DEVELOPMENT :

With our long experience, expertise and continues Research & Development with incorporation of advanced technology and high-tech cutting-edge machineries, **DAWSONS-TECH** is committed to constant upgradation and expand its product range to meet the requirements of its customer to their entire satisfaction at every time.


CUSTOMER SATISFACTION:

We strive to achieve total customer satisfaction and continuously work to set higher goals to provide the reliable quality, timely delivery of our products and prompt services in the best interest of our customers with very competitive price.

DAWSONS-TECH carefully design and manufacture Metal Gasket Face Seal Fittings and Clean Weld Fittings for High Purity and Ultra High Purity applications. We work towards achieving our common objectives by sharing knowledge, experience and expertise within ourselves as well as co-ordinated teamwork to develop our product line that reflects the company's deep understanding and the critical requirements of the Semiconductor, Biotech and Pharmaceutical Industries.

Features / Benefits :

FEMALE NUT: Internally Silver Plated to extend the Fittings life by preventing galling across a wide range of temperature and also reduce the torque during assembly.

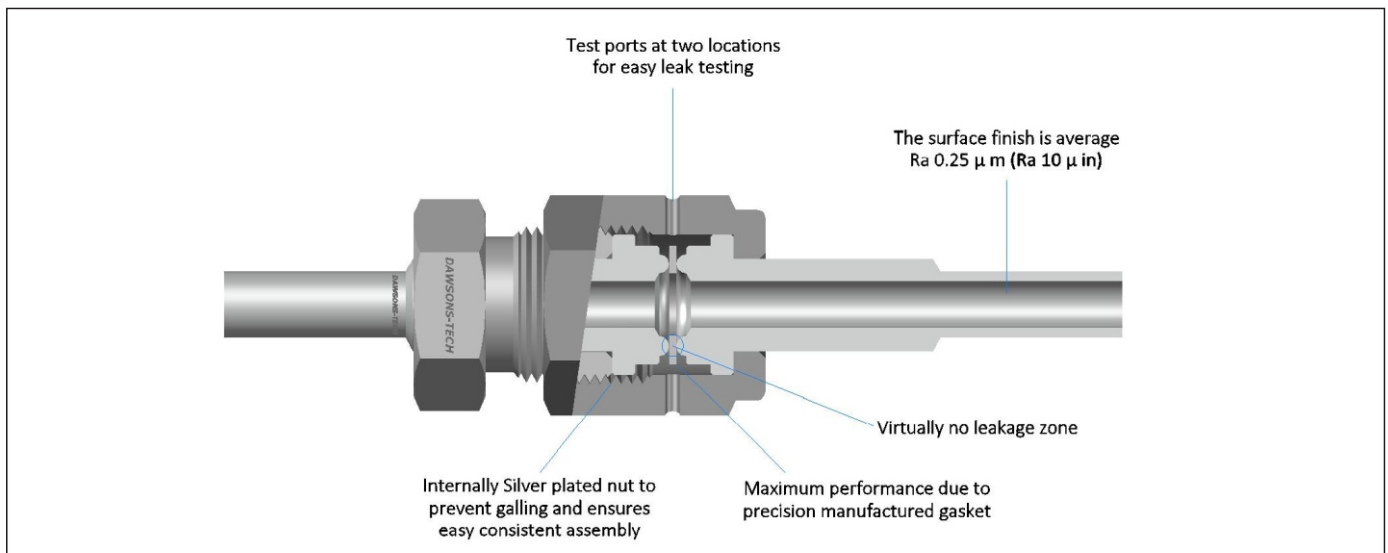

Surface Finish :

Products	LEVEL 'E'			LEVEL 'NE'		
	Treatment	Ra (Microinch)		Treatment	Ra (Microinch)	
		Max	Average		Max	Average
Glands	Electropolished	10	5	Non-Electropolished	15	10
Mini Butt weld	Electropolished	10	5	Non-Electropolished	15	10
Shaped Unions	Electropolished	10	15	Non-Electropolished	20	15
Long Weld Shaped Connectors	Electropolished	10	5	Non-Electropolished	15	10
Threaded Straight Connectors	Electropolished	10	5	Non-Electropolished	20	10

Level 'E' – Electropolished / Level 'NE' – Non-Electropolished

Material :

Each and every components of Metal Gasket Face Seal Fittings and Clean Weld Fittings are manufactured from Heat Code traceable Material Grade SS316L confirming to ASTM A479 / A182.

Testing :

DAWSONS-TECH Face Seal Fittings are Helium Leak Tested and qualified to leak rate of 10^{-9} torr.

Temperature Rating :

Products	Material	PSIG	°C
GFS FITTINGS	316L	1000	538
GFS GASKETS	316SS	1000	538
GFS GASKETS	NICKEL	1000	538
GFS BUTTWELD	316L	1000	538

Pressure Rating :

Pressure Ratings are calculated in accordance with ANSI code of pressure piping ANSI B-31, for Stainless Steel Fittings. All working pressures are at 4:1 safety factor.


Cleaning :

Precision cleaning is done by Ultra Sonic cleaning process with D.I. water after the passivation.

Packing :

Each finished component is double bagged in a clean room to ensure cleanliness and protect it from environmental contamination.


Assembly Instructions For Face Seal Fittings :

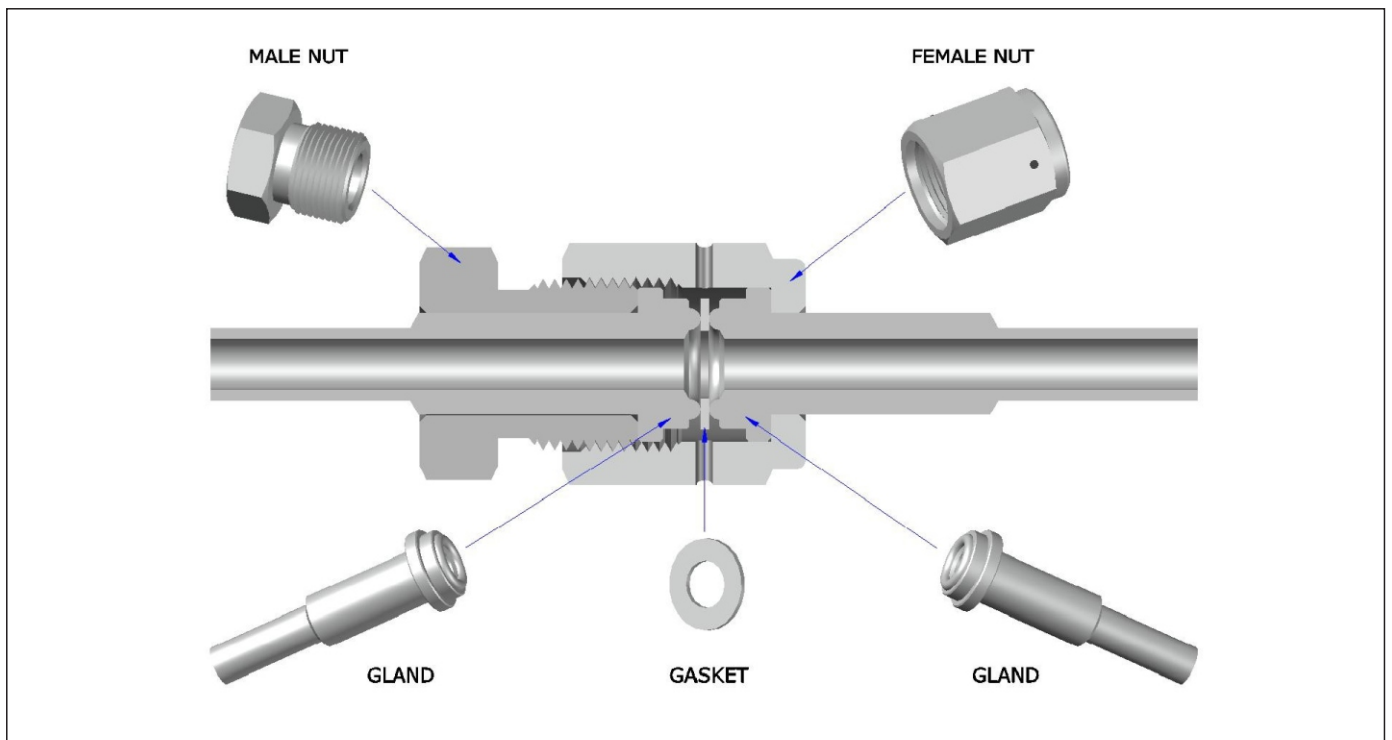


1. Be sure to protect all DAWSONS-TECH Face Seal Fittings until assembly and make-up. Extreme care should be taken so that the sealing surfaces are not scratched, damaged or contaminated in any way during handling and assembly.
2. Always use a clean environment and employ proper clean room environment for the make-up and assembly of Face Seal Fittings.
3. Finger tighten Female Nut to the Male Nut / Body assuring that all Components have made proper contact are in position for final tightening with wrenches.
4. Tighten the Female Nut 1/8 – 1/4 turn past finger tight.
5. Face Seal Connections are remarkable. Always use a new gasket for each remake.

INDEX


Glands :




Short Tube Butt Weld
Page No. 8




Long Tube Butt Weld
Page No. 9




Short Automatic Tube Butt Weld
Page No. 9




Long Automatic Tube Butt Weld
Page No. 10




Socket Weld
Page No. 10




Short Socket Weld
Page No. 11




Reducing Socket Weld
Page No. 11



Male Weld
Page No.11




Tube Adapter
Page No. 12




Blind
Page No. 12

Bodies :




Male NPT Connector

Page No. 12




Male NPT Bulkhead Connector

Page No. 13




Straight Thread O-Ring Seal
Male Connector
Page No. 13




Female NPT Connector


Page No.13



Compression Tube Fitting
Connector
Page No. 14




Compression Tube Fitting
Bulkhead Connector
Page No. 14



Union


Page No. 14



Reducing Union


Page No. 15

Bodies :




Bulkhead Union

Page No. 15




Tube Butt Weld Bulkhead Connector

Page No. 15




Coupling

Page No. 16




Female Reducing Union

Page No. 16




Reducing Adapter

Page No. 16




Reducing Bushing

Page No. 17




Male NPT Elbow

Page No. 17




Union Elbow

Page No. 17



Union Tee


Page No. 18



Union Cross


Page No. 18

Nuts, Caps & Plug :




Female Nut

Page No. 18




Male Nut

Page No. 19




Short Male Nut

Page No. 19



Cap


Page No. 19



Plug


Page No. 20

Max Flow - Gland :




Tube Butt Weld
Page No. 20


Max Flow - Bodies :



Tube Butt Weld
Page No. 20




Automatic Tube Weld
Page No. 21



Bulkhead Connector
Page No. 21




Union Elbow
Page No. 21




Union Tee
Page No. 22

Max Flow - Nuts :




Female Nut
Page No. 22



Male Nut
Page No. 22

Max Flow - Gaskets :



Non-Retained
(Silver Plated)
Page No. 23



Non-Retained
(Un-Plated)
Page No. 23



Gasket Retainer Assembly
(Silver Plated)
Page No. 23




Gasket Retainer Assembly
(Un-Plated)
Page No. 24

METAL GASKET FACE SEAL FITTINGS

GLANDS

Short Tube Butt Weld

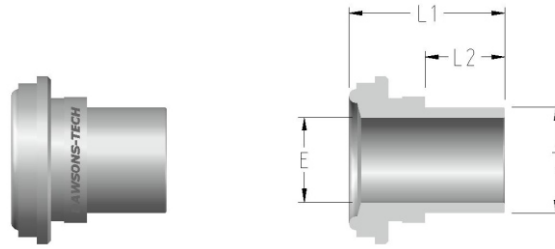

Standard Configuration Dimensions


Face Seal Size	Tube OD	Wall Thickness	Dimensions in mm			Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	T		E	L1	L2		
Fractional							
1/4	1/4	0.035	4.6	15.2	6.4	5100 (351)	GFSSTG-4-4BW/15
1/4	1/4	0.035	4.6	18.3	9.6	5100 (351)	GFSSTG-4-4BW/18
1/4	1/4	0.035	4.6	27.9	19.1	5100 (351)	GFSSTG-4-4BW/27
1/2	1/4	0.035	4.6	28.4	19.1	4300 (296)	GFSSTG-8-4BW
1/2	3/8	0.035	7.9	15.7	6.4	3300 (227)	GFSSTG-8-6BW/15
1/2	1/2	0.049	10.2	15.7	6.4	3700 (254)	GFSSTG-8-8BW/15
1/2	1/2	0.049	10.2	18.8	9.6	3700 (254)	GFSSTG-8-8BW/18
1/2	1/2	0.049	10.2	28.4	19.1	3700 (254)	GFSSTG-8-8BW/28
Metric							
1/4	6mm	1.0mm	4.0	29.5	19.1	6800 (468)	GFSSTG-4-6MBW
1/4	8mm	1.0mm	6.0	29.5	19.1	4900 (337)	GFSSTG-4-8MBW
1/2	10mm	1.0mm	8.0	29.5	19.1	3500 (241)	GFSSTG-8-12MBW
1/2	12mm	1.0mm	10.0	29.5	19.1	3100 (213)	GFSSTG-8-12MBW
3/4	18mm	1.5mm	15.0	31.0	19.1	3000 (206)	GFSSTG-12-18MBW

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS

GLANDS

Long Tube Butt Weld

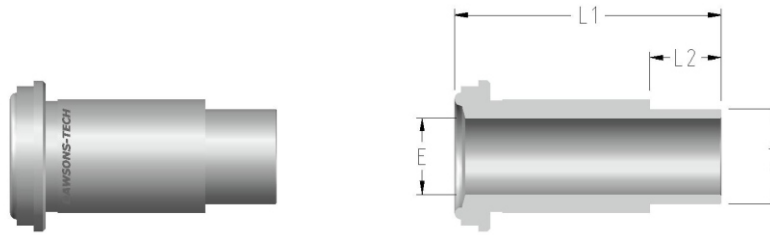


Standard Configuration Dimensions

Face Seal Size	Tube OD T	Wall Thickness	Dimensions in mm			Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
			E	L1	L2		
Fractional							
1/4	1/4	0.035	4.6	30.5	6.4	5100 (351)	GFSLTG-4-4BW/30
1/4	1/4	0.035	4.6	33.3	9.1	5100 (351)	GFSLTG-4-4BW/33
1/4	1/4	0.035	4.6	33.5	9.6	5100 (351)	GFSLTG-4-4BW/34
1/4	1/4	0.035	4.6	43.2	19.1	5100 (351)	GFSLTG-4-4BW/43
1/2	1/4	0.035	4.6	45.7	19.1	4300 (296)	GFSLTG-8-4BW
1/2	3/8	0.035	7.9	32.8	6.4	3300 (227)	GFSLTG-8-6BW/32
1/2	3/8	0.035	7.9	45.5	19.4	3300 (227)	GFSLTG-8-6BW/45
1/2	1/2	0.049	10.2	32.8	6.4	3700 (254)	GFSLTG-8-8BW/32
1/2	1/2	0.049	10.2	35.8	9.6	3700 (254)	GFSLTG-8-8BW/35
1/2	1/2	0.049	10.2	45.5	19.1	3700 (254)	GFSLTG-8-8BW/45
3/4	3/4	0.049	16.5	51.6	19.1	2400 (165)	GFSLTG-12-12BW
1	1	0.065	22.1	58.9	19.1	2400 (165)	GFSLTG-16-16BW
Metric							
1/4	6mm	1.0mm	4.0	43.2	19.1	6800 (468)	GFSLTG-4-6MBW
1/4	8mm	1.0mm	6.0	43.2	19.1	4900 (337)	GFSLTG-4-8MBW
1/2	10mm	1.0mm	8.0	45.5	19.1	3500 (241)	GFSLTG-8-10MBW
1/2	12mm	1.0mm	10.0	45.5	19.1	3100 (213)	GFSLTG-8-12MBW
3/4	18mm	1.5mm	15.0	51.6	19.1	3000 (206)	GFSLTG-12-18MBW

Dimensions are for reference only and are subject to change.

Short Automatic Tube Butt Weld

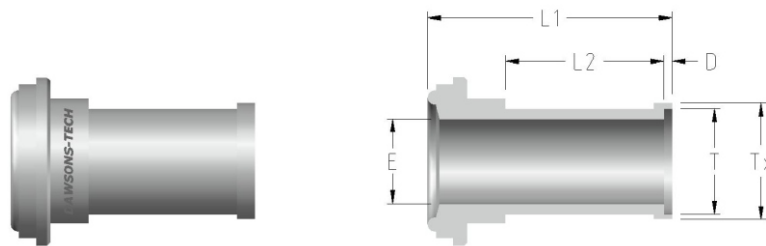

Standard Configuration Dimensions


Face Seal Size	Tube OD T	Wall Thickness	Dimensions in mm					Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
			D	E	L1	L2	Tx		
Fractional									
1/4	1/4	0.035	0.5	4.6	28.4	19.1	7.4	5100 (351)	GFSSATG-4-4BW
1/2	3/8	0.035	0.8	7.9	29.2	19.1	10.4	3300 (227)	GFSSATG-8-6BW
1/2	1/2	0.049	1.0	10.2	29.5	19.1	14.0	3500 (241)	GFSSATG-8-8BW
Metric									
1/4	6mm	1.0mm	0.5	4.0	30.0	19.1	6.8	6800 (468)	GFSSATG-4-6MBW
1/4	8mm	1.0mm	0.8	6.0	30.2	19.1	8.9	4900 (337)	GFSSATG-4-8MBW
1/2	10mm	1.0mm	0.8	8.0	31.0	19.1	10.9	3500 (241)	GFSSATG-8-10MBW
1/2	12mm	1.0mm	1.0	10.0	30.5	19.1	13.2	3100 (213)	GFSSATG-8-12MBW

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS

GLANDS

Long Automatic Tube Butt Weld

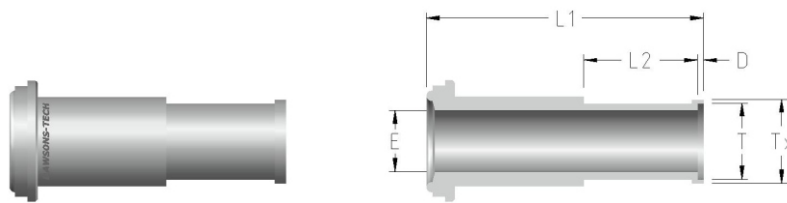


Standard Configuration Dimensions

Face Seal Size	Tube OD T	Wall Thickness	Dimensions in mm					Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
			D	E	L1	L2	Tx		
Fractional									
1/4	1/4	0.035	0.5	4.6	43.7	19.1	7.4	5100 (351)	GFSLATG-4-4BW/43
1/2	1/4	0.035	0.5	4.6	46.2	19.1	7.4	3500 (241)	GFSLATG-8-4BW/46
1/2	3/8	0.035	0.8	7.9	46.2	19.1	10.4	3300 (227)	GFSLATG-8-6BW
1/2	1/2	0.049	1.0	10.2	46.5	19.1	14.0	3500 (241)	GFSLATG-8-8BW
3/4	3/4	0.049	1.0	16.5	52.6	19.1	20.3	2400 (165)	GFSLATG-12-12BW
1	1	0.065	1.0	22.1	65.3	24.4	26.9	2400 (165)	GFSLATG-16-16BW
Metric									
1/4	6mm	1.0mm	0.5	4.0	43.7	19.1	6.8	6800 (468)	GFSLATG-4-6MBW
1/2	12mm	1.0mm	1.0	10.0	46.5	19.1	13.2	3100 (213)	GFSLATG-8-12MBW
3/4	18mm	1.0mm	1.0	15.0	52.6	19.1	19.3	3000 (206)	GFSLATG-12-18MBW

Dimensions are for reference only and are subject to change.

Socket Weld

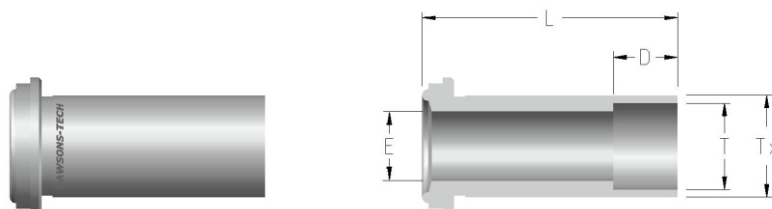

Standard Configuration Dimensions


Face Seal Size	Tube Socket T	Dimensions in mm				Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		D	E	L	Tx		
1/4	1/4	7.1	4.6	33.3	8.9	5500 (378)	GFSG-4-4SW
1/2	3/8	7.9	7.1	38.1	15.2	4300 (296)	GFSG-8-6SW
1/2	1/2	9.6	10.2	38.1	15.2	3000 (206)	GFSG-8-8SW
5/8	5/8	10.4	12.7	39.6	18.3	2800 (192)	GFSG-10-10SW
3/4	3/4	11.2	15.7	50.8	22.4	2800 (192)	GFSG-12-12SW
1	1	15.7	22.1	56.4	30.2	3000 (206)	GFSG-16-16SW

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS

GLANDS

Short Socket Weld

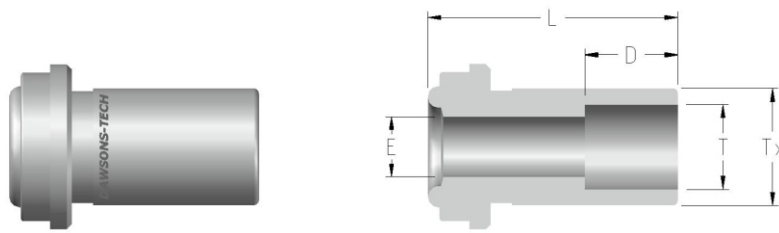


Standard Configuration Dimensions

Face Seal Size	Tube Socket	Dimensions in mm				Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	T	D	E	L	Tx		
1/4	1/4	7.1	4.6	12.7	8.9	5500 (378)	GFSSG-4-4SW/12
1/4	1/4	7.1	4.6	19.1	8.9	5500 (378)	GFSSG-4-4SW/19

Dimensions are for reference only and are subject to change.

Reducing Socket Weld

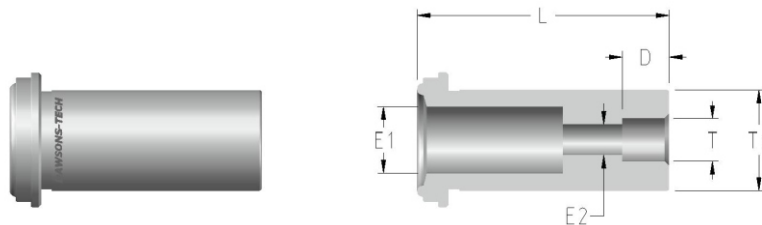


Standard Configuration Dimensions

Face Seal Size	Tube OD	Dimensions in mm					Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	T	D	E1	E2	L	Tx		
1/4	1/4	2.5	4.6	2.3	33.3	8.9	8000 (378)	GFSRG-4-4SW
1/2	1/4	7.1	10.2	4.6	38.1	15.2	3500 (241)	GFSRG-8-4SW

Dimensions are for reference only and are subject to change.

Male Weld

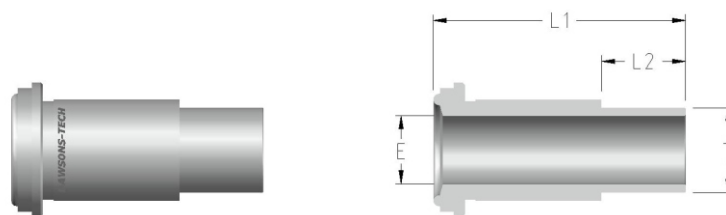

Standard Configuration Dimensions



Face Seal Size	Tube Socket	Dimensions in mm			Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	T	E	L1	L2		
1/4	1/4	3.0	33.3	10.1	10,000 (689)	GFSC-4-4MW
1/2	1/4	3.0	38.1	10.4	4300 (296)	GFSC-8-4MW
1/2	3/8	7.1	38.1	10.4	4300 (296)	GFSC-8-6MW
1/2	1/2	10.2	38.1	12.7	3500 (241)	GFSC-8-8MW
3/4	3/4	13.5	50.8	15.7	3700 (254)	GFSC-12-12MW
1	1	19.1	56.4	20.6	3000 (206)	GFSC-16-16MW

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS

GLANDS

Tube Adapter

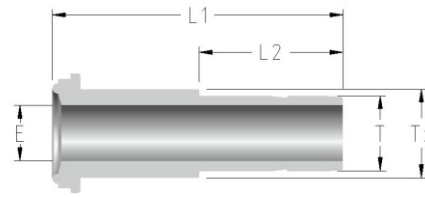

Standard Configuration Dimensions

Face Seal Size	Tube Socket	Dimensions in mm				Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		T	E	L1	L2		
1/4	1/4	4.3	41.0	16.2	8.9	10,000 (689)	GFST AG-4-4
1/2	3/8	6.8	46.0	17.8	15.2	4300 (296)	GFST AG-8-6
1/2	1/2	9.4	49.0	24.4	15.2	3500 (241)	GFST AG-8-8

Dimensions are for reference only and are subject to change.

Blind (Undrilled) Gland





Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		Dawsons-Tech Part No.
	L		
1/4	33.3		GFSBG-4
1/2	38.1		GFSBG-8
3/4	50.8		GFSBG-12
1	56.4		GFSBG-16

Dimensions are for reference only and are subject to change.

BODIES

Male Connector (NPT Thread)

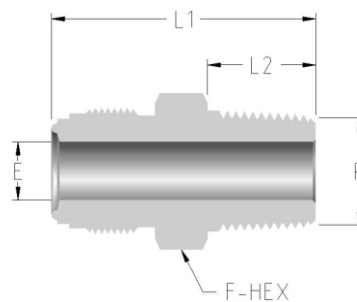



Standard Configuration Dimensions

Face Seal Size	NPT Male Thread	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E	L1	L2			
1/4	1/4	4.6	37.8	14.2	5/8	10,000 (689)	GFSMC-4-4N
1/2	1/4	7.1	41.9	14.2	15/16	4300 (296)	GFSMC-8-4N
1/2	3/8	9.6	41.9	14.2	15/16	4300 (296)	GFSMC-8-6N
1/2	1/2	10.2	46.7	19.1	15/16	4300 (296)	GFSMC-8-8N
3/4	3/4	15.7	55.6	19.1	15/16	3700 (254)	GFSMC-12-12N
1	1	22.1	62.7	23.9	1-5/8	3000 (206)	GFSMC-16-16N

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS BODIES

Bulkhead Male Connector (NPT Thread)

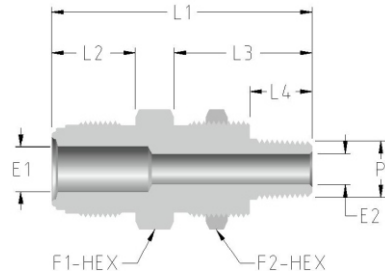



Standard Configuration Dimensions

Face Seal Size	NPT Male Thread	Dimensions in mm								F1-Hex (Inch)	F2-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		P	E1	E2	L1	L2	L3	L4	Max Panel Hole Size				
1/4	1/4	4.6	7.1	56.1	15.7	31.5	14.2	16.8	9.7	13/16	13/16	8000 (551)	GFSBHMC-4-4N
1/2	1/4	10.2	7.1	59.4	19.1	31.5	14.2	16.8	9.7	15/16	13/16	4300 (296)	GFSBHMC-8-4N

Dimensions are for reference only and are subject to change

Straight Thread O-Ring Seal Male Connector

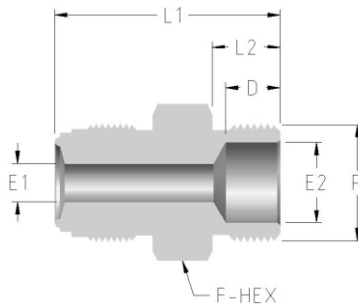


Standard Configuration Dimensions

Face Seal Size	SAE/MS Straight Thread	Dimensions in mm					F-Hex (Inch)	Uniform 'O' Ring Size	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		P	D	E1	E2	L1				
1/4	9/16-18	6.4	4.6	7.1	33.8	9.9	3/4	906 Flurocarbon	4500 (310)	GFSMC-4-9SE
1/2	7/8-14	10.2	7.1	15.0	42.2	12.7	1	910 Flurocarbon	3500 (241)	GFSMC-8-14SE
1/2	9/16-18	-	7.1	7.1	37.6	9.9	15/16	906 Flurocarbon	3500 (241)	GFSMC-8-9SE

Dimensions are for reference only and are subject to change

Female Connector (NPT Thread)





Standard Configuration Dimensions

Face Seal Size	NPT Female Thread	Dimensions in mm		F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E	L			
1/4	1/4	4.6	39.1	5/8	6600 (454)	GFSFC-4-4N
1/2	3/8	10.2	44.7	15/16	4300 (296)	GFSFC-8-6N
1/2	1/2	10.2	50.5	15/16	4300 (296)	GFSFC-8-8N
3/4	3/4	15.7	59.9	15/16	3700 (254)	GFSFC-12-12N
1	1	22.1	63.8	1-5/8	3000 (206)	GFSFC-16-16N

Dimensions are for reference only and are subject to change

METAL GASKET FACE SEAL FITTINGS BODIES

Compression Tube Fitting Connector





Standard Configuration Dimensions

Face Seal Size	Tube OD	Dimensions in mm				F-Hex (Inch)	G-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		T	D	E	L1				
1/4	1/4	15.2	4.6	41.1	17.8	5/8	9/16	10,000 (689)	GFSTFC-4-4
1/2	3/8	16.8	7.1	46.7	19.3	15/16	11/16	4300 (296)	GFSTFC-8-6
1/2	1/2	22.9	10.2	49.5	21.8	15/16	7/8	4300 (296)	GFSTFC-8-8

Dimensions are for reference only and are subject to change.

Compression Tube Fitting Bulkhead Connector

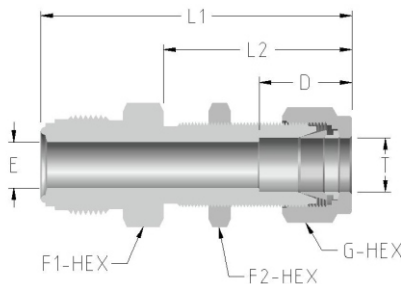



Standard Configuration Dimensions

Face Seal Size	Tube OD	Dimensions in mm						F1-Hex (Inch)	F2-Hex (Inch)	G-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		T	D	E	L1	L2	Panel Hole Size					
1/4	1/4	15.2	4.6	57.2	33.5	11.9	10.2	5/8	5/8	9/16	10,000 (689)	GFSTFBC-4-4/57
1/4	1/4	15.2	4.6	47.8	26.7	11.9	3.3	5/8	5/8	9/16	10,000 (689)	GFSTFBC-4-4/47
1/2	3/8	16.8	7.1	64.5	36.8	15.0	11.2	15/16	3/4	11/16	4300 (296)	GFSTFBC-8-6
1/2	1/2	22.9	10.2	69.6	41.9	19.8	12.7	15/16	15/16	7/8	4300 (296)	GFSTFBC-8-8

Dimensions are for reference only and are subject to change.

Male Union




Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L			
1/4	4.6	39.4	5/8	10,000 (689)	GFSMU-4
1/2	10.2	46.7	15/16	4300 (296)	GFSMU-8
3/4	15.7	62.0	15/16	3700 (254)	GFSMU-12
1	22.1	65.8	1-5/8	3000 (206)	GFSMU-16

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS BODIES

Male Reducing Union

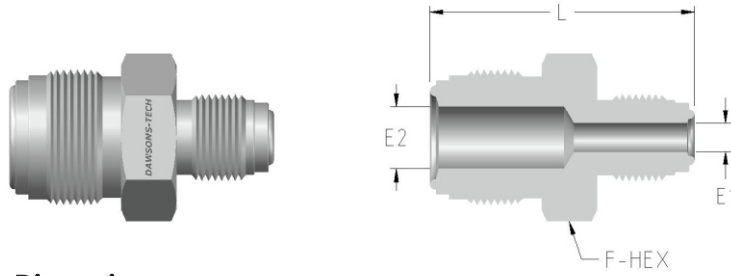


Standard Configuration Dimensions

Face Seal Size	Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E1	E2	L			
1/2	1/4	10.2	4.6	43.4	15/16	4300 (296)	GFSMRU-8-4

Dimensions are for reference only and are subject to change

Male Bulkhead Union

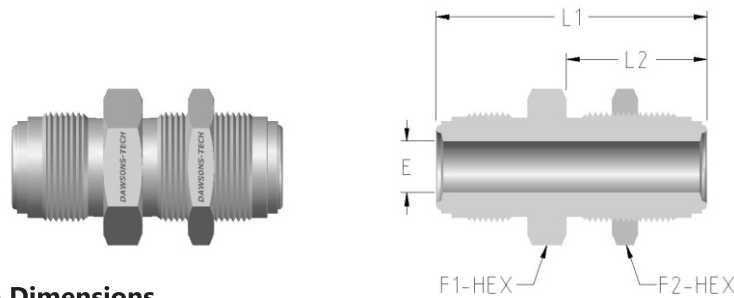


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm					F1-Hex (Inch)	F2-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L1	L2	Panel Hole Size	Max Panel Thickness				
1/4	4.6	56.6	33.0	15.0	11.2	3/4	3/4	10,000 (689)	GFSMBU-4/56
1/4	4.6	46.2	25.1	15.0	3.3	3/4	3/4	10,000 (689)	GFSMBU-4/46
1/2	10.2	65.3	37.6	23.1	12.7	1-1/16	1-1/16	4300 (296)	GFSMBU-8/65
1/2	10.2	54.4	28.2	23.1	3.3	1-1/16	1-1/16	4300 (296)	GFSMBU-8/54

Dimensions are for reference only and are subject to change.

Tube Butt Weld Bulkhead Connector

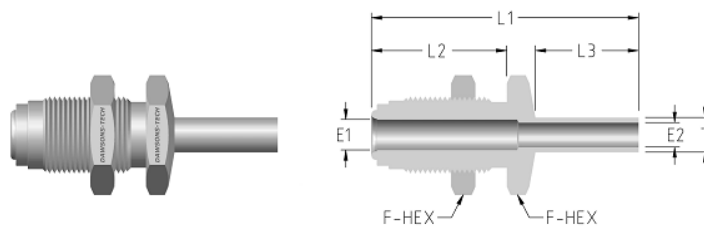



Standard Configuration Dimensions

Face Seal Size	Tube OD	Dimensions in mm/inch							F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	T	E1	E2	L1	L2	L3	Panel Hole Size	Max Panel Thickness			
1/4	1/4	5.6	4.6	59.9	33.0	19.1	15.0	11.2	3/4	5100 (351)	GFSTBC-4-4BW59
1/4	1/4	5.6	4.6	49.5	25.1	19.1	15.0	3.3	3/4	5100 (351)	GFSTBC-4-4BW49

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS BODIES

Coupling





Standard Configuration Dimensions

Face Seal Size	Dimensions in mm			F-Hex (Inch)	Dawsons-Tech Part No.
	L				
1/4	30.2			3/4	GFSBG-4
1/2	33.3			1-1/16	GFSBG-8
3/4	42.7			1-1/2	GFSBG-12
1	51.8			1-3/4	GFSBG-16

Dimensions are for reference only and are subject to change.

Female Reducing Union





Standard Configuration Dimensions

Face Seal Size	Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E	L	X			
1/2	1/4	6.4	35.8	8.9	1-1/16	4300 (296)	GFSFRU-8-4

Dimensions are for reference only and are subject to change.

Reducing Adaptor





Standard Configuration Dimensions

Face Seal Size	Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E	L	X			
1/2	1/4	4.6	35.8	21.6	1-1/16	4300 (296)	GFSFRA-8-4

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS BODIES

Reducing Bushing




Standard Configuration Dimensions

Face Seal Size	Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E	L	X			
1/2	1/4	6.4	35.8	23.1	15/16	4300 (296)	GFSFRB-8-4

Dimensions are for reference only and are subject to change

Male Elbow (NPT Thread)

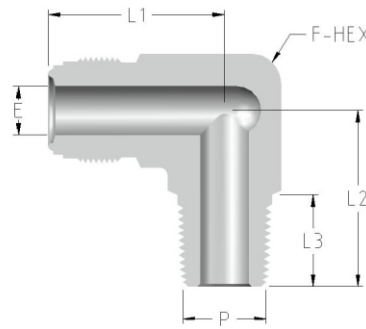


Standard Configuration Dimensions

Face Seal Size	NPT Male Thread	Dimensions in mm/inch				F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		P	E	L1	L2			
1/4	1/4	1/4	4.6	27.2	26.7	14.2	8000 (551)	GFSME-4-4N
1/2	3/8	3/8	10.2	36.8	32.0	14.2	4300 (296)	GFSME-8-6N
1/2	1/2	1/2	10.2	36.8	36.8	19.1	4300 (296)	GFSME-8-8N

Dimensions are for reference only and are subject to change.

Union Elbow

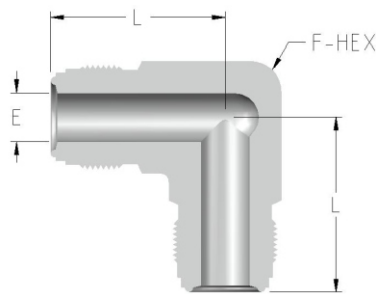


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L			
1/4	4.6	27.2	1/2	10,000 (689)	GFSUE-4
1/2	10.2	36.8	13/16	4300 (296)	GFSUE-8
3/4	15.7	48.8	1-1/4	3700 (254)	GFSUE-12
1	22.1	50.8	1-11/16	3000 (206)	GFSUE-16

Dimensions are for reference only and are subject to change

METAL GASKET FACE SEAL FITTINGS BODIES

Union Tee

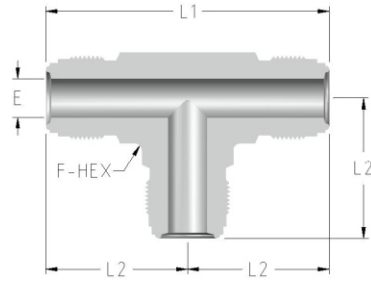


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L1	L2			
1/4	4.6	54.4	27.2	1/2	10,000 (689)	GFSUT-4
1/2	10.2	73.7	36.8	13/16	4300 (296)	GFSUT-8
3/4	15.7	97.5	48.8	1-1/4	3700 (254)	GFSUT-12
1	22.1	102.0	50.8	1-11/16	3000 (206)	GFSUT-16

Dimensions are for reference only and are subject to change.

Union Cross





Standard Configuration Dimensions

Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L1	L2			
1/4	4.6	54.4	27.2	1/2	10,000 (689)	GFSUC-4
1/2	10.2	73.7	36.8	13/16	4300 (296)	GFSUC-8
3/4	15.7	97.5	48.8	1-1/4	3700 (254)	GFSUC-12
1	22.1	102.0	50.8	1-11/16	3000 (206)	GFSUC-16

Dimensions are for reference only and are subject to change.

NUTS, CAPS & PLUGS

Female Nut




Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	L	TX		
1/4	20.6	9.1	3/4	GFSFN-4
1/2	22.4	15.5	1-1/16	GFSFN-8
5/8	22.4	18.8	1-3/16	GFSFN-10
3/4	28.4	22.6	1-1/2	GFSFN-12
1	34.0	30.5	1-3/4	GFSFN-16

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS NUTS, CAPS & PLUGS

Male Nut

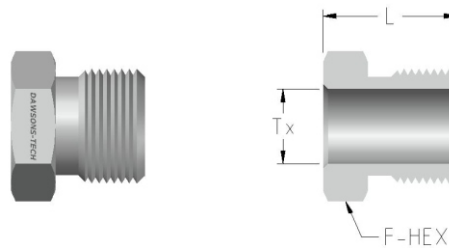


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	L	TX		
1/4	18.0	9.1	5/8	GFSMN-4
1/2	20.6	15.5	15/16	GFSMN-8
5/8	20.6	18.8	1-1/16	GFSMN-10
3/4	25.4	22.6	1-5/16	GFSMN-12
1	30.2	30.5	1-5/8	GFSMN-16

Dimensions are for reference only and are subject to change.

Short Male Nut (For use with short Gland)

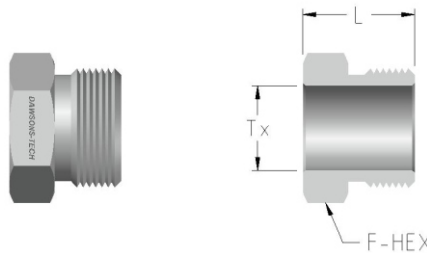


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	L	TX		
1/4	13.7	9.1	5/8	GFSSMN-4/13
1/4	16.5	9.1	5/8	GFSSMN-4/16

Dimensions are for reference only and are subject to change.

Cap

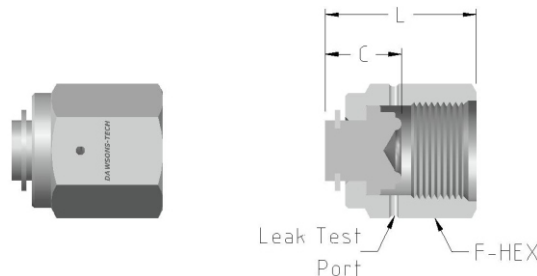


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	C	L		
1/4	11.2	23.9	3/4	GFSCP-4
1/2	11.4	25.6	1-1/16	GFSCP-8
3/4	13.7	32.8	1-1/2	GFSCP-12
1	16.0	39.1	1-3/4	GFSCP-16

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS NUTS, CAPS & PLUGS

Plug

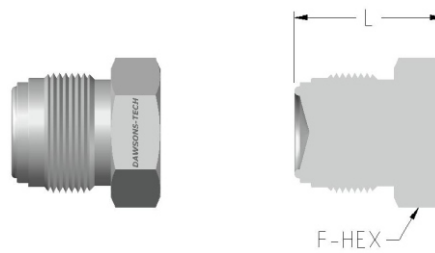


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	L			
1/4	23.4		5/8	GFSP-4
1/2	27.4		15/16	GFSP-8
3/4	36.3		1-5/16	GFSP-12
1	38.6		1-5/8	GFSP-16

Dimensions are for reference only and are subject to change.

MAX FLOW - GLAND

Tube Butt Weld

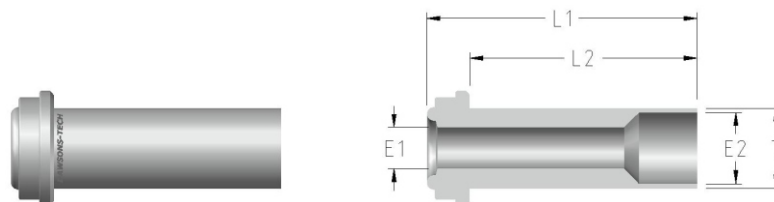


Standard Configuration Dimensions

Face Seal Size	Tube OD T	Dimensions in mm/inch				Wall Thickness	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E1	E2	L1	L2			
1/4	3/8	6.4	7.9	15.2	10.4	0.035	3300 (227)	GFSMFTG-4-6BW/15
1/4	3/8	6.4	7.9	30.2	25.4	0.035	3300 (227)	GFSMFTG-4-6BW/30
1/4	3/8	6.4	7.9	33.3	28.4	0.035	3300 (227)	GFSMFTG-4-6BW/33

Dimensions are for reference only and are subject to change.

MAX FLOW - BODIES

Tube Butt Weld

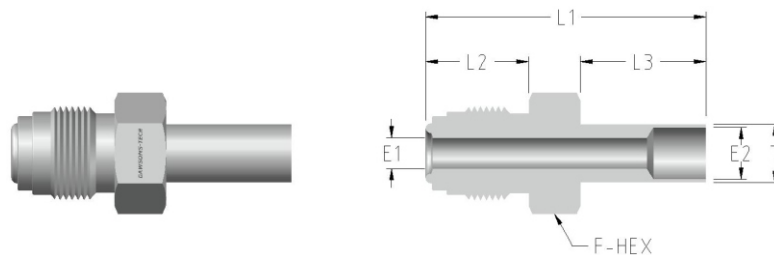


Standard Configuration Dimensions

Face Seal Size	Tube OD T	Dimensions in mm					F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		E1	E2	L1	L2	L3			
1/4	3/8	6.4	7.9	42.7	15.7	19.1	5/8	3300 (227)	GFSMFB-4-6BW

Dimensions are for reference only and are subject to change.

MAX FLOW - BODIES

Automatic Tube Weld

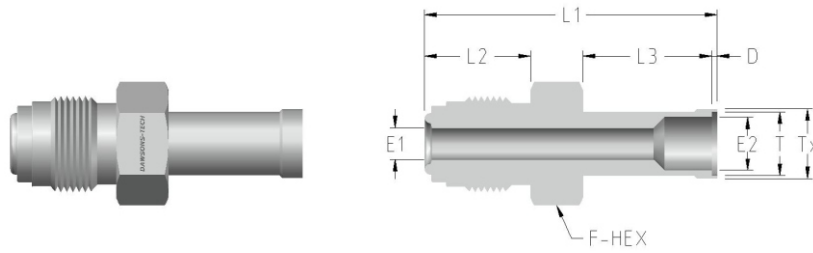


Standard Configuration Dimensions

Face Seal Size	Tube OD	Dimensions in mm							F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		T	D	E1	E2	L1	L2	L3			
1/4	3/8	0.8	6.4	7.9	43.4	15.7	19.1	10.4	5/8	3300 (227)	GFSMFA-4-6TW

Dimensions are for reference only and are subject to change.

Bulkhead Connector

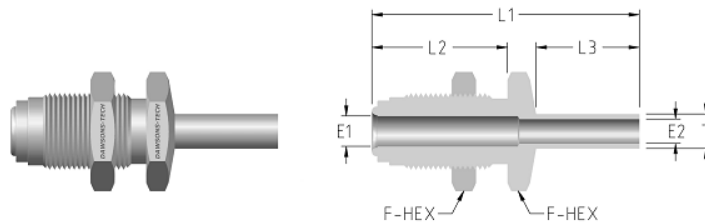


Standard Configuration Dimensions

Face Seal Size	Tube OD	Dimensions in mm							F-Hex	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
		T	E1	E2	L1	L2	L3	Panel Hole Size			
1/4	3/8	7.9	6.4	59.9	33.0	19.1	15.0	11.2	3/4	3300 (227)	GFSMFBC-4-6

Dimensions are for reference only and are subject to change.

Union Elbow

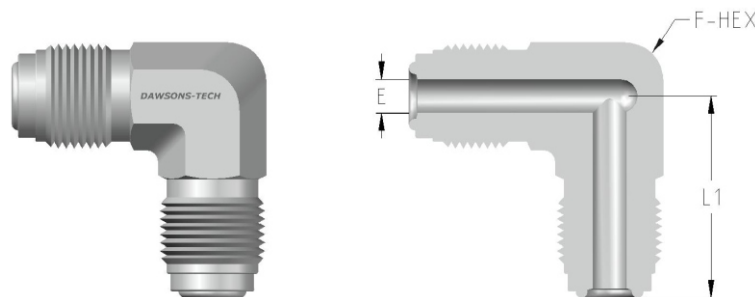


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L			
1/4	6.4	27.2	1/2	10,000 (689)	GFSMFUE-4

Dimensions are for reference only and are subject to change.

MAX FLOW - BODIES

Union Tee

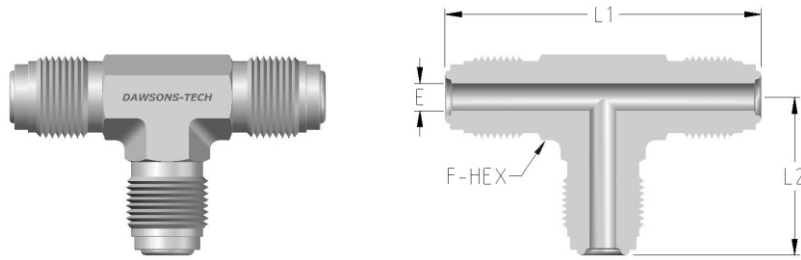


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm			F-Hex (Inch)	Working Pressure PSIG (Bar)	Dawsons-Tech Part No.
	E	L1	L2			
1/4	6.4	54.4	27.2	1/2	10,000 (689)	GFSMFUT-4

Dimensions are for reference only and are subject to change.

MAX FLOW - NUTS

Female Nut

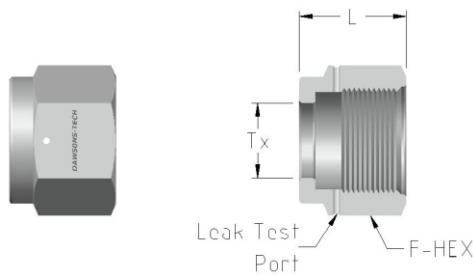


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	L	Tx		
1/4	20.6	9.9	3/4	GFSMFFN-4/9
1/4	20.6	11.7	3/4	GFSMFFN-4/11

Dimensions are for reference only and are subject to change.

Male Nut

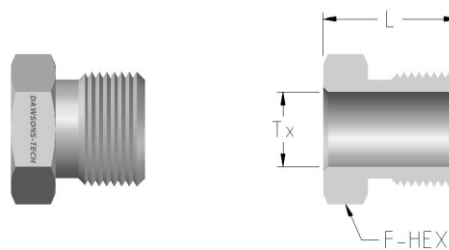

Standard Configuration Dimensions


Face Seal Size	Dimensions in mm		F-Hex (Inch)	Dawsons-Tech Part No.
	L	Tx		
1/4	18.0	9.9	5/8	GFSMFMN-4

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS

GASKETS

Non-retained (Silver Plated) (Cannot be used in a Gasket Retainer Assembly)

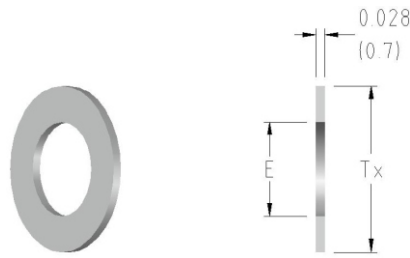


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		Dawsons-Tech Part No.
	E	Tx	
1/4	5.6	11.9	GFSGNR-4SP
1/2	11.2	19.8	GFSGNR-8SP
5/8	14.7	23.1	GFSGNR-10SP
3/4	16.8	29.0	GFSGNR-12SP
1	22.6	35.6	GFSGNR-16SP

Dimensions are for reference only and are subject to change.

Non-retained (Un-Plated)

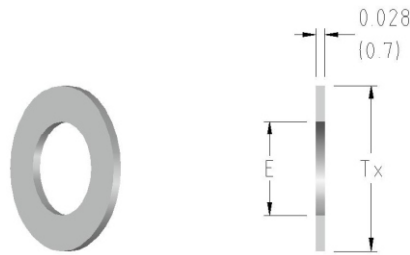


Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		Dawsons-Tech Part No.
	E	Tx	
1/4	5.6	11.9	GFSGNR-4UP
1/2	11.2	19.8	GFSGNR-8UP
5/8	14.7	23.1	GFSGNR-10UP
3/4	16.8	29.0	GFSGNR-12UP
1	22.6	35.6	GFSGNR-16UP

Dimensions are for reference only and are subject to change.

Gasket Retainer Assembly (Silver Plated) (Retainer & Gasket must be used as an assembly)

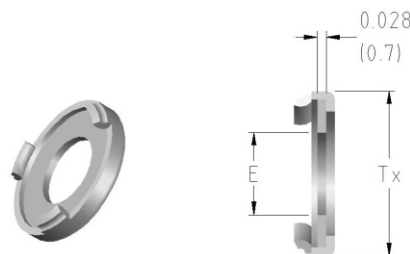

Standard Configuration Dimensions


Face Seal Size	Dimensions in mm		Dawsons-Tech Part No.
	E	Tx	
1/4	6.1	12.7	GFSGRA-4SP
1/2	11.2	20.1	GFSGRA-8SP
3/4	16.8	29.0	GFSGRA-12SP
1	22.6	35.6	GFSGRA-16SP

Dimensions are for reference only and are subject to change.

METAL GASKET FACE SEAL FITTINGS

GASKETS

Gasket Retainer Assembly (Un-Plated)



Standard Configuration Dimensions

Face Seal Size	Dimensions in mm		Dawsons-Tech Part No.
	E	Tx	
1/4	6.1	12.7	GFSGRA-4UP
1/2	11.2	20.1	GFSGRA-8UP
3/4	16.8	29.0	GFSGRA-12UP
1	22.6	35.6	GFSGRA-16UP

Dimensions are for reference only and are subject to change.

ORDERING INFORMATION : (GLANDS - FRACTIONAL)

For Example : PART NO. : GFSLTG-12-12BW-SS

Type of Fittings	Face Seal Size	Tube OD Size	Tube OD Type	Material of Construction
GFSLTG	12	12	BW	SS
Long Tube Gland	3/4"	3/4"	Butt Weld	SS316

ORDERING INFORMATION : (GLANDS - METRIC)

For Example : PART NO. : GFSLTG-8-12MBW-SS

Type of Fittings	Face Seal Size	Tube OD Size	Tube OD Type	Material of Construction
GFSLTG	8	12M	BW	SS
Long Tube Gland	1/2"	12mm	Butt Weld	SS316

ORDERING INFORMATION : (BODIES - FRACTIONAL)

For Example : PART NO. : GFSMC-8-8N-SS

Type of Fittings	Face Seal Size	End Connection Thread Size	End Connection Thread Type	Material of Construction
GFSMC	8	8	N	SS
Male Connector	1/2"	1/2"	NPT	SS316

PART NO. CODE DESCRIPTION :

Face Seal Size			
Fractional Tube		Metric Tube	
4	1/4"	6M	6mm
6	3/8"	8M	8mm
8	1/2"	10M	10mm
12	3/4"	12M	12mm
16	1"	18M	18mm


End Connection Size Tube OD			
Fractional Tube		Metric Tube	
4	1/4"	6M	6mm
6	3/8"	8M	8mm
8	1/2"	10M	10mm
12	3/4"	12M	12mm
16	1"	18M	18mm

Pipe End Connection Thread Size	Fractional	
	4	1/4"
	6	3/8"
	8	1/2"
	9	9/16"
	12	3/4"
	14	7/8"
	16	1"

End Connection Thread Type	N : NPT
	SE : Straight Thread
	BW : Butt Weld
	SW : Socket Weld
	MW : Male Weld

Material of Construction	SS : SS316
	SSL : SS316L


End Connection Thread Type	V : Fluorocarbon
	R : Nitrile
	E : EPDM
	Z : Neoprene

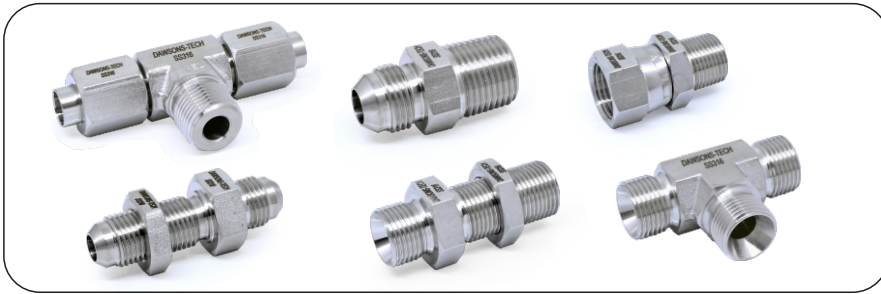

37° Flare Fittings / BSP 60° Cone Fittings




Precision Threaded / Socket /
Butt Weld Pipe Fittings & Adapters

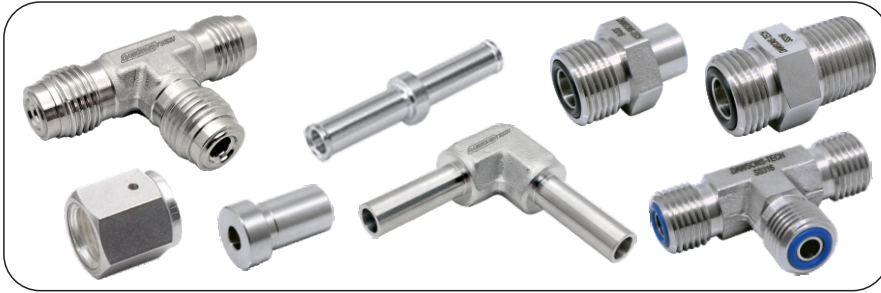


High Purity Fittings



Wellhead Grease / Bleed Fittings
& Components

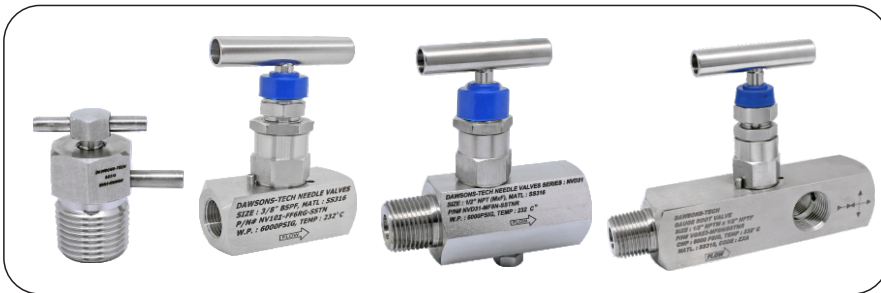

Instrumentation Valves

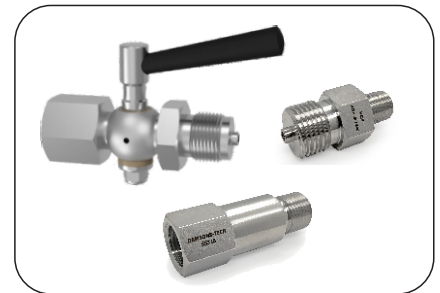

Gauge Cock & Accessories



High Pressure Ball Valves



Check Valves



Quick Connect Couplings to ISO 16028 & ISO 7241-1 Series B



Customized Fittings and Valves



Registered Office and Manufacturing Plant:

DAWSONS-TECH COMPONENTS LLP

Unit No. DD - 6 & 7, Khan Real Industrial Estate,

N. H. 08, Pelhar, Vasai Phata, Vasai (East),

Dist. Palghar - 401 208, Maharashtra, India.

Mobile : +91-9833355596

Email : info@dawsonstech.com

Website: www.dawsonstech.com

LLPIN: AAN-0434

Catalogue No. GFS-19