

ARKSEN

35 Gallon Gas Caddy

Model# 002-AU-30035
OWNER'S MANUAL



CONTACT INFO
www.arksenusa.com
(949) 344-2588

CAUTION! Do not use this device before reading these instructions.

Contents

GENERAL SAFETY	03
IDENTIFICATION OF PARTS	04
FIRST TIME INSTRUCTIONS	06

INSTRUCTIONS PERTAINING TO THE RISK OR INJURY TO PERSONS.

IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.



**READ THIS MANUAL CAREFULLY BEFORE INSTALLING,
OPERATING OR SERVICING THIS EQUIPMENT**

It is the responsibility of the employer to place this information in the hands of the operator. Keep for future reference.

⚠ DANGER

Gasoline and other fuels are extremely flammable. Keep away from heat sparks, and open flames as an explosion will result in severe personal injury.

- Do not use electronics or mobile communications devices such as mobile phones while pumping flammable liquids.
- Attach ground wire and bond containers that are being pump from and into. Ground all containers to a known ground source to dissipate static electricity before pumping liquids
- Gasoline vapors can explode. Harmful or fatal is swallowed. Avoid breathing fuel vapors
- Do not smoke near or while using this gas caddy.
- This product is intended for fuel transfer only and is not to be used to transport fuel in any vehicle or trailer.
- Do not modify this tank or product.

⚠ WARNING

- When using this product basic precautions should always be followed, including the following;
 1. Read all instructions before using this product
 2. To reduce the risk of injury, close supervision is necessary.
 3. Keep out of reach of children
 4. Do not put fingers or hands into openings or into the pump
- Personnel should always wear proper personal protection equipment and clothing
- Ensure that all fittings and threaded hose and pipe connections are tightened and lead free.

⚠ CAUTION





Not for prolonged storage of fuel.


- Use caddy for "one type of fuel only" to avoid possible damage to vehicle
- Monitor flow rate and fill levels to prevent overflows and spills. Do not overfill containers, drums or tanks.
- Always empty the pump and hose after use by lifting the hose and turning the handle in the opposite direction of the arrow to empty all remaining liquids back into the caddy.
- Use caution when filling through the fill tube. Monitor closely to prevent overflows and pills.
- Use care when maneuvering to prevent injury or loss of control. Seek assistance to avoid strain or injury where required.

IDENTIFICATION OF PARTS

Read the owner's manual and safety instructions carefully before operating the gas caddy. Compare the illustration below to the gas caddy in order to familiarize yourself with the location of the various controls and adjustments. Save this manual for future reference.

- A. Clamp
- B. 3.5 M Plastic wire tube
- C. Tube Connector
- D. Earth wire with clip
- E. Plastic nut
- F. Fuel Measure gauge
- G. Oil pump
- H. Plastic dome
- I. Metal Floater (inner the body)
- J. Lock nut
- K. 10' solid rubber wheel
- L. Wheel axel
- M. Matel Washer
- N. M18 cap nut
- O. Matel Washer
- P. M8 nut
- Q. 3' universal wheel with brake
- R. M8*40 hex bolt
- S. Oil Cap
- T. Oil Filter
- U. Handle
- V. Steel body
- W. Teflon tape
- X. Pump handle
- Y. Foot

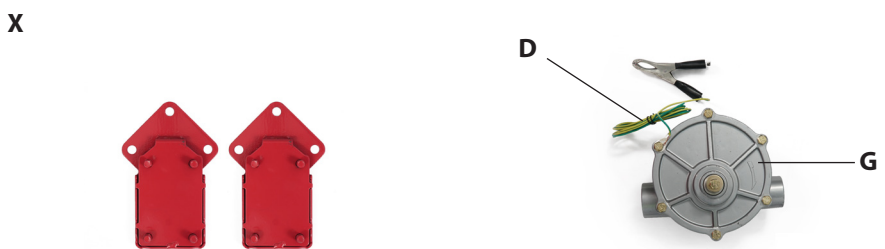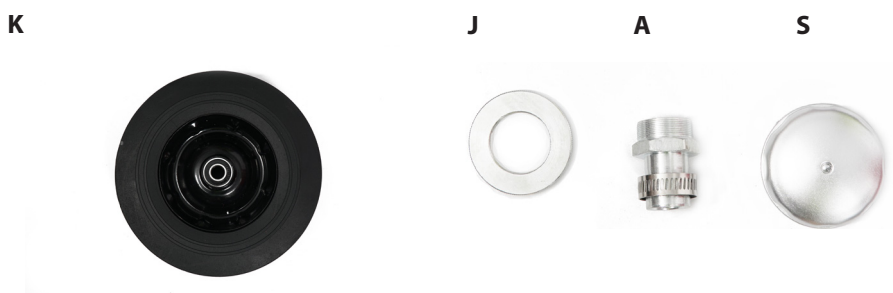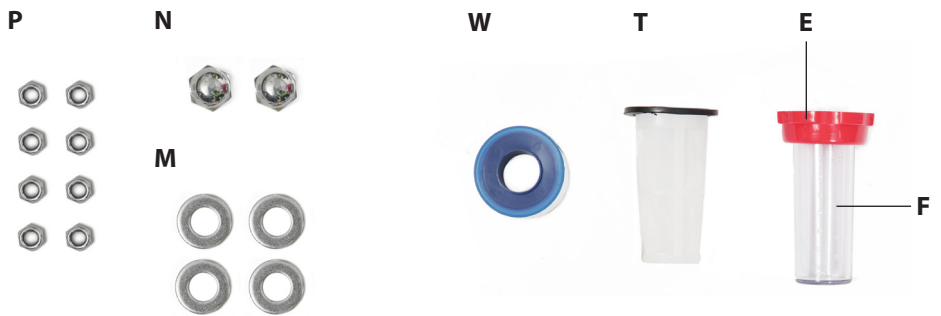

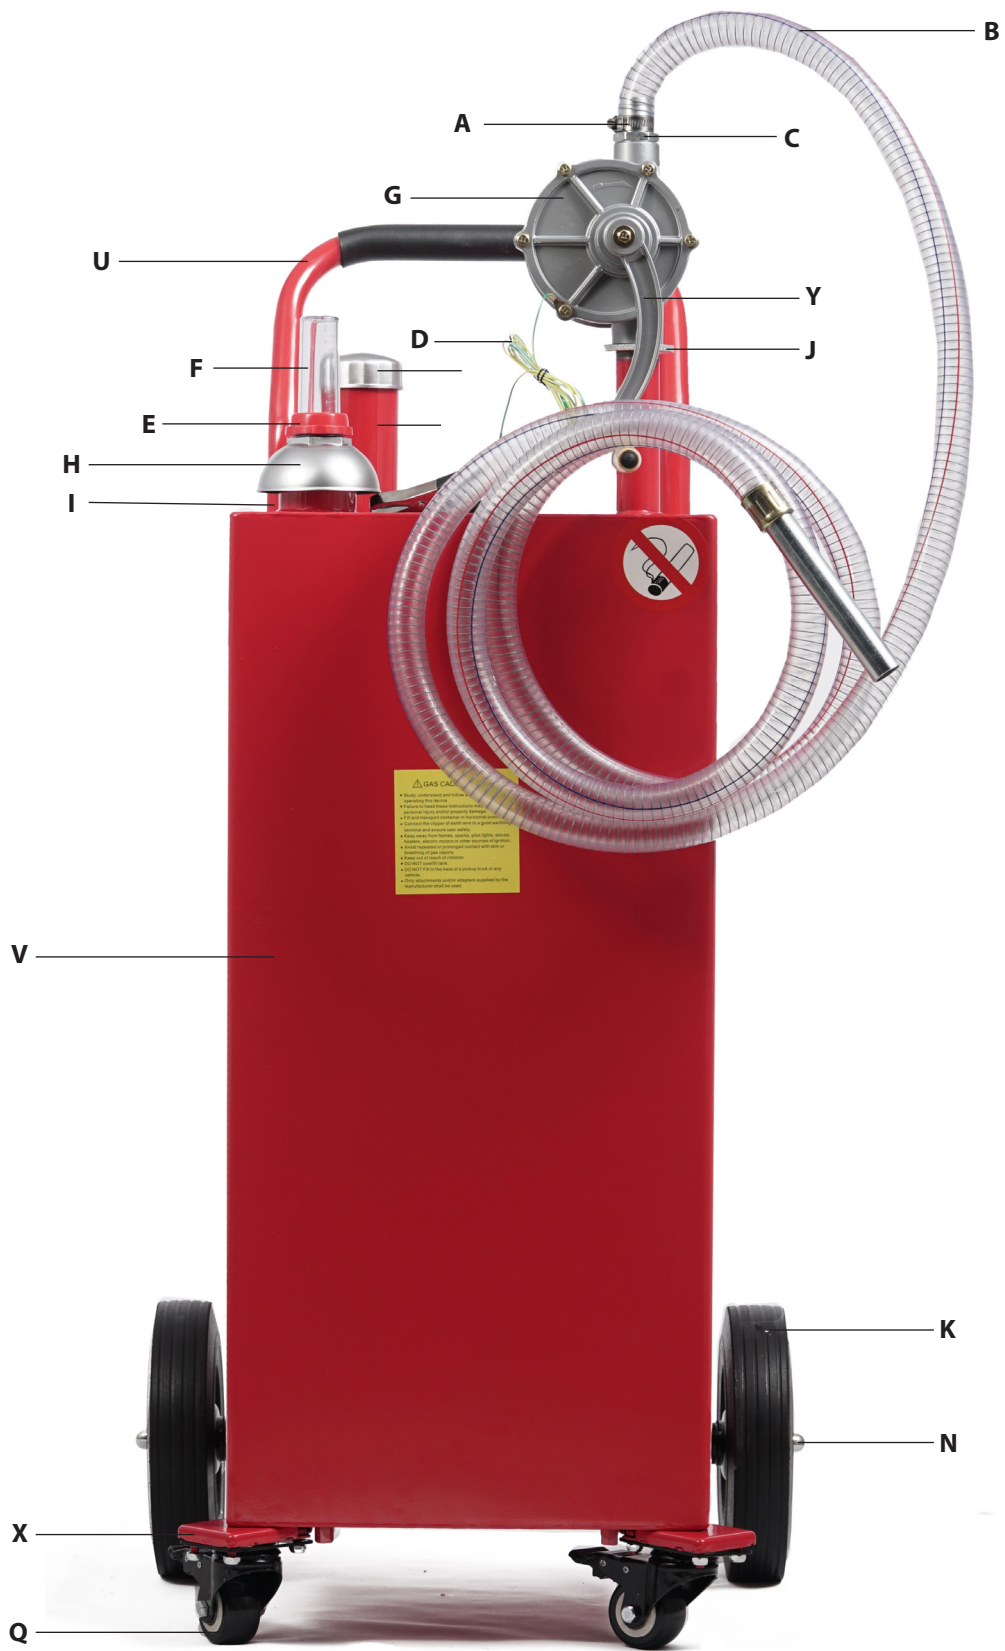

FIRST TIME INSTRUCTIONS

STEP ONE:

Tilt caddy frontwards (handle up). Take wheel axle and insert 018 washers to the end of wheel axle (see image below). Insert the metal shaft to the caddy.



STEP FOUR:

Take the 3" universal wheels with brakes and attach to the red foot on each side. Take the (8) M8 Lock nuts and screw on to each side so that wheels are secure. Tilt the caddy back to its standing position.



STEP TWO:

Put wheels on and follow with washers and cap nuts on the wheel axel. Tighten cap nut with a wrench.



STEP FIVE:

Take Teflon tape and wrap tightly around the pump pipe 5-8 times. Screw on oil pump and use the wedge lock washer to position pump and tighten.




STEP THREE:

Remove the 3 red hex nuts from bottom of each side of caddy. Attach the red foot and then re-screw the 3 red hex nuts to each side.




STEP SIX:

Take Teflon tape and wrap around the pump connector 5-8 times, wrapping tightly. Assemble oil tube to oil pump and secure with clamp.

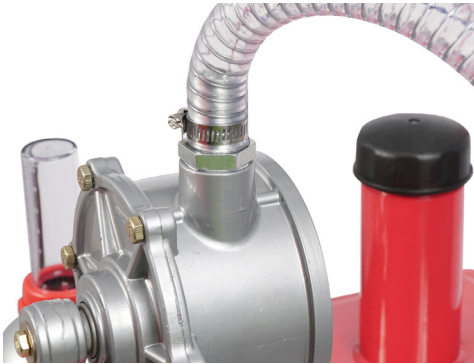

STEP SEVEN:

Attach pump handle to oil pump.

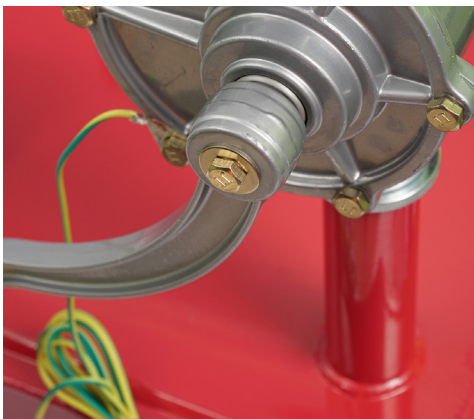

STEP EIGHT:

Take Teflon tape and wrap around the thread of plastic dome 5-8 times. Install fuel level gauge on plastic dome and tighten.



STEP NINE:

Drop oil filter in the oil inlet and screw on the oil cap securely.



STEP TEN:

Attach handle to the caddy and lock into place.



