



**Through-The-Wall Air Conditioner
Cooling Only**
Available in 8, 10 & 12K BTU
2016 ENERGY STAR® Certified

Specifications

Voltage (Unit Specific)	115 or 230/208 VAC
Frequency	60 Hz
Plug	Prewired LCDI NEMA Type
Control Panel	Digital Display & Interface
Temperature Display	Fahrenheit or Celsius
Timer Settings	Up to 24 Hours
Fan Speeds	High/Medium/Low
Refrigerant	Eco-Friendly R-410A
Filter	Reusable
Directional Air Louvers	4-Way Manual Control
Wireless Remote	Included
Universal Trim Kit	Included
Rear Grille	Included

Mode Selection

Choose between fan, cooling, dehumidifying & automatic operation.

Sleep Feature

Slowly increases room temperature by 4°F when activated and returns to the original temperature setting after 7 hours.

Energy Saver Feature

Optimally manages system operation to minimize power consumption.

Follow-Me Feature

Automatically adjusts thermostatic performance based on location of the remote.

Check Filter Indicator

Light illuminates to notify when the filter needs to be cleaned or replaced.

Auto-Restart

If power loss occurs, the system will automatically resume operation based on previous settings.

Optimal Conditions for Cooling

- Outdoor Temperature: 64-109°F
- Indoor Temperature: 62-90°F

Certifications

- C-UL-US
- 2016 ENERGY STAR®
- CEC & DOE Listed

Warranties

- 2-Year Limited Warranty on Entire Unit
- 5-Year Limited Warranty on Sealed System

Accessories & Replacement Parts

- All models fit wall sleeve 1028309:
Size (WxHxD): 25-1/2" x 15-1/4" x 7-1/2"





NEMA Receptacle Configuration.





5-15P



6-15P

For Compatibility, Match to NEMA Plug.

Garrison Model #	2498540	2498541	2498542	2498543	2498544
Cooling Performance					
Capacity (BTU/Hr)	8,000	10,000	10,000/9,800	12,000	12,000/11,700
Current	7.0 A	8.3 A	4.5/4.8 A	10 A	5.2/5.6 A
Input Power	754 W	943 W	943/924 W	1,142 W	1,142/1,114 W
Refrigerant Charge Amount	17.64 Oz.	20.81Oz.	21.87 Oz.	21.87 Oz.	21.87 Oz.
Design Pressure (High/Low)	520/300 PSIG	520/300 PSIG	520/300 PSIG	520/300 PSIG	520/300 PSIG
General Performance					
EER	10.6	10.6	10.6	10.5	10.5
Airflow CFM (H/M/L)	270/235/202	269/235/203	275/240/209	286/264/240	286/264/240
Room Area	300-350 Ft. ²	400-450 Ft. ²	400-450 Ft. ²	450-550 Ft. ²	450-550 Ft. ²
Max. Indoor Sound Level	57 dBA	57 dBA	58 dBA	61 dBA	61 dBA
Dehumidification Rate	2.1 Pt./Hr	2.3 Pt./Hr	2.3 Pt./Hr	2.5 Pt./Hr	2.5 Pt./Hr
Electrical Specifications					
Voltage	115 VAC	115 VAC	230/208 VAC	115 VAC	230/208 VAC
Frequency	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.
NEMA Plug Configuration	5-15P	5-15P	6-15P	5-15P	6-15P
Power Cord Length	7 Ft.	7 Ft.	6-1/2 Ft.	7 Ft.	6-1/2 Ft.
Dimensions					
Net Weight	65 Lbs.	68 Lbs.	69 Lbs.	76 Lbs.	78 Lbs.

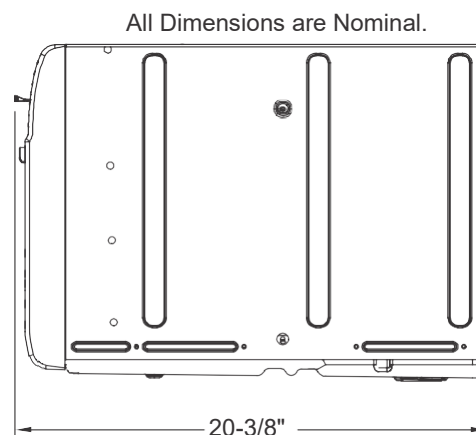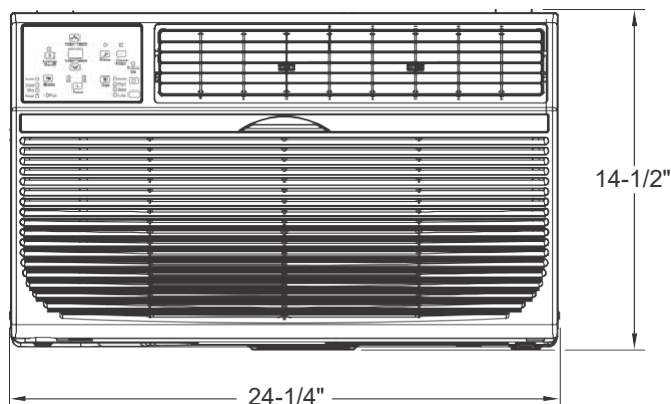



**Through-The-Wall Air Conditioner
Cooling Only
Available in 14K BTU**

Specifications

Voltage	230/208 VAC
Frequency	60 Hz
Plug	Prewired LCDI NEMA Type
Control Panel	Digital Display & Interface
Temperature Display	Fahrenheit or Celsius
ON/Off Timer Settings	Up to 24 Hours
Fan Speeds	High, Medium & Low
Refrigerant	Eco-Friendly R-410A
Filter	Reusable
Directional Air Louvers	4-Way Manual Control
Wireless Remote	Included
Universal Trim Kit	Included
Rear Grille	Included

Mode Selection

Choose between fan, cooling, dehumidifying & automatic operation.

Sleep Feature

Slowly increases room temperature by 4°F when activated and returns to the original temperature setting after 7 hours.

Energy-Saver Feature

Optimally manages system operation to minimize power consumption.

Follow-Me Feature

Automatically adjusts thermostatic performance based on location of the remote.

Check Filter Indicator

Filter light illuminates to notify when the filter needs to be cleaned or replaced.

Auto Restart

If power loss occurs, the system will automatically resume operation based on previous settings.

Optimal Conditions for Cooling

- Outdoor Temperature: 64-109°F
- Indoor Temperature: 62-90°F

Certifications

- C-UL-US

Warranties

- 2-Year Limited Warranty on Entire Unit
- 5-Year Limited Warranty on Sealed System

Accessories & Replacement Parts

- Fits 1028309 (sold separately)
- Size (WxHxD): 25-1/2" x 15-1/4" x 7-1/2"





NEMA Receptacle Configuration.



6-15P

For Compatibility, Match to NEMA Plug.

Garrison Model #	2477810
Cooling Performance	
Capacity (BTU/Hr)	14,000/13,600
Current	6.9/7.5 A
Input Power	1,505/1,462 W
Refrigerant Charge Amount	21.52 Oz.
Design Pressure (High/Low)	520/300 PSIG
General Performance	
EER	9.3
Airflow CFM(H/M/L)	296/275/253
Room Area	550-700 Ft. ²
Max. Indoor Sound Level	61 dBA
Dehumidification Rate	3.0 Pt./Hr
Electrical Specifications	
Voltage	230/208 VAC
Frequency	60 Hz.
NEMA Plug Configuration	6-15P
Power Cord Length	6-1/2 Ft.
Dimensions	
Net Weight	78 Lbs.

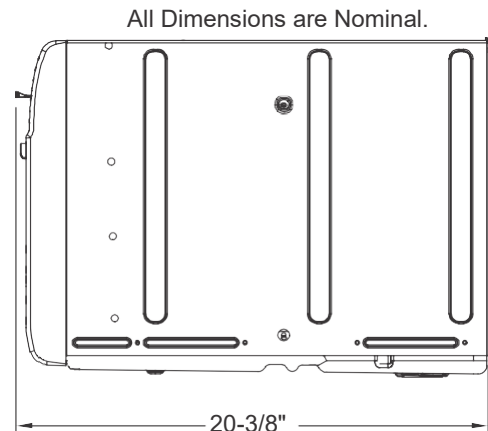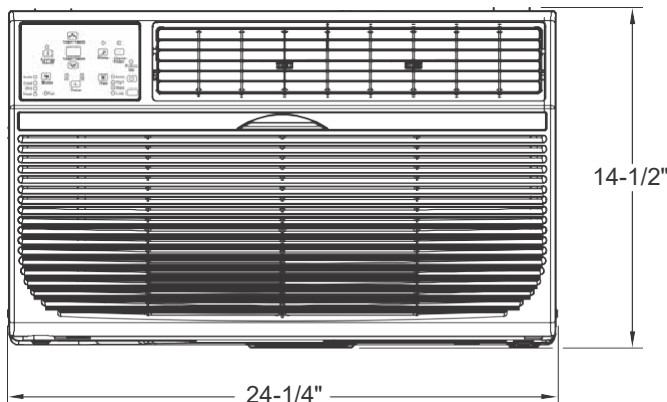



**Through-The-Wall Air Conditioner
Cooling Only**
Available in 8, 10 & 12K BTU
2016 ENERGY STAR® Certified

Specifications

Voltage (Unit Specific)	115 or 230/208 VAC
Frequency	60 Hz
Plug	Prewired LCDI NEMA Type
Control Panel	Digital Display & Interface
Temperature Display	Fahrenheit or Celsius
Timer Settings	Up to 24 Hours
Fan Speeds	High/Medium/Low
Refrigerant	Eco-Friendly R-410A
Filter	Reusable
Directional Air Louvers	4-Way Manual Control
Wireless Remote	Included
Universal Trim Kit	Included
Rear Grille	Included

Mode Selection

Choose between fan, cooling, dehumidifying & automatic operation.

Sleep Feature

Slowly increases room temperature by 4°F when activated and returns to the original temperature setting after 7 hours.

Energy Saver Feature

Optimally manages system operation to minimize power consumption.

Follow-Me Feature

Automatically adjusts thermostatic performance based on location of the remote.

Check Filter Indicator

Light illuminates to notify when the filter needs to be cleaned or replaced.

Auto-Restart

If power loss occurs, the system will automatically resume operation based on previous settings.

Optimal Conditions for Cooling

- Outdoor Temperature: 64-109°F
- Indoor Temperature: 62-90°F

Certifications

- C-UL-US
- 2016 ENERGY STAR®
- CEC & DOE Listed

Warranties

- 2-Year Limited Warranty on Entire Unit
- 5-Year Limited Warranty on Sealed System

Accessories & Replacement Parts

- All models fit wall sleeve 1028309:
Size (WxHxD): 25-1/2" x 15-1/4" x 7-1/2"





NEMA Receptacle Configuration.



5-15P

6-15P

For Compatibility, Match to NEMA Plug.

Garrison Model #	2498540	2498541	2498542	2498543	2498544
Cooling Performance					
Capacity (BTU/Hr)	8,000	10,000	10,000/9,800	12,000	12,000/11,700
Current	7.0 A	8.3 A	4.5/4.8 A	10 A	5.2/5.6 A
Input Power	754 W	943 W	943/924 W	1,142 W	1,142/1,114 W
Refrigerant Charge Amount	17.64 Oz.	20.81Oz.	21.87 Oz.	21.87 Oz.	21.87 Oz.
Design Pressure (High/Low)	520/300 PSIG	520/300 PSIG	520/300 PSIG	520/300 PSIG	520/300 PSIG
General Performance					
EER	10.6	10.6	10.6	10.5	10.5
Airflow CFM (H/M/L)	270/235/202	269/235/203	275/240/209	286/264/240	286/264/240
Room Area	300-350 Ft. ²	400-450 Ft. ²	400-450 Ft. ²	450-550 Ft. ²	450-550 Ft. ²
Max. Indoor Sound Level	57 dBA	57 dBA	58 dBA	61 dBA	61 dBA
Dehumidification Rate	2.1 Pt./Hr	2.3 Pt./Hr	2.3 Pt./Hr	2.5 Pt./Hr	2.5 Pt./Hr
Electrical Specifications					
Voltage	115 VAC	115 VAC	230/208 VAC	115 VAC	230/208 VAC
Frequency	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.
NEMA Plug Configuration	5-15P	5-15P	6-15P	5-15P	6-15P
Power Cord Length	7 Ft.	7 Ft.	6-1/2 Ft.	7 Ft.	6-1/2 Ft.
Dimensions					
Net Weight	65 Lbs.	68 Lbs.	69 Lbs.	76 Lbs.	78 Lbs.

