



Networking Heavy-Duty Vehicles Based on SAE J1939 From Parameter Group to plug-and-play Application


In networking ECUs in heavy-duty vehicles, it is the J1939 protocol that plays a key role. J1939 networks are based on the CAN bus (high-speed CAN per ISO11898); they are primarily used in powertrain and chassis components. The protocol creates a uniform basis for communication between electronic control units, and it supports the plug-and-play principle. Special J1939 tools and software components spare developers from needing to train in the details of the J1939 protocol, and they improve the quality of the development process.

The J1939 protocol – founded in the USA and defined by the Society of Automotive Engineers (SAE) – serves above all to preserve a uniform perspective and uniform handling of the most common vehicle components of various vehicle types and manufacturers. In this context, it is interesting to note certain distinct differences between the European and North-American heavy-duty vehicle markets. For example, heavy-duty vehicle buyers in the USA have prescribed to OEMs which components they need to install in specific vehicles. In Europe, on the other hand, it is the OEMs who fully define the design of the entire vehicle, including the components and their configuration. Besides using uniformly defined signals and data formats to communicate, it is of course important that receivers know how to interpret the information. Ideally, it should be possible to interconnect individual J1939 components based on a plug-and-play scheme. Despite all of its stand-

ardization aspects, J1939 gives OEMs sufficient freedom for customized extension of communication. This is especially important in promoting innovations, because no OEM wants to announce or discuss plans in working committees before their implementation.

ISO Layers Model decouples the Application from Transmission Physics

From the perspective of the ISO/OSI network model, J1939 is essentially based on the Application Layer (Layer 7), Network Layer (Layer 3), Data Link Layer (Layer 2) and Physical Layer (Layer 1) (Figure 1). This lets developers work with signals without needing to be concerned about communication details on the Application Level, such as details of the transport protocols. J1939 documentation and definition is oriented toward individual layers, and this is expressed in the names of the total of 14 documents of the

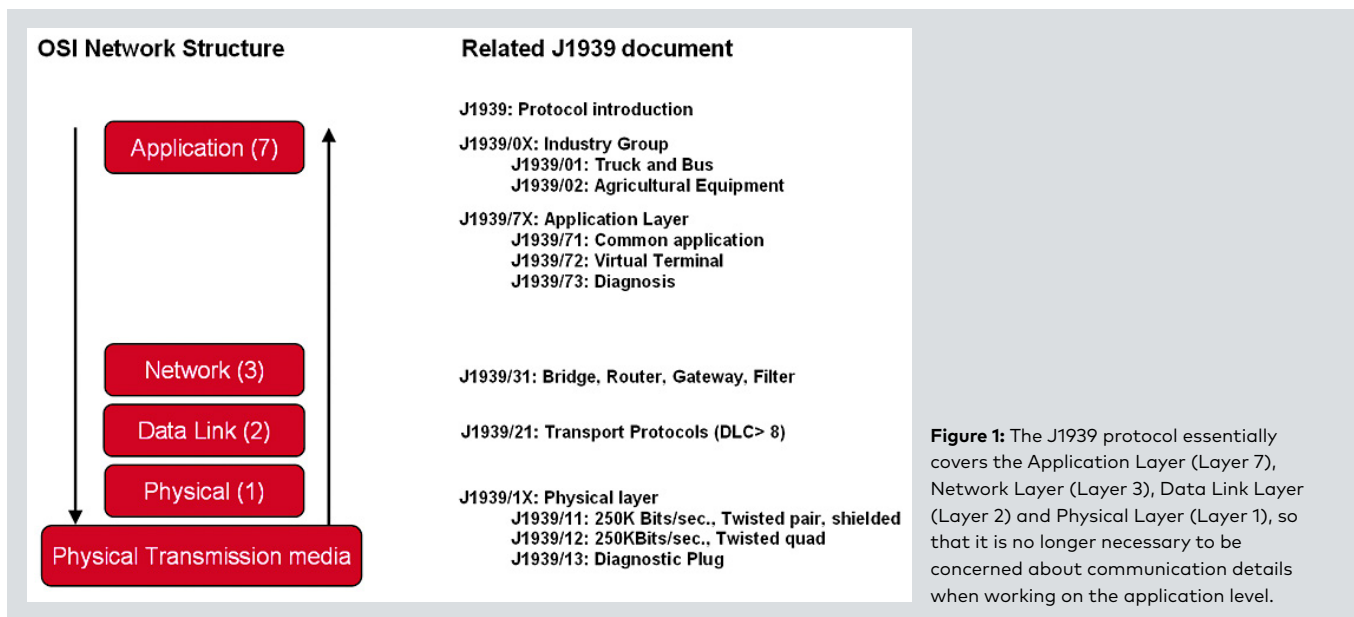

standard. For example, documents of the 7 series such as "J1939/71" refer to the Applications Layer, document J1939/21 the Data Link Layer, etc.


CAN Message Format in J1939

Although J1939 utilizes normal 29-bit CAN messages with up to 8 bytes of data, here the CAN identifier quasi defines the mask of a uniform J1939 scheme (Figure 2). This is necessary to assure plug-and-play properties. The CAN identifier – besides identifying the useful data with the help of the Parameter Group Number (PGN) – also contains the J1939 ECU address of the sender and if applicable the address of the receiver too. In addition, the three most significant bits of the CAN identifier are reserved for the priority

field; although these bits do not replace the implicit priority established by the CAN protocol, they make it possible to organize the Parameter Groups into up to eight J1939-specific priority levels. These priorities are used to adjust the priority to momentary application requirements at the time the Parameter Group is transmitted – or during an optional ECU configuration phase. This makes it possible to fine-tune communication to the application without the SAE protocol permanently setting the priority when the Parameter Group is defined.

The Name says it all: J1939 Device Names

J1939 defines device names that are each represented by a 64-bit number. When an ECU is switched to active in the

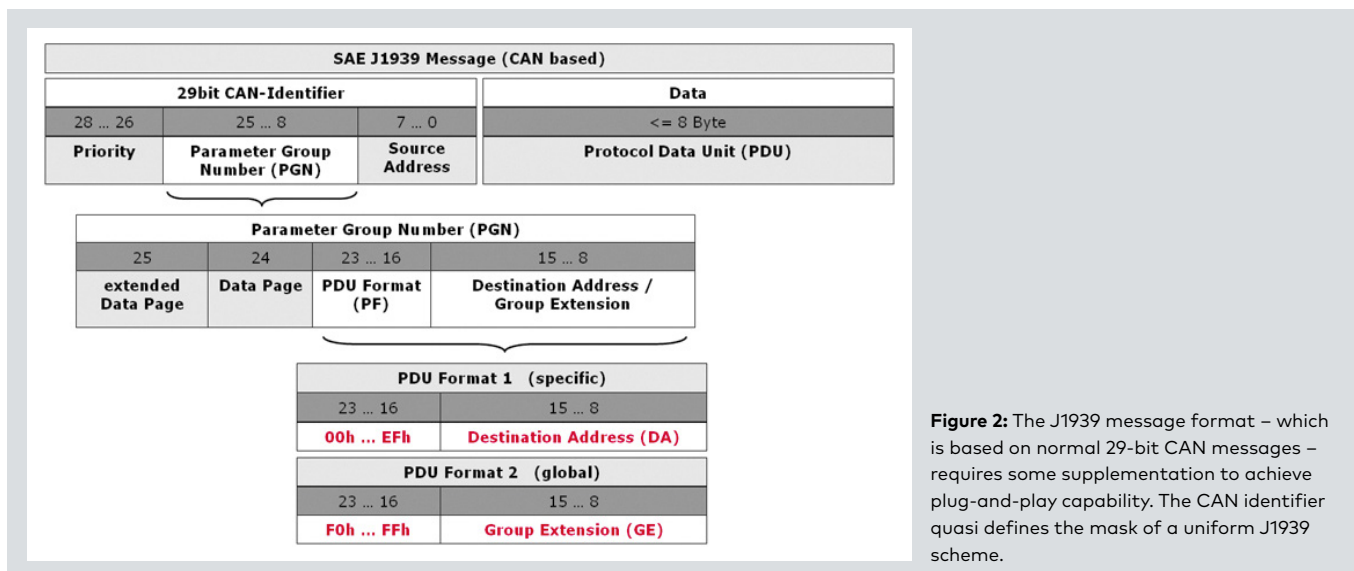

plug-and-play network, the device name serves to identify the device and its functionality. The device name is subdivided into different elements, between which certain dependencies exist. The independent fields include the Industry Group and Manufacturer Code. The Industry Group is used to establish the functions required in the network, since the J1939 protocol is not only used in conventional heavy-duty vehicles but also in vehicles in the agricultural and marine industries. Each ECU carries one of the SAE assigned Manufacturer Codes that can be requested from that organization. Since each device also has a serial number, the complete name over all fields is unique worldwide, and there are no overlaps.

Since addressability of the devices is inefficient in practice when 64 bit long device names are used, the SAE defines 8-bit addresses for the individual vehicle components in the heavy-duty vehicle field; practically these addresses never change over the life of the components. This does not apply to the agricultural and marine industries; there the addresses are dynamically negotiated at the start, based on the device name. The addresses 0 to 127 are assigned to the most commonly used ECUs such as engine, transmission, retarder, brakes, etc., while the range from 128 to 247 is reserved for agricultural, marine, construction equipment, etc. Service tools, OBD scanners, etc. occupy addresses from 248 to 253. Finally, there are the special addresses: 254 to identify devices that do not have their own address and 255 that is used as a global address for addressing broadcast messages.

Types of Communication: Point-to-Point or Broadcast

The J1939 protocol supports two communication types: point-to-point transmissions (1:1) are directed to precisely one target address; they are used for device configuration or ECU commands, for example. Broadcast messages (1:n),

on the other hand, are simultaneously addressed to all bus nodes, which is practical when it comes to sending out measured values, error handling and diagnostic purposes.

Flexible Network Topology

J1939 works with a passive bus that is terminated at each of its two ends with 120 Ohm impedance. The advantage here is that individual ECUs can be connected to the bus via branch lines with a length of 1 to 3 m. This enables flexible wire harness design, provided that a total bus length of 40 m is not exceeded. Depending on the physical transmission layer, between 10 and a maximum of 30 nodes may be connected to the network. J1939 provides uniform diagnostic access for service testers and on-board diagnostics. Legal requirements specify that a branch line with a length of up to 5 m must be possible here, e.g. for road tests of the emissions control system. Bridges can be used to extend J1939 networks to include trailers/implements, enabling implementation of a separate network there (Figure 3). In the EU, ISO 11992 has prevailed for this purpose, while in the USA the "Power Line Carrier" is state-of-the-art technology.

Timing Requirements in ECU Design

In designing J1939 ECUs, care should be taken to ensure that no messages are lost due to hardware or design limitations. At a baudrate of 250 Kbps, transmission of one bit takes 4 microseconds. With 8 data bytes, a typical message length of about 128 bits is obtained, yielding a transmission time of about 500 microseconds per CAN message. The shortest message length, however, is 64 bits, i.e. it must be possible to receive messages at intervals of 250 microseconds and process them sufficiently fast. In practice, this leads to a high interrupt load due to the CAN controller's often limited CAN identifier filtering capabilities. Filtering also usually needs to be implemented in software.

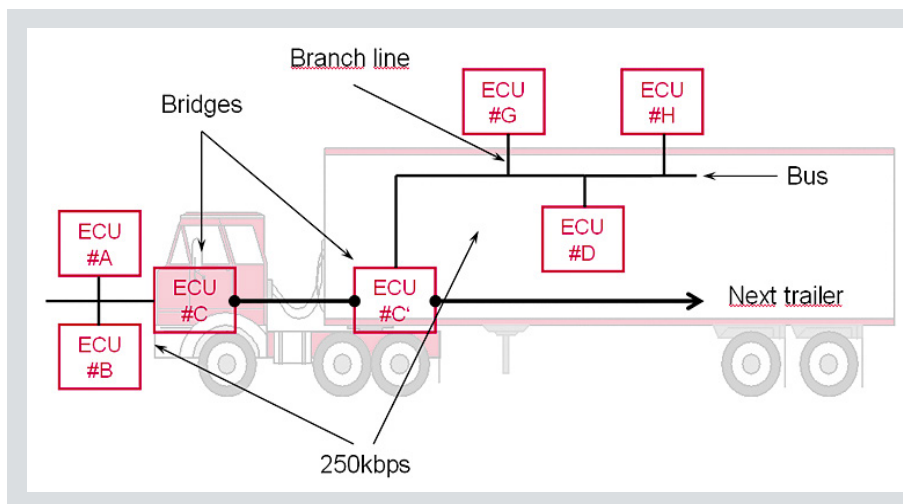


Figure 3: With regard to network topology, J1939 enables flexible design of wire harnesses. Individual ECUs can be connected via branch lines up to 3 m in length. Bridges make it possible to realize separate networks on implements and trailers.

Testing and Diagnostics of J1939 Components and Systems

In view of the rising number of J1939 ECUs and the fact that software solutions in heavy-duty vehicles are becoming increasingly complex, a systematic strategy for testing and diagnostics also continues to gain in importance in the J1939 field. Tests are indispensable in all development phases, from functional tests to integration tests to driving trials in the total vehicle. It is well known that the later that errors are detected, the more complicated and expensive it is to correct them. However, it is generally only possible to test ECUs comprehensively after they have been integrated in the network structure. Consequently, weak points are often not revealed until very late, unless one relies on the support of proven software tools right from the start.

Given this situation, the use of specialized tools offers developers substantial simplifications in testing and diagnostic tasks. For many years now, Vector has been actively involved in SAE J1939 subcommittees and regularly participates in working sessions. With a universal tool chain for all J1939 projects, it is possible to efficiently solve the most challenging tasks in networking and communication in the heavy-duty vehicle field [1]. Besides development, testing and analysis tools, embedded software components tailored to the special requirements of J1939-based applications are available, and customized project work and training events round out Vector's products and services.

A J1939 extension is available for the widely used CANoe development and test tool; it spares heavy-duty vehicle developers from needing to train in the details of the J1939 protocol. The package from Vector extends basic software functionality to cover all necessary protocol-specific fea-

tures. When CANoe .J1939 is used consistently, the models and databases created in the design phase not only serve as a foundation for simulation during development, but also for all tests accompanying development up to and including later diagnostic tasks (Figure 4). With the help of simulated nodes, it is possible to set up and execute tests for the ECU to be developed. The tests are further refined during development and are used in verification of the total system.

Extensive J1939 Test Library

The CANoe Test Feature Set is made up of CAPL test modules, XML test modules and .NET test modules. They are able to cover all challenges arising in testing tasks of varying complexity, from simple to difficult test cases. While the C-like script language CAPL is ideal for creating extensive test scenarios, the primary focus of XML is on simple parameterization of test patterns and simple generation of test procedures. That makes it possible to implement application-specific test modules (function libraries) in CAPL and then generate test control that is individually adapted to the ECU configuration. The J1939-specific extensions in the Test Service Libraries allow the system react to Parameter Groups (PG) instead of typical CAN identifiers. They also offer test patterns for J1939 protocol functionality and checks (background monitoring) for protocol violations. For example, it is possible to test whether the ECU is able to send all Parameter Groups at the configured cycle time under high bus load. Furthermore, it is possible to send faulty transmissions via the BAM (Broadcast Announce Message) and CMDT (Connection Mode Data Transfer) transport protocols for test purposes.

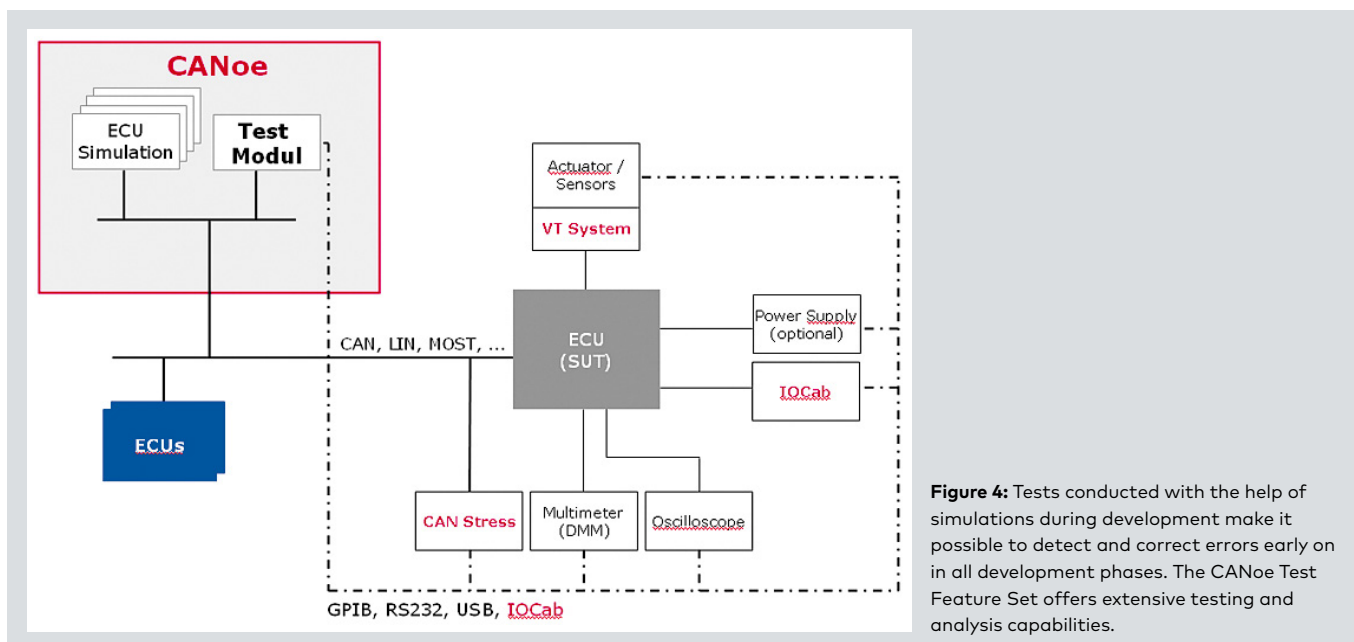


Figure 4: Tests conducted with the help of simulations during development make it possible to detect and correct errors early on in all development phases. The CANoe Test Feature Set offers extensive testing and analysis capabilities.

To create the test modules – besides the J1939 Test Module Manager and the convenient Test Automation Editor – the Option DiVa is useful. DiVa creates a connection between CANoe and the diagnostic specification tool CANdelaStudio, so that specifications created there can be ideally used in further ECU-specific diagnostic tests.

Other functions of the Test Feature Set relate to test flow control and automatic report generation, including statistical information in XML or HTML format based to individual requirements. Further options for automating test processes are enabled by the COM interface, e.g. options relating to flow control, parameter changes or status queries. CANoe Option J1939 provides a trace window, J1939 diagnostic monitor and J1939 diagnostic memory access for diagnostic purposes. The diagnostic monitor supports various J1939 diagnostic messages, such as DM1 and DM2, and it serves to display and clear active errors. Also possible is access to memory areas, objects and parameters as well as periodic object updating for monitoring purposes.

Integrating Matlab/Simulink Models in J1939 Network Simulations

Generally, various function models are created for mechanical components such as transmission, powertrain or even the entire vehicle during the different heavy-duty vehicle development phases. ECU architectures are initially saved in virtual CANoe function models and are implemented step-by-step on the final target hardware platform. CANoe .J1939 can also integrate Matlab/Simulink models in ECU and network simulations (Figure 5). With the Real-Time Workshop from Mathworks the user generates a *.DLL for CANoe so that variable names and units are compatible.

Progressing through the various stages of the V development model, individual tests and subsystem tests are possible through final verification of the overall system. This enables early detection and correction of errors. If an error is found, the automated tests can be restarted at any time; they minimize the risk of side effects in error correction. As a result, development is characterized by short verification cycles, enabling a seamless transition from MIL (Model in the loop) to SIL (Software in the loop) and then to the real ECU (HIL – Hardware in the loop). If there are exceptional real-time requirements of the simulation platform, a special real-time version is available with CANoe RT.

Realizing Goals quickly with standardized Embedded Software Components

Use of CANbedded J1939 software components leads to quick development results. These components largely relieve developers of the need to handle all of the details of the J1939 standard, and they avoid duplicated developments. A key aspect is a central OEM-managed database containing all elementary information related to ECU communication. Depending on requirements, this information might be distributed to other working partners, producing flexible distribution of tasks between the OEM, network specialists from Vector and suppliers (Figure 6). The latter can use the GENy configuration tool for specific settings and parameterizations. The results are reduced cost and timing for implementation and testing, compatibility on the CAN bus based on unambiguous signal interpretation and maximum quality and flexibility in the J1939 communication stack. CANbedded J1939 supports all relevant microcontrollers and is characterized by low ROM and RAM memory requirements as well as high runtime efficiency.

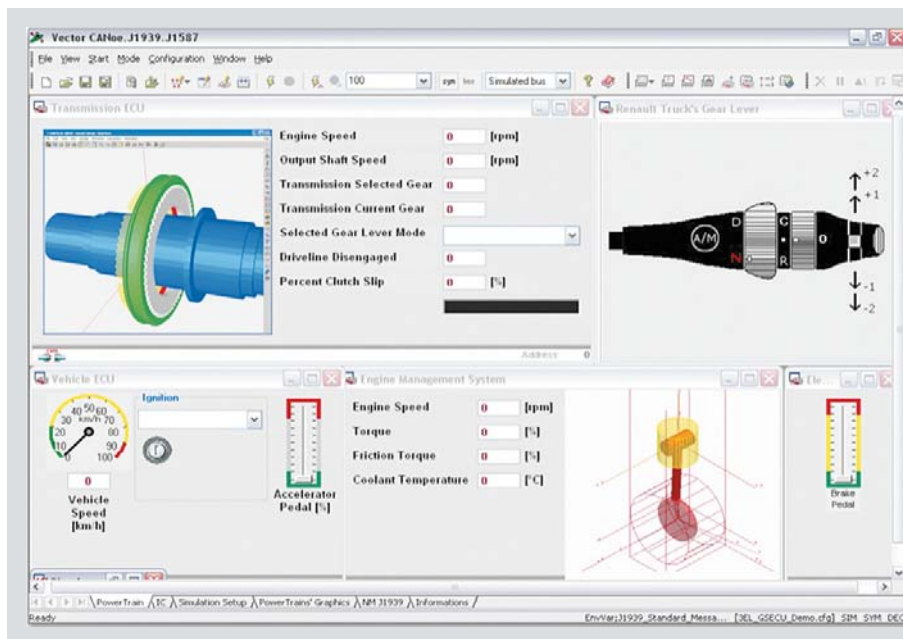


Figure 5: Not only is CANoe able to simulate functional models of ECUs during the development process and integrate models created with Matlab/Simulink in the scenarios; at the same time it also serves as a convenient user-interface. (Source: Renault Trucks)

Image rights:

Vector Informatik GmbH

Internet links:[1] J1939 solutions from Vector – www.j1939-solutions.com[2] Download of presentations from J1939 User Day – www.vector-worldwide.com/ud [most of them are German]**Peter Fellmeth**

studied at the University of Applied Sciences in Esslingen, Germany, majoring in Computer Engineering and specializing in Automation Technology. He is team leader and product manager at Vector Informatik GmbH, where he is responsible for the development of products and customer-specific projects related to J1939, ISOBUS, Ethernet and DeviceNet.

**Thomas Löffler**

studied Automation Technology at the University of Applied Sciences in Reutlingen, Germany. He has been employed at Vector Informatik GmbH since 2000, initially in the DeviceNet area, and since 2002 in the J1939 and ISOBUS area. His areas of specialization are configuration and generation tools for embedded software, support of customer projects and product and protocol training programs.

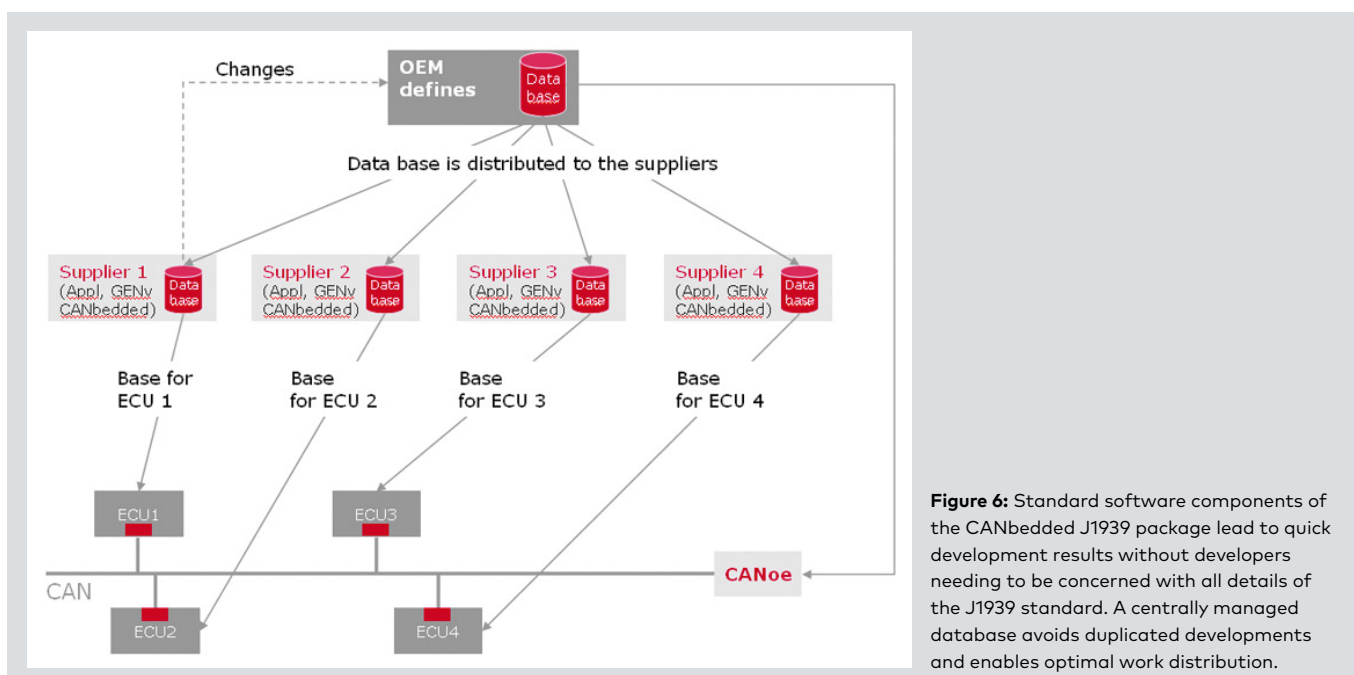


Figure 6: Standard software components of the CANbedded J1939 package lead to quick development results without developers needing to be concerned with all details of the J1939 standard. A centrally managed database avoids duplicated developments and enables optimal work distribution.