

www.afnor.org

Ce document est à usage exclusif et non collectif des clients Normes en ligne. Toute mise en réseau, reproduction et rediffusion, sous quelque forme que ce soit, même partielle, sont strictement interdites.

This document is intended for the exclusive and non collective use of AFNOR Webshop (Standards on line) customers. All network exploitation, reproduction and re-dissemination, even partial, whatever the form (hardcopy or other media), is strictly prohibited.



**DOCUMENT PROTÉGÉ
PAR LE DROIT D'AUTEUR**

Droits de reproduction réservés. Sauf prescription différente, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans accord formel.

Contacteur :
AFNOR – Norm'Info
11, rue Francis de Pressensé
93571 La Plaine Saint-Denis Cedex
Tél : 01 41 62 76 44
Fax : 01 49 17 92 02
E-mail : norminfo@afnor.org

afnor

Boutique AFNOR

Pour : CERN

Client 99871000

Commande N-20110715-475465-TA

le 15/07/2011 08:00

Diffusé avec l'autorisation de l'éditeur

Distributed under licence of the publisher

European standard

NF EN 13000

April 2010

French standard

Classification index: E 52-087

ICS: 53.020.20

Cranes

Mobile Cranes

F : Appareils de levage à charge suspendue — Grues mobiles

D : Krane — Fahrzeugkrane

French standard approved

by decision of the Director General of AFNOR on March 10, 2010 taking effect on April 10, 2010.

Replaces the approved standard NF EN 13000, dated November 2004.

Correspondence

The European standard EN 13000:2010, with its corrigendum AC:2010, has the status of French standard.

Analysis

This document specifies the safety requirements for the design, construction, installation, use, maintenance and testing of mobile cranes. This document was prepared in order to comply with the "Machinery" Directives 98/37/EC and 2006/42/EC.

Descriptors

Technical International Thesaurus: lifting equipment, cranes: hoists, safety of machines, accident prevention, cabs, visibility, noise : sound, control devices, verification, information, use, marking.

Modifications

With respect to the replaced document:

- modifications of requirements for control devices (4.2.5.2), movement limiters (4.2.6.2.2), moving parts and protectors and means of restraint (4.2.9.1 and 4.2.9.2), for protective devices and accesses (4.2.9.3.1 and 4.2.9.3.2);
- addition of paragraphs 4.2.6.3.3 "Particular cases for the rated capacity limiter", 4.6.2 "Separately transported parts", 4.7 "Roll over and tip over protection", 6.7 "Instructions for disposal", 7.6 "Marking data recorder", and of Annex W: "Selection of a suitable set of crane standards for a given application";
- addition of Annex ZB supporting the "Machinery" Directive 2006/42/EC.

Corrections

With respect to the first issue, addition of the corrigendum AC dated October 2010.

WARNING: the corrigendum is located in the last pages of the document.



EUROPEAN STANDARD

EN 13000

NORME EUROPÉENNE

EUROPÄISCHE NORM

January 2010

ICS 53.020.20

Supersedes EN 13000:2004

English Version

Cranes - Mobile cranes

Appareils de levage à charge suspendue - Grues mobiles

Krane - Fahrzeugkrane

This European Standard was approved by CEN on 19 December 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

EN 13000:2010 (E)**Contents**

Page

Foreword.....	7
Introduction	8
1 Scope	9
2 Normative references	9
3 Terms and definitions	12
4 Safety requirements and/or protective measures	15
4.1 Structures and components	15
4.1.1 General.....	15
4.1.2 Load effects	16
4.1.3 Limit states	21
4.2 Equipment and devices.....	23
4.2.1 General principles.....	23
4.2.2 Control station	23
4.2.3 Protection against falling tools	25
4.2.4 Seats	25
4.2.5 Controls and control systems	26
4.2.6 Limiting and indicating devices	27
4.2.7 Steering system	33
4.2.8 Braking systems	34
4.2.9 Protection devices	36
4.2.10 Hydraulic and pneumatic systems and components.....	38
4.2.11 Pressure vessels and fuel tanks	40
4.2.12 Electric and electronic components and related phenomena	40
4.2.13 Hooks and hook blocks	41
4.2.14 Specific requirements for spare tyres/wheels	41
4.2.15 Specific requirements for pin jointed jib/fly jib connections	41
4.3 Visibility	41
4.3.1 Crane operator's field of view.....	41
4.3.2 Lighting.....	42
4.4 Noise and noise reduction.....	42
4.4.1 Noise and noise reduction at source by design.....	42
4.4.2 Noise reduction by information.....	42
4.5 Fire protection.....	42
4.5.1 Fire resistance.....	42
4.5.2 Fire extinguisher.....	43
4.6 Requirements for transport and travel	43
4.6.1 General.....	43
4.6.2 Separately transported parts.....	43
4.7 Roll over and tip over protection	43
5 Verification	43
5.1 Methods of verification	43
5.2 Test procedures and conditions	46
5.2.1 General.....	46
5.2.2 Conceptual verification by calculation.....	46
5.2.3 Conceptual verification by experiment	46
5.2.4 Examination after test	46
5.2.5 Test report	46
5.3 Verification based on noise emission values	47
6 Information for use	47
6.1 Format of instruction.....	47

EN 13000:2010 (E)

6.1.1	General.....	47
6.1.2	Technical data and information	47
6.2	Instructions for use	48
6.2.1	General.....	48
6.2.2	Crane operator instructions	49
6.3	Instructions for assembly, erection, disassembly and transport.....	50
6.4	Instructions for maintenance and inspection.....	50
6.4.1	General.....	50
6.4.2	Instructions for maintenance	50
6.4.3	Instructions for inspection	51
6.5	Instructions for training	51
6.6	Instructions for spare parts.....	51
6.7	Instructions for disposal.....	51
7	Marking	52
7.1	Machine marking	52
7.2	Information and warning.....	52
7.3	Graphic symbols.....	52
7.4	Marking of crane parts	52
7.5	Marking of outriggers.....	52
7.6	Marking data recorder	52
Annex A	(normative) Examples of mobile crane types.....	53
Annex B.1	(informative) Major parts of telescopic cranes.....	55
Annex B.2	(informative) Major parts of lattice jib cranes	56
Annex C	(normative) List of hazards	57
Annex D	(normative) Load effects of combined motions	60
Annex E	(normative) Crane operator's seat dimensions	64
E.1	General.....	64
E.2	Dimensions of crane operator's seat.....	64
E.3	Other dimensions or adjustments	64
Annex F	(normative) Rigid body stability: Load effects due to acceleration	66
Annex G.1	(normative) Noise test code for mobile cranes.....	67
G.1.1	Introduction.....	67
G.1.2	Normative references	67
G.1.3	Terms and definitions	67
G.1.4	Description of machinery family	67
G.1.5	Sound power level determination	68
G.1.5.1	Basic standard to be used	68
G.1.5.2	Positioning of the crane.....	68
G.1.5.3	Microphone positions	68
G.1.5.4	Measurement and calculation procedure.....	68
G.1.6	Emission sound pressure level determination.....	69
G.1.6.1	Basic standard to be used	69
G.1.6.2	Crane operator position	69
G.1.6.3	Specifications concerning the crane operating cabin.....	69
G.1.6.4	Specification relating to wind speed	69
G.1.6.5	Measurement and calculation procedure.....	69
G.1.7	Configuration	70
G.1.8	Operating conditions.....	70
G.1.8.1	General.....	70
G.1.8.2	Test procedure.....	70
G.1.9	Information on measurement uncertainties.....	71
G.1.10	Information to be recorded	71
G.1.11	Information to be reported.....	71
G.1.12	Declaration and verification of noise emission values.....	71
Annex G.2	(normative) Noise measurement, test report	73
G.2.1	General data	73

EN 13000:2010 (E)

G.2.2	Measurements per motion	74
Annex H	(normative) Limit values for structural and fine grain steel types	76
Annex J.1	(normative) Minimum requirements for specification of hoist/derrick gears	77
Annex J.2	(normative) Minimum requirements for specification of slewing gears	79
Annex J.3	(normative) Minimum requirements for specification of travel gears	81
Annex J.4	(normative) Minimum requirements for specification of drums	83
Annex K.1	(normative) Minimum requirements for the specification of lifting hooks	85
Annex K.2	(normative) Minimum requirements for specification of sheaves	86
Annex K.3	(normative) Minimum requirements for specification of hook blocks	88
Annex K.4	(normative) Minimum requirements for the specification of hydraulic cylinders	90
Annex K.5	(normative) Minimum requirements for the specification of slew rings	92
Annex L	(normative) Proof of competence	94
L.1	General	94
L.2	Proof of competence for steel structures	94
L.2.1	General	94
L.2.2	Method of permissible stresses	94
L.2.3	Method of partial safety coefficients and limiting stresses	94
L.3	Proof of competence for non steel structures	95
L.4	Proof of competence for load bearing components	95
L.4.1	General	95
L.4.2	Proof of competence for mechanisms	95
L.4.3	Proof of competence for ropes	95
L.4.4	Proof of competence for chains	95
L.4.5	Proof of competence for other components	96
L.5	Proof of competence of rigid body stability of the crane	96
L.6	Proof of competence – experimental	96
L.6.1	Structural tests	96
L.6.2	Rigid body stability tests	96
Annex M	(normative) Test of steering systems for off-road mobile cranes	97
M.1	Test conditions	97
M.2	Test procedure	97
M.3	Permitted steering control effort	97
Annex N.1	(informative) Wind speed as a function of elevation	98
Annex N.2	(informative) Impact pressure as a function of elevation	99
Annex N.3	(informative) Storm wind map of Europe	100
Annex P	(normative) Efficiency of sheave sets	101
Annex Q	(informative) Manufacturer's sign	102
Annex R	(normative) Certificate for wire rope, requirements	103
Annex S	(normative) Certificate for chain, requirements	104
Annex T	(informative) Test procedures: Selection of load cases	105
Annex U	(normative) Test certificate	106
Annex V	(informative) Additional information of the concept of the limiting and indicating device	107
Annex W	(informative) Selection of a suitable set of crane standards for a given application	108
Annex ZA	(informative) Relationship between this European Standard and the Essential Requirements of EU Directive 98/37EC	109
Annex ZB	(informative) Relation between this European Standard and the Essential Requirements of EU Directive 2006/42/EC	110
Bibliography	111

Figures

Figure A.1 — Industrial mobile crane	53
Figure A.2 — Mobile crane with telescopic jib	53
Figure A.3 — Mobile crane with telescopic and fly jib.....	53
Figure A.4 — Mobile crane with luffing fly jib.....	53
Figure A.5 — Mobile crane with lattice jib.....	53
Figure A.6 — Crawler crane.....	53
Figure A.7 — Crawler crane with additional counterweight.....	54
Figure A.8 — Mobile harbour crane.....	54
Figure B.1.1 — Examples of major parts.....	55
Figure B.1.2 — Examples of jibs and jib combinations.....	55
Figure B.2.1 — Examples of major parts.....	56
Figure B.2.2 — Examples of jibs and jib combinations.....	56
Figure D.1 — Crawler crane.....	60
Figure D.2 — Crane on outriggers	61
Figure D.3 — Telescopic crane on outriggers	62
Figure E.1 — Seat dimensions (see Table E.1).....	64
Figure F.1 — Crane jib in travelling and in lateral direction.....	66
Figure G.1 — Test conditions – Position of the crane; exact position of the crane in relation to the radial centre of the hemisphere, see G.1.5.1 and G.1.5.2	72
Figure K.3.1 — Model of hook blocks (Examples)	89
Figure N.3.1 — Regions where same mean storm wind velocities are applicable	100
Figure Q.1 — Example of a Manufacturer's sign.....	102
Figure T.1 — Selection of load cases	105

Tables

Table 1 — Verification of safety requirements including the proof of competence.....	44
Table C.1 — List of hazards.....	57
Table D.1 — Load combinations, one or two simultaneous movements	62
Table D.2 — Load combinations, more than two simultaneous movements.....	63
Table E.1 — Seat dimensions and adjustments.....	65

EN 13000:2010 (E)

Table F.1 — Minimum values of tipping angle.....	66
Table H.1 — Limit values for structural and fine grain steel types	76
Table M.1 — Permitted steering control effort.....	97
Table N.1.1 — 3-second wind gust speed as a function of mean wind speed as per Beaufort Scale and as per elevation.....	98
Table N.2.1 — Quasistatic impact pressure as a function of mean wind speed as per the Beaufort Scale and as a function of elevation	99
Table R.1 — Rope certificate (Example)	103
Table S.1 — Certificate for chain (Example)	104
Table U.1 — Test certificate (Example).....	106

Foreword

This document (EN 13000:2010) has been prepared by Technical Committee CEN/TC 147 "Cranes — Safety", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2010, and conflicting national standards shall be withdrawn at the latest by July 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 13000:2004.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annexes ZA and ZB, which are integral parts of this document.

This standard applies to mobile cranes which are put on the market 12 months after the date of ratification by CEN of this standard or at the latest 2010-01-01.

This document has been prepared by Product Working Group CEN/TC 147/WG 11 "Mobile Cranes", the secretariat of which is held by DIN.

Annexes A, C, D, E, F, G.1 and G.2, H, J.1 to J.4, K.1 to K.5, L, M, P, R, S and U are normative. Annexes B.1 and B.2, N.1 to N.3, Q, T, V and W are informative.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

EN 13000:2010 (E)

Introduction

This European Standard is a type C standard.

This European Standard has been prepared to provide one means for mobile cranes to conform with the essential health and safety requirements of the Machinery Directive.

The machinery concerned and the extent to which hazards, hazardous situations and events are covered are indicated in the scope of this document.

When provisions of this type C standard are different from those which are stated in type A or B standards, the provisions of this type C standard take precedence over the provisions of the other standards, for machines that have been designed and built according to the provisions of this type C standard.

1 Scope

This European Standard is applicable to the design, construction, installation of safety devices, information for use, maintenance and testing of mobile cranes as defined in ISO 4306-2 with the exception of loader cranes (see 3.1.1 of EN 12999:2002). Examples of mobile crane types and of their major parts are given in Annexes A and B.

This standard does not cover hazards related to the lifting of persons.

NOTE The use of mobile cranes for the lifting of persons is subject to specific national regulations.

Mobile cranes covered by this European Standard are designed for a limited number of stress cycles and particular properties of motions, e.g. smooth application of the driving forces and loading conditions according to ISO 4301-2:1985, group A1.

For a duty cycle such as grab, magnet or similar work, additional provisions are required which are outside the scope of this European Standard.

The hazards covered by this European Standard are identified by Annex C.

This document is not applicable to mobile cranes which are manufactured before the date of publication of this document by CEN.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2:1992, *Classification of fires*

EN 294:1992, *Safety of machinery — Safety distance to prevent danger zones being reached by the upper limbs*

EN 349:1993, *Safety of machinery — Minimum gaps to avoid crushing of parts of the human body*

EN 547-1:1996, *Safety of machinery — Human body measurements — Part 1: Principles for determining the dimensions required for openings for whole body access into machinery*

EN 614-1:2006, *Safety of machinery — Ergonomic design principles — Part 1: Terminology and general principles*

EN 626-1:1994, *Safety of machinery — Reduction of risk to health from hazardous substances emitted by machinery — Part 1: Principles and specifications for machinery manufacturers*

EN 811:1996, *Safety of machinery — Safety distances to prevent danger zones being reached by the lower limbs*

EN 842:1996, *Safety of machinery — Visual danger signals — General requirements, design and testing*

EN 853:1996, *Rubber hoses and hose assemblies — Wire braid reinforced hydraulic type — Specification*

EN 854:1996, *Rubber hoses and hose assemblies — Textile reinforced hydraulic type — Specification*

EN 856:1996, *Rubber hoses and hose assemblies — Rubber-covered spiral wire reinforced hydraulic type — Specification*

EN 894-2:1997, *Safety of machinery — Ergonomics requirements for the design of displays and control actuators — Part 2: Displays*

EN 894-3:2000, *Safety of machinery — Ergonomics requirements for the design of displays and control actuators — Part 3: Control actuators*

EN 953:1997, *Safety of machinery — Guards — General requirements for the design and construction of fixed and movable guards*

EN 13000:2010 (E)

EN 954-1:1996, *Safety of machinery — Safety-related parts of control systems — Part 1: General principles for design*

EN 982:1996, *Safety of machinery — Safety requirements for fluid power systems and their components — Hydraulics*

EN 983:1996, *Safety of machinery — Safety requirements for fluid power systems and their components — Pneumatics*

EN 1005-3:2002, *Safety of machinery — Human physical performance — Part 3: Recommended force limits for machinery operation*

EN 1037:1995, *Safety of machinery — Prevention of unexpected start-up*

EN 10025-2:2005, *Hot rolled products of structural steels — Part 2: Technical delivery conditions for non-alloy structural steels*

EN 10025-3:2004, *Hot rolled products of structural steels — Part 3: Technical delivery conditions for normalized/normalized rolled weldable fine grain structural steels*

EN 10025-6:2005, *Hot rolled products of structural steels — Part 6: Technical delivery conditions for flat products of high yield strength structural steels in the quenched and tempered condition*

EN 12077-2:1998, *Cranes safety — Requirements for health and safety — Part 2: Limiting and indicating devices*

EN 12644-1:2001, *Cranes — Information for use and testing — Part 1: Instructions*

EN 13557:2003, *Cranes — Control and control stations*

EN 13586:1999, *Cranes — Access*

EN 14502-2:2005, *Cranes — Equipment for the lifting of persons — Part 2: Elevating control stations*

EN 60204-32:2008, *Safety of machinery — Electrical equipment of machines — Part 32: Requirements for hoisting machines (IEC 60204-32:2008)*

EN 61000-6-2:2005, *Electromagnetic compatibility (EMC) — Part 6-2: Generic standards — Immunity for industrial environments (IEC 61000-6-2:2005)*

EN 61000-6-4:2007, *Electromagnetic compatibility (EMC) — Part 6-4: Generic standards; Emission standard for industrial environments (IEC 61000-6-4:2006)*

EN 61310-1:2008, *Safety of machinery — Indication, marking and actuation — Part 1: Requirements for visual, acoustic and tactile signals (IEC 61310-1:2007)*

EN 61310-2:2008, *Safety of machinery — Indication, marking and actuation — Part 2: Requirements for marking (IEC 61310-2:2007)*

EN ISO 3411:2007, *Earth-moving machinery — Physical dimensions of operators and minimum operator space envelope (ISO 3411:2007)*

EN ISO 3744:1995, *Acoustics — Determination of sound power levels of noise sources using sound pressure — Engineering method in an essentially free field over a reflecting plane (ISO 3744:1994)*

EN ISO 4871:1996, *Acoustics — Declaration and verification of noise emission values of machinery and equipment (ISO 4871:1996)*

EN ISO 5349-1:2001, *Mechanical vibration — Measurement and evaluation of human exposure to hand-transmitted vibration — Part 1: General requirements (ISO 5349-1:2001)*

EN 13000:2010 (E)

EN ISO 5349-2:2001, *Mechanical vibration — Measurement and evaluation of human exposure to hand-transmitted vibration — Part 2: Practical guidance for measurement at the workplace (ISO 5349-2:2001)*

EN ISO 5353, *Earth-moving machinery, and tractors and machinery for agriculture and forestry — Seat index point (ISO 5353:1995)*

EN ISO 6385:2004, *Ergonomic principles in the design of work systems (ISO 6385:2004)*

EN ISO 6683:2008, *Earth-moving machinery — Seat belts and seat belt anchorages — Performance requirements and tests (ISO 6683:2005)*

EN ISO 7096:2008, *Earth-moving machinery — Laboratory evaluation of operator seat vibration (ISO 7096:2000)*

EN ISO 7250:1997, *Basic human body measurements for technological design (ISO 7250:1996)*

EN ISO 7731:2008, *Ergonomics — Danger signals for public and work areas — Auditory danger signals (ISO 7731:2003)*

EN ISO 11201:1995, *Acoustics — Noise emitted by machinery and equipment — Measurement of emission sound pressure levels at a work station and at other specified positions — Engineering method in an essentially free field over a reflecting plane (ISO 11201:1995)*

EN ISO 12100-1:2003, *Safety of machinery — Basic concepts, general principles for design — Part 1: Basic terminology, methodology (ISO 12100-1:2003)*

EN ISO 12100-2:2003, *Safety of machinery — Basic concepts, general principles for design — Part 2: Technical principles (ISO 12100-2:2003)*

EN ISO 13732-1:2008, *Ergonomics of the thermal environment — Methods for the assessment of human responses to contact with surfaces — Part 1: Hot surfaces (ISO 13732-1:2006)*

ISO 2631-1:1997, *Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 1: General requirements*

ISO 3795:1989, *Road vehicles and tractors and machinery for agriculture and forestry — Determination of burning behaviour of interior materials*

ISO 3864-1:2002, *Graphical symbols — Safety colours and safety signs — Part 1: Design principles for safety signs in workplaces and public areas*

ISO 4301-1:1986, *Cranes and lifting appliances — Classification — Part 1: General*

ISO 4301-2:1985, *Lifting appliances — Classification — Part 2: Mobile cranes*

ISO 4305:1991, *Mobile cranes — Determination of stability*

ISO 4306-1:2007, *Cranes — Vocabulary — Part 1: General*

ISO 4306-2:1994, *Cranes — Vocabulary — Part 2: Mobile cranes*

ISO 4308-1:2003, *Cranes and lifting appliances — Selection of wire ropes — Part 1: General*

ISO 4308-2:1988, *Cranes and lifting appliances — Selection of wire ropes — Part 2: Mobile cranes — Coefficient of utilisation*

ISO 4309:2004, *Cranes — Wire ropes — Care, maintenance, installation, examination and discard*

ISO 4310:1981, *Cranes — Test code and procedures*

ISO 6309:1987, *Fire protection — Safety signs*

EN 13000:2010 (E)

ISO 7000:2004, *Graphical symbols for use on equipment — Index and synopsis*

ISO 7296-1:1991, *Cranes — Graphic symbols — Part 1: General*

ISO 7296-2:1996, *Cranes — Graphic symbols — Part 2: Mobile cranes*

ISO 7752-2:1985, *Lifting appliances — Controls layout and characteristics — Part 2: Basic arrangement and requirements for mobile cranes*

ISO 8087:1985, *Mobile cranes — Drum and sheave sizes*

ISO 8566-2:1995, *Cranes — Cabins — Part 2: Mobile cranes*

ISO/CIE 8995-1:2002, *Lighting of indoor work places — Part 1: Indoor*

ISO/DIS 8995-2:2006, *Lighting of indoor work places — Part 2: Outdoor*

ISO/CIE 8995-3:2006, *Lighting of indoor work places — Part 3: Lighting requirements for safety and security of outdoor work places*

ISO 11660-2:1994, *Cranes — Access guards and restraints — Part 2: Mobile cranes*

ISO 11662-1:1995, *Mobile cranes — Experimental determination of crane performance — Part 1: Tipping loads and radii*

ISO 12480-1:1997, *Cranes — Safe use — Part 1: General*

ISO 13200:1995, *Cranes — Safety signs and hazard pictorials — General principles*

FEM 1.001:1998, *Rules for the design of hoisting appliances (3rd edition)*

FEM 5.004:1994, *Rules for the design of the steel structures of general use mobile cranes*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4306-1:2007 and ISO 4306-2:1994 and the following apply¹⁾.

3.1

angle indicator

device to display the actual angle of parts of the crane to the horizontal

EXAMPLES Jib angle indicator, fixed fly jib angle indicator, luffing fly jib indicator and/or mast angle indicator.

3.2

angle limiter

device to limit the motion of parts of the crane regarding their angles

EXAMPLES Jib angle limiter, fly jib angle limiter and/or mast angle limiter.

3.3

cabin

control station with protective enclosure

NOTE See 3.6, 3.7 and 3.9.

1) The definitions are listed alphabetically.

3.4**configuration**

combination of structural members, counterweights, support or outrigger position, hook block reeving and similar items assembled, positioned and erected according to manufacturer's instructions and ready for operation

3.5**control station**

permanent position of controls on or off the crane

3.6**crane**

machine for cyclic lifting or cyclic lifting and handling of loads suspended on hooks or other load handling devices, whether manufactured to an individual design, in series or from prefabricated components

NOTE "Suspended" can include additional means fitted to prevent swinging, rotation of the load, etc.

3.7**crane level indicator**

device to indicate the "levelled position" of the crane

3.8**crane operating cabin**

cabin provided for the operation of the crane motions to move the load

3.9**crane travelling cabin**

cabin provided for the transportation of the crane by road from one job site to another

3.10**derricking (luffing) limiter**

device to prevent derricking (luffing) motions of the jib and/or fly jib beyond specified limits

3.11**hoisting limiter**

device either to prevent the fixed load lifting attachment from being raised such that it strikes the crane structure, or to prevent any other specified upper limitation of the load lifting attachment from being exceeded

NOTE It can also include any other design limitation imposing a restriction on lifting.

3.12**hook load indicator**

device to display the actual mass (weight) of the load

3.13**indicator**

device which provides warnings and/or data to facilitate the competent control of the crane within its design parameters

3.14**jib length indicator**

device to display the actual jib length

3.15**load bearing component**

single part or assembly of parts of a crane, which are directly subjected to load effects

EXAMPLES Hooks, ropes (stationary or running), traverse beams, pendant bars, wheels, axles, gears, couplings, brakes, hoists, hydraulic cylinders, shafts and pins.

NOTE In contrast to (steel) structures components can be regarded as independent units.

EN 13000:2010 (E)

3.16

lock indicator

device to display the locked condition of a part or function

3.17

lowering limiter

device to ensure that the specified minimum number of turns of rope on the hoist drum is maintained at all times during operation

3.18

mobile crane

self powered jib crane capable of travelling loaded or unloaded without the need for fixed runways and relying on gravity for stability

NOTE 1 Examples of mobile cranes are given in the Annexes A, B.1 and B.2.

NOTE 2 Mobile cranes can operate on tyres, crawlers or with other mobile arrangements. In fixed positions, they can be supported by outriggers or other accessories increasing their stability.

NOTE 3 The superstructure of mobile cranes can be of the type of full circle slewing, of limited slewing or non slewing. It is normally equipped with one or more hoists and/or hydraulic cylinders for lifting and lowering the jib and the load.

NOTE 4 Mobile cranes can be equipped either with telescopic jibs, with articulated jibs, with lattice jibs – or a combination of these – of such a design that they can readily be lowered.

NOTE 5 Loads can be handled by hook block assemblies or other load-lifting attachments for special services.

3.19

off-road mobile crane

mobile crane which travels on site

EXAMPLES Rough terrain crane, crawler crane.

3.20

on-road mobile crane

mobile crane which has the necessary equipment to travel on public roads and on the job site

EXAMPLES All terrain crane, truck crane.

3.21

partial safety coefficient

safety margin for the method of limit states chosen as described in Annex A of ISO 8686-1:1989

NOTE See partial load coefficients γ_p .

3.22

performance limiter

device which automatically prevents a design performance characteristic from being exceeded

3.23

radius indicator

device to display the actual radius of the load

3.24

rated capacity

load that the crane is designed to lift for a given operating condition (e.g. configuration, position of the load)

NOTE For mobile cranes the mass (weight) of the hook block is part of the load.

3.25

rated capacity indicator

device which gives, within specified tolerance limits, at least a continuous indication that the rated capacity is exceeded, and another continuous indication of the approach to the rated capacity

3.26**rated capacity limiter**

device that automatically prevents the crane from handling loads in excess of its rated capacity, taking into account the dynamic effects during normal operational use

3.27**slack rope limiter**

device to automatically prevent dangers from slack rope situations

3.28**slew position indicator**

device to indicate to the crane operator the actual slew position

3.29**slew range indicator**

device to indicate to the crane operator the permitted slew range for the selected configuration

3.30**slewing limiter**

device to prevent slewing beyond specified limits

3.31**telescoping limiter**

device to prevent telescoping beyond specified limits

3.32**wind speed indicator**

device to indicate to the crane operator the actual wind speed

3.33**working load**

load on the hook plus mass (weight) of hook and block

3.34**working load factor**

safety margin for the permissible stress method chosen as described in Annex A of ISO 8686-1:1989

NOTE See coefficients applied to the specified strength γ_F .

4 Safety requirements and/or protective measures

4.1 Structures and components

4.1.1 General

Machinery shall comply with the safety requirements and/or protective measures of this clause. In addition, the machine shall be designed according to the principles of EN ISO 12100 (all parts) for hazards relevant but not significant, which are dealt with by this document (e.g. sharp edges).

Mechanical hazards can arise when loads acting on a crane exceed limiting conditions. Such an overload can cause the entire crane and/or its components to lose stability (elastic or rigid body) as well as cause the supporting structure and/or components to be subjected to failure.

In order to prevent this potential danger, verification shall be provided for the extreme values of load effects based on all forces which act simultaneously on the crane multiplied by adequate (partial) safety factors to ensure that the corresponding loading limits are not exceeded.

This standard defines loads and load combinations as well as specific values of factors and coefficients to be applied to mobile cranes.

EN 13000:2010 (E)

The limit state for materials and components shall be indicated in the form of nominal values, which are laid down in relation to the nominal load effects (internal forces or stresses) defined in the relevant standards.

All cases in which limits are exceeded and can endanger the mechanical structure, e.g. creeping, elastic instability, loss of stability, significant displacements, fatigue or wear (including discard of ropes), uncontrolled motions and temperature limits shall be taken into account.

The procedure for the design and calculations is described in this clause. The procedure consists of identifying load effects (see 4.1.2), determining the limit states (see 4.1.3) and the proof of competence (see Annex L). Alternatively advanced and recognized theoretical methods (e.g. elastokinetic analysis to simulate load effects) or experimental methods (e.g. measurement of load effects or tests for determining limit states or strain gauge testing) may be used. These methods shall provide the same level of safety.

4.1.2 Load effects

4.1.2.1 General

All loads which act on the crane or its supporting sections including dead weights, additional loads (e.g. due to gravity, wind loads or other ambient influences), test loads and special loads during erection or dismantling (of jib systems) shall not cause damage, such as fracturing, permanent deformations or unintentional displacements.

Load effects shall be determined based on an elastostatic/rigid body kinetic model of the crane and load models. Loads acting on the crane at the same time shall be combined as given in Annex D.

For mobile cranes a load spectrum factor $Q_1 = \text{"light"}$ ($K_p = 0,125$) according to ISO 4301-1 shall be applied as minimum. The minimum number of load cycles shall be $3,2 \times 10^4$.

It is assumed that:

- a) the number of important stress cycles (i.e. stress cycles contributing significantly to fatigue: minimum one stress cycle per lift) is not higher than the number of operating cycles;
- b) critical notch conditions are avoided by careful design and construction;
- c) there are no predominant alternating stresses.

With these assumptions, it is not necessary to carry out a fatigue analysis on the load bearing structure.

When considering test loads the crane shall be in the same configurations as intended for use without any modification (e.g. without changing outriggers, counterweight, counterweight position).

When the method of permissible stresses (see L.2.2) is applied, the working load shall be multiplied by the working load factor.

When the method of partial safety coefficients and limiting stresses (see L.2.3) is applied, the working load shall be multiplied by the working load factor and its partial safety coefficients and all other loads by their respective partial safety coefficients.

Loads with a low number of stress cycles and low amplitudes are to be seen as mean values multiplied by the working load factor and/or the respective partial safety coefficients.

The analysis of load effects with alternative advanced methods, i.e. from individual events (dynamic factors) or representative use of a crane shall provide at least equivalent levels of safety. It shall take into account unfavourable operating conditions and sequences of movements of the crane and/or the load.

4.1.2.2 Wind loads

4.1.2.2.1 Wind speeds and pressures

To calculate the wind loads, it is assumed that the wind blows horizontally from the most unfavourable direction, but at an elevation-related speed.

The speed of a 3-second wind gust $v(z)$ [m/s] acting on an elevated point z [m] and decisive for calculations is based on a mean wind speed determined over 10 min \bar{v} [m/s] at 10 m above ground or sea level.

$$v(z) = [(z/10)^{0,14} + 0,4] \cdot \bar{v}$$

$$\text{for } z = 10 \text{ [m]} \Rightarrow v(z) = 1,4 \cdot \bar{v}$$

see Annex N.1

The quasi-static impact pressure q [N/m²] is as a result of:

$$q = 0,625 \cdot v(z)^2$$

$$\text{for } z = 10 \text{ [m]} \Rightarrow q(z) = 1,225 \cdot \bar{v}^2$$

see Annex N.2

The admissible wind speed for the crane in-service and out-of-service is derived from the wind gust speed $v(z)$ acting on the highest elevated point taken in account for the verifications.

4.1.2.2.2 In-service wind loads

To calculate the wind load during crane operation conservatively, the wind gust speed determined at the highest elevated point v_i (max. z) can be assumed to act all over the height of the crane and its jib.

Precise elevation-related calculations of the wind forces acting on the jib are permissible, e.g. in 10 m elevation intervals.

The wind forces acting on the crane and its components as well as the pertaining impact pressures determined shall be combined with the other in-service loads.

The permissible wind speed v_i (max. z) shall be indicated in the rated capacity charts and in the instruction manual. The reference value used to determine the load (area exposed to wind per mass (weight) unit of the capacity) shall likewise be indicated; if not otherwise laid down, then the value is 1,2 m²/t.

NOTE 1 Value 1,2 m²/t based on $c_w = 1,2$.

The wind loads acting on the suspended load shall be derived from the maximum lifting height of the suspended load. Special verification is required from case to case for lifting loads with a large "sail area" (> 1,2 m²/t).

NOTE 2 Safe crane use is only possible within the range of the permissible wind speed v_i (max. z) while the crane is in service, the speed at the highest elevation can be monitored by means of an anemometer. To prevent any danger, in particular, due to sudden changes in wind speed or direction during the passing of weather fronts, weather reports should be taken into account when lifting operations are being scheduled. Instructions should be laid down in the instruction manual providing suitable measures for lowering the crane to a safe position.

NOTE 3 Mobile cranes are normally equipped with jib systems which can be lowered quickly and readily. As a result, the hazards due to sudden changes in wind speeds and increases in gust speed at elevated points can be reduced in a short time, e.g. within 5 min.

EN 13000:2010 (E)**4.1.2.2.3 Out-of-service wind loads (when the crane is not in operation)**

a) Out-of-service storm winds

To calculate the wind loads when the crane is not in operation, an average, regionally varying, reference wind speed can be assumed. The reference wind speed v_{ref} is determined over 10 min at 10 m above ground or sea level. In Europe the following figures are applicable (see Annex N.3):

Regions	A	B	C	D	E
v_{ref} [m/s]	24	24	28	32	36

The design is considered safe when all the required verifications including the effect of 3-second elevation-related wind gusts are calculated based on a reference wind speed (see formulas in 4.1.2.2.1 and Annexes N.1 and N.2).

b) Out-of-service limiting wind speed

To calculate the wind load effect when the crane is not in operation, the wind gust speed at the highest elevated point v_a (max. z) shall be considered. See Annexes N.1 and N.2. The required safety shall be verified for all permitted configurations and/or positions of the crane.

Precise elevation-related calculations of the wind forces acting on the jib in such a configuration and/or position are permissible, e.g. in 10 m elevation intervals, for the relevant gust speeds (3-second gust speed).

The forces on the crane and its components resulting from the impact pressure shall be combined with the dead weights and, if required, with other geometric influences (e.g. out of level surfaces).

NOTE 1 A crane which is safe with respect to the effect of the wind speeds v_a (max. z) based on crane-specific limits, should only remain in this configuration and/or position up to the derived wind gust speed.

Information shall be provided in the instruction manual as to which measures shall be taken by the crane operator in order to maintain the crane in safe condition, e.g. by lowering or telescoping in the jib in the event that v_a (max. z) is exceeded. Instructions shall be laid down in the instruction manual providing suitable measures for securing the crane out-of-service.

NOTE 2 The safety of a crane is only maintained within the range of the permissible wind speed v_a (max. z) while the crane is (in- or) out-of-service. Therefore exceeding of the limiting wind speed out-of-service should be prevented by planning a lift including the weather forecast.

4.1.2.3 Load effects on steel structures

The loads acting on the steel structure of general use mobile cranes shall be calculated in accordance with FEM 5.004:1994, where the group classification A1 of ISO 4301-1:1986 and ISO 4301-2:1985 applies.

If a mobile crane is designed to carry out simultaneous movements, the load effects of two of these movements shall be taken into account (see Annex D). As a minimum requirement the load combinations of the load cases 1, 2 and 3 in Table 1 of FEM 5.004:1994 shall be calculated.

4.1.2.4 Load effects on non steel structures

Non-steel structures shall be designed with equivalent safety margins as for steel structures for their intended lifetime. Special characteristics (e.g. tensile creeping, relaxation, anisotropy, thermal behaviour) shall be considered. The technical requirements for these materials are not dealt with in this standard. Sufficient knowledge and experience shall be proven by the manufacturer of the crane or the supplier of such structures.

4.1.2.5 Load effects on load bearing components

4.1.2.5.1 General

For the purpose of this European Standard, the term "load bearing component" applies to all single parts or assemblies of parts of a crane, which are directly subjected to load effects (see 3.15).

There are two different procedures to design the components of a crane and to proof their competence. Either the components are designed individually, using the applicable standards concerning load effects and proof calculation or the pre-designed components have to be selected.

For individually designed components, the load effects derived from the service conditions shall be established by the crane designer.

For pre-designed components, the crane designer and the component designer/supplier shall identify and agree upon the relevant load effects derived from the service conditions (see 4.1.3.4).

4.1.2.5.2 Load effects on mechanisms

Differing from the (steel) structures, which are loaded by only one important stress cycle per operating cycle, the mechanisms are loaded by multiple stress cycles depending on linear movements, distances and the number of rotational movements.

The estimation of the number of stress cycles during the assumed life time of the mechanisms is based upon the written agreement upon service conditions between the user and the manufacturer of the crane.

Where the use of mechanisms is unknown, the stress cycles and assumed life time shall correspond with those values available from previous experience.

The mechanism group classification shall be in accordance with Table 6 of ISO 4301-1:1986 and Table 2 of ISO 4301-2:1985 (complies with T.2.1.3.4 of FEM 1.001:1998, booklet 2).

The load effects for mechanisms shall be calculated in accordance with 2.5 and 2.6 of FEM 1.001:1998, booklet 2.

4.1.2.5.3 Load effects on ropes

The loads acting on running and stationary ropes used directly for lifting the load or supporting the crane structure shall be calculated from the dead loads and the nominal working loads as specified in Table 1 of FEM 5.004:1994, load combination case 1.

The coefficient of utilisation depending on the crane mechanism classification shall be in accordance with ISO 4308-2. The influences of dynamic effects and friction losses shall be covered. For crane classification A1, the working load factor Φ may be taken as 1,0. The friction losses shall be calculated according to Annex P.

4.1.2.5.4 Load effects on chains

The loads acting on chains used as components for lifting the load or supporting the crane structure shall be taken as the maximum value from the two cases: maximum occurring force for the moving chain or calculating the dead loads and the nominal working loads as defined in Table 1 of FEM 5.004:1994, load combination case 1.

The chain group classification shall be in accordance with Table 6 of ISO 4301-1:1986 and Table 2 of ISO 4301-2:1985 (complies with T.2.1.3.4 of FEM 1.001:1998, booklet 2).

Dynamic effects shall be covered by increasing the load with the working load factor. Technical requirements for friction losses are not covered with in this standard.

EN 13000:2010 (E)

4.1.2.5.5 Load effects on other load bearing components

The loads acting on other load bearing components shall be calculated as specified in 4.1.2.1, if they are loaded with only one important stress cycle per operating cycle and the other conditions of Clause 6 of FEM 5.004:1994 are fulfilled.

The classification of each component, which is loaded by multiple stress cycles per operating cycle, shall be in accordance with 2.1.4 of FEM 1.001:1998, booklet 2. The load effects for these components shall be calculated in accordance with 2.2 and 2.3 of FEM 1.001:1998, booklet 2.

4.1.2.6 Load effects for determination of rigid body stability

4.1.2.6.1 General

The rigid body stability of the crane shall be in accordance with ISO 4305.

The values to be considered for the rigid body stability shall be taken as specified in Tables 1 and 2 of ISO 4305:1991.

Tipping lines of mobile cranes depend on the individual design. Examples for tipping lines are given in Annex A of ISO 4305:1991. For crawler cranes special attention has to be given to forward or backward tipping over the sprocket and/or first roller.

It is assumed that the crane is operated on a firm and level surface (up to 1 % gradient of the ground). If greater gradients of the slewing plane are allowed by the manufacturer, special capacity charts shall be provided. A minimum side gradient of 0,5 % for cranes on outriggers and/or 1 % for cranes free on tyres or crawlers shall be taken into account.

The maximum values of forces and pressures resulting thereof shall correspond to the allowable values of the inclination of the crane level and the limits shall be established for the relevant capacity charts. Special attention shall be given to the elastic deformation of the crane structure and the crane movements (slewing, luffing, travelling, etc.) increasing the supporting forces and ground pressure.

4.1.2.6.2 Stability for sudden release of the load

Accelerations due to sudden release of the load can cause tipping backwards of the crane or can cause unintended backward motions of parts of the crane. Instead of an exact calculation, a vertical upward force acting on the unloaded crane without wind loads may be used.

The vertical upward force shall be taken as ≥ 10 % of the rated capacity for cranes with classification A1 according to ISO 4301-2:1985.

4.1.2.6.3 Stability during erection and dismantling

The rigid body stability for erection of the unloaded crane and its dismantling procedure shall be considered as a special loading condition. The dead loads and the additional loads (gravitational, wind loads, etc.) increasing the tipping moment shall be amplified with a safety coefficient $\geq 1,1$.

4.1.2.6.4 Additional effects

The following additional effects shall be considered to determine adequate stability of the crane:

a) Additional effects due to elasticity of the crane

Special attention shall be paid to the elastic behaviour of the crane, considering:

- 1) effects due to elastic deformation of carrier, wheels, tyres, crawlers and outriggers;

EN 13000:2010 (E)

- 2) effects due to angle displacement of the jib system during slewing of the load according to different stiffness of the carrier in different slew ranges.

b) Additional effects due to acceleration

Accelerations due to abrupt starting/stopping of movements of the crane and/or the load can cause unintended movements of the crane and/or the load (kinetic energy). To determine adequate stability to avoid tipping of the crane sufficient potential energy shall be provided.

These dynamic effects shall be covered by calculation or by a simplified procedure using a tipping angle, see Annex F.

4.1.3 Limit states

4.1.3.1 General

Limit states shall be as specified below. Where the limit states of materials and components are not given below, they shall be laid down as written agreement between the crane manufacturer and the supplier of these materials and components on the basis of recognized methodology and standards.

The limiting values for materials shall include the static and dynamic (where required) properties for strength and ductility – depending on the dimension, the kind of fabrication (heat treatment), the allowed temperature for in- and out-of-service conditions, the elastic properties and their suitability for the production process and use.

NOTE The limit states may be found by tests of material specimen and of components or by applying theoretical methods and using basic test results additionally, if appropriate.

4.1.3.2 Limit states for steel structures

The limit values for structural and fine grained steel types of common use shall be taken from the table in Annex H (see Table 2 of FEM 5.004:1994).

The limit states for steel structures shall be calculated from the values of the relevant European Standards for materials or, where not existing, the specialized data sheets for those materials, which are not covered by harmonized standards, as provided by the manufacturers of these materials.

The permissible and/or limiting stresses of structural components and welds shall be calculated by the yield stresses and the (safety) factors according to L.2.2 and L.2.3.

4.1.3.3 Limit states for non steel structures

The limit states for non steel structures shall be calculated from the values of the relevant European Standards for materials or, where not existing, the specialized data sheets for those materials, which are not covered by harmonized standards, as provided by the manufacturers of these materials. The requirements for these materials are not dealt with in this standard.

4.1.3.4 Limit states for load bearing components

4.1.3.4.1 Limit states for mechanisms

The limit states for mechanisms shall be specified by the manufacturer/supplier of the mechanism. They are based upon information about dimensions, loading, assembly and service conditions which were taken into account when designing the crane.

The minimum requirements for the technical specification agreed between crane manufacturer and manufacturer/supplier of mechanisms shall be based upon uniform formats given for the particular type of mechanism. The technical specification for gears and drums shall include the parameters shown in the related annexes:

- Sheaves: **see Annex K.2**
- Hook blocks: **see Annex K.3**
- Hydraulic cylinders: **see Annex K.4**
- Slew rings: **see Annex K.5**

4.2 Equipment and devices

4.2.1 General principles

The ergonomic requirements for the general design of equipment and devices shall be in accordance with EN 547-1, EN ISO 7250, EN ISO 6385. The principles of EN 626-1 for selection of materials shall apply. Hazards shall be avoided according to EN 294, EN 349 and EN 811.

Sharp edges of equipment and devices which have to be accessed during normal use shall be avoided by means as laid down in 4.2.2.3.

Electrical cables shall not be installed in close proximity to hot pipes or hoses (e.g. hydraulic system, exhaust system) that are likely to cause damage to the cables.

4.2.2 Control station

4.2.2.1 General

Control stations and control devices shall be designed and placed to enable the safe use of the crane.

Control stations for the movement of the load and/or the travelling of the crane shall be provided with a cabin (crane operation cabin, crane travelling cabin). This does not apply to the provision of remote controls.

Elevated control stations shall be solidly designed and built. They shall be reliably attached to the crane. The material in the supporting structure shall be fire retardant. Damage to shock absorbers or absorbent material as a result of fire shall not allow the control station to come loose from its supports. For guidance see ISO 8566-2 and ISO 11660-2.

Elevating control stations shall be designed and built in accordance to EN 14502-2:2005.

The dimension of railings (handrail, knee and foot ledge) shall be in accordance with Figures 4, 7, 12 and Table 6 of EN 13586:1999.

4.2.2.2 Cabins

Covering and insulation of walls, floor and ceiling shall be made of fire retardant material, see 4.5.1. These materials shall minimise optical reflections disturbing the operator.

The cabin floor shall be designed to be cleaned easily without edges preventing the removal of dirt.

The cabin floor shall have a slip resistant surface (e.g. bulb plate/checker plate, open mesh, sanded paint).

Space shall be available inside the cabin for the storage of documents needed to safely operate the crane. A first aid box shall be available at least in one cabin. Space for a fire extinguisher shall be provided in or adjacent to each cabin (see 4.5.2).

Where a cabin roof is to be used during assembly and/or dismantling the surface shall be slip resistant. The loads arising from persons standing on the roof, including tools, etc. shall be taken into consideration. A proof load of 1 000 N applied evenly over an area of a 125 mm diameter disc anywhere on the surface shall not cause permanent deformation.

EN 13000:2010 (E)

Where the surface of the cabin roof is intended to drain off water, the water shall not run down the windows.

4.2.2.3 Sharp edges

Parts of the equipment inside the cabin which are accessible during normal use shall not present any sharp edges or points which could cause injuries. Edges shall have radii (minimum 1 mm) or be chamfered (minimum 1 mm × 1 mm) or be covered achieving an equivalent level of safety.

4.2.2.4 Emergency exit

The crane operating cabin shall have exit routes for emergency evacuation in at least two directions. Emergency exits shall be easily recognised and opened from inside the cabin. The emergency exit route in a direction other than that of the normal entrance to the cabin may take the form of an opening with a size of an emergency exit as specified in ISO 11660-2. For example, an opening window or a window opening with an easily removable window pane of that size is suitable.

4.2.2.5 Space envelope

The space inside the cabin shall permit all operating controls to be actuated from the working position. The space shall also afford accessibility for the supervision, repair, etc. of the equipment inside the cabin. The minimum internal dimensions shall be in accordance with Figure 1 of ISO 8566-2:1995.

For cranes designed exclusively for use in confined spaces (e.g. lifting/travelling under low headroom conditions) the cabin dimensions can deviate from ISO 8566-2.

4.2.2.6 Heating and ventilation

Means shall be provided to keep the air temperature inside the closed cabin at 18 °C minimum at a reference outside temperature of – 10 °C. The cabin shall be such as to protect against draughts.

The cabin shall be provided with adjustable ventilating equipment. The equipment shall be capable of supplying air from the outside. The fresh air valve shall be adjustable.

Heating means which are powered by gas, petrol, diesel or burning oil shall be installed in such a way that there is an adequate supply of fresh air to ensure complete combustion and that the exhaust gases cannot ingress into the cabin regardless of wind direction and speed.

4.2.2.7 Doors and windows

All crane operating cabin doors, whether of sliding or swinging type, shall be provided with a means of restraint from inadvertent opening or closing during travelling or operation of the crane. The door adjacent to the crane operator shall open outward or slide backward to open. The door shall be capable of being retained in the open position.

Crane operating cabin doors shall be lockable from the outside but not the inside. The door shall always be able to be opened from the inside without a key whether locked or not.

Crane operating cabin windows shall be equipped with latches which guard against opening the windows from outside the cabin.

All cabin windows shall be made of a material which will not produce sharp edges if broken (e.g. toughened or laminated glass) and that do not lose transparency in exposure to natural light.

Roof windows shall withstand or be protected against falling tools, see 4.2.3.

4.2.2.8 Cabin lighting

All cabins shall be equipped with lighting to allow all information contained within the cabin, such as manuals, signs, labels or rated capacity charts, to be readily legible during operating conditions in accordance with ISO/CIE 8995-1, -2 and -3. The lighting shall be provided by a permanent installation.

4.2.2.9 Specific requirements for crane travelling cabins

Crane travelling cabins with a floor higher than 0,65 m above ground shall have entrances and exits with:

- a) step width of min. 300 mm;
- b) step depth of min. 80 mm;
- c) foot space height of min. 150 mm;
- d) foot space depth of min. 150 mm.

Steps shall:

- e) have the same distance of max. 400 mm to each other;
- f) be arranged in one straight line.

The access shall have ergonomic handrails.

4.2.2.10 Specific requirements for crane operating cabins

Cabins with a floor higher than 1,0 m (to be measured from ground level) shall be provided with handholds. Other control stations or crane operating cabins with doors opening outwards above 1,0 m height shall be provided railings which prevent the operator from an accidental headlong fall.

Cabins with a floor higher than 2,5 m (to be measured from ground level) shall be provided with a platform and railings. This platform shall have enough space for at least two persons. Other control stations above 2,5 m height shall be provided with a platform with handholds and railings.

4.2.3 Protection against falling tools

As a minimum, the roof of the crane operating cabin including windows in the roof shall be able to withstand the impact of a steel ball weighing 7 kg, falling from a height of 2 m, without plastic deformations exceeding 50 mm.

4.2.4 Seats

4.2.4.1 General

The crane operating cabin shall be fitted with a seat having sufficient adjustments to enable the crane operator to operate the crane according to the ergonomic principles given in EN ISO 6385.

The seat shall be able to be locked in its adjusted positions. If foot supports and/or armrests are provided, accessibility to the crane operator's seat shall be maintained and the operation of the crane shall not be limited.

NOTE The seat should be provided with an adjustable headrest.

4.2.4.2 Dimensions

The seat dimensions shall conform to Annex E. The Seat Index Point (SIP) is given in EN ISO 5353.

NOTE The dimensions are based on EN ISO 3411.

EN 13000:2010 (E)

4.2.4.3 Adjustments

All adjustments to accommodate the crane operator's size and weight shall be readily achievable without the use of any tool.

4.2.4.4 Vibrations

The value of vibrations transmitted by the crane operator's seat shall not exceed the limiting values specified in EN ISO 7096 and ISO 2631-1. The weighted acceleration shall be less than the given health guidance zones in ISO 2631-1. The vibration transmitted by the crane operator's handles/armrests shall be measured and valued according to EN ISO 5349-1 and EN ISO 5349-2.

4.2.4.5 Restraint system

If a restraint system is required, it shall conform to EN ISO 6683 unless otherwise specified by prevailing road regulations.

It is preferred to have the seat belt anchorage attached to the seat with the belt locking device to the side of the crane operator. Anchorage shall permit the restraint system to be readily installed or replaced.

4.2.5 Controls and control systems

4.2.5.1 General

All safety related functions of the controls mentioned in the subclause below shall be in accordance with EN 954-1:1996 category 1, all electronic evaluation devices with category 2.

NOTE 1 The crane operator interacts via a man-machine interface with the machine in an open loop system. This interface consists of control devices by means of which the crane operator initiates actions and by indicators the crane operator receives information. In addition certain motions of the crane are limited by motion/performance limiters and the rated capacity limiter. These limiters form an integral part of the control system.

NOTE 2 With the present state of art the control system of a mobile crane with the crane operator as a part of the system cannot prevent every dangerous situation. There are several influences which cannot be automatically controlled. The following list is not exhaustive:

- wind forces on the crane and/or the load;
- dynamic influences due to abrupt motions (influences outside the control system);
- ground conditions;
- demolition work.

4.2.5.2 Control devices

Control devices shall be in accordance with EN 614-1, EN 894-3, EN 1005-3 and EN 61310-2. The arrangement and the direction of movements of the control devices shall be in accordance with ISO 7752-2.

In case of more than one control device, the use of one of them precludes the use of the others.

The starting of a movement shall be possible only by intended actuation of a control device provided for this purpose.

The crane shall be provided with means to give an audible warning to persons in the vicinity of the crane (e.g. when the engine is started, when motions are initiated). This device shall only be able to be activated by the crane operator. The acoustic warning shall conform to the appropriate clauses of EN ISO 7731.

Control devices for extending/retracting the outrigger beams shall be in a position or provided with means where the movements of the outriggers can clearly be seen by the crane operator and from where crushing of the crane operator is not possible. If the horizontal movement of the outriggers is controlled from ground level, it shall only be possible to affect that movement on the side where the controls are situated.

EN 13000:2010 (E)

With the present state of art, it is not possible to provide a complete view of all the danger zones from one control station. Therefore means for the viewing of danger zones (e.g. mirrors, TV-cameras) or control stations at different places related to the hazardous movement shall be provided.

In case crane functions including all outrigger movements (e.g. sliding beams, slewing beams, support cylinders), pinnings, assembly devices, etc. are controlled by cable less control systems, EN 13557 applies.

NOTE By means of cableless control systems all danger zones can be completely monitored by direct view, whilst being out of the danger zone

Resetting devices where fitted require additional protection to avoid inadvertent activation (e.g. key switch).

On systems with electronic selector switches (e.g. keyboards) the breakdown of the power supply with loss of the stored information, the recovery of power supply shall result in a reset whereby no selection is activated.

To enable the crane operator to check the selected configuration and compare it easily with the configuration of the machine itself the following shall be provided:

- symbols and figures at or near to the configuration selector switch; or
- in case of coded information (e.g. thumbwheel with code numbers), the code number shall refer to each different configuration. Each code number shall be printed in the relevant place on the capacity chart.

4.2.5.3 Starting

The starting system shall be in accordance with EN 1037.

Means shall be provided so that no unintended movement of the crane is possible until the crane operator is in the prescribed operating position (e.g. armrest switch, dead man switch, seat switch).

4.2.5.4 Stopping

All control devices shall move to the neutral position (stop) when released.

An engine cut off with a red push button of mushroom type on a yellow surface, that remains in the off-position, to enable the stopping of the engine(s) shall be provided. It shall be located at a prominent place in the cabin within easy reach through the door. These stopping devices are required only on engine(s) for load motions and are not required on specific engine(s) related to travel and outrigger motions only.

NOTE Emergency stop equipment according to EN ISO 13850 does not reduce the stopping time for dangerous motions. Contrarily emergency stop can generate additional hazards due to inertia of moving masses if they are stopped abruptly (e.g. swinging of the load).

4.2.6 Limiting and indicating devices**4.2.6.1 General**

The requirements of EN 12077-2 apply.

4.2.6.2 Requirements for indicators, displays and limiters**4.2.6.2.1 General**

All information provided by the indicators and displays shall be visible from the control positions, including remote controls, where that information is required.

Indicators and displays to ensure safe operation of the crane shall be in accordance with the appropriate clauses of EN 894-2 and EN 61310-1. Audible indicators shall be in accordance with EN ISO 7731. Visual indicators and displays shall be in accordance with the appropriate clauses of EN 842.

EN 13000:2010 (E)

All safety related parts of limiting and indicating devices mentioned in the subclause below shall be in accordance to EN 954-1 category 1, all electronic evaluation devices with category 2.

If two or more motions can be carried out simultaneously, the motion/performance limiters shall take into account the effects of the possible combinations.

The effect of one motion upon another shall also be taken into account by the system where movement of that motion may cause another limit of motion or characteristic of performance to be exceeded.

The response of indicators and displays shall follow the corresponding motion with a suitable precision (e.g. $\pm 5\%$) and speed, so that they always show the current situation.

For stepped values (e.g. lattice jib length, or telescoping jib length with locking pins) the indicated values shall correspond directly to the related capacity chart.

At or near to each indicator at the control station(s) there shall be a legible and durable explanation of the function of the device (preferably by a symbol, see 7.3 or e.g. by the position of a selection device, by a turn wheel for falls of hoisting line).

4.2.6.2.2 Motion limiters

Any motion which has a designed restriction of movement has to be kept in the designed range. This can be done either by motion limiters or by the design of the device itself, e.g. limited stroke of a hydraulic cylinder.

NOTE 1 Regarding the state of the art, it is impossible to prevent automatically every dangerous motion or to prevent automatically every collision, e.g. man-machine, machine-machine, machine-fixed obstacle.

NOTE 2 Working space limiters and/or anti-collision devices can be provided if agreed between manufacturer and user of the crane. These devices cannot prevent hazards due to swinging of the load and/or the crane or parts of the crane caused by abrupt starting or stopping of movements caused by incorrect operation.

Where a motion is provided with a motion limiter, after the triggering of that motion limiter, movement in the opposite direction to a safe condition shall be possible without resetting.

Movements of attachment parts (for example luffing jibs), with restricted visibility and designed restrictions which cannot be easily monitored by the crane operator, shall be equipped with two consecutive motion limiters or with other devices ensuring the same level of safety (for example two independent angle sensors).

Where a motion is provided with two consecutive limiters, it shall not be possible to operate the limited motion after the second limiter has been activated. A reset action is necessary before the movement in the opposite direction is possible.

4.2.6.2.3 Performance limiters

A motion shall have a performance limiter if:

- the motion has a designed performance limitation which if exceeded can cause a failure of the structure or the mechanisms, overturning of the crane or falling of the load;
- there is an external influence which can cause the performance limitation to be exceeded (e.g. gravity).

NOTE Performance limiters are often an integral part of the system (e.g. a given diameter of a tube in a hydraulic system restricts the flow of hydraulic oil and therefore restricts the speed of lowering the load).

Performance limiters shall operate automatically when the respective performance limit is reached.

4.2.6.3 Mandatory limiters and indicators

4.2.6.3.1 General

The rated capacity limiter/indicator shall conform to 4.2.6.3.2 and 4.2.6.3.3 for all rated capacities given on the rated capacity chart and the test certificate for the crane.

A rated capacity limiter/indicator shall operate automatically without the need for resetting during a lifting cycle.

Where a crane can be operated in different configurations, there shall be a precise and continuous indication of the crane configuration for which the rated capacity limiter/indicator has been set. As a minimum requirement, the configuration selection device shall provide a direct description of the configuration selected, or indicate a code which can be checked against a separate list of codes/configurations which are given on the capacity chart or attached to it.

The location/design of any configuration selecting device shall prevent alteration of the setting by the operator from the application of a load to the release of that load, but it shall be readily accessible whenever the configuration is changed.

On mobile cranes which can be operated in different configurations (e.g. on wheels, on outriggers, different counterweights, different jib length, different number of falls) no unintended change of the configuration selection shall be possible (e.g. location of selection device, separate confirmation of settings).

NOTE Normally there is no check (automatic plausibility check), whether the selected configuration corresponds with the real configuration.

Selections of configurations not referring to configurations of the crane permitted by the manufacturer shall not allow the crane to operate.

The design and installation of rated capacity limiters and indicators shall be able to withstand overloads during test and verification without dismantling and without affecting their performance (see 5.1).

4.2.6.3.2 Rated capacity limiter

All mobile cranes having a rated capacity of not less than 1 000 kg or an overturning moment of not less than 40 000 Nm shall be fitted with a rated capacity limiter.

The rated capacity limiter shall prevent the crane from supporting a load outside the limits of the permitted radii, and outside the positions and loads shown and/or described on the rated capacity chart and current test certificate or the permissible working load of the ropes.

The rated capacity limiter shall operate, with lowest possible working speed, between 100 % and 110 % of the rated capacity. This tolerance shall be achieved by the complete installation as fitted to the crane.

In case of increased tolerances additional structural strength and stability shall be provided to achieve the same level of safety as for above mentioned standard tolerance. The values of increased tolerances shall be given in the crane documentation.

The rated capacity limiter shall operate to override the controls of the crane:

- a) to prevent any motion that will lead to an overload condition; and
- b) to prevent dangerous movements of the load.

For a mobile crane the motions that shall normally be overridden by the rated capacity limiter when triggered are:

- c) derricking out;
- d) derricking in;

EN 13000:2010 (E)

- e) hoisting;
- f) telescoping out.

NOTE 1 An override key for d) may be provided within the reach of the operator (for derricking in a suspended load).

NOTE 2 The derricking in/luffing in of a grounded load is not to be permitted (see 6.2.2.2, g)).

The rated capacity limiter shall not prevent the crane operator from returning the controls to the "stop" position and starting any motions that will move the crane to a safer condition.

The rated capacity limiter, once triggered, shall remain active until the overload has been removed. In all working areas of the crane, for which load charts are available, the crane control system shall ensure that it is not possible to override the rated capacity limiter excepted in the particular cases (see 4.2.6.3.3).

4.2.6.3.3 Particular cases for the rated capacity limiter

Two particular cases in crane operation shall be covered as follows:

- a) For **rigging-/de-rigging procedures** and for **special operating conditions**, such as deadlock of the rated capacity limiter, a set-up button may be provided:

NOTE The set-up button is an electrical momentary contact switch that is not mechanically latched.

- 1) For rigging/de-rigging procedures, where no load charts provided by the manufacturer are available, it is admissible to override the rated capacity limiter using the set-up button. These rigging/de-rigging procedures shall be described in the crane operator instructions and available to the operator.
- 2) For special operating conditions (e.g. deadlock), the shut-off limits of the rated capacity limiter shall not exceed 110 % (plus tolerance) of the load chart when the set-up button is actuated. Here, the speeds of all movements shall be only max. 15 % of the permissible working speed for the corresponding load case.

For mobile cranes where an actuating device controls the hydraulic pressure, this speed reduction may be provided by a central control pressure reduction. All speeds must be hereby reduced to max. 25 %.

This set-up button shall not allow any movement which can lead to component failure or loss of stability.

The increase of the shut off limits by the set-up button shall automatically reset when the control lever(s) is/are in neutral position, or at engine stop, with a delay of 10 s being permissible.

- b) In case of a **failure of components** of the rated capacity limiter/the load moment limiter, or in emergency situations, a bridging device may be necessary. For this case, bridging device may be provided, if:
 - 1) the bridging device is located outside of the crane operator's cab and is under lock and key (e.g. a switch in a locked cabinet or a key switch); and
 - 2) the bridging of the rated capacity limiter resets automatically:
 - i) at engine stop;
 - ii) not later than after 30 min; and
 - 3) upon actuation of the bridging device, the speeds of all **movements increasing the loading condition** are only max. 15 % of the permissible working speed for the corresponding load case.

For mobile cranes where an actuating device controls the hydraulic pilot pressure, this speed reduction may be provided by a central control pressure reduction. This shall reduce **the speeds of all movements increasing the loading condition** to max. 25 %.

EN 13000:2010 (E)

If the mobile crane is equipped with a set-up button and/or a bridging device, then a data recorder shall be available which meets the following criteria:

- the data shall be recorded automatically, independent of the crane operator;
- each actuation of the set-up button or the bridging device, which leads to an overloading of the crane (> 100 % of the set load chart), shall be recorded. Here, the size of the overloading shall be recorded;
- in addition, if the set-up button, or the bridging device, is activated, all data shall be recorded which are relevant to reconstruct the last load case;
- a suitable interface to read out the data shall be available;
- suitable measures shall prevent the manipulation of the recorded data;
- the function of the data recorder shall be automatically checked each time the crane is put into operation. A data recorder malfunction shall be indicated to the crane operator.

4.2.6.3.4 Rated capacity indicator

All mobile cranes having a rated capacity of not less than 1 000 kg or an overturning moment of not less than 40 000 Nm shall be fitted with a rated capacity indicator.

The rated capacity indicator shall give warnings in accordance with EN ISO 7731 and EN 842, for all motions that induce an approach to the rated capacity or an excess of the rated capacity as shown on the rated capacity chart and the test certificate for the crane.

The rated capacity indicator shall warn:

- a) the crane operator both visually and audibly of the approach to the rated capacity;
- b) the crane operator both visually and audibly and persons in the danger zone of the crane audibly so that they can take heed of the warning when the rated capacity limiter is activated;
- c) persons in the danger zone of the crane visually and audibly when the rated capacity limiter has been overridden.

Warnings for both the approach to the rated capacity, and for the rated capacity being exceeded, shall be continuous. There shall be a clear difference between the warning for approach and the warning for overload.

The rated capacity indicator shall give a warning of approach to the rated capacity starting between 90 % and 97,5 % of the rated capacity of the crane.

NOTE This gives the crane operator time to react to the warning and prevent the crane from being overloaded, e.g. slowing down of movements, to prevent the load from swinging.

No provisions shall be made for the crane operator to cancel a warning from the control station, except for the audible warning required by a) and b) above where a cancellation facility may be provided for this warning that only becomes operable after the warning has been active for 5 s. If such a cancellation facility is used, followed by the crane returning to a condition requiring an audible warning, the warning shall automatically operate.

The rated capacity indicator shall continue its function when the rated capacity limiter is overridden during testing, rigging or de-rigging.

Provisions can be made to cancel the audible warning during calibration and testing of the crane. Provisions can also be made for a rigging setting that inhibits audible warnings during the rigging of the crane.

The rated capacity indicator shall be such that its operation, but not necessarily its accuracy, can be checked without applying loads to the crane.

EN 13000:2010 (E)

4.2.6.3.5 Crane level indicator

The crane level shall be indicated at or near at the crane operating cabin within the view of the crane operator. Mobile cranes supported by outriggers shall have in addition a crane level indicator at each outrigger control station where the levelling motion(s) can be controlled. The crane level indicator shall have an accuracy better than $\pm 0,1^\circ$.

4.2.6.3.6 Hoisting limiter

All cranes shall be fitted with a hoisting limiter to stop all motions which can cause the hook block to make contact with the jib/jib head and cause damage. Bridging of the hoisting limiter shall only be possible for rigging operations and transport. The bridging device has to be of the type that requires to be held in the override position.

4.2.6.3.7 Lowering limiter

All cranes shall be fitted with a lowering limiter. As a minimum the lowering limiter shall ensure three turns of rope on the drum. Bridging the lowering limiter shall only be possible for rigging operations, transport and changing of the rope. The bridging device has to be of the type that requires to be held in the override position.

4.2.6.3.8 Additional mandatory indicators

All mobile cranes having a rated capacity of not less than 1 000 kg or an overturning moment of not less than 40 000 Nm the following indications shall be given to the operator on the indicator(s) for the current configuration and position of the crane with the following requirements:

- a) Continuous display during crane operation:
 - 1) utilisation of rated capacity: for all configurations, given as an analogue display with marking of the loading status of the crane (e.g. green; yellow – approach to rated capacity; red – overload condition);
 - 2) rated capacity: for cranes with a rated capacity in excess of 5 t a display of permitted load in accordance with the rated capacity at the actual radius/outreach or jib angle;
 - 3) working load: for cranes with a rated capacity in excess of 5 t (indication of load on the hook plus mass (weight) of hook and block).

NOTE For the purpose of error checking or adjustments special displays superseding the continuous display may be selected temporarily during crane operation(s).

- b) Selected display (to be selected manually by the crane operator):
 - 1) Related to capacities – display of:
 - i) radius/outreach: when the crane is on radius/outreach related rated capacities; on non-slewing cranes the outreach to the tipping axis shall be displayed;
 - ii) jib angle: when the crane is on angle related rated capacities;
 - iii) fly jib angle: for luffing fly jib configurations, when the crane is on angle related rated capacities;
 - 2) display of wind speed: when the crane has a jib combination length in excess of 65 m, or where the stowing time is more than 5 min;
 - 3) display of slew range: when the crane has slew range related rated capacities;
 - 4) display of jib length: for telescopic jib cranes;
 - 5) display of jib lock: for telescopic jibs with locking mechanisms;
 - 6) display of axle lock: for cranes with axle locking mechanisms;

- 7) display of falls of hoisting line: for all configurations;
- 8) display of slew position: when the crane is on slew range related rated capacities;
- c) Audible indicator:
 - 1) During travelling/slewing (audible warning): on cranes (on tyres and crawlers) where the operator has no clear view immediately behind the crane when travelling backwards. On cranes with additional counterweight (see A.7) when slewing.

4.2.6.3.9 Additional mandatory limiters

The following mandatory limiters shall be fitted to the crane under the following conditions:

- a) maximum and minimum jib angle for all configurations;
- b) maximum and minimum fly jib angle for luffing fly jib configurations;
- c) telescoping for telescopic jib cranes;
- d) slewing where there are slew range related rated capacities;
- e) control station position for cranes with moveable control stations;
- f) mast/A-frame position where mast/A-frame shall be kept within limits;
- g) slack rope on special configurations (see A.7) where slack rope may cause a special hazard.

4.2.7 Steering system

4.2.7.1 Steering – On-road mobile cranes

The steering shall ensure safe handling of the vehicle at speeds up to those permitted. The steering systems shall have power assistance with minimum two independent circuits and an automatic indication if the power assistance of one of the circuits fails.

NOTE 1 The steering system of on-road mobile cranes is subjected to national and European regulations (e.g. 70/311/EEC as amended, with vehicle category N3).

NOTE 2 Since the above covers steering control effort in the event of a single failure it can be assumed to meet the requirements of A.3.3.5 of EN ISO 12100-2:2003.

4.2.7.2 Steering – Off-road mobile cranes

The steering equipment shall ensure safe handling of the vehicle, including where the crane is permitted to travel with load, at speeds up to those permitted by the manufacturer.

Any crane conforming to the requirements of 4.2.7.1 can be considered to conform to the requirements of this clause.

For on site travel design speeds of 25 km/h and below it is not necessary to fit additional equipment to cater for a power assistance failure.

For travel design speeds on site greater than 25 km/h the steering shall not become inoperative because of the failure of a single power supply (electric, hydraulic, pneumatic) to either the power assistance of the steering system or the controls.

The permitted steering control effort requirements shall be as given in Annex M.

EN 13000:2010 (E)

Steering controls for crawler cranes shall meet the requirements of 4.2.5.

4.2.7.3 Steering – Crane operating cabin

Where the crane is steered from a crane operation cabin on the rotating upper structure an indication of the direction of movement or an automatic change of the direction of steering – depending on the position of the rotating upper structure – shall be provided.

4.2.8 Braking systems

4.2.8.1 Braking systems for crane motions

4.2.8.1.1 General

This subclause covers static holding brakes and dynamic braking systems for crane mechanisms (e.g. hoisting, derricking and slewing mechanisms).

Smooth deceleration of each crane motion shall be achieved by a braking system (e.g. hydraulic brake, electric brake, mechanical friction brake). The minimum requirements shall be as follows:

- a) the wearing surface of all brake drums or plates shall be smooth and homogenous;
- b) the wearing surface of disk brakes may be of compound lining type and/or sinus disc type;
- c) brake linings shall be adequately and permanently secure during their effective life;
- d) dry type brake blocks and linings shall be protected from oil, grease and any environmental conditions which might affect brake performance;
- e) wet type brakes shall be reliably sealed for their lifetime;
- f) where the design of brakes requires inspection of the linings for maintenance, it shall be possible to verify the wear of the linings without dismantling. To ensure effective operation of the brake between such inspections or maintenance periods either sufficient torque reserve or a self-compensating system shall be provided;
- g) brake mechanisms that rely upon air or fluid under pressure or an electrical or electro-mechanical mechanism for application shall be such that the brake is applied automatically in the event of loss of energy of the operating system;
- h) static holding brakes for securing hoisting or derricking motions shall be such that the brakes are applied automatically in the event of loss of energy of the operating system. The brakes shall be connected directly to the drive/mechanism;
- i) on mechanisms where the drive can be disconnected from the drum freefall of the load and/or parts of the crane shall be avoided by adequate means (e.g. interlocking arrangement).

4.2.8.1.2 Hoisting and derricking brake

The holding brake for hoisting and for derricking systems operated by hoist and drum mechanisms shall be able to exert a restraining torque at least 33 % greater than the maximum torque transmitted from the rope drum to the brake under working or erection conditions, whichever is greater.

Mechanisms with dynamic braking systems (e.g. hydraulic brake valve, electrical braking) shall have a secondary holding brake system which is independent of the dynamic brakes restraining the same torque as for the primary holding brake.

The holding brake shall perform the function of an emergency brake for at least one operation in the event of failure of the dynamic brake system to avoid freefall. The holding brake shall operate automatically when the energy

supply is switched off. The deceleration in an emergency case shall not lead to damage to the structure, ropes, drums and mechanisms.

NOTE After such an emergency stop it may be necessary to carry out maintenance, see 6.4.3, b).

4.2.8.1.3 Slewing brake

Slewing mechanisms shall be provided with a holding brake or a locking mechanism to hold the superstructure and jib system during operation with load and during out-of-service condition in a safe position. The holding brake/locking mechanism shall withstand a torque moment at least 25 % above the torque required for holding the acting torque derived from wind loads combined with the inclination permitted by the manufacturer. The locking mechanism shall be able to be actuated in all permissible slewing positions.

The crane shall be equipped with a dynamic braking system which allows smooth deceleration by the crane operator. The deceleration shall not cause any damage to the structure of the crane. The dynamic braking system may be hydraulic, electric or mechanical.

If a mechanical brake is used as holding brake and as dynamic braking system, different controls for both applications shall be provided.

4.2.8.2 Braking systems for travel motions

4.2.8.2.1 On-road mobile cranes

The braking system shall ensure safe deceleration of the vehicle at speeds up to those permitted. The braking system shall have power assistance and have minimum two independent circuits with an automatic indication if the power assistance of one of the circuits fails. A parking brake shall be fitted.

NOTE The braking system of on-road mobile cranes is subject to national and European regulations (e.g. 71/320/EEC as amended with vehicle category N3).

4.2.8.2.2 Off-road mobile cranes on tyres

Off-road mobile cranes on tyres with a on site travel design speed greater than 25 km/h shall conform to 4.2.8.2.1. Off-road mobile cranes on tyres with a on site travel design speed of 25 km/h or below shall conform either to the requirements of 4.2.8.2.1 or at least to the following requirements for travelling, parking and emergency braking systems.

a) Travelling braking system

The travelling braking system shall have an efficiency of at least 25 % of gravitational acceleration measured on a decelerometer when stopping on level, dry and firm ground from half of the manufacturers permitted off-road speed when in normal travelling order without load.

b) Parking braking system

Besides the travelling braking system a parking braking system is required. A parking braking system shall be fitted to restrain all the loading, wind and gradient conditions specified by the manufacturer when the crane is in normal use.

This braking system shall be capable of holding the unloaded crane in normal travelling order on a gradient not less than 15 %. It shall also be operated by a separate system to that for the travel braking. The parking brake function may be achieved by the travelling brake.

Testing shall either be by means of a decelerometer on level ground or facing both up and down a gradient of 15 % minimum.

c) Emergency braking system

EN 13000:2010 (E)

An emergency braking system shall be fitted to gain sufficient deceleration in case of failure of the travelling brake system. The emergency braking system shall be operated by fully independent and easily accessible controls.

Parking brake and emergency brake can be combined in the same system provided that it is purely mechanically operated. The emergency brake function may be achieved by the travelling braking system and/or parking braking system.

4.2.8.2.3 Off-road mobile cranes on crawlers

Off-road mobile cranes on crawlers shall conform to the requirements for travelling and parking braking systems following below.

a) Travelling braking system

A travelling braking system shall be fitted capable of slowing down and braking so as to ensure safety under all the operating, loading, speed and gradient conditions specified by the manufacturer when the crane is in normal use.

If braking during travel can safely and smoothly be applied by using the hydraulic driving system an additional travelling braking system is not necessary.

b) Parking brake

A parking braking system shall be fitted to restrain all the loading, wind and gradient conditions specified by the manufacturer when the crane is in normal use.

This braking system shall be capable of holding the unloaded crane in normal travelling order on a gradient not less than 15 %. It shall also be operated by a separate system to that for the travel braking. The parking brake function may be achieved by the travelling brake.

If friction loses in the crawler drive allow adequate braking, an additional parking brake system and a separate activation of the brake is not necessary. When determining these loses the friction and/or the holding torque in the hydraulic motor shall be neglected.

4.2.9 Protection devices

4.2.9.1 Moving parts

The control station shall be provided in such a way that the hands, arms, the head or other parts of the operators body cannot be crushed due to proximity of moving parts (e.g. jib, derricking, cylinder). The safety distances of EN 294, EN 349 and EN 811 shall apply.

The slewing ring and the hoists shall have protection to avoid the insertion of hands or limbs in the areas of gearing (pinion protection). All points where hazards can occur at open rope and chain drives and other moved parts (for hoist drums see the following paragraph) shall have a protection against crushing, shearing or drawing-in of limbs. The safety distances specified in Tables 1, 3, 4 and 5 of EN 294:1992 and EN 811 apply.

Due to the nature of mobile cranes parts move close to each other without the possibility to mount protection devices (e.g. slewing superstructure including counterweight related to carrier, boom related to luffing cylinder and/or carrier, outrigger beams). In these areas the requirements of EN 294, EN 349 and EN 811 cannot be met in all cases, appropriate instruction and warning shall be given (see 6.2.2.2, c)).

The hoist drums, pulleys of jibs, fly jibs, hook blocks shall be installed in such a way that reeving operations can be conducted with a minimised risk of trapping or drawing-in of hands or arms into jamming areas. Areas with remaining risks of trapping or drawing-in shall be clearly marked (see 7.2).

Handles shall be provided on hook blocks to remove the need to approach the trapping and drawing-in areas.

EN 13000:2010 (E)

The design shall ensure that a rope is not able to jump off the drum or sheaves sideways, even in the case of slack rope (e.g. if the drum is provided with flanges, the projection of the flanges above the outer rope layer shall be at least equal to 1,5 times the rope diameter; in case of sheaves the gap between the outside diameter of the sheave and the inside face of the stirrup or protective casing surrounding the sheave shall not exceed $\frac{1}{3}$ of the rope diameter or 10 mm whichever value is the smaller one).

4.2.9.2 Guards and restraints

Guards and restraints shall be in accordance with ISO 11660-2 and EN 953.

Fixed guards e.g. for fly wheel cover and other rotational drive components shall be fixed by systems that can be opened or removed by tools. These fixing systems (e.g. captive fasteners, sash fastener) shall remain attached to the guards or to the machinery when the guards are removed. Where possible, guards shall be incapable of remaining in place without their fixings.

4.2.9.3 Access**4.2.9.3.1 General**

The design of access for erection, dismantling, maintenance, inspection and to control stations shall be in accordance to EN 13586.

For the purpose of determining the dimension for accesses the following rule applies:

- a) level ground;
- b) crane on outriggers;
- c) wheels 50 mm free of ground/crawler support rolls free of loading.

NOTE For other set up conditions adequate means for safe access should be provided by the user, see 6.2.1, e).

Deviating from 6.6 of EN 13586:1999, side protection for platforms and walkways up to a height of 2,50 m is not required if either:

- a safe access with related ergonomic handrails or handholds for three point support are provided; or
- the free standing width of walkways or platforms is at least 0,5 m.

Due to the nature of mobile cranes the distance between chassis and slewing platform is limited. In this area the clearance from handle to wall can be minimum 40 mm.

4.2.9.3.2 Access to control stations

The access to the cabins shall be in accordance with type 1 access of EN 13586:1999. For the purpose of measuring the distance from the ground to the lowest step of the access the basis of measurement is taken as follows:

- a) For all mobile crane types: Solid level ground;
- b) For cranes on wheels: Levels in transport positions – suspension locked if necessary;
- c) For cranes on outriggers: Lifted until wheels or rollers are free of loading.

Safe egress from the crane operating cabin shall be possible in every operating position of the crane. If this is possible only with movable access systems (e.g. movable platforms or movable ladders), instructions for selection, installation and safe use of this access systems shall be given in the manual.

NOTE Requirements for the emergency exit are given in 4.2.2.4.

EN 13000:2010 (E)

4.2.9.3.3 Access for maintenance, inspection, erection and dismantling

The access to components or parts of the crane for maintenance, inspection, erection and dismantling, shall be in accordance with EN 13586.

If safe access is possible only with personal protective equipment (e.g. safety harness) and/or movable access systems (e.g. movable platforms or movable ladders), instructions for selection, installation and safe use of this access systems shall be given in the manual.

4.2.9.4 Exhaust system

Exhaust systems shall be designed so that the emissions do not present a hazard at control stations. The exhaust system shall be installed in such a way that the exhaust gases cannot ingress into the closed cabins provided with the crane regardless of wind conditions.

4.2.9.5 Hot surfaces

The temperature of accessible surfaces located less than 300 mm from foreseen hand positions shall not exceed the 10 s burning point (lowest value) for the relevant materials given in EN ISO 13732-1.

NOTE Protection devices may be required to achieve the above mentioned objective.

This requirement does not apply to surfaces heated by solar radiation or for areas accessed only during maintenance and repair.

4.2.10 Hydraulic and pneumatic systems and components

4.2.10.1 General

The hydraulic and pneumatic components shall be such that the power system can be operated at the intended maximum working pressure (including the pressure during overload test) without failure of the components.

The hydraulic power system shall conform to EN 982. The pneumatic power system shall conform to EN 983.

The power systems shall have adequate filters to avoid contamination of the medium.

Inspection of hoses, fittings and components shall be feasible except those located inside frames, etc. It shall be possible to inspect directly or indirectly (e.g. mirror) the end fittings and the first $3 \times d$ length of hose entering such fittings (where d is the outside diameter of the hose). If this is not practicable special arrangements shall be provided, e.g. fit protective valves, short inspection periods (see 6.4.2 and 6.4.3).

4.2.10.2 Hydraulic components

4.2.10.2.1 General

Every hydraulic circuit shall be fitted with a device for indicating the working pressure, or shall be equipped with a pressure measurement outlet to which a measuring device can be connected.

4.2.10.2.2 Hydraulic steel pipes

Hydraulic steel pipes complete with their end fittings shall have a minimum safety factor of 2,5 between working pressure and bursting pressure.

4.2.10.2.3 Hydraulic hoses

For the purpose of this standard hydraulic hoses are understood to be complete with their end fittings.

EN 13000:2010 (E)

Hydraulic hoses shall conform to EN 853, EN 854 or EN 856 in respect of their type. A minimum safety factor of 4 between working pressure and bursting pressure is required for all hoses.

The hoses shall be installed in such a way that the minimum bending radius is in accordance with the hose manufacturer's specification.

Hoses subjected to a working pressure of more than 15 MPa (150 bar) shall not be fitted with removable fittings (e.g. screw type).

NOTE Hoses with fittings are considered to meet the requirement if the assembly requires the use of dedicated tooling (e.g. a press) and parts provided by the hose manufacturer.

For hydraulic hoses containing fluid with a working pressure of more than 5 MPa (50 bar) and/or having a temperature over 50 °C and which are located within 1,0 m of the crane operator at the control station, deflecting shields shall be provided to protect the crane operator from hazards arising from sudden hose failure where no other component or structure of the crane performs this function.

4.2.10.2.4 Pressure-Limiting valves

Pressure-limiting protective valve(s) shall be fitted in every hydraulic circuit to provide protection against excess of pressure. The adjustment of protective valves shall require the use of tools and be capable of being sealed. The limited pressure shall not exceed 110 % of the maximum working pressure.

4.2.10.2.5 Hydraulic cylinders

Load bearing hydraulic cylinders (e.g. luffing, telescoping, outrigger cylinder) shall be fitted with a device, which will stop the movement in the event of hose rupture or pipe fracture, e.g. automatic closing hydraulic brake valves, pilot operated non-return valves (protective valves). This device shall be placed inside or directly connected to the cylinder.

Where it is necessary to have a connection on the cylinder side of the protective valve (e.g. pressure gauge for rated capacity limiter/indicator) than in the event of a failure in the circuit the flow shall be restricted to the extent that the operator can take action before a dangerous situation arises.

In addition to the above, where two cylinders operate in parallel (e.g. luffing), a suitable valve system (e.g. protective valves) shall be provided to ensure that in the event of loss of pressure to one cylinder the other cylinder shall be protected against overloading. The design and location of these devices shall limit the speed of motion which can occur to 10 % of maximum speed of the respective motion.

If a connection is installed between a cylinder port and a valve (e.g. a protective valve) in the form of a welded or fitted pipe, the bursting pressure for the whole construction shall be at least 2,5 times the maximum working pressure to which the circuit will be subjected.

Hydraulic load bearings cylinders used for axle suspension when travelling on site may not be fitted with protection valves. The bursting pressure of such a hydraulic system shall be at least 1,5 times the maximum working pressure to which the circuit will be subjected

4.2.10.2.6 Hydraulic tank

The hydraulic tank shall have capacity to store at least the fluid that is contained in the entire system when all cylinders are fully retracted. In addition, it shall have sufficient capacity for operation of the hydraulic pumps when all cylinders are fully extended.

The hydraulic tank shall have devices to monitor the minimum and maximum fluid level.

The hydraulic tank shall have access opening and drain valve for cleaning.

If the oil reservoir is of the pressurised type then it shall withstand the maximum working pressure with a minimum safety factor of 2 and be fitted with a device to relieve pressures above the maximum working pressure of the tank.

EN 13000:2010 (E)

4.2.10.3 Pneumatic components

The bursting pressure for hoses complete with connections shall be at least four times the maximum working pressure.

The bursting pressure for pipes complete with connections shall have a safety factor of 2,5 between nominal working pressure and bursting pressure.

Compressed air controls or systems shall be protected so that in case of failure of the air pressure (e.g. as a result of pipe or hose fracture or when the pressure is unacceptably low) relevant movements of the crane are stopped automatically and remain stopped.

A low pressure warning device shall be fitted.

4.2.11 Pressure vessels and fuel tanks

4.2.11.1 Pressure vessels

NOTE Pressure vessels forming a part of a mobile crane should be in conformity with EU-Directive 87/404/EEC.

4.2.11.2 Fuel tanks

Fuel spillage shall not be possible under normal operating conditions.

The fuel tank shall have a filler with:

- a) easy access;
- b) provision(s) for lockable filler cap(s);
- c) location outside of the cabins provided with the crane.

Fuel gases arising during filling or during operation shall not be able to enter the cabin.

The tank location and facilities for filling shall be such that spillage during filling of the tank cannot drain into the engine or cabins or into the electrical system.

The fuel tank shall have devices to monitor at least the minimum fuel level.

Fuel systems shall be firmly connected to the crane. The fuel tank and filler fittings shall be located in such a way that the possibility of damage to the tank and its fittings is minimised.

4.2.12 Electric and electronic components and related phenomena

4.2.12.1 General

Electric and electronic components shall be in accordance with EN 60204-32.

4.2.12.2 Electromagnetic compatibility (immunity)

For electromagnetic compatibility (immunity) the electrical system shall conform to EN 61000-6-2.

When using certified components for the electrical system fulfilling the requirements of the above mentioned standard in accordance with the recommendations of the supplier, testing of the electromagnetic compatibility (immunity) of the whole arrangement is not necessary.

4.2.12.3 Electromagnetic compatibility (emission)

For electromagnetic compatibility (emission) the electrical system shall conform with EN 61000-6-4.

When using certified components for the electrical system fulfilling the requirements of the above mentioned standard in accordance with the recommendations of the supplier, testing of the electromagnetic compatibility (emission) of the whole arrangement is not necessary.

4.2.12.4 Batteries

Batteries shall:

- a) have a cover on the terminals that is not connected to ground;
- b) be protected against inadvertent movements;
- c) if the danger of gases arising exists, the battery room shall be ventilated.

4.2.13 Hooks and hook blocks

Hooks/hook blocks supplied with the crane shall be designed for the same size and type of rope and shall allow the same maximum rope pull as the hoist. The hook fitted to a hook block shall be capable to carry the load derived from the maximum rope pull and maximum number of falls for the respective hook block.

NOTE Requirements for technical specifications of hooks and hook blocks are given in K.1 and K.3.

4.2.14 Specific requirements for spare tyres/wheels

Where spare tyres/wheels are provided, they shall be attached so that they can safely be removed or replaced onto the crane (e.g. persons do not have to be under the lifted wheel while removing or attaching the spare tyre/wheel). Manual forces required to handle the wheel/tyre shall be smaller than 500 N.

4.2.15 Specific requirements for pin jointed jib/fly jib connections

Provision shall be made to ensure that persons do not have to stand under/inside sections to insert/remove the pins to avoid shearing/crushing hazard during assembly/disassembly.

4.3 Visibility

4.3.1 Crane operator's field of view

The view of the crane operator when in prescribed operating position shall enable him to see the following under normal operating conditions:

- a) front view: movement of the load;
- b) side view: movement of the upper (slewing) structure and the surrounding of the working area;
- c) upper view: movement of the load to the top of the jib;
- d) rear view: movement of the upper (slewing) structure and the surrounding of the working area.

NOTE For directions b), c) and d) aids (e.g. mirrors, ultrasonic devices, TV devices) may be provided to remedy inadequate direct view.

The front and the roof window of a crane operating cabin shall be equipped with motorised windscreen wiper. The front window of a crane operating cabin shall be additionally equipped with a washer. Arrangements shall be provided for defrosting/demisting the windows, at least the front window, of the cabin(s).

EN 13000:2010 (E)

The front and the roof window shall be provided with a permanently installed adjustable sunvisor/sunscreen to protect the operator from the glare of the sun but permitting the view on the load.

4.3.2 Lighting

The crane shall be provided with suitable and adjustable lighting intended as an aid for the crane operator to illuminate the immediate vicinity of the crane under normal operational conditions.

The crane shall have exterior lighting when required for access and egress. The crane shall have lighting in the machinery room if inspection is necessary.

4.4 Noise and noise reduction

4.4.1 Noise and noise reduction at source by design

The main sound sources to be found on mobile cranes are:

- engine(s) used for the crane functions;
- pumps, valves and hydraulic circuits;
- cylinders, brakes and other mechanical components;
- hoist/derrick gears, slewing gears.

Mobile cranes shall be designed so that the A-weighted measured sound pressure level in the crane operating cabin, determined according to Annex G, shall be reduced to the lowest possible level, but in any case less than or equal to 85 dB(A).

It is recommended to use the general guidance information given in EN ISO 11688-1 on the design of low-noise machinery.

NOTE 1 The following technical measures are currently used to reduce noise at source on mobile cranes:

- choice of low-noise hydraulic and mechanical components;
- use of anti-vibration systems to reduce structure-borne sound;
- encasement of noise-radiating parts;
- appropriate adjustment of operating speeds.

NOTE 2 The above list is not exhaustive, alternative technical measures for noise reduction with identical or greater effectiveness can be used.

NOTE 3 The criterion for assessing the effectiveness of these measures is the actual noise emission values from the machine in relation to other machines of the same family and not the nature of the reduction measures themselves.

4.4.2 Noise reduction by information

Specific conditions for noise reduction during use shall be given in the instruction manual, e.g. keep encasement devices closed, keep cabin door and windows closed (if compatible with safety needs), actuate controls smoothly.

If necessary, for special purposes outside the operating cabin, wearing of a hearing protector shall be recommended.

4.5 Fire protection

4.5.1 Fire resistance

The floor of the cabins as well as the interior, upholstery and insulation shall be made of fire-retardant material. The material burning rate shall not exceed 150 mm/min when tested in accordance to ISO 3795.

4.5.2 Fire extinguisher

The crane shall be equipped with a portable fire extinguisher for class A and B fires in accordance with EN 2 containing at least 6 kg of extinguishing agent. The number, size and type of the extinguisher shall be suitable for the size of equipment on the crane. The extinguisher should preferably be located in a cabin or be accessible near to the control station. The filled weight of the extinguisher shall not exceed 20 kg.

4.6 Requirements for transport and travel

4.6.1 General

To avoid risks due to hazardous movements during transport and travel, mechanical locks secured to the crane or hydraulic locking devices shall be provided, in particular to avoid:

- a) unintended rotation of the superstructure;
- b) unintended luffing or telescoping of the jib;
- c) inadvertent extension of outrigger beams.

Means have to be provided for the driver before and/or during transport to check that items a) to c) are in transport position (e.g. direct vision, mirrors, warning lights, buzzers).

Means for locking of other stowed components intended to be carried on the crane (e.g. hook block, outrigger plates, counterweight) to avoid hazardous movements, shall be provided.

4.6.2 Separately transported parts

Every separately transported part needs to be equipped with sufficient dimensioned means for fixing during transport (e.g. lugs for lashing and towing). Adequate lifting lugs shall be provided at each part transported separately.

4.7 Roll over and tip over protection

Crane shall be designed that no roll over and tip over is possible if used as intended. Instruction for use, see 6.3.

NOTE On Mobile cranes protective structures against roll over and tip over are technically not feasible.

5 Verification

5.1 Methods of verification

The design of a crane shall be checked by a conceptual verification (proof of competence).

This verification shall be done in accordance with Table 1 below. It shall be carried out to show adequate safety for any hazard. The conceptual verification is normally done on the first crane of a series of cranes of the same type.

To ensure fitness for purpose every single crane shall be checked individually. Where a quality management system exists, verification on sample(s) of series (crane and components) is permitted. This verification (individual check) shall be done in accordance with Table 1 below. Configurations and load cases for the load tests shall be selected in accordance with experience from calculation, results from conceptual verification and the actual results from single checks in serial production.

NOTE Annex T may be taken as guideline for the selection of test loads. Test loads may be applied by increasing loads or increasing outreach/radius.

EN 13000:2010 (E)

Table 1 — Verification of safety requirements including the proof of competence

Subclause	Safety requirement	Conceptual Verification			Visual Check	Individual check
		Calculation	Experiment			
			Crane	Component		
4.1.2.3 4.1.2.4	Load effects on structures	●	●	–	–	L
4.1.2.5	Load effects on load bearing components, mechanisms, ropes, chains and other components	●	●	○	–	L
4.1.2.6.1	Stability, general	●	●	–	–	L
4.1.2.6.3	Stability during erection and dismantling	●	●	–	–	L/F
4.1.2.6.4	Stability, effects due to elasticity	●	●	–	–	–
4.1.2.6.2 4.1.2.6.4	Stability, effects due to acceleration	●	–	–	–	–
4.1.3.2 4.1.3.3	Limit states for structures	●	–	–	–	–
4.1.3.4	Limit states for load bearing components	●	–	○	–	–
4.1.3.4.1	Limit states for mechanisms	●	–	○	●	–
4.1.3.4.2	Limit states for ropes including end fittings	●	–	●	–	V
4.1.3.4.2	Rope system, diameter of sheaves and drums	●	–	–	●	–
4.1.3.4.3	Limit states for chains	●	–	●	–	V
4.1.3.4.4	Limit states for hooks, sheaves and hook blocks	●	–	○	●	V
4.1.3.4.4	Limit states for slew ring, hydraulic cylinder and other components	●	○	○	●	–
4.2.1	Control station, pipes, cables and hoses	–	○	○	●	V
4.2.2.2	Control station, cabin	–	–	●	●	V
4.2.2.3	Sharp edges and acute angles	–	–	–	●	–
4.2.2.4	Emergency exit	–	–	○	●	–
4.2.2.5	Space envelope	–	–	○	●	–
4.2.2.6	Heating and ventilation	○	●	○	–	F

EN 13000:2010 (E)

Table 1 (continued)

Subclause	Safety requirement	Conceptual Verification			Visual Check	Individual check
		Calculation	Experiment	Component		
			Crane	Component		
4.2.2.7	Doors and windows	–	–	●	●	F
4.2.2.8	Cabin lighting	–	–	●	●	F
4.2.3	Protection against falling objects (tools)	–	–	●	○	–
4.2.4	Seats, general, dimensions etc.	–	–	○	●	–
4.2.4.4	Seats, vibrations	–	–	●	–	–
4.2.5	Controls and control systems	–	●	○	–	F
4.2.6.3.1 4.2.6.3.2 4.2.6.3.3	Rated capacity limiter, rated capacity indicator	–	●	○	●	F
4.2.6.3.7 4.2.6.3.8	Additional mandatory limiters and indicators	–	●	○	●	F
4.2.7	Steering systems	●	●	●	–	F
4.2.8.1	Braking systems for crane motions	●	●	–	–	F
4.2.8.2	Braking systems for travel motions	●	●	○	–	F
4.2.9.1	Protection devices, moving parts	–	–	–	●	V
4.2.9.2	Guards and restraints	–	–	●	●	V
4.2.9.3	Access	–	–	–	●	V
4.2.9.4	Exhaust system	–	○	–	●	–
4.2.9.5	Hot surfaces	–	○	–	●	–
4.2.10	Hydraulic and pneumatic systems	●	–	●	–	F
4.2.11.1	Pressure vessel	●	–	○	●	–
4.2.11.2	Fuel tanks	–	–	○	●	V
4.2.12	Electric/electronic components	●	–	●	–	F
4.2.12.2 4.2.12.3	Electromagnetic compatibility	–	–	○	–	–
4.3.1	Crane operator's field of view	–	–	–	●	–
4.3.2	Lighting	–	–	–	●	F
4.4	Noise and noise reduction	–	●	–	–	–
6.1.2	Prohibition-, warning- and information signs	–	–	–	●	V

Key: ● = mandatory, ○ = if required, – = not relevant, L = load test, F = functional check, V = visual check

EN 13000:2010 (E)

5.2 Test procedures and conditions

5.2.1 General

The test procedures and test conditions used by the manufacturer to verify that a mobile crane is capable lifting rated loads shall be taken from ISO 4310. The tests include:

- visual inspection;
- functional checks;
- tests with load: static tests, dynamic tests, stability tests.

The selection of crane configurations and load cases to be tested shall ensure that the structure and all components of the crane are subjected to the maximum loads under the worst conditions foreseeable by the manufacturer when the crane is used as intended. This includes all permitted combinations of jib, fly jib and luffing fly jib with all counterweights, counterweight positions and corresponding outrigger positions.

Load tests shall be carried out with the crane configured as it is intended to be used without any modifications (e.g. without changing outriggers, without extra counterweight or counterweight in extra position).

NOTE For the calibration of limiting and indicating devices it may be necessary to lift additional loads on different configurations.

5.2.2 Conceptual verification by calculation

The conceptual verification by calculation requires additional tests with load to verify the assumptions and the results of the calculation. The selection of the load cases and configurations for these tests shall be done for those cases where minimum safety factors exist.

5.2.3 Conceptual verification by experiment

If verification during conceptual verification is not done by calculation, a test programme (load cases and configurations) shall be set up which guarantees the same adequate safety for all configurations and for any hazard as that achieved by means of calculation.

Additionally the tests shall be done with minimum and maximum counterweight, minimum and maximum radius of counterweight and the according outrigger positions. The test loads shall be selected as follows (for interpretation of test points see Figure T.1):

- a) test loads at or near to the minimum (1), medium (2) and maximum radius (3) where the static and dynamic test load can be applied by increasing radius or load;
- b) a static test load for the minimum radius (4).

5.2.4 Examination after test

After the test a thorough examination checking for failures or defects shall be made.

NOTE The person carrying out an examination may ask for any dismantling or non-destructive testing, which is considered necessary to reveal potential defects.

5.2.5 Test report

After the examination a report shall be prepared listing the conclusions and findings of the tests and examination. The test report shall identify the crane tested, and shall give the date and location of the tests and the name of the test supervisor. It shall list the configurations, procedures and findings in each case. Requirements and an example of a format are given in Annex U.

5.3 Verification based on noise emission values

Noise emission values of mobile cranes shall be measured, declared and, if needed, verified according to the noise test code given in Annex G.

NOTE The decision to determine the sound power level is to be taken from the measured value of the emission sound pressure level.

6 Information for use

6.1 Format of instruction

6.1.1 General

The requirements of EN 12644-1 shall apply together with the following additional information:

- an instruction manual shall be provided by the supplier, having contents that are the responsibility of the manufacturer;
- the text shall be written so that a trained person will understand it, with all information being explicit and comprehensive.

All parts shall have clear identification to which crane they apply, including as a minimum:

- title of instruction manual;
- title of other parts (if necessary);
- model and serial number of the crane;
- list of contents with page numbering.

NOTE The instruction manual may be published in separate volumes. Where appropriate, cross reference to other parts should be made to avoid unnecessary repetition. Clear and simple illustrations, diagrams, graphs and tables should be used in preference to written text and be placed adjacent to any corresponding text.

The instruction manual shall be:

- compiled in the language(s) of the country the crane is delivered to;
- simple to understand and have adequate explanatory notes;
- written in internationally recognised terms, definitions, units and symbols.

6.1.2 Technical data and information

The instruction manual shall give the following information:

- a) a drawing of the crane with main dimensions, number and location of main components;
- b) a description and explanation about intended use, classification (for guidance see ISO 4301-2), rated capacity, design limits and service conditions, for which the crane is designed and built. In particular in- and out-of-service wind speeds and sail area of load (see 4.1.2.2.2) shall be given;
- c) service conditions and activities for which the crane shall not be used;
- d) information about crane marking (see Clause 7 and Annex Q);

EN 13000:2010 (E)

- e) rated capacity charts specifying the rated capacity of the crane for all its permitted operating configurations – readily accessible to the crane operator at the control position;
- f) a description of the limiting and indicating devices;
- g) a description of the control system(s);
- h) where appropriate, a description of emergency escape(s);
- i) important technical data for the assembly such as masses (weights) of parts, reaction forces on supporting parts, power supply, in-service, out-of-service and test conditions;
- j) where appropriate, requirements for outrigger supports and crawlers;
- k) where appropriate, the arrangement and amount of the counterweight including the means of assembly and disassembly;
- l) where necessary for transportation and assembly, the dimensions and mass (weight) of the crane or crane parts and the supporting or suspending instructions, as predetermined by the manufacturer;
- m) the instruction manual and the technical documentation describing the machinery shall give:
 - 1) the declared noise emission value(s) of the mobile crane as specified in EN ISO 4871. The noise declaration shall give the guaranteed value of the sound power level (a single number value);
 - 2) the reference to Annex G, according to which the determination of these values has been carried out;
 - 3) the recommendations as specified in 4.4.2;
- n) where appropriate, value of vibration including the uncertainties and description of test method and operating conditions during measurement;
- o) a drawing indicating the positions of each warning sign fixed to the crane;
- p) information for components and materials requiring specialised repair techniques;
- q) test certificates (see Annexes R, S and U);
- r) specification for hook block(s) (see Annex K.3).

A second copy of the instruction manual shall be given by the manufacturer for planning the lifting operation.

6.2 Instructions for use**6.2.1 General**

The instructions for use shall specify the required level of skills for operating, maintenance and rigging personnel and shall give information about residual risks.

The instructions for use shall specify the duties of the crane operator before, during and after crane operation. The crane operator shall be made aware about the danger for people entering the working area.

The instruction manual shall include requirements for the user to ensure that the service conditions are compatible with the crane specification:

- a) checking the lifting operation to be in accordance with the intended use of the crane (e.g. required crane capacity, working radius, hook height), according to ISO 12480-1;
- b) checking the site conditions (e.g. wind including site effects, snow, adverse temperature, visibility);

EN 13000:2010 (E)

- c) checking that fitness for purpose of all parts (e.g. components, additional parts, load lifting attachment, slings) has been verified;
- d) checking ground/support conditions for the maximum loading imposed.

NOTE Checks should be made to insure that the ground can withstand the forces imposed by the mobile crane (outriggers, crawlers, wheels, etc.). Special attention should be paid to hidden ground deficiencies, melting ice or overflowing. Information about necessary measures should be given if the ground condition is in doubt or the ground pressure is exceeding the limiting value.

- e) Checking conditions for safe access to and egress from the crane.

6.2.2 Crane operator instructions**6.2.2.1 Checks before starting a crane operation**

Before starting a crane operation the following checks are required:

- a) evaluation of the loading condition before lifting a load;
- b) crane positioning, ground conditions, horizontal support;
- c) check, where accessible, the condition of all ropes (including their end termination(s)), drums and sheaves;
- d) indicators of the mobile crane (e.g. loading condition, fluid level, engine operation, hydraulic pressure, electric power supply, wear limits, wind speed);
- e) clear and unrestricted view of the load and working area. If not, check the communication system between supervisor and crane operator ensuring safe operation;
- f) required capacity of the crane, permitted and expected ground pressure;
- g) correct function of the safety devices, including the data recorder;
- h) assure communication between crane operator and slinger.

6.2.2.2 Specific safety requirements during operation

The following aspects shall be considered:

- a) evaluation of the loading condition before lifting a load;
- b) correct use of slings (rope or chain), hook vertical over centre of gravity of load;
- c) starting and stopping of movements, ensure that danger zone of moving parts of the crane and of the moving load are free from persons and/or obstacles;
- d) stopping of movements in case of emergency;
- e) combined movements;
- f) approaching the limiting conditions;
- g) Prohibition of the dragging of loads including the lifting of an overload by derricking in;
- h) precautions to avoid contact between the load or the load lifting attachment and the structure;
- i) behaviour of the crane operator or persons in the vicinity of the crane in the event of storm or thunderstorm with lightning;

EN 13000:2010 (E)

- j) measures to be taken after lightning hits the crane;
- k) measures to be taken if the rated capacity limiter bridging device is provided and used (see 4.2.6.3.2).

In case crane functions including all outrigger movements (e.g. sliding beams, slewing beams, support cylinders), pinnings, assembly devices, etc. are controlled by cable less control systems, EN 13557 applies.

NOTE By means of cableless control systems all danger zones can be completely monitored by direct view, whilst being out of the danger zone.

6.2.2.3 Leaving the mobile crane out-of-service

The following aspects shall be considered:

- a) out-of-service condition of the crane and lifting attachment (e.g. parking position);
- b) stop the engine, cut off the power supply;
- c) locking the crane operation cabin(s) or securing the control equipment; d) precautions to be taken in the event of storm or thunderstorm with lightning.

6.3 Instructions for assembly, erection, disassembly and transport

The instructions shall specify the sequence of operations before, during and after assembly, erection, disassembly and transport. If appropriate, the instruction manual shall give a test programme to verify the assembly.

The instructions shall highlight the danger to persons entering the assembly, erection, disassembly and transportation area.

The instructions shall give clear and safe procedure(s) for assembly/disassembly of pin jointed jib/fly jib sections, particular attention being drawn to the danger of unsupported sections hinging/falling.

Instructions shall be given for safe procedure(s) for moving the mobile crane on site minimizing the risk of roll over and tip over.

6.4 Instructions for maintenance and inspection

6.4.1 General

Instructions including drawings, where appropriate, for the maintenance of the crane allowing the identification of replacement parts shall be given.

The instruction manual shall give instructions on specific tasks to be carried out at defined intervals, in order to maintain the safe condition of the crane.

The instruction manual shall contain information to ensure that all maintenance operations can be carried out safely. Attention shall be drawn to all hazards which may occur during maintenance.

The instruction manual shall give the necessary details for achieving the adequate level of maintenance. This shall be done by the provision of schematic charts, check lists and test values.

6.4.2 Instructions for maintenance

The maintenance operation shall cover:

- a) preventive maintenance amount and periods (e.g. lubrication intervals, change of filters and wear parts, tyre type and tyre pressure, tension or torque moment of bolts/screws, inspection of ropes). Parts and tools needed for preventive maintenance shall be listed in the instruction manual. A list of checks, inspections, examinations

EN 13000:2010 (E)

and tests, including the safe conditions for carrying them out, shall be given b) the time interval for testing in accordance with the design shall be given;

- b) criteria and adequate records to enable the determination of the approach to the design limits of the crane and its components during intended lifetime (e.g. safe working period of hoists). If indicating or recording devices are used to achieve this, instructions for the use and the maintenance of the devices shall be given;
- c) the examination and test programme after a long out-of-service period, that means if out-of-service period exceeds time interval for testing according to b), and the necessary actions before using the mobile crane again shall be given (e.g. lubricating, cleaning of components, check of control system and safety devices);
- d) warning for the service by non-specialised persons, and for replacement of parts which are not guaranteed to be in accordance with the manufacturer's specification;
- e) conditions for replacement or repair of elements instead of replacement where necessary and appropriate. The manufacturer or competent person shall consider whether the original verification is still valid after repair or replacement.

NOTE 1 Guidance for condition monitoring is given in ISO 12482-1.

NOTE 2 Guidance for periodical check, inspection, examination and test is given in ISO 12480-1.

6.4.3 Instructions for inspection

- a) Before first use:

The instruction manual shall give instructions for the relevant inspections before first use after a maintenance or repair.

- b) Periodical checks:

If inspections are necessary to ensure that the crane is safe for use, instructions for periodical checks shall be provided, e.g. for holding brakes, for hoisting motion according to 4.2.8.1.2.

6.5 Instructions for training

The instruction manual shall give information for the training of the crane operator, to develop basic operational skill and to provide the required knowledge for the safe use of the crane. This includes:

- a) the technical data, rated capacity, safety devices necessary to know before operating the crane;
- b) the controls and their layout;
- c) the telephone, radio or television communications used for the control;
- d) safety advice, signs and information.

NOTE The crane owner/user is responsible for adequate training of the crane operators.

6.6 Instructions for spare parts

A spare parts list shall be provided to cover the complete mobile crane. The list shall include identification and location for all items supplied as replacement parts or assemblies.

NOTE For further information see ISO 10973.

6.7 Instructions for disposal

Instructions for disposal shall be provided with special regard to hazardous substances.

EN 13000:2010 (E)

7 Marking

7.1 Machine marking

The manufacturer's machine marking including the CE marking shall be in accordance with Annex Q.

7.2 Information and warning

Information and warning on mobile cranes shall be done preferably by signs and pictograms. They shall be in accordance with ISO 3864-1, ISO 6309 and ISO 13200.

7.3 Graphic symbols

Graphic symbols used for controls and indicators shall be in accordance with ISO 7000, ISO 7296-1 and ISO 7296-2.

7.4 Marking of crane parts

Parts of the crane which are disassembled and transported separately (e.g. lattice jib intersection, part of the counterweight) shall be identified by markings if there is a risk of unintended interchange.

NOTE For connecting elements (e.g. pins, bolts, screws) separate transport positions on the main parts (e.g. lattice jib intersection) should preferably be provided.

For main parts which need to be handled by using load lifting attachments, the weight, the position of the lifting lugs and for non symmetrical parts the centre of gravity shall be marked on the part itself. If these parts need to be handled in combination with other parts during assembly/disassembly such information shall be given in respective configuration/transport drawings.

7.5 Marking of outriggers







Outriggers shall be marked to show the fully extended positions. Where the crane rated capacity charts permit intermediate position(s) they shall also be marked and identified according to the charts.

7.6 Marking data recorder

The operator shall be informed that data are recorded e.g. by means of a plate.

Annex A
(normative)

Examples of mobile crane types

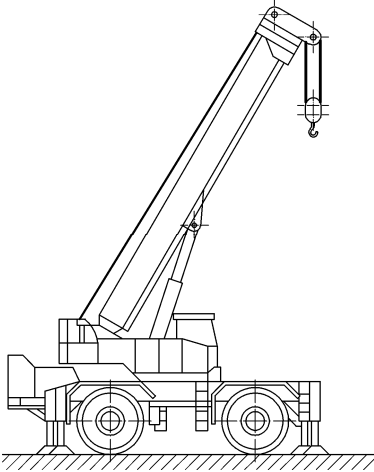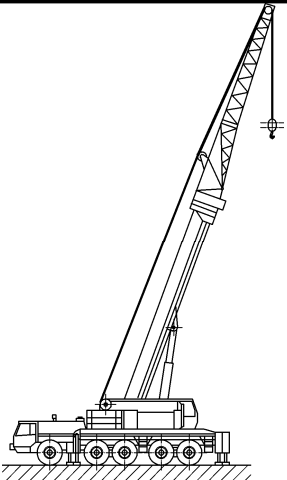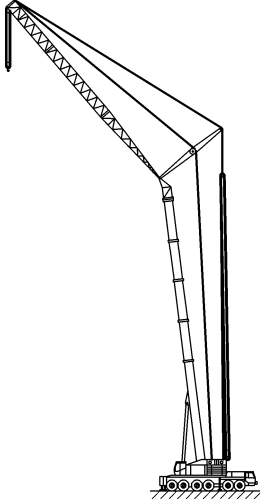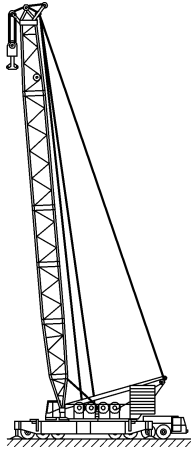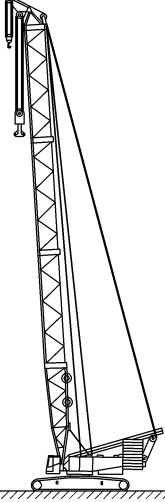 <p>A line drawing of an industrial mobile crane. It features a large, heavy-duty chassis with four large wheels. The crane's jib is a single, long, telescopic section that extends upwards and outwards. A hook is attached to the end of the jib.</p>	 <p>A line drawing of a mobile crane on a multi-axle trailer. The crane has a telescopic jib that extends upwards and outwards. A hook is attached to the end of the jib.</p>	 <p>A line drawing of a mobile crane on a multi-axle trailer. The crane has a telescopic jib that extends upwards and outwards, followed by a shorter, non-telescopic 'fly' section. A hook is attached to the end of the jib.</p>
<p>Figure A.1 — Industrial mobile crane</p>	<p>Figure A.2 — Mobile crane with telescopic jib</p>	<p>Figure A.3 — Mobile crane with telescopic and fly jib</p>
 <p>A line drawing of a mobile crane on a multi-axle trailer. The crane has a jib that is primarily telescopic but includes a 'luffing' section at the top that can rotate around a horizontal axis. A hook is attached to the end of the jib.</p>	 <p>A line drawing of a mobile crane on a multi-axle trailer. The crane has a lattice-style jib that extends upwards and outwards. A hook is attached to the end of the jib.</p>	 <p>A line drawing of a crawler crane. The crane is mounted on a continuous track system instead of wheels. It has a lattice-style jib that extends upwards and outwards. A hook is attached to the end of the jib.</p>
<p>Figure A.4 — Mobile crane with luffing fly jib</p>	<p>Figure A.5 — Mobile crane with lattice jib</p>	<p>Figure A.6 — Crawler crane</p>

EN 13000:2010 (E)

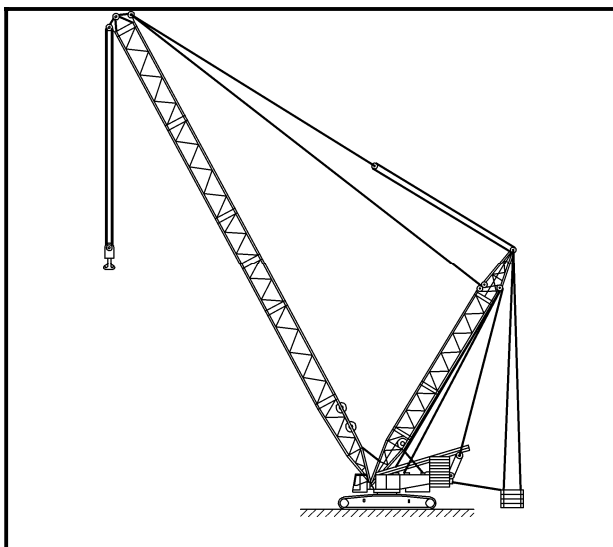


Figure A.7 — Crawler crane with additional counterweight

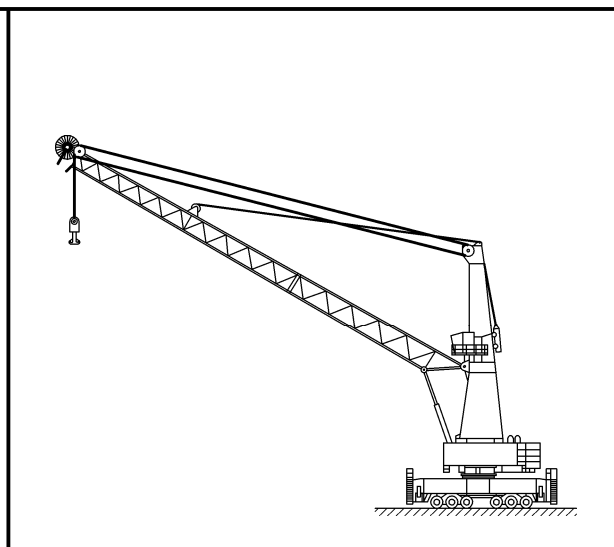


Figure A.8 — Mobile harbour crane

Annex B.1 (informative)

Major parts of telescopic cranes



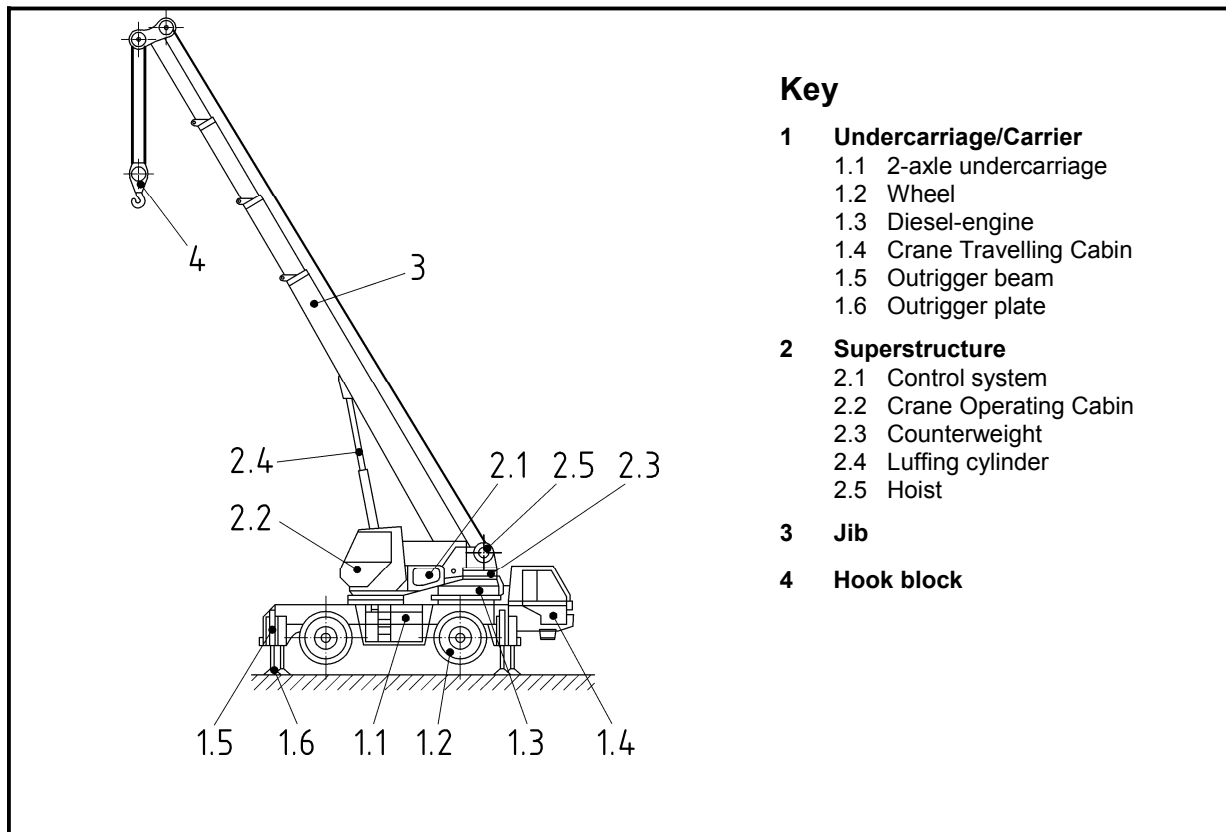


Figure B.1.1 — Examples of major parts

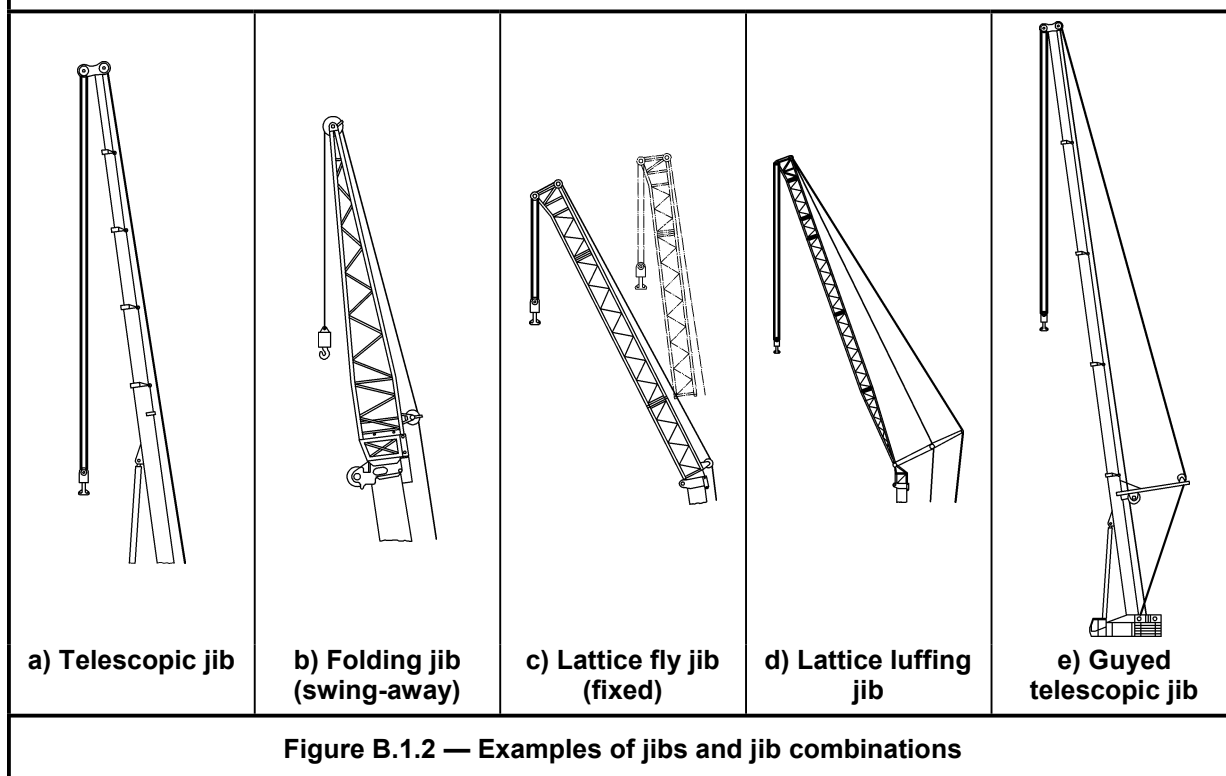

Annex B.2
(informative)


Major parts of lattice jib cranes

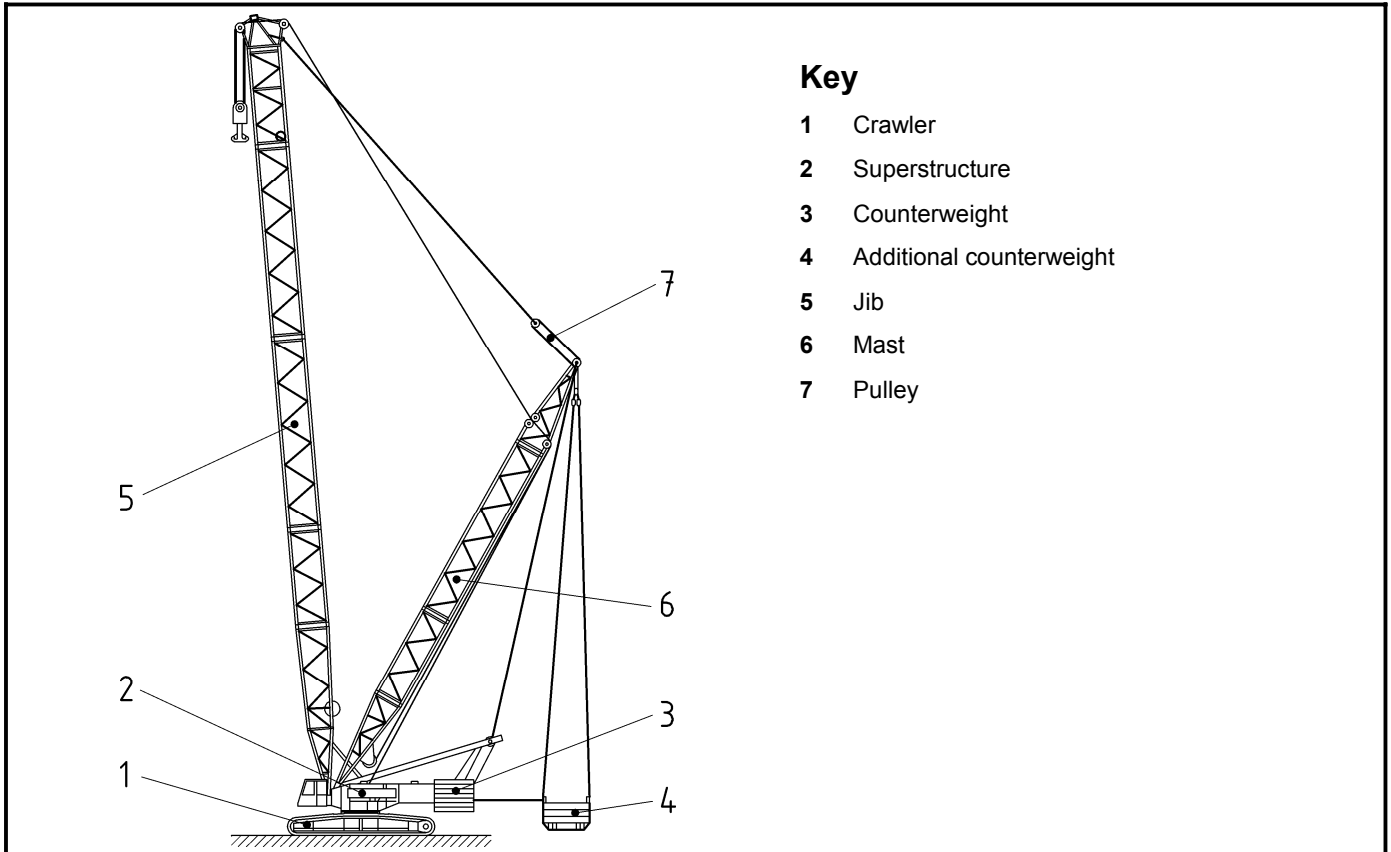

Key

- 1 Crawler
- 2 Superstructure
- 3 Counterweight
- 4 Additional counterweight
- 5 Jib
- 6 Mast
- 7 Pulley

Figure B.2.1 — Examples of major parts

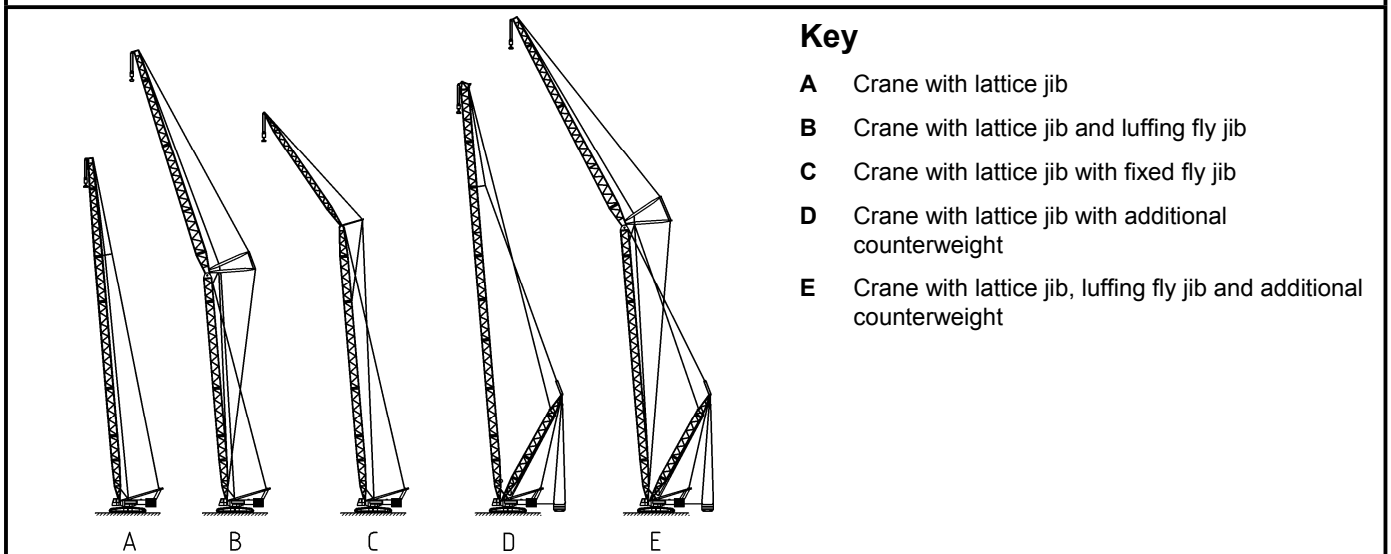

Key

- A Crane with lattice jib
- B Crane with lattice jib and luffing fly jib
- C Crane with lattice jib with fixed fly jib
- D Crane with lattice jib with additional counterweight
- E Crane with lattice jib, luffing fly jib and additional counterweight

Figure B.2.2 — Examples of jibs and jib combinations

Annex C (normative)

List of hazards

This annex contains all the significant hazards, hazardous situations and events, as far as they are dealt with in the standard, identified by risk assessment as significant for this type of machinery and which require action to eliminate or reduce the risk.

The significant hazards are based upon EN 1050, the numbering follows the sequence of EN 1050:1996, Table A.1. Also shown are the subclause references to the safety requirements and/or protective measures in this standard. Before using this standard it is important to carry out a risk assessment of machine to check the hazards have been identified in the annex.

Table C.1 — List of hazards

No	Significant hazards and hazardous events	Machinery Directive 2006/42/EC, Annex I	EN ISO 12100-1 :2003	EN ISO 12100-2 :2003	Requirement clause(s) in this standard
1	Mechanical hazards due to — machine parts or workpieces — accumulation of energy inside the machinery	1.3 1.5.3, 1.6.3	4.2 4.2	3.1, 3.2, 4 3.8, 6.2.2.	4.1, 4.2 4.2.10
1.1	Crushing hazard	1.3	4.2.1		4.2.9
1.2	Shearing hazard	1.3	4.2.1		4.2.2.3, 4.2.9
1.4	Entanglement hazard	1.3	4.2.1		4.2.9
1.5	Drawing-in or trapping hazard	1.3	4.2.1		4.2.9
1.9	High pressure fluid injection or ejection hazard	1.3.2	4.2.1	3.8	4.2.10.2
2	Electrical hazards	1.5.1, 1.5.2, 1.6.3	4.3	3.9, 6.2.2	4.2.12, 6.2
3	Thermal hazards resulting in:				
3.1	Burns, scalds and other injuries by a possible contact of persons with objects or materials with an extreme high or low temperature, by flames or explosions and also by the radiation of heat sources	1.5.5, 1.5.6, 1.5.7	4.4		4.2.9.5
3.2	Damage to health by hot or cold working environment	1.5.5	4.4		4.2.2.6 4.2.9.5
4	Hazards generated by noise, resulting in:				
4.1	Hearing loss (deafness), other physiological disorders (e.g. loss of balance, loss of awareness)	1.5.8	4.5	3.2, 4	4.4.1, 4.4.2
4.2	Interference with speech communication, acoustic signals, etc.	1.5.8	4.5	3.2, 4	4.2.5.2, 4.2.6.2, 4.4.1, 4.4.2
5	Hazards generated by vibration	1.5.9	4.6	3.2	4.2.4.4
7	Hazards generated by materials and substances (and their constituent elements) processed or exhausted by the machinery:				
7.1	Hazards from contact with or inhalation of harmful fluids, gases, mists, fumes and dusts	1.1.3, 1.5.13, 1.6.5	4.8	3.3 b), 3.4	4.2.2.6, 4.2.9.4

EN 13000:2010 (E)

Table C.1 (continued)

No	Significant hazards and hazardous events	Machinery Directive 2006/42/EC, Annex I	EN ISO 12100-1 :2003	EN ISO 12100-2 :2003	Requirement clause(s) in this standard
7.2	Fire hazard or explosion hazard	1.5.6, 1.5.7	4.8	3.4	4.5
8	Hazards generated by neglecting ergonomic principles in machinery design as, e.g. hazards from:				
8.1	Unhealthy postures or excessive efforts	1.1.2 d), 1.1.5, 1.6.2, 1.6.4	4.9	3.6.1, 6.2.1, 6.2.3, 6.2.4, 6.2.6	4.2.2, 4.2.4, 4.2.5
8.2	Inadequate consideration of hand-arm or foot-leg anatomy	1.1.2 d), 2.2	4.9	3.6.2	4.2.5
8.4	Inadequate local lighting	1.1.4		3.6.5	4.2.2.8, 4.3.2
8.6	Human error, human behaviour	1.1.2 d), 1.2.2, 1.2.5, 1.2.8, 1.5.4, 1.7	4.9	3.6, 3.7.8, 3.7.9, 5, 6.1.1	4.1, 4.2.5, 4.2.6, 6, 7
8.7	Inadequate design, location or identification of manual controls	1.2.2		3.6.6, 3.7.8	4.2.5.2
8.8	Inadequate design or location of visual display units	1.7.1		3.6.7, 5.2	4.2.6.2
10	Unexpected start-up, unexpected overrun/overspeed:				
10.1	Failure/disorder of the control system	1.2.7, 1.6.3		3.7, 6.2.2	4.2.5.1
10.2	Restoration of energy supply after an interruption	1.2.6		3.7.2	4.2.5.2, 4.2.5.3, 4.2.5.4
10.3	External influences on electrical equipment	1.2.1, 1.5.11, 4.1.2.8		3.7.11	4.2.12
10.4	Other external influences (gravity, wind, etc.)	1.2.1		3.7.3	4.2.6.2.3
14	Failure of the control circuit	1.2.1, 1.2.3, 1.2.4, 1.2.5, 1.2.7, 1.6.3		3.7, 6.2.2	4.2.5.1, 4.2.5.2, 4.2.5.4
15	Errors of fitting	1.5.4	4.9	3.7, 6.2.1	4.2.6, 4.2.9
18	Loss of stability/overturning of machinery	1.3.1	4.2.2	6.2.5	4.1.2, 4.1.3
19	Slip, trip and fall of persons (related to machinery)	1.5.15	4.2.3	6.2.4	4.2.9
Additional hazards due to mobility					
20	Additional hazards relating to the travelling function:				
20.6	Insufficient ability of machinery to be slowed down, stopped and immobilised	3.3.3, 3.3.5			4.2.5.2, 4.2.8.2
21	Additional hazards linked to the work position				
21.1	Fall of persons during access to (at/from) the work position	3.2.1, 3.2.3, 3.4.5, 3.4.7			4.2.9.3
21.2	Exhaust gases/lack of oxygen at the work position	3.2.1			4.2.9.4
21.3	Fire	3.2.1, 3.5.2			4.5.1, 4.5.2
21.4	Mechanical hazards at the work position	3.2.1, 3.4.3, 3.3.4, 3.4.2, 3.4.4,			4.2.2.3
21.5	Insufficient visibility from the work positions	3.2.1			4.3.1

EN 13000:2010 (E)

Table C.1 (continued)


No	Significant hazards and hazardous events	Machinery Directive 2006/42/EC, Annex I	EN ISO 12100-1 :2003	EN ISO 12100-2 :2003	Requirement clause(s) in this standard
21.6	Inadequate lighting	3.1.2			4.2.2.8, 4.3.2
21.7	Inadequate seating	3.2.2			4.2.4
21.8	Noise at the work position	3.2.1			4.4, 5.3
21.9	Vibration at the work position	3.2.1, 3.2.2, 3.6.3			4.2.4.4
21.10	Insufficient means for evacuation/emergency exit	3.2.1			4.2.2.4
22	Additional hazards due to control system:				
22.1	Inadequate location of manual controls	3.2.1, 3.3.1, 3.4.5			4.2.5.2
22.2	Inadequate design of manual controls and their mode of operation	3.2.1, 3.3.1, 3.3.3			4.2.5.2
23	Additional hazards from handling the machine, lack of stability	3.1.3			4.1.2, 4.1.3
24	Additional hazards due to the power source; hazards from the engine and the batteries	3.4.8, 3.5.1			4.2.12.4
25	Additional hazards from third persons, unauthorised start-up/use	3.3.2			4.2.2.7, 4.2.5.3, 4.2.5.4
26	Additional hazards from insufficient instructions for the driver/operator	3.6			6
Additional hazards due to lifting					
27	Mechanical hazards:				
27.1	From load falls, collisions, machine tipping caused by:				
27.1.1	Lack of stability	4.1.2.1			4.1.2.6
27.1.2	Uncontrolled loading – overloading – overturning moments exceeded	4.2.1.4, 4.3.3, 4.4.2 a)			4.2.6
27.1.3	Uncontrolled amplitude of movements	4.1.2.6 a), 4.2.1.3			4.1.2.6.4 b), 4.2.5.1, 4.2.6.2.2, 4.2.6.2.3
27.1.4	Unexpected/unintended movement of loads	4.1.2.6e			4.2.5.2, 4.2.5.3, 4.2.5.4, 4.2.8
27.1.5	Inadequate holding devices/accessories	4.1.2.6 e), 4.4.1			4.2.6.2.2
27.1.6	Collision of more than one machine	4.1.2.6 b)			4.2.6.2.2
27.4	From insufficient mechanical strength of parts	4.1.2.3			4.1.2, 4.1.3
27.5	From inadequate design of pulleys, drums	4.1.2.4			4.1.2.5, 4.1.3.4
27.6	From inadequate selection of chains, ropes, lifting and accessories and their inadequate integration into the machine	4.1.2.4, 4.1.2.5, 4.3.1, 4.3.2			4.1.2.5, 4.1.3.4
27.8	From abnormal conditions of assembly/testing/use/maintenance	4.4.1, 4.4.2 d)			4.1.2, 4.1.3, 5.2, 6.2, 6.3
28	Electrical hazards from lightning	4.1.2.8			6.2.2.2, 6.2.2.3
29	Hazards generated by neglecting ergonomic principles, insufficient visibility from the driving position	4.1.2.7, 4.4.2 c)			4.3, 6.2.1, 6.2.2


EN 13000:2010 (E)

Annex D (normative)

Load effects of combined motions

In the case of crawler-, truck- and telescopic cranes the load is moved by hoisting (H), slewing (Sl), luffing (Lu) (i.e. derricking), travelling (Tr) and telescoping (Te), see Figures D.1, D.2 and D.3.

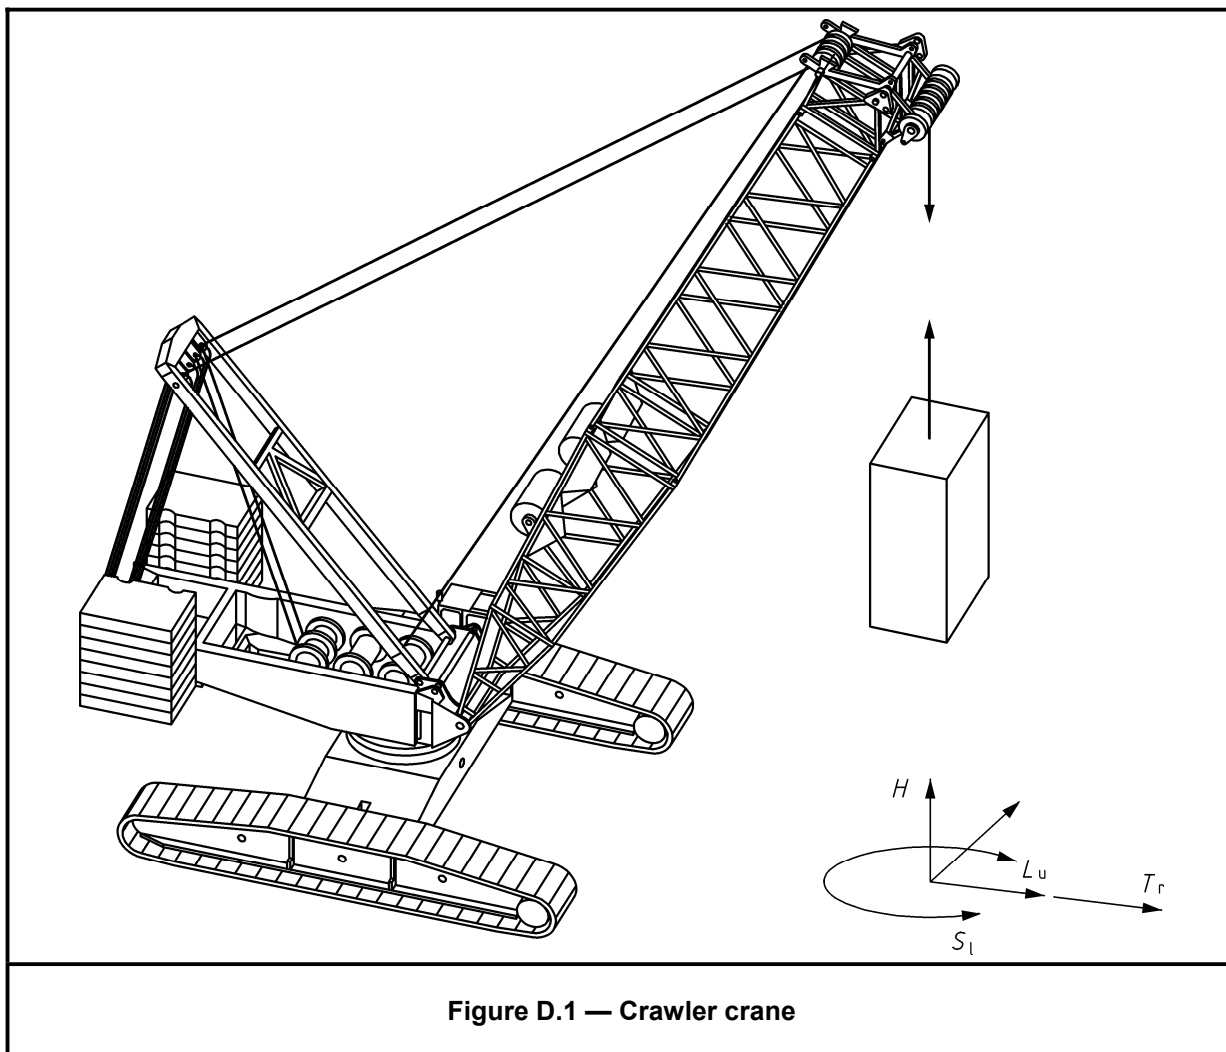

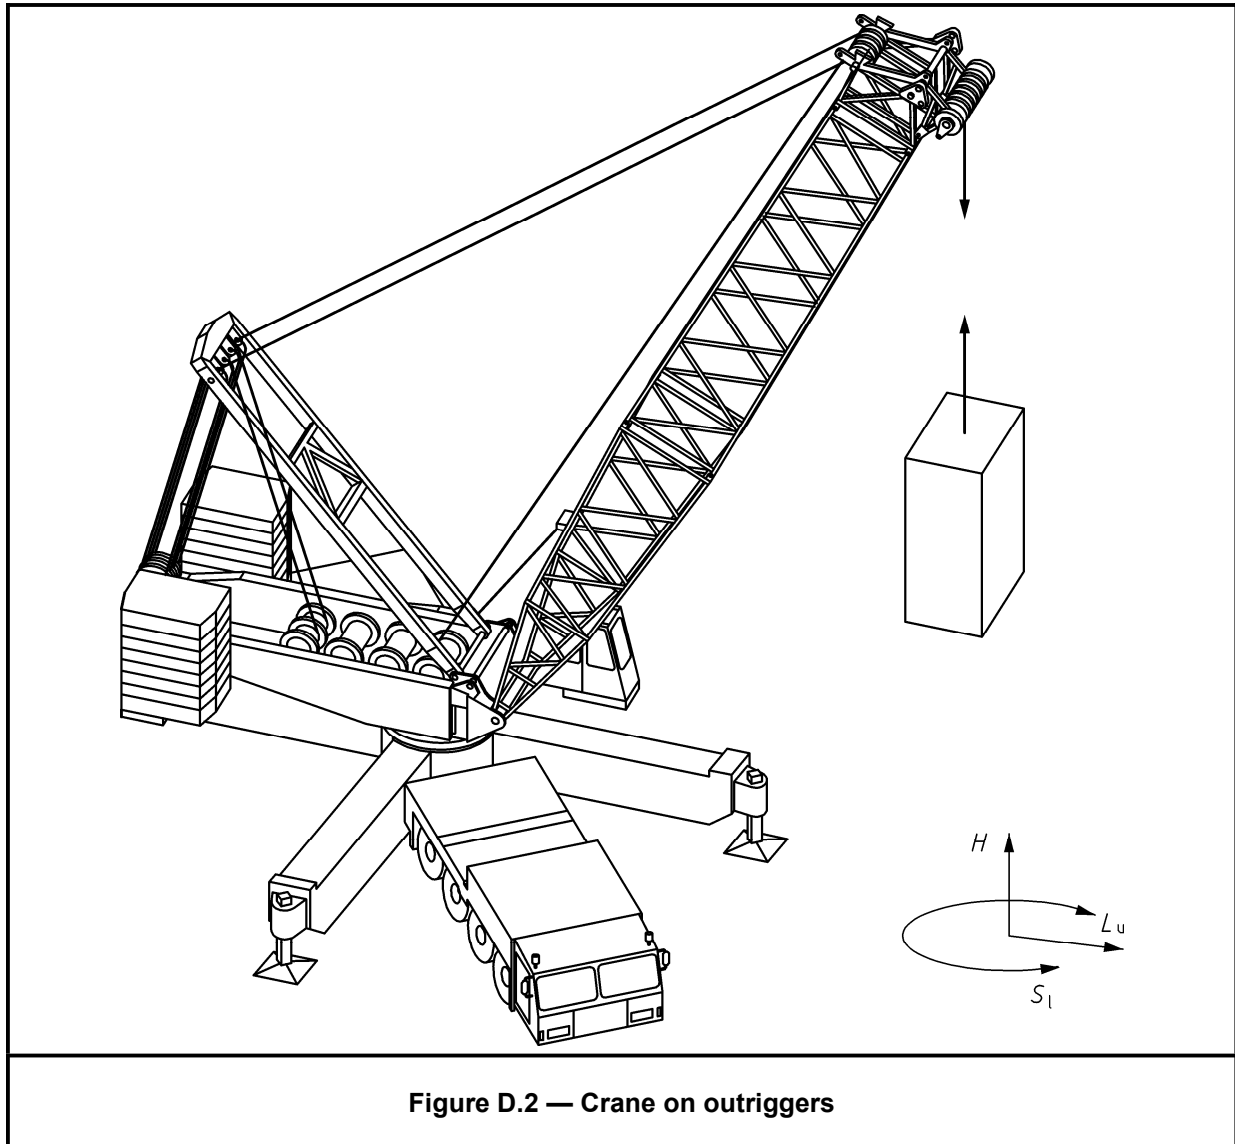

EN 13000:2010 (E)

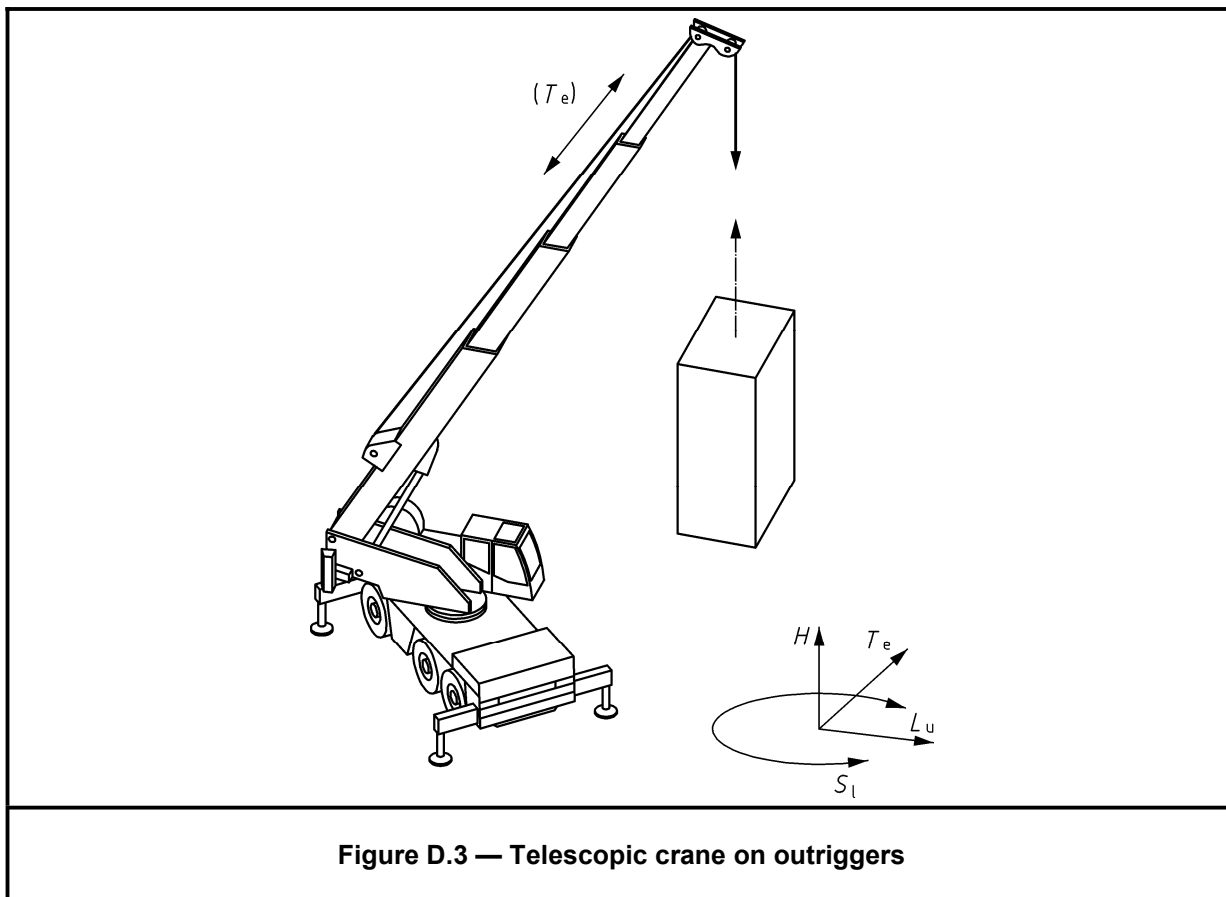




Figure D.3 — Telescopic crane on outriggers

The acceleration effects of these motions acting simultaneously on the crane depend on their control, the service conditions of the crane and whether the load is hoisted from the ground or if a suspended load is hoisted (see Table D.1).

If a mobile crane is designed to carry out simultaneous movements, the load effects of two of these movements shall be taken into account.

In case of hoisting a grounded load, only the effect of hoisting acceleration shall be considered.

Table D.1 — Load combinations, one or two simultaneous movements

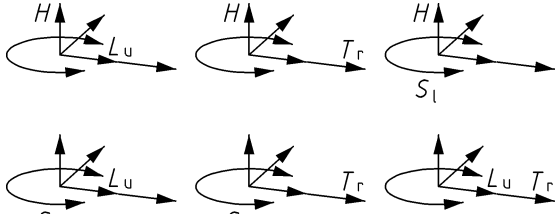Hoisting a grounded load; Load combinations A1, B1, C1	Hoisting a suspended load; Load combinations A2-A4, B2-B4, C3
	

NOTE Load combinations A, B, C are according to Table 3 of ISO 8686-1:1989.

In special cases the effects of three or more simultaneous movements can be considered, to be decided by the designer (see Table D.2).

Table D.2 — Load combinations, more than two simultaneous movements

Hoisting a suspended load	Moving a suspended load

EN 13000:2010 (E)

Annex E (normative)

Crane operator's seat dimensions

E.1 General

This annex specifies dimensions and adjustments range for upright crane operator seats for use on mobile cranes.

E.2 Dimensions of crane operator's seat

For the crane operator's seat and related adjustments shall be in accordance with Figure E.1 and Table E.1. All seat dimensions and adjustments (if provided) are referenced to the S.I.P as defined in EN ISO 5353.

E.3 Other dimensions or adjustments

Nominal values of dimensions regarding seat elements, their mutual locations and adjustments shall be established on the basis of ergonomic requirements taking into consideration crane operator sizes (according to EN ISO 3411) from 5th percentile female through 95th percentile male.

Dimensions and adjustments other than those in this Annex E may be used only if they provide better accommodation of the crane operator.

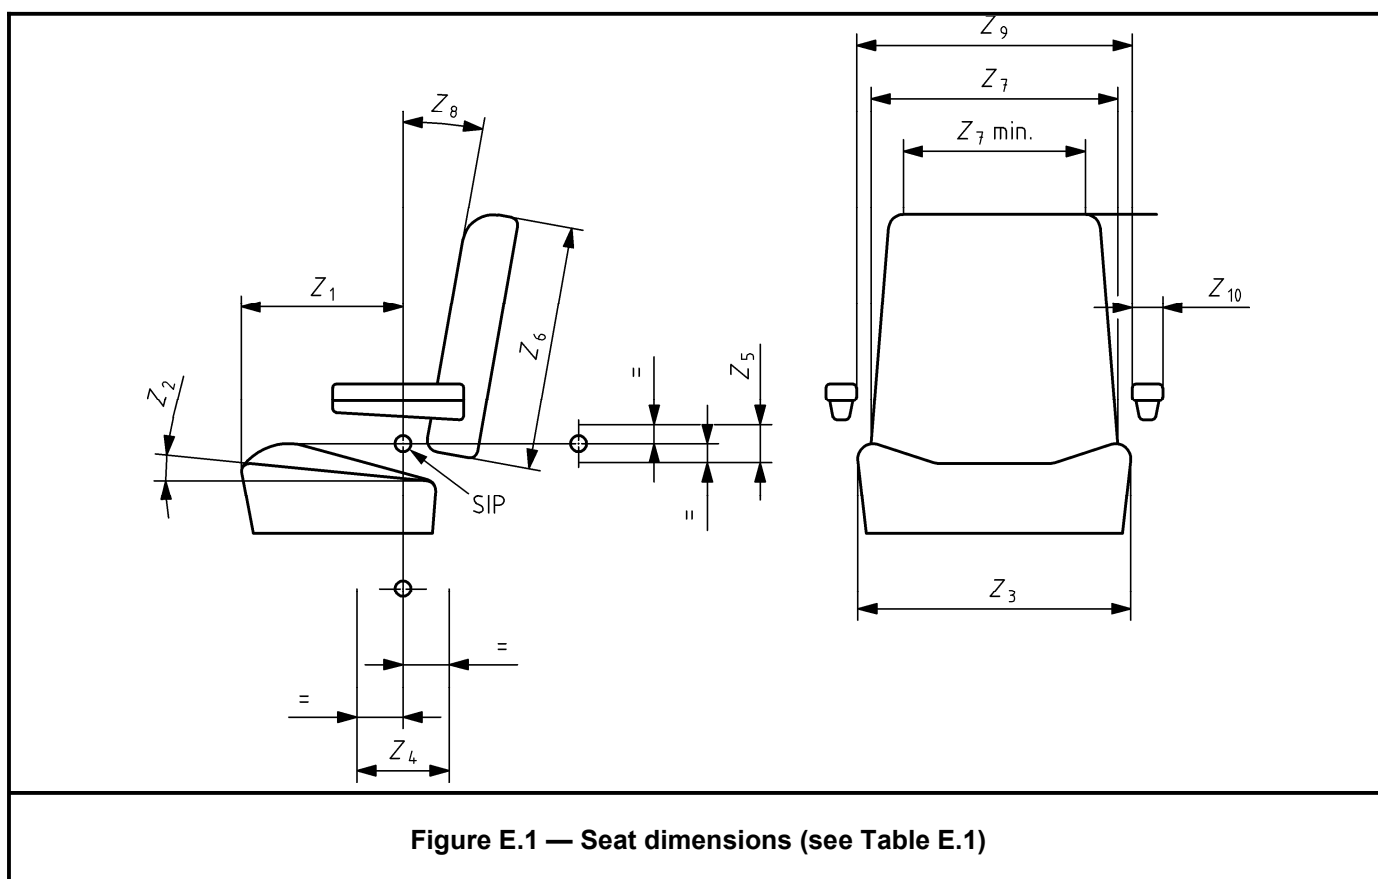


Figure E.1 — Seat dimensions (see Table E.1)

Table E.1 — Seat dimensions and adjustments

Dimension	Description	Key	Minimum	Nominal	Maximum
Z1	Seat cushion length	1	215 mm	265 mm	315 mm
Z2	Seat cushion angle	1, 2	5°	10°	15°
	Adjustment	1, 3	+/- 3°	+/- 5°	—
Z3	Seat cushion width	1	430 mm	—	500 mm
Z4	Forward/backward adjustment	1, 4	100 mm	150 mm	—
Z5	Vertical adjustment	1, 4	60 mm	—	—
Z6	Back cushion height	1, 5	150 mm	400 mm	—
Z7	Back cushion width	1, 6	300 mm	500 mm	—
Z8	Back cushion angle	1, 7	5°	10°	15°
	(if applicable)	1, 3	+/- 3°	+/- 5°	—
Z9	Lateral gap between armrests	1, 8	450 mm	500 mm	550 mm
Z10	Armrest width	1, 8	50 mm	75 mm	—
Key					
1 The max. and min. values listed may be changed based on ergonomic justification or better accommodation for the operator.					
2 Angle of the top of the seat base of the SIP device after being positioned and weighted using the seat index point measuring device and procedures as given in EN ISO 5353.					
3 Angle adjustment, if provided, is based from the mid position.					
4 Adjustment values are total adjustments.					
5 Where free swing of shoulders and arms over the top of the back is necessarily or appropriate for visibility when travelling in reverse or when controlling rear-mounted implements, the maximum back height should be 300 mm.					
6 Where free backward swing of the elbows is desired, the maximum width should be 330 mm.					
7 Measure the angle of the centreline of the back cushion. If a lumbar support is provided, it should be set at the mid-range position, and the back angle measured on centre-line of the back cushion above the lumbar support. For back cushions with a lumbar support, the allowable angles of Table E.1 may be increased by 5° or more.					
8 Where fitted.					

EN 13000:2010 (E)

Annex F (normative)

Rigid body stability: Load effects due to acceleration

Instead of an exact calculation of the load effect due to acceleration (see 4.1.2.6.4) the following simplified calculation procedure can be used. For the purpose of the simplified calculation procedure it can be assumed that the crane is operating on a level surface if the capacity charts permit up to 1 % gradient only.


The calculation shall show that the tipping angle for all rated capacities in all configurations slewed in the least stable direction is greater than or equal to the given minimum tipping angle (see Table F.1).

The tipping angle is indicated in Figure F.1.

To fix the height of the centre of gravity of the loaded crane the load shall be considered to be concentrated at the axle of the top sheaves of the jib.

Table F.1 — Minimum values of tipping angle

Crane configuration/condition	Min. tipping angle
on outriggers/crawlers in stationary condition	4,0°
on wheels (tyres) in stationary condition	4,5°
on crawlers/wheels (tyres) when travel speed up to 0,4 m/s is permissible	4,5°
on crawlers/wheels (tyres) when travel speed greater than 0,4 m/s is permissible	5,0°

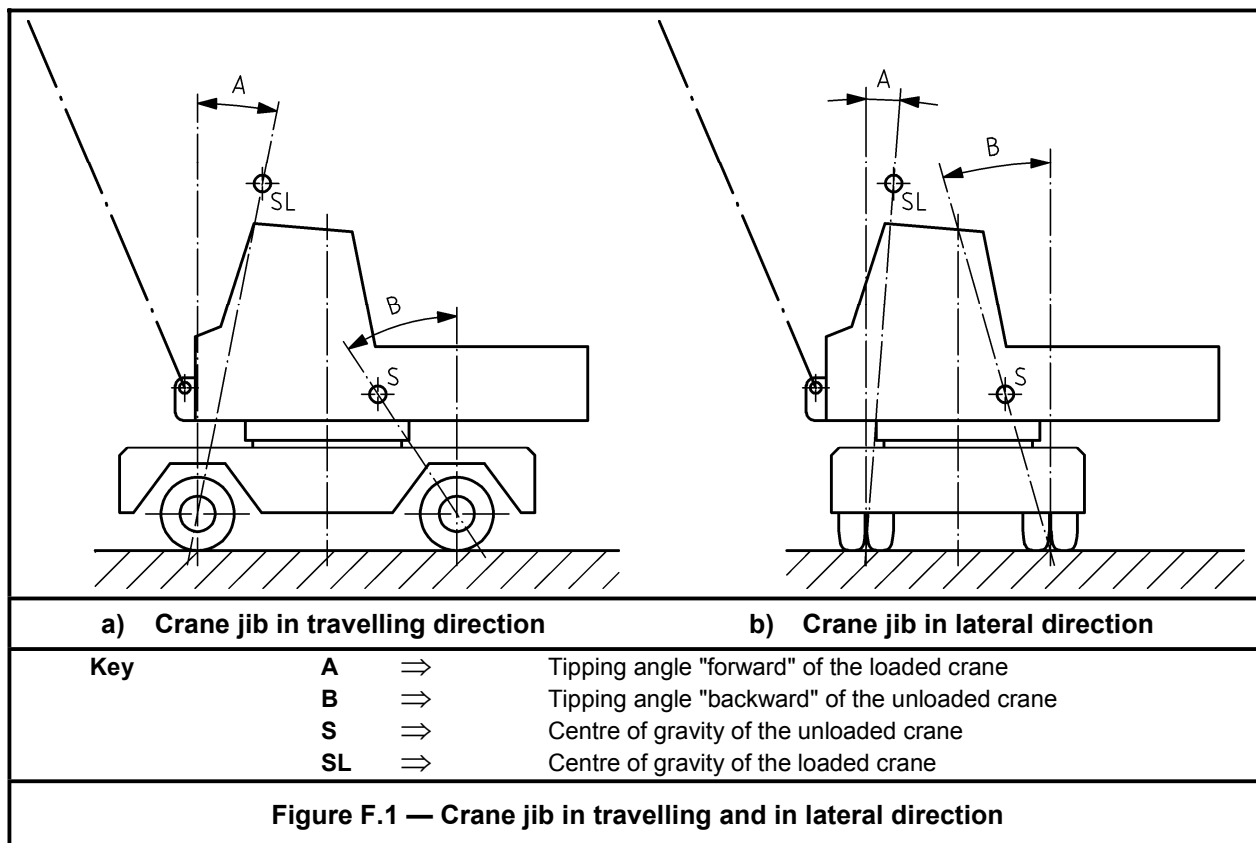

Annex G.1 (normative)

Noise test code for mobile cranes

G.1.1 Introduction

This noise test code specifies all the information necessary to carry out efficiently and under standardized conditions the determination, declaration and verification of the noise emission characteristics of mobile cranes. It specifies the noise emission measurement methods that are available and the configuration and conditions that shall be used for the test.

Noise emission characteristics include emission sound pressure levels at workstations and the sound power level. The determination of these quantities is necessary for:

- manufacturers to declare the noise emitted;
- comparing the noise emitted by mobile cranes on the market;
- purposes of noise control at source at the design stage.

The use of this noise test code ensures the reproducibility of the determination of the noise emission characteristics within specified limits determined by the grade of accuracy of the basic noise measurement method used. Noise measurement methods of grade 2 are allowed by this standard.

G.1.2 Normative references

This annex incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the annex, and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this annex only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

EN ISO 4871, *Acoustics — Declaration and verification of noise emission values of machinery and equipment (ISO 4871:1996)*

G.1.3 Terms and definitions

Definitions of acoustical terms are given in the basic standards (see G.1.2).

G.1.4 Description of machinery family

This noise test code applies to all mobile cranes covered by this standard. The determination of sound power level (L_{WA}) and emission sound pressure level (L_{pA}) shall be carried out with the same test conditions.

Any modification to noise generating components shall result in a new series of measurements.

EN 13000:2010 (E)

G.1.5 Sound power level determination

G.1.5.1 Basic standard to be used

The A-weighted sound power level of the mobile crane shall be determined using the basic standard EN ISO 3744, except with regard to the number and location of microphones (see G.1.5.3).

The measurement surface shall be a hemisphere, the radius of which shall be preferably 16 m. Other radii according to EN ISO 3744 shall be used if the crane does not fit into the 16 m hemisphere.

G.1.5.2 Positioning of the crane

The mobile crane is installed so that geometric centre of the engine that drives the crane motions coincides with the radial centre of the hemisphere. The driving direction of the undercarriage is in the direction + x and the jib of the upper structure is in direction – x. If the driving direction of the undercarriage is the same as the working direction of the jib (non slewing crane), the whole crane is aligned to direction – x (see Figure G.1).

If the mobile crane is equipped with only one engine for both driving and crane operation, the mobile crane is installed such that the middle point of the hemisphere is in the middle between the engine and the hoist(s) of the crane.

NOTE Sound power levels in frequency bands may also be determined using EN ISO 3744.

G.1.5.3 Microphone positions

Microphone positions on the hemisphere shall be those indicated in Figure G.1.

NOTE The microphone positions given in Figure G.1 differ in number and location from those specified in EN ISO 3744. Experience with the determination of noise emission from mobile cranes shows that results obtained with the array of microphones of Figure G.1 do not differ significantly from those obtained with the microphone array specified in EN ISO 3744.

G.1.5.4 Measurement and calculation procedure

The measurement and calculation procedure in EN ISO 3744 shall be followed.

The A-weighted sound power level shall be determined for each part of the work cycle following the procedure of EN ISO 3744.

The A-weighted sound power level $L_{WA \text{ cycle}}$ combined over the cycle shall be determined using the following equation:

$$L_{WA \text{ cycle}} = 10 \cdot \log_{10} \sum_i a_i \cdot 10^{0,1 \cdot L_{WAi}}$$

where

L_{WAi} is the A-weighted sound power level for part i of the work cycle;

a_i is a percentage for each part i of the work cycle.

If telescoping is applicable, $i = 1$ to 4, see G.1.8.2:

$a_1 = 0,40$ for a)

$a_2 = 0,25$ for b)

$a_3 = 0,25$ for c)

$a_4 = 0,10$ for d)

If telescoping is not applicable, $i = 1$ to 3, see G.1.8.2:

$a_1 = 0,40$ for a)

$a_2 = 0,30$ for b)

$a_3 = 0,30$ for c)

G.1.6 Emission sound pressure level determination

G.1.6.1 Basic standard to be used

The A-weighted emission sound pressure level at the operator position of a mobile crane shall be measured using EN ISO 11201.

NOTE Emission sound pressure levels at the operator position in frequency bands may also be measured using EN ISO 11201.

G.1.6.2 Crane operator position

The operator position is that of a person seated at the crane operating controls in the crane operating cabin. This person shall wear standard working clothes.

Where a separate crane travelling cabin is provided this shall not be considered as the operator position.

The microphones shall be placed at (200 ± 20) mm on each side of the mid-plane of the head in the alignment of the eyes. They shall be placed perpendicularly to the mid-plane of the head and directed towards the front.

NOTE To facilitate the positioning of the microphones, it may be convenient to place them on a frame, to fix them to the safety helmet or to fit them onto a harness placed on the shoulders of the operator.

G.1.6.3 Specifications concerning the crane operating cabin

If the cabin is fitted with an air conditioning and/or ventilation system, then the readings shall be taken with all doors and windows closed and with the air conditioning and/or ventilation system in operation at 100 % of their nominal working speed. If a high speed for rapid cooling is provided (not intended for normal operation) it shall be not in operation.

If it is anticipated that one can work in the cabin with doors and windows open, and there is no air conditioning and/or ventilation system fitted, then the readings shall be taken both with doors and windows closed and then with doors and windows open.

G.1.6.4 Specification relating to wind speed

The maximum admissible wind speed is 8 m/s, measured at 1,5 m above ground level.

If the maximum allowable wind speed specified by the manufacturer of the microphone is exceeded, a wind shield shall be fitted to the microphone.

G.1.6.5 Measurement and calculation procedure

The measurement and calculation procedures in EN ISO 11201 shall be followed.

The maximum of the two measured A-weighted sound pressure level values (right ear or left ear) shall be retained.

EN 13000:2010 (E)

The A-weighted emission pressure level at the operator position, L_{pA} to be determined shall be calculated from the values of the A-weighted emission sound pressure levels, L_{pAi} measured for each part i of the work cycle using the following equation:

$$L_{pA} = 10 \cdot \log_{10} \sum_i a_i \cdot 10^{0,1 \cdot L_{pAi}}$$

where

L_{pAi} is the A-weighted sound pressure level for part i of the work cycle;

a_i the values of a_i to be taken has given in G.1.5.4.

G.1.7 Configuration

If the crane is equipped with outriggers, they shall be fully extended and the crane shall be levelled on its outrigger plates in mid position of possible support height.

G.1.8 Operating conditions**G.1.8.1 General**

The mobile crane to be tested shall be presented in its standard version as described by the manufacturer. The engine power considered for determining noise emission shall be the nominal power of the engine when used for crane motions. The crane shall be equipped with its maximum permitted counterweight mounted on the slewing structure.

Before carrying out any measurement, the engine and the hydraulic system of the mobile crane shall be brought to their normal working temperature following the instructions of the manufacturer and all relevant safety-related procedures given in the instruction manual shall be carried out.

If the mobile crane is equipped with several engines, the engine for the crane functions shall be used. The carrier engine shall be turned off.

If the engine of the mobile crane is fitted with a ventilator, it shall run during the test. If the ventilator can be operated at several speeds, the test shall be carried out with the ventilator running at the highest speed.

G.1.8.2 Test procedure

The mobile crane shall be measured under the following three or four operating conditions (a–c) or (a–d). Constant conditions for (a–d) are:

- engine speed at $\frac{3}{4}$ of maximum speed specified for crane operation mode with a tolerance of $\pm 2\%$;
- acceleration and deceleration at the maximum value without dangerous movements of the load or the hook block;
- motions at maximum possible speed as given in the instruction manual under the conditions given below.

NOTE If during the tests significant noise peaks occur, this should be reported.

EN 13000:2010 (E)

a) Hoisting

The mobile crane shall be loaded with a load which creates 50 % of the maximum rope force. The test consists of the hoisting of the load and the immediately following lowering to the starting position. The length of the boom shall be chosen so that the full test lasts 15 s to 20 s.

b) Slewing

With the boom adjusted to an angle of 40° to 50° to the horizontal and without load the upper carriage shall be slewed 90° to the left immediately followed by slewing back to the starting position. The jib shall be at its minimum length. The observation period shall be the time needed to carry out the working cycle.

c) Derricking

The test shall start with raising the shortest jib from the lowest working position immediately followed by the lowering of the jib to this original position. This movement shall be executed without load. The duration of the test shall be at least 20 s.

d) Telescoping (if applicable)

With the jib adjusted to an angle of 40° to 50° to the horizontal, without load and the jib fully retracted, the telescoping cylinder for the first section only shall be extended together with the first section to its full length and immediately retracted together with the first section.

NOTE This can result in synchronous motion(s) of other sections.

The observation period shall be the time needed to carry out the working cycle.

G.1.9 Information on measurement uncertainties

The measurement uncertainty of the noise emission data provided by this noise test code is specific to the basic standard used. It is expressed in terms of the standard deviation of reproducibility. The grade of accuracy obtained is grade 2 (engineering) which is the preferred grade for noise declaration purposes.

The standard deviation of reproducibility of A-weighted sound power levels obtained using EN ISO 3744 is equal to 1,5 dB.

The standard deviation of reproducibility of A-weighted emission sound pressure levels at the operator position obtained using EN ISO 11201 is equal to 2,5 dB.

G.1.10 Information to be recorded

The information to be recorded is as required by the basic standards used, see G.1.2.

G.1.11 Information to be reported

The information to be reported is as required by the basic standards used, see G.1.2. The contents of the test report shall be as shown in Annex G.2.

G.1.12 Declaration and verification of noise emission values

The declaration of the noise emission values of a mobile crane is the responsibility of the manufacturer of the crane. It shall be done:

- a) according to EN ISO 4871;

EN 13000:2010 (E)


- b) in such a way that the values can be verified according to EN ISO 4871;
- c) as a single number value of the guaranteed sound power level as defined in EN ISO 4871.

The noise declaration shall mention the fact that the noise emission values have been obtained according to this noise test code. In other cases, the noise declaration shall indicate clearly the deviations from this noise test code and/or from the basic standards used.

The noise declaration shall give the A-weighted sound power level for each part of the work cycle.

If undertaken, a verification shall be carried out by using the same configuration and operating conditions as used for the determination of the noise emission values.

NOTE Additional noise emission quantities such as sound power levels in frequency bands may also be given. In this case, care should be taken to avoid confusion between this additional information and the declared dual-number noise emission values.

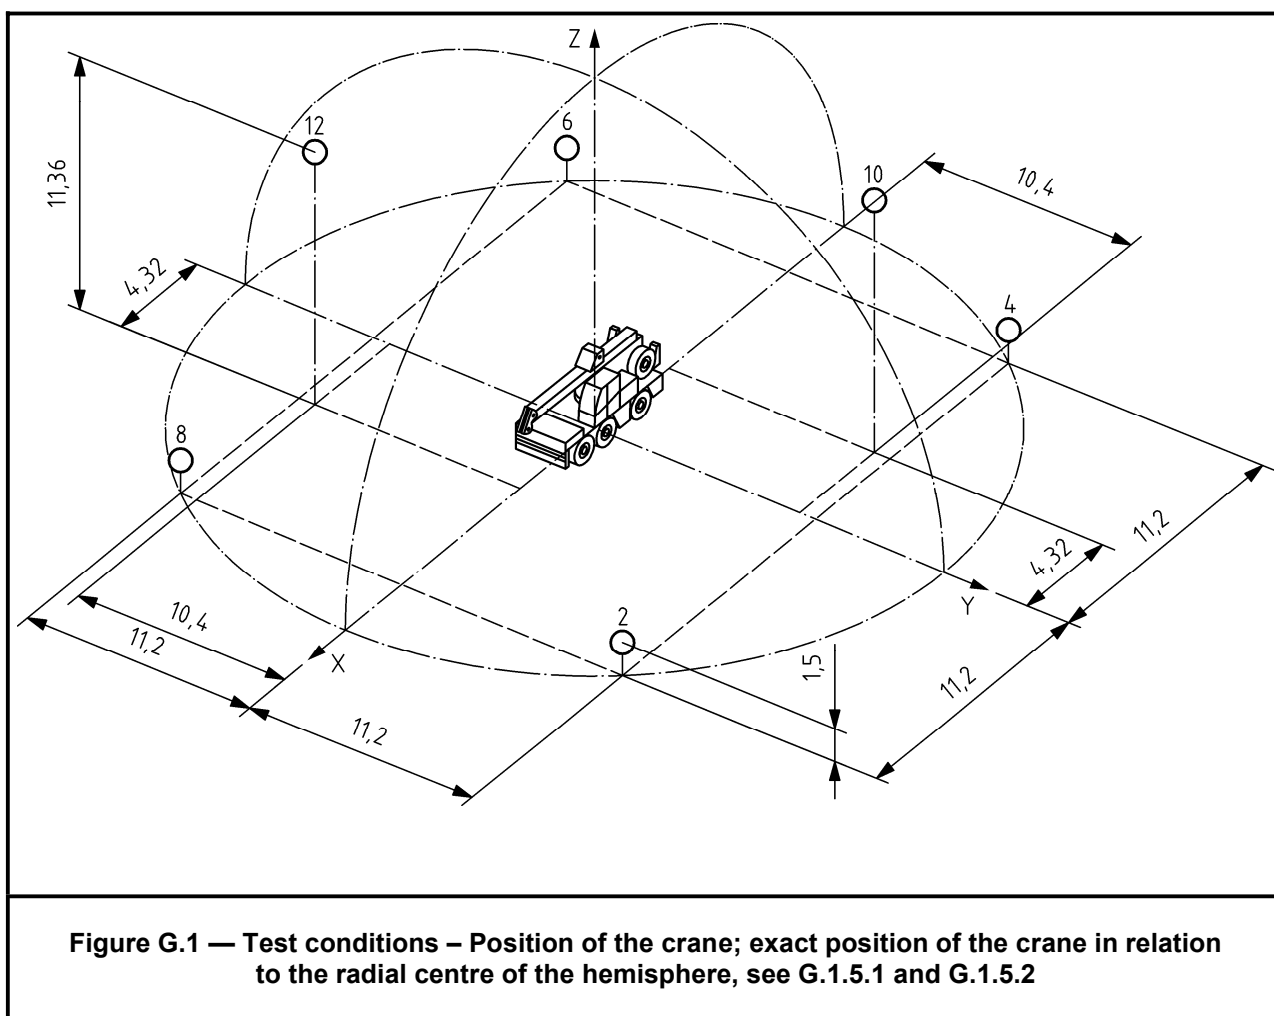

Annex G.2 (normative)

Noise measurement, test report

The following minimum data shall be given in each report, the format of the report is a proposal only:

G.2.1 General data

a) Manufacturer reference		
Name:		
Address:		
b) Mobile crane reference		
Manufacturer:	Type:	Version:
Dimensions: L =	[m]; B =	[m]; H = [m]
c) Engine reference		
Manufacturer:	Type:	
Revs:	[1/min] (nominal value as declared)	
Power:	[kW] (corresponding to speed; 80/1269/EEC)	
Exhaust system		
Manufacturer:	Type:	
Air filter		
Manufacturer:	Type:	
d) Test conditions		
Indicate measurement points according to crane if other than in Figure G.1		
Ground type of test area:		
Meteorological conditions		
Weather general:		
Temperature:		
Barometric pressure:		
Wind speed:		
Relative humidity:		
e) Measuring instruments used		
Manufacturer:		
Type:		
f) Measurement results (see G.2.2)		
Date:		
Location:		

EN 13000:2010 (E)

G.2.2 Measurements per motion

Hoisting (up and down)	Test	Sound pressure level at the measurement points							Sound pressure in the operating cabin L_{pA}		
		2	4	6	8	10	12	L_{pAm}	1*	2*	3*
Load	No.1										
Radius	No.2										
	No.3										
$R = 16 \text{ m}$		$L_{WA} = L_{pAm} + 10 \log(S/S_0) =$							dB(A)		

Derricking (up and down)	Test	Sound pressure level at the measurement points							Sound pressure in the operating cabin L_{pA}		
		2	4	6	8	10	12	L_{pAm}	1*	2*	3*
	No.1										
	No.2										
	No.3										
$R = 16 \text{ m}$		$L_{WA} = L_{pAm} + 10 \log(S/S_0) =$							dB(A)		

Slewing (left and right)	Test	Sound pressure level at the measurement points							Sound pressure in the operating cabin L_{pA}		
		2	4	6	8	10	12	L_{pAm}	1*	2*	3*
Radius	No.1										
	No.2										
	No.3										
$R = 16 \text{ m}$		$L_{WA} = L_{pAm} + 10 \log(S/S_0) =$							dB(A)		

Telescoping (in and out)	Test	Sound pressure level at the measurement points							Sound pressure in the operating cabin L_{pA}		
		2	4	6	8	10	12	L_{pAm}	1*	2*	3*
	No.1										
	No.2										
	No.3										
$R = 16 \text{ m}$		$L_{WA} = L_{pAm} + 10 \log(S/S_0) =$							dB(A)		

1*: Doors and windows open

2*: Doors and windows closed without air conditioning and fan

3*: Doors and windows closed with air conditioning and fan

Calculation:

$$L_{WA_{cycle}} = 10 \cdot \log_{10} \left(\sum_i a_i \cdot 10^{0,1 \cdot L_{WAi}} \right)$$

$$L_{pA} = 10 \cdot \log_{10} \left(\sum_i a_i \cdot 10^{0,1 \cdot L_{pAi}} \right)$$

If telescoping is applicable, $i = 1$ to 4, see G.1.8.2

$$a_1 = 0,40 \text{ for a)}$$

$$a_2 = 0,25 \text{ for b)}$$

$$a_3 = 0,25 \text{ for c)}$$

$$a_4 = 0,10 \text{ for d)}$$

If telescoping is not applicable, $i = 1$ to 3, see G.1.8.2

$$a_1 = 0,40 \text{ for a)}$$

$$a_2 = 0,30 \text{ for b)}$$

$$a_3 = 0,30 \text{ for c)}$$

Result:

$$L_{WA \text{ cycle}} = \underline{\hspace{2cm}} \quad L_{pA} = \underline{\hspace{2cm}}$$

Signature

Tested by (name):

Date and Place:

Organisation (name):

Signature:

EN 13000:2010 (E)

Annex H (normative)

Limit values for structural and fine grain steel types

Table H.1 — Limit values for structural and fine grain steel types

Grade of Steel	Type	Document	Yield Point ^a [N/mm ²] MPa	Tensile Strength ^a [N/mm ²] MPa	Shear Modulus [N/mm ²] MPa	Youngs Modulus of Elasticity [N/mm ²] MPa
Structural steel	S235J	EN 10025-2	≥ 235	≥ 360	81 000	210 000
Structural steel	S355J	EN 10025-2	≥ 355	≥ 510		
Thermomechanically rolled steel	S355MC	EN 10149-2	≥ 355	≥ 460		
Thermomechanically rolled steel	S700MC	EN 10149-2	≥ 700	≥ 750		
Normalized fine grain structural steel	S460N	EN 10025-3	≥ 460	≥ 550		
High yield strength structural steel	S460Q	EN 10025-6	≥ 460	≥ 550		
High yield strength structural steel	S690Q	EN 10025-6	≥ 690	≥ 790		
High yield strength structural steel	S890Q	EN 10025-6	≥ 890	≥ 940		
High yield strength structural steel	S960Q	EN 10025-6	≥ 960	≥ 980		
High yield strength structural steel	S1100Q	similar to EN 10025-6	≥ 1 100	≥ 1 200		

^a Nominal value for limited thickness, details see related standards and/or manufacturer specification.

Annex J.1 (normative)

Minimum requirements for specification of hoist/derrick gears

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Hoist gears/Derrick gears		
General information		
manufacturer		
type (ordering code)		
intended purpose		
model		
with brake / without brake		
type of brake		
use of brake	holding brake/dynamic brake	
General data (dimensions, transmission ratio, drive)		
dimensions see drawing no.		
transmission ratio	i_G	
drive motor (manufacturer, type)		
motor model		
Information about duration of use and group classification		
total duration of use (see Annex A of FEM 1.001:1998, booklet 2)	$T_{H \max}$	[h]
group classification according to FEM 1.001:1998	class of utilisation	
	spectrum class	
	mechanism group	
Load effects		
max. output torque (or max. drum torque) *1)	max. T_L	[kNm]
average output torque *1)	$T_{L,m}$	[kNm]
output torque due to special loading condition: "test load" *2)	T_{Fg}	[kN]
max. output revolutions (or revolutions of drum) *3)	max. n	[1/min]
average output revolutions *3)	n_m	[1/min]
static torque of the brake *4)	T_{BR}	[kNm]
dynamic torque of the brake *5)		[kNm] see enclosure
Information about assembly and maintenance		
admissible ambient temperatures	t_{\min}	[°C]
	t_{\max}	[°C]
type of gear oil		
interval of oil change (operating hours)	[h]	
Miscellaneous		
mass (weight) (with oil/without oil)		[kg]
*1), *2), *3), *4), *5) Definitions/explanations see as follows.		

EN 13000:2010 (E)

*1)	$\max T_L$	\Rightarrow	Maximum output torque due to the nominal load of the rope. See Table 1 of FEM 5.004:1994, case 1; the friction losses shall be considered.
	$T_{L,m}$	\Rightarrow	Average output torque calculated under consideration of the spectrum class according to T.2.1.3.3 of FEM 1.001:1998, booklet 2.
			$T_{L,m} = \max T_L \cdot \sqrt[3]{k_m} \quad k_m \Rightarrow$ spectrum factor
*2)	T_{Fg}	\Rightarrow	Output torque due to special loading condition: "test load". Additional special loading conditions (e.g. during crane erection or dismantling – see Table 1 of FEM 5.004:1994, case 3-II) shall be specified in an enclosure to the technical specification. The enclosure shall include adequate explanations and comments. Minimum requirements are: — the output torque; — the operating time of the mechanism relating to the load spectrum; — the average output revolutions.
*3)	$\max. n$	\Rightarrow	Maximum output revolutions
	n_m	\Rightarrow	Average output revolutions occurring at the same time to $T_{L,m}$
*4)	T_{Br}	\Rightarrow	Required static holding torque of the brake calculated from the maximum output torque ($\max T_L$) amplified with the required safety factor (see 4.2.8.1.2). Special loading cases by derricking mechanisms (e.g. the output torque due to load effects during crane erection or dismantling) shall be additionally considered.
*5)			The dynamic braking torque results from both the maximum output torque ($\max T_L$) and the dynamic torque resulting from the required brake deceleration. Normally additional data is required to calculate and to produce a dynamic brake. Therefore this data shall be specified in an enclosure to the technical specification. The enclosure shall include the adequate explanations and comments.

Annex J.2 (normative)

Minimum requirements for specification of slewing gears

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of slewing gears		
General information		
manufacturer		
type (ordering code)		
intended purpose		
model		
with brake / without brake		
type of brake		
use of brake	holding brake/dynamic brake	
General data (dimensions, transmission ratio, drive)		
dimensions see drawing no.		
transmission ratio	i_G	
drive motor (manufacturer, type)		
motor model		
Information about duration of use and group classification		
total duration of use (see Annex A of FEM 1.001:1998, booklet 2)	$T_{H \max}$	[h]
group classification according to FEM 1.001:1998	class of utilisation	
	spectrum class	
	mechanism group	
Load effects		
max. output torque *1)	max. T_S	[kNm]
average output torque *1)	$T_{S,m}$	[kNm]
max. output revolutions *2)	max. n	[1/min]
average output revolutions *2)	n_m	[1/min]
static torque of the brake *3)	T_{Br}	[kNm]
dynamic torque of the brake *4)		[kNm] see enclosure
Information about assembly and maintenance		
admissible ambient temperatures	t_{\min}	[°C]
	t_{\max}	[°C]
type of gear oil		
interval of oil change (operating hours)		[h]
Miscellaneous		
mass (weight) (with oil / without oil)		[kg]
*1), *2), *3), *4) Definitions/explanations see as follows.		

EN 13000:2010 (E)

*1)	$\max. T_S$	\Rightarrow	Maximum output torque – e.g. the output torque determined from slewing of the crane with load against in-service wind and against the maximum in-service permissible inclination and for this case intended slewing acceleration (see 2.5 and 2.6 of FEM 1.001:1998, booklet 2). Occurring friction losses shall be taken in consideration.
	$T_{S,m}$	\Rightarrow	Average output torque calculated under consideration of the spectrum class according to T.2.1.3.3 of FEM 1.001:1998, booklet 2.
			$T_{S,m} = \max T_S \cdot \sqrt[3]{k_m} \quad k_m \Rightarrow \text{spectrum factor}$
*2)	$\max. n$	\Rightarrow	Maximum output revolutions
	n_m	\Rightarrow	Average output revolutions occurring at the same time to $T_{S,m}$
*3)	T_{Br}	\Rightarrow	Required static holding torque of the brake – e.g. the holding torque due to in-service wind pressure on the crane and the load and due to the admissible in-service inclination. Special cases (e.g. the holding torque due to out-of-service wind and admissible out-of-service inclination) shall be considered additionally.
*4)			The dynamic braking torque results from both the maximum output torque ($\max T_S$) and the dynamic torque resulting from the required brake deceleration. Normally additional data is required to calculate and to produce a dynamic brake. Therefore this data shall be specified in an enclosure to the technical specification. The enclosure shall include the adequate explanations and comments.

Annex J.3 (normative)

Minimum requirements for specification of travel gears

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Travel gears		
General information		
manufacturer		
type (ordering code)		
intended purpose *1)		
model		
with brake / without brake		
type of brake		
use of brake	holding brake / dynamic brake	
General data (dimensions, transmission ratio, drive)		
dimensions see drawing no.		
transmission ratio	i_G	
drive motor (manufacturer, type)		
motor model		
Information about duration of use and group classification		
total duration of use (see Annex A of FEM 1.001:1998, booklet 2)	$T_{H \max}$	[h]
group classification according to FEM 1.001:1998	class of utilisation	
	spectrum class	
	mechanism group	
Load effects		
max. output torque *2)	max. T_{Tr}	[kNm]
average output torque *2)	$T_{Tr,m}$	[kNm]
max. output revolutions *2)	max. n	[1/min]
average output revolutions *3)	n_m	[1/min]
additional loads *4)		see enclosure
static torque of the brake *5)	T_{Br}	[kNm]
dynamic torque of the brake *6)		[kNm] see enclosure
Information about assembly and maintenance		
admissible ambient temperatures	t_{\min}	[°C]
	t_{\max}	[°C]
type of gear oil		
interval of oil change (operating hours)		[h]
Miscellaneous		
mass (weight) (with oil / without oil)		[kg]
*1), *2), *3), *4), *5), *6) Definitions/explanations see as follows.		

EN 13000:2010 (E)

*1) The technical specification does not apply to travel gears (e.g. gear boxes or axle gears) of on-road mobile cranes.

NOTE Commercially purchased gearboxes for on-road use can be considered as acceptable for on site travel (with or without load).

*2) $\max. T_{Tr}$ \Rightarrow Maximum output torque according to 2.5 and 2.6 of FEM 1.001:1998, booklet 2, 2.6.4.2 case III applies normally.

$T_{Tr,m}$ \Rightarrow Average output torque calculated under consideration of the spectrum class according to T.2.1.3.3 of FEM 1.001:1998, booklet 2.

$$T_{Tr,m} = \max T_{Tr} \cdot \sqrt[3]{k_m} \quad k_m \Rightarrow \text{spectrum factor}$$

*3) $\max. n$ \Rightarrow Maximum output revolutions

n_m \Rightarrow Average output revolutions occurring at the same time to $T_{Tr,m}$

*4) Loads which are not caused through drive torque but through exterior load effects (e.g. vertical supporting forces, wheel loads, horizontal transverse reactions due to travelling action) and acting on the gear or on parts of the gear shall be specified in an enclosure to the specification. The enclosure shall include adequate explanations and comments.

*5) T_{Br} \Rightarrow Required static holding torque of the brake – e.g. the required holding torque due to in-service wind pressure on the crane and the load and due to the passable inclination with load.

Special cases (the holding torque due to out-of-service wind and the passable inclination without load) shall be considered additionally.

*6) The dynamic braking torque results from the required brake deceleration.

Normally additional data is required to calculate and to produce a dynamic brake. Therefore this data shall be specified in an enclosure to the specification. The enclosure shall include adequate explanations and comments.

Annex J.4 (normative)

Minimum requirements for specification of drums

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Hoist drums / Derrick drums		
General information		
manufacturer		
type of mechanism	hoist mechanism / derrick mechanism	
delivery condition	finished product / moulded blank	
drawing no.		
type of drum	single drum / dual drum	
max. number of rope layers		
type of groove thread	normal thread / parallel thread (Lebus system)	
groove profile (standard used) *1)		
Main dimensions		
dimensions see drawing no.		
rope diameter	d_R	[mm]
rope length (max. winding length)	l_R	[m]
nominal diameter of drum (pitch dia. related to middle of first layer)	d_{Dr}	[mm]
diameter of last rope layer (related to middle of rope)	$d_{Dr(m)}$	[mm]
drum width (between the flanges)	b_{Dr}	[mm]
outer diameter of flanges	d_{Fl}	[mm]
pitch of groove thread	t	[mm]
Group classification of mechanism		
group classification according to FEM 1.001:1998 *2)	class of utilisation	
	spectrum class	
	mechanism group	
Load effects		
nominal rope force *3)	F_R	[kN]
Data for determination of fatigue life *4)		
average rope force	$F_{R,m}$	[kN]
average revolutions	$n_{Dr,m}$	[1/min]
Data for checking for ultimate strength *5)		
max. rope force due to special load case	max. F_R	[kN]
Information about material and manufacturing process		
manufacturing process	welding / casting	
Material		
Miscellaneous		
mass (weight) (in delivery condition)		[kg]

EN 13000:2010 (E)

*1), *2), *3), *4), *5) Definitions/explanations see as follows.

*1) \Rightarrow e.g. ISO 4308-1, DIN 15061-2:1977.

*2) \Rightarrow According to the group classification of the mechanism belonging to the drum (see Annex J.1).

*3) \Rightarrow See Table 1 of FEM 5.004:1994, case 1. The friction losses shall be considered.

*4) \Rightarrow Average data $F_{R,m}$, $n_{Dr,m}$ calculated considering the spectrum class according FEM 1.001:1998, booklet 2.

$$F_{R,m} = \max F_R \cdot \sqrt[3]{k_m} \quad k_m \Rightarrow \text{spectrum factor}$$

$n_{Dr,m} \Rightarrow$ Average output revolutions occurring at the same time to $F_{R,m}$

*5) \Rightarrow Maximum value $\max. F_R$ due to the special loading condition (during crane erection or dismantling, test load) that gives rise to the maximum stress in the drum.

Annex K.1 (normative)

Minimum requirements for the specification of lifting hooks

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Lifting Hooks		
General information		
manufacturer		
ordering code *1)		
form of hook	single hook / ramshorn hook	
boss for safety catch	with boss / without boss	
Lifting capacity, Classification		
nominal lifting load	L_H	[t]
lifting load in accordance to (standard used) *2)		
strength class / grade *2)		
mechanism group (ISO 4301-1)		
Dimensions		
standard of hook dimensions		
type and standard of shank thread *3)		
Information about manufacturing process and material		
manufacturing process *4)		
material		
Miscellaneous		
marking (standard used)		
certificate (standard used)		
mass (weight)		[kg]
*1), *2), *3), *4) Definitions/explanations see as follows.		
*1)	⇒	e.g.: single hook DIN 15401, Part 1:1982 and Part 2:1983 – GSN – M.
*2)	⇒	e.g.: DIN 15400:1990.
*3)	⇒	e.g.: metric thread ISO 261, knuckle thread DIN 15403:1969.
*4)	⇒	e.g.: drop forged, hammer forged.

EN 13000:2010 (E)

Annex K.2 (normative)

Minimum requirements for specification of sheaves

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Sheaves		
General information		
manufacturer	drawing no.	
groove profile (standard used) *1)		
bearing application	plain bearing/roller bearing (bearings are not included in the scope of supply)	
no. and type of bearings		
Main dimensions		
dimensions see drawing no.		
rope diameter (nominal)	d_R	[mm]
loop angle	β_R	[°]
nominal diameter (related to centre of rope)	$d_{Sh,1}$	[mm]
diameter of hub bore	$d_{Sh,2}$	[mm]
hub width	$l_{Sh,2}$	[mm]
axle diameter	$d_{Sh,3}$	[mm]
Information about duration of use and group classification		
max. number of stress cycles	n_c	
group classification according to FEM 1.001:1998 *2)	class of utilisation	
	spectrum class	
	mechanism group	
Load effects		
nominal rope force *3)	F_R	[kN]
Data for determination of strength *4)		
average rope force	$F_{R,m}$	[kN]
average diagonal pull angle	$\gamma_{R,m}$	[°]
average revolutions	$n_{Sh,m}$	[1/min]
Data for checking the safety margin against ultimate strength *5)		
max. rope force due to special load case	max. F_R	[kN]
max. diagonal pull angle at max. F_R	max. γ_R	[°]
Material specification		
kind of material *6)	steel/plastic / light metal	
Miscellaneous		
mass (weight)		[kg]
*1), *2), *3), *4), *5), *6) Definitions/explanations see as follows.		

EN 13000:2010 (E)

- *1) ⇒ e.g. ISO 4308-1, DIN 15061-1
- *2) ⇒ see 2.1.4 of FEM 1.001:1998, booklet 2
- *3) ⇒ see Table 1 of FEM 5.004:1994, case 1. Friction losses shall be considered.
- *4) ⇒ Average data $F_{R,m}$, $\gamma_{R,m}$, calculated under consideration of the spectrum class according to FEM 1.001:1998, booklet 2. with: $F_{R,m} = \max F_R \cdot \sqrt[3]{k_m}$ $k_m \Rightarrow$ spectrum factor.
- *5) ⇒ Maximum values of $\max F_R$, $\max \gamma_R$ from special load case (during erection, dismantling or test load), that gives rise to the maximum stress in the sheave.
- *6) ⇒ Special requirements for plastic sheaves (e.g. interference fit of hub bore, minimal diameter of hub bore, minimal hub width) shall be specified in an enclosure to the specification or in a general agreement.


EN 13000:2010 (E)

Annex K.3 (normative)

Minimum requirements for specification of hook blocks

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Hook Blocks		
General information		
manufacturer		
dimensions see drawing no.		
model *1)	Single / double / multiple hook block	
Lifting capacity, Classification		
nominal lifting load	L_H	[t]
mechanism group (ISO 4301-1)		
Information about ropes and no. of falls *1)		
rope diameter	d_R	[mm]
max. number of ropes		
max. number of falls		
Lifting hook		
technical specification of lifting hook *2)		
Sheaves		
number of sheaves *1)		
technical specification of sheaves *3)		
Miscellaneous		
marking (agreement) *4)		
certificate (agreement) *4)		
mass (weight)	[kg]	
*1), *2), *3), *4) Definitions/explanations see as follows		
*1)	⇒	see Figure K.3.1
*2)	⇒	Minimum requirements for technical specification of lifting hooks see Annex K.1
*3)	⇒	Minimum requirements for technical specification of sheaves see Annex K.2
*4)	⇒	Agreement between the designer of the crane and the manufacturer of the hook block.

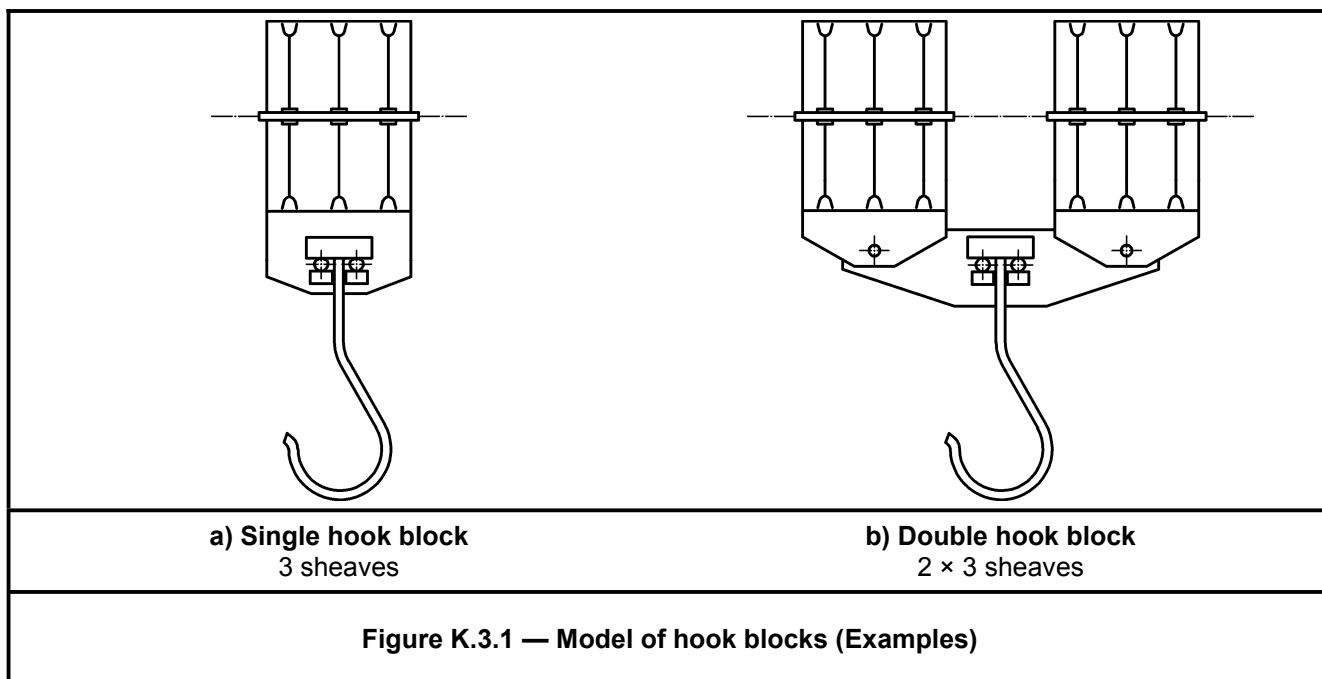

EN 13000:2010 (E)

Annex K.4 (normative)

Minimum requirements for the specification of hydraulic cylinders

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Hydraulic Cylinders			
General information			
manufacturer			
type (ordering code)			
dimensions see drawing no.			
intended purpose *1)			
model *2)			
Main dimensions (see drawing)			
piston diameter	d_1	[mm]	
piston rod diameter	d_2	[mm]	
outer diameter	d_3	[mm]	
stroke length	h	[mm]	
overall length (retracted)	l_0	[mm]	
Information about duration of use and group classification			
max. number of stress cycles	n_c		
group classification according to FEM 1.001:1998	class of utilisation		
	spectrum class		
	mechanism group		
Load effects (permissible loads, pressures, piston speed)			
maximum operating pressure, piston side	$p_{c,1}$	[bar]	
maximum operating pressure, piston rod side	$p_{c,3}$	[bar]	
test pressure, piston side	$p_{T,1}$	[bar]	
test pressure, piston rod side	$p_{T,3}$	[bar]	
max. pushing force (retracted)	$F_{c,1}$	[N]	
max. pushing force (extended)	$F_{c,2}$	[N]	
max. pulling force	$F_{c,3}$	[N]	
max. piston speed	v_c	[m/s]	
Information about assembly and maintenance			
admissible ambient temperatures	t_{min}	[°C]	
	t_{max}	[°C]	
medium (type of hydraulic fluid)			
Miscellaneous			
type of corrosion prevention (e.g. piston rode)			
layer thickness		[µm]	
mass (weight) (with/without fluid)		[kg]	
*1), *2) Definitions/explanations see as follows			

EN 13000:2010 (E)

- | | | |
|-----|---|--|
| *1) | ⇒ | e.g. outrigger cylinder (vertical, horizontal), luffing cylinder, telescoping cylinder, jib restraining cylinder, suspension cylinder, axle blocking cylinder, hydro-accumulator cylinder, working cylinder (general). |
| *2) | ⇒ | e.g. pulling cylinder, pushing cylinder, differential cylinder. |

EN 13000:2010 (E)

Annex K.5 (normative)

Minimum requirements for the specification of slew rings

The information given is mandatory, the format of presentation is a proposal only.

Technical Specification of Slew Rings		
General information		
manufacturer	drawing no. (manufacturer)	
load limiting diagram no. *1)		
type / model *2)		
General dimensions		
outer diameter		
inner diameter		
height (between the connecting surfaces)		
Gear tooth geometry		
type of gearing	internal gear / external gear	
no. of teeth		
diametrical pitch		
tooth width		
profile correction ($x \cdot m$)		
Fixing bolts/screws for superstructure		
no. of bolts/screws	i	
type of bolts/screws (standard used) *3)		
bolt / screw thread size		
strength class		
assembly method	torque controlled / hydraulic tension method	
mounting torque	M_A	[Nm]
tension force	F_A	[kN]
Fixing bolts/screws for carrier		
no. of bolts/screws	i	
type of bolts/screws (standard used) *3)		
bolt thread size		
strength class		
assembly method	torque controlled / hydraulic tension method	
mounting torque	M_A	[Nm]
tension force	F_A	[kN]

EN 13000:2010 (E)

Admissible loads (additional information for load limiting diagram)		
permissible tangential force of gearing	$\max F_U$	[kN]
permissible radial force	$\max F_R$	[kN]
Miscellaneous		
type of grease (standard used)		
mass (weight)		[kg]
*1), *2), *3) Definitions/explanations see as follows.		
*1)	⇒	The load limiting diagram (load moment as a function of axial load) shall include curves showing at least the permissible static and dynamic loads for slew ring and rollers/balls and permissible static and dynamic loads for bolt/screw connections, test load curve.
*2)	⇒	e.g.: Ball type slew ring, roller type slew ring (single row bearing, triple row bearing, etc.)
*3)	⇒	e.g.: Shank bolts – ISO 4014

EN 13000:2010 (E)**Annex L**
(normative)**Proof of competence****L.1 General**

The objective of this annex is to prove theoretically and/or by experiment that a mobile crane, taking into account the expected service conditions agreed between the user, designer and/or manufacturer, as well as the states during erection, dismantling and transport, has been designed to be in conformity with the safety requirements to prevent mechanical hazards.

The theoretical proof of competence is based on the comparison of the limit states with calculated nominal load effects. The calculations for the proof of competence of (steel) structures shall allow either the method of permissible stresses (see L.2.2) or the method of partial safety coefficients and limiting stresses (see L.2.3) – where appropriate.

The experimental proof of competence shall provide a systematic, non-destructive procedure for determining the stresses in structures under equivalent static loads and load combinations.

The proof of competence for rigid body stability shall prevent any lack of stability of the crane in- and out-of-service, during its intended use, erection and dismantling.

By evaluation of the load effects and the definition of the limit states of the crane structure and its components the proof of competence shall be carried out to show adequate safety for any hazard due to loss of mechanical strength and/or loss of stability.

The determination of stresses, which depend on the loading condition and the type of analysis, shall not exceed the permissible stresses or the limiting stresses. In addition the required safety margins shall be fulfilled.

These required minimum safety margins in comparison between the maximum values of load effects established by calculation or experiment and the limit states are given in the following subclauses.

L.2 Proof of competence for steel structures**L.2.1 General**

The theoretical proof of competence shall be made in accordance with FEM 5.004. The experimental proof of competence is covered by L.6.

The calculation and analysis for the proof of competence shall be made according to either the method of permissible stresses or the method of partial safety coefficients and limiting stresses. The selection of the method to be applied shall be made in accordance with Clause 6 of FEM 5.004:1994.

L.2.2 Method of permissible stresses

The minimum required safety factors for structural components and for welds shall be taken from Tables 3 and 4 of FEM 5.004:1994.

L.2.3 Method of partial safety coefficients and limiting stresses

The partial safety coefficients shall be taken from Table 5 of FEM 5.004:1994.

The minimum required safety factors for structural components and for welds shall be taken from Tables 6 and 7 of FEM 5.004:1994.

L.3 Proof of competence for non steel structures

The theoretical proof of competence shall be made with the same minimum required safety factors as for steel structures. Additional effects of non-metallic materials, e.g. long time behaviour, environmental influences (e.g. temperature, humidity) and ageing of plastic materials, shall be considered according to the state of art.

The experimental proof of competence is covered by L.6.

L.4 Proof of competence for load bearing components

L.4.1 General

The theoretical proof of competence shall be made in accordance with the following subclauses. The experimental proof of competence is covered by L.6.

A written agreement between the manufacturer of the crane and the manufacturer of the component shall state clearly that the loading, environmental and service conditions (classification) are permissible during the total intended lifetime of the component.

L.4.2 Proof of competence for mechanisms

The general design principles and safety margins shall be in accordance with FEM 1.001:1998, booklet 4.

The minimum requirements for the written agreements are laid down in the relevant parts of Annex J.

L.4.3 Proof of competence for ropes

The proof of competence for ropes shall be made as a comparison of the actual safety factor – calculated by the load (increased by adequate factors due to friction) and the limit state for the rope (minimum breaking load) – with the minimum values for Z_p given from Clause 3 of ISO 4308-2:1988.

For test load cases of special configurations (e.g. crane with additional counterweight – see Figure A.7) the minimum Z_p value for luffing/derricking ropes shall not be less than 3.35.

The proof of competence for the end termination of a rope system shall be as follows:

- a) The end termination of running ropes shall permit a minimum breaking load not less than 80 % of the minimum breaking load of the rope itself;
- b) The end termination of stationary ropes shall permit a minimum breaking load not less than 90 % of the minimum breaking load of the rope itself;
- c) In any case where the minimum breaking load of a rope system is reduced by the end termination, the safety factors for the rope systems shall not be less than the values for erection given in Table 1 of ISO 4308-2:1988;
- d) The attachment of the rope to the hoist drum shall be in a way that 2,5 times the rope force can be taken up taking into account the friction of the rope remaining on the hoist drum. The friction factor between the rope and the hoist drum shall be taken as $\mu = 0,1$.

L.4.4 Proof of competence for chains

The proof of competence for chains shall be done either by the manufacturer of the chains or by a simplified calculation by the manufacturer of the crane.

In the case of the simplified calculation, the minimum breaking load of a chain shall not be less than four times the nominal load in the chain without consideration of friction losses, under the loading conditions according to group classification A1 of ISO 4301-1:1986.

EN 13000:2010 (E)

The end termination shall be in accordance with 4.1.1 of FEM 1.001:1998, booklet 4.

L.4.5 Proof of competence for other components

The proof of competence for other components shall be made in accordance with general design principles. The minimum requirements for the written agreements between the manufacturer of the components and the manufacturer of the crane are laid down in Annex K.

L.5 Proof of competence of rigid body stability of the crane

The proof of competence for rigid body stability shall verify that the stabilising moment of the crane is greater or equal than the overturning moment under static and/or dynamic conditions as specified in 4.1.2.6.

This proof shall either be done by theoretical proof of competence (calculation according to ISO 4305 verified by tests according to ISO 4310) or by an experimental proof of competence, see L.6.

L.6 Proof of competence – experimental

L.6.1 Structural tests

The experimental proof of competence to determine the stresses induced in the crane structure(s) and load bearing components requires a systematic, non-destructive procedure under specified conditions. The procedure shall be in accordance with ISO 11660-2:1994. The required minimum safety margins for different load combinations shall be in accordance with L.2.

L.6.2 Rigid body stability tests

The experimental proof of competence of rigid body stability of the crane as a whole according to ISO 11662-1 shall be verified by, as a minimum, the stability tests as specified by ISO 4310. Additional experiments shall be made for backward stability and tipping due to acceleration (see Annex F) showing that the same level of safety as for calculation is achieved. When testing the stability of the crane, the limits of structural strength and other limits of components shall be observed.

Annex M (normative)

Test of steering systems for off-road mobile cranes

M.1 Test conditions

The test shall be conducted on a surface offering good adhesion (e.g. concrete, asphalt).

The crane shall be unloaded and in normal travel order.

M.2 Test procedure

The crane shall be driven from straight ahead into a spiral with a turning radius as given in Table M.1 at a speed of 10 km/h. The steering effort shall be measured at the nominal radius of the steering control. At least one measurement of each steering movement shall be made to the right and to the left.

The test shall be carried out for both the intact steering and the steering with a simulated failure (e.g. failure of power assistance).

NOTE If the steering is purely mechanical, simulated failure test does not apply. In the EU Directive 70/311/EEC mechanical failures are not specified.

M.3 Permitted steering control effort

Steering control efforts shall not exceed the values given in Table M.1.

Table M.1 — Permitted steering control effort

Steering intact		Steering with a simulated failure	
Maximum effort (daN)	Turning radius (m)	Maximum effort (daN)	Turning radius (m)
30	15 ^a	60	30
^a Or full lock if 15 m is not possible.			

Annex N.1 (informative)

Wind speed as a function of elevation

Table N.1.1 — 3-second wind gust speed as a function of mean wind speed as per Beaufort Scale and as per elevation

Beaufort Grade	3	4	5 ^a	5	6	7 ^a	7	8	9	10
\bar{v} [m/s] ^b	5,4	7,9	10,1	10,7	13,8	14,3	17,1	20,7	24,4	28,4
z [m]	$v(z)$ [m/s]									
10	7,6	11,1	14,1	15,0	19,3	20,0	23,9	29,0	34,2	39,8
20	8,1	11,9	15,2	16,1	20,7	21,5	25,7	31,1	36,6	42,7
30	8,5	12,4	15,8	16,8	21,6	22,4	26,8	32,4	38,2	44,5
40	8,7	12,8	16,3	17,3	22,3	23,1	27,6	33,4	39,4	45,8
50	8,9	13,1	16,7	17,7	22,8	23,6	28,3	34,2	40,3	46,9
60	9,1	13,3	17,0	18,0	23,3	24,1	28,8	34,9	41,1	47,9
70	9,3	13,5	17,3	18,3	23,6	24,5	29,3	35,5	41,8	48,7
80	9,4	13,7	17,6	18,6	24,0	24,8	29,7	36,0	42,4	49,4
90	9,5	13,9	17,8	18,8	24,3	25,1	30,1	36,4	42,9	50,0
100	9,6	14,1	18,0	19,1	24,6	25,4	30,4	36,9	43,4	50,6
110	9,7	14,2	18,2	19,2	24,8	25,7	30,8	37,2	43,9	51,1
120	9,8	14,3	18,3	19,4	25,1	25,9	31,1	37,6	44,3	51,6
130	9,9	14,5	18,5	19,6	25,3	26,2	31,3	37,9	44,7	52,0
140	10,0	14,6	18,7	19,8	25,5	26,4	31,6	38,2	45,1	52,5
150	10,0	14,7	18,8	19,9	25,7	26,6	31,8	38,5	45,4	52,9
160	10,1	14,8	18,9	20,1	25,9	26,8	32,1	38,8	45,7	53,2
170	10,2	14,9	19,1	20,2	26,0	27,0	32,3	39,1	46,0	53,6
180	10,3	15,0	19,2	20,3	26,2	27,1	32,5	39,3	46,3	53,9
190	10,3	15,1	19,3	20,4	26,4	27,3	32,7	39,5	46,6	54,2
200	10,4	15,2	19,4	20,6	26,5	27,4	32,8	39,8	46,9	54,6
<p>^a In-service wind:</p> <p>1 light $\bar{v} = 10,1$ [m/s] => for $z = 10$ [m] => $q(z) = 125$ [N/m²]</p> <p>2 normal $\bar{v} = 14,3$ [m/s] => for $z = 10$ [m] => $q(z) = 250$ [N/m²]</p> <p>^b Upper Beaufort Limit.</p>										

\bar{v} [m/s]: Mean wind speed at 10 m elevation (upper limit of Beaufort grade) over a period of 10 min.

z [m]: Elevation above even ground.

$v(z)$ [m/s]: 3-second wind gust speed acting at elevation z and decisive for calculations.

$q(z)$ [N/m²]: quasi-static impact pressure acting at elevation z and calculated based on $v(z)$, see Annex N.2.

Annex N.2 (informative)

Impact pressure as a function of elevation

Table N.2.1 — Quasistatic impact pressure as a function of mean wind speed as per the Beaufort Scale and as a function of elevation

Beaufort Grade	3	4	5 ^a	5	6	7 ^a	7	8	9	10
\bar{v} [m/s] ^b	5,4	7,9	10,1	10,7	13,8	14,3	17,1	20,7	24,4	28,4
z [m]	$q(z)$ [N/m ²]									
10	35,7	76,5	125,0	140,3	233,3	250,0	358,2	524,9	729,3	988,0
20	41,1	88,0	143,8	161,4	268,5	287,7	412,2	604,1	839,4	1 137,1
30	44,7	95,7	156,4	175,5	292,0	312,9	448,3	657,0	912,8	1 236,6
40	47,5	101,6	166,1	186,4	310,1	332,3	476,2	697,8	969,6	1 313,5
50	49,8	106,5	174,2	195,5	325,1	348,4	499,2	731,5	1 016,4	1 376,9
60	51,8	110,8	181,0	203,2	338,0	362,2	519,0	760,5	1 056,6	1 431,4
70	53,5	114,5	187,1	210,0	349,3	374,3	536,4	786,0	1 092,1	1 479,5
80	55,0	117,8	192,6	216,1	359,5	385,2	552,0	808,9	1 123,9	1 522,6
90	56,5	120,8	197,5	221,7	368,8	395,1	566,2	829,7	1 152,8	1 561,8
100	57,8	123,6	202,1	226,8	377,3	404,3	579,3	848,9	1 179,5	1 597,9
110	59,0	126,2	206,3	231,6	385,2	412,7	591,4	866,7	1 204,2	1 631,3
120	60,1	128,6	210,3	236,0	392,6	420,6	602,8	883,3	1 227,2	1 662,6
130	61,2	130,9	214,0	240,2	399,5	428,1	613,4	898,8	1 248,9	1 691,9
140	62,2	133,1	217,5	244,1	406,0	435,1	623,4	913,6	1 269,3	1 719,6
150	63,1	135,1	220,8	247,8	412,2	441,7	632,9	927,5	1 288,7	1 745,9
160	64,0	137,0	224,0	251,4	418,1	448,0	642,0	940,8	1 307,1	1 770,8
170	64,9	138,9	227,0	254,8	423,7	454,1	650,6	953,4	1 324,7	1 794,7
180	65,7	140,6	229,9	258,0	429,1	459,8	658,9	965,5	1 341,6	1 817,5
190	66,5	142,3	232,6	261,1	434,3	465,4	666,8	977,2	1 357,7	1 839,3
200	67,3	144,0	235,3	264,1	439,3	470,7	674,5	988,3	1 373,2	1 860,4
^a	In-service wind: 1 light $\bar{v} = 10,1$ [m/s] => for $z = 10$ [m] => $q(z) = 125$ [N/m ²] 2 normal $\bar{v} = 14,3$ [m/s] => for $z = 10$ [m] => $q(z) = 250$ [N/m ²]									
^b	Upper Beaufort Limit.									

\bar{v} [m/s]: Mean wind speed at 10 m elevation (upper limit of Beaufort grade) over a period of 10 min.

z [m]: Elevation above even ground.

$v(z)$ [m/s]: 3-second wind gust speed acting at elevation z and decisive for calculations, see Annex N.1.

$q(z)$ [N/m²]: quasistatic impact pressure acting at elevation z and calculated based on $v(z)$.

EN 13000:2010 (E)

Annex N.3 (informative)

Storm wind map of Europe

The following map indicates regions where same mean storm wind velocities are applicable. Wind speeds for the areas A to D, see 4.1.2.2.3.

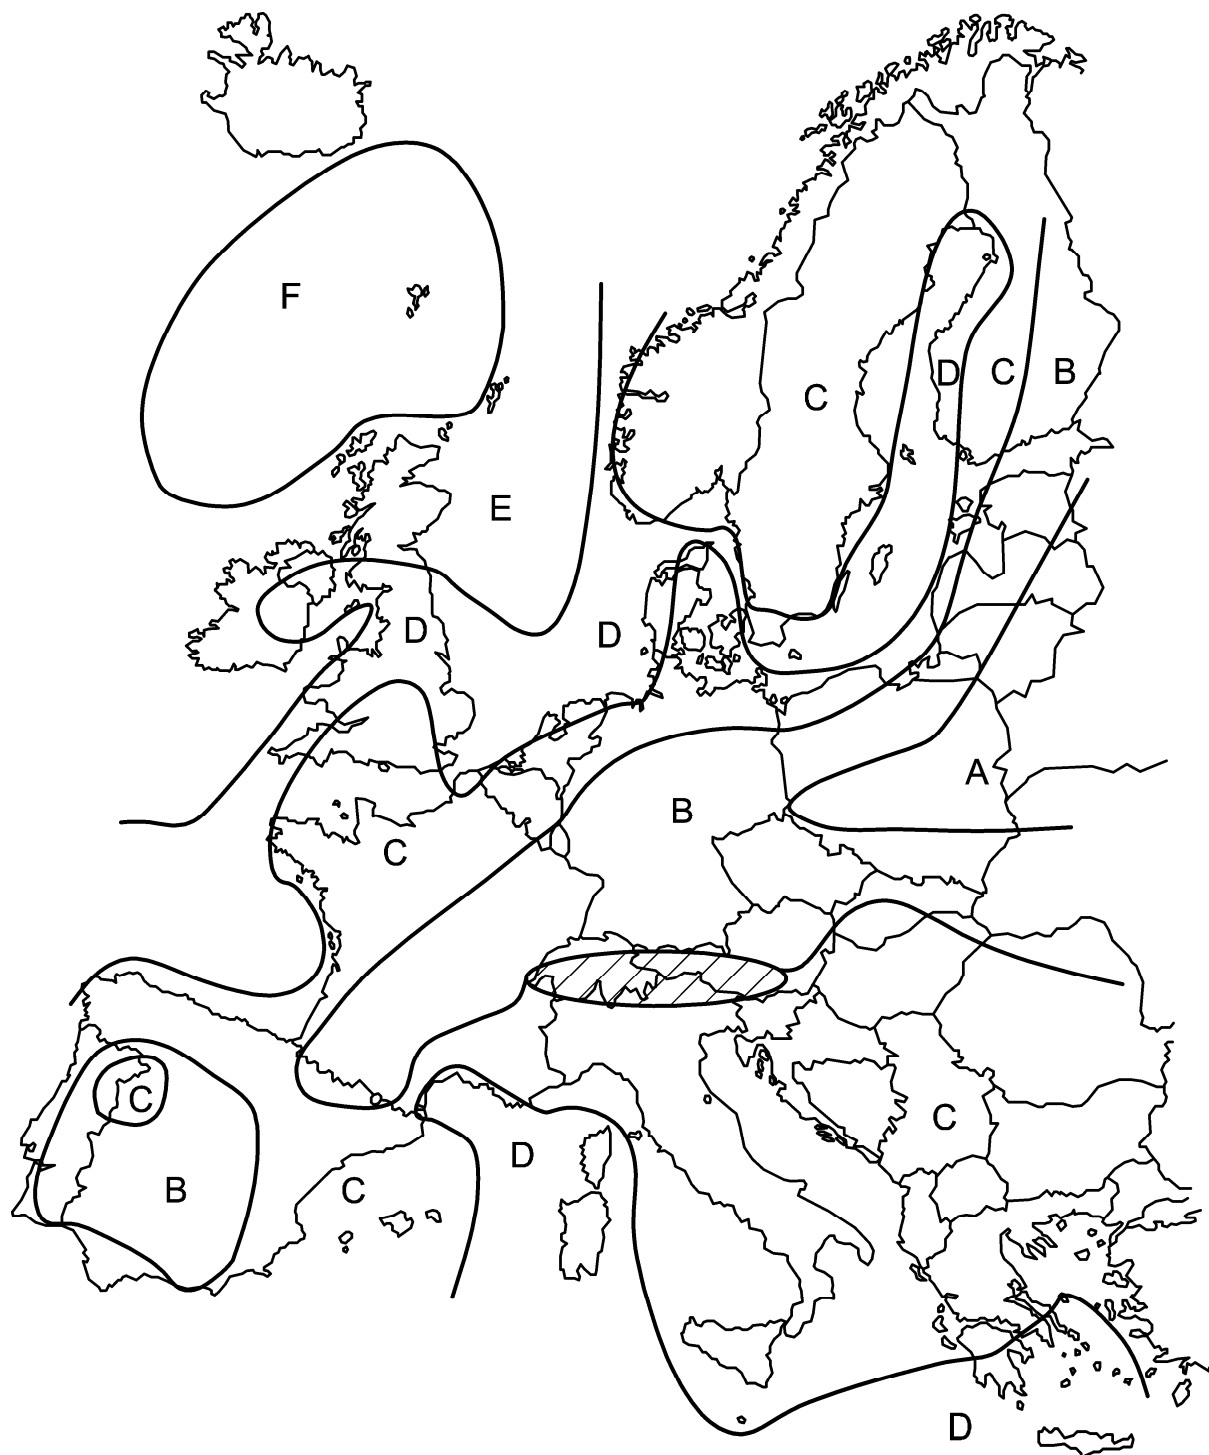


Figure N.3.1 — Regions where same mean storm wind velocities are applicable

Annex P (normative)

Efficiency of sheave sets

The influence of friction losses of sheave sets shall be calculated by the efficiency of the sheave as described below.

The efficiency of a rope drive, for calculation of the rope pulling force is determined as:

$$\eta_S = (\eta_R)^i \cdot \eta_F$$

where

η_S is the efficiency of the rope drive;

η_R is the efficiency of one individual sheave;

i is the number of fixed sheaves between the rope drum and the sheave set or load;

n is the number of rope plies on one sheave block. One sheave block consists of the sum total of all the rope plies and sheaves for one rope winding onto a rope drum;

η_F is the efficiency of the sheave block.

$$\eta_F = \frac{1}{n} \cdot \frac{1 - (\eta_R)^n}{1 - \eta_R}$$

where

η_R is the efficiency of one sheave.

The efficiency of a rope pulley is dependent on the ratio of the rope pulley diameter to the rope diameter ($D : d$), on the rope design and on the rope lubrication, in addition to being dependent on the type of bearing arrangement of the pulley (plain bearings or antifriction bearings).

In so far as more accurate values have been proven by means of trials, the following shall be assumed for calculations:

for plain bearings $\eta_R = 0,96$

for antifriction bearings $\eta_R = 0,98 \dots 0,99$ (depending on type of bearing, lubrication and seal friction).

It has to be proven that the unloaded hook/hook block can be lowered under the specified working conditions.

EN 13000:2010 (E)

Annex Q (informative)

Manufacturer's sign

The information given in Figure Q.1 is mandatory, the format of presentation is a proposal only.


		<p><i>Hersteller, Name und Anschrift name and adress of the Manufacturer nom et adresse du fabricant</i></p>	
Krantyp Crane type Type de grue		Baunummer Serial no. No de construction	
Baujahr Year of manufacture Année de construction		Motorleistung Engine power Puissance du moteur	

Figure Q.1 — Example of a Manufacturer's sign

NOTE CE marking should be in accordance with EU Directive 2006/42/EC.

Annex R (normative)

Certificate for wire rope, requirements

The information given in Table R.1 is mandatory, the format of presentation is a proposal only.

Table R.1 — Rope certificate (Example)

Wire Rope Certificate ^a	
Rope Manufacturer (Name of Company)	
General Information	
type of rope date of certificate signature of manufacturer	
Geometric and Material Information	
nominal rope diameter [mm] rope length [m] construction of the rope construction of termination kind of lay number of load bearing wires in outer strands surface (circular wire strands, calibrated strands, etc.) mass (weight) per unit length [kg/100 m]	
Information regarding Limit States	
tensile strength of wires [N/mm ²] calculated aggregate breaking load [N] minimum breaking load of rope [N] minimum breaking load of end termination [N] (if provided by rope manufacturer) permissible working conditions: a) Classification of the crane according to ISO 4301-1 b) Service life cycles according to manufacturers' test ^b , test conditions: <i>D/d</i> = 20, steel sheave Line pull = min. breaking load/4.5 Geometry according to ISO 4308-1 c) Code of practice for examination and discard if not covered by ISO 4309	
Other Comments	
...	
^a Example for certificate – filled in and signed by the rope manufacturer. ^b Voluntary information – if available.	

EN 13000:2010 (E)

Annex S (normative)

Certificate for chain, requirements

The information given in Table S.1 is mandatory, the format of presentation is a proposal only.


Table S.1 — Certificate for chain (Example)

Chain Certificate ^a	
Chain Manufacturer (Name of company)	
General Information	
type of chain number of certificate date of certificate identification of inspector (name, function) signature of manufacturer	
design of chain according to standard thread of chain combination of chain batch number quantity of chains shipped quantity by reference manufacturer quantity of links by chain	
Information regarding Limit States	
prior test sample: minimum breaking load of chain according to standard: reference Wöhler curve for chain:	
Other Information	
specification for assembly reference: specification for cleaning/maintenance reference: others:	
^a Example for certificate – filled in and signed by the chain manufacturer.	

Annex T (informative)

Test procedures: Selection of load cases

Figure T.1 gives guideline for the selection of test loads. Test loads may be applied by increasing loads or by increasing radius/outreach.

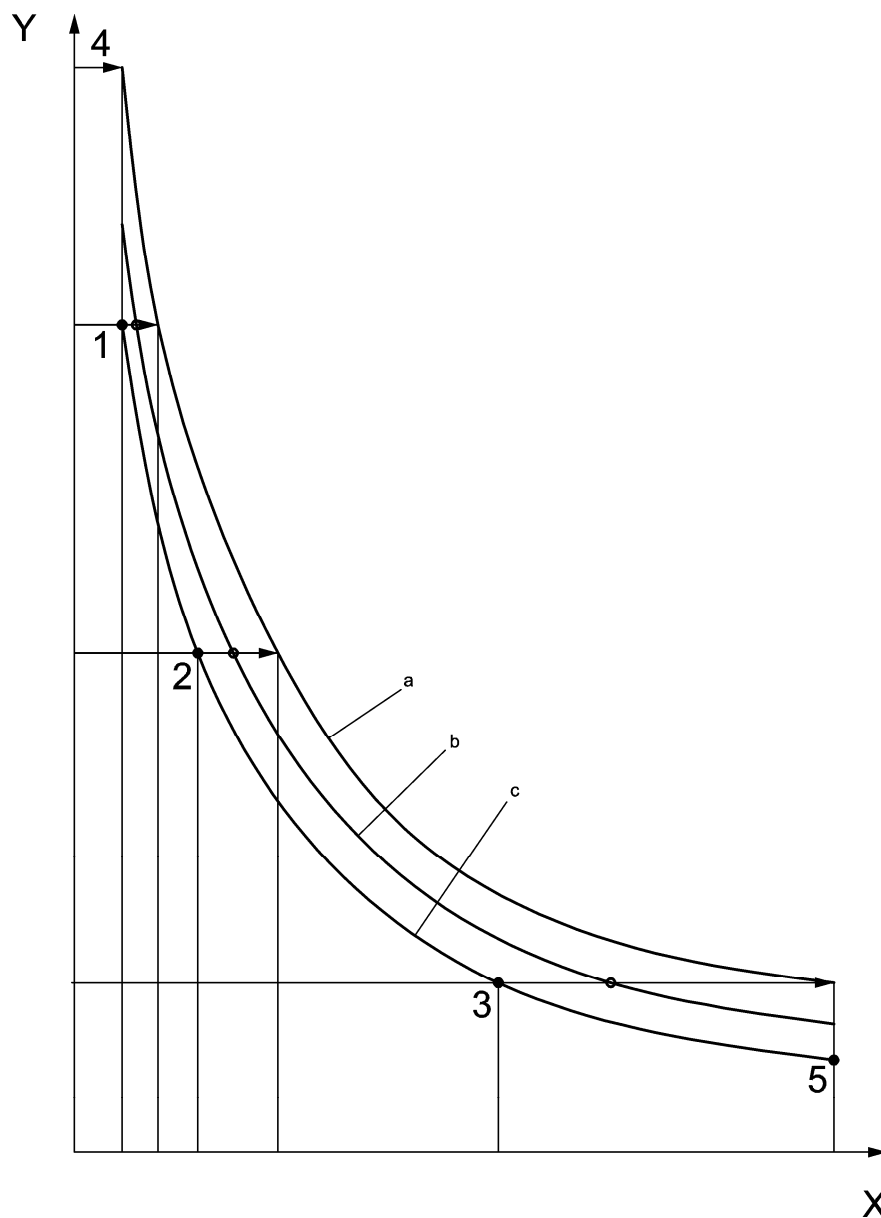

Key

X Radius

Y Capacity

a Static test load ($1,25 P + 0,1 F$); see ISO 4305:1991, Table 1 and ISO 4310.

b Dynamic test load ($1,1 P$); see ISO 4305:1991, Table 2 and ISO 4310.

c Nominal capacity

Figure T.1 — Selection of load cases

EN 13000:2010 (E)**Annex U**
(normative)**Test certificate**

The information given in Table U.1 is mandatory, the format of presentation is a proposal only.

Table U.1 — Test certificate (Example)

Certificate of individual verification		
Crane type:		Serial No.:
<p>The visual inspections, functional checks and load tests to validate the conformity of the above mentioned crane with the essential health and safety requirements of the Machinery Directive, the corresponding documentation and the duty charts have been carried out according to Clause 5 of EN 13000:2010.</p> <p>All capacity charts listed in the documentation of the crane are valid, the load limiting and indicating device has been tested and adjusted for correct operation according to the rated capacities given. The load tests were carried out with maximum test loads according to ISO 4310. In case of increased tolerances of the load limiting and indicating device the tolerance shall be given hereby and the test load or additional factors to be applied to the test load shall be listed hereby.</p> <p>The load tests have been carried out on samples of configurations. The procedure of the manufacturer for the selection of these samples ensures that all relevant components of the crane have been subjected to maximum loads under the conditions which may occur when the crane is used as intended.</p> <p>The Table below shows the tested configurations to provide information for periodic inspection. The load combinations shall be as follows if no specific knowledge allows selection of special load cases.</p> <p>Test loads at or near to the minimum, medium and maximum radius where the static and dynamic test load can be applied by increasing radius or load;</p> <p>A static test load for the minimum radius.</p> <p>After the tests the crane was thoroughly examined. The visual inspection, the functional checks and the load tests and the examination itself was supervised by an expert of the manufacturer.</p> <p>There have been no findings restricting the safe use of the crane. Other findings are listed in this certificate.</p>		
Date of test:		Location of test:
Date, place, signature:		
Tested configurations		
Configuration	Chart specification	Remarks/Findings

... Table continues ..

Annex V (informative)

Additional information of the concept of the limiting and indicating device

Among other reasons for crane accidents (e.g. insufficient ground conditions, wrong programming of the safe load indicator, approaching of high voltage lines), the misuse of the existing bridging device may cause crane accidents. To reduce this risk, a new safety concept for the rated capacity limiter has been developed by three items:

a) Set-up-button:

- 1) Under normal operation where capacity charts are available, a bridging of the rated capacity limiter is no longer possible.
- 2) During rigging and derigging of the crane, a bridging of the rated capacity limiter is still possible by using a set-up button to allow complex erection procedures, especially for lattice boom cranes with their variety of boom combinations.
- 3) For dead lock situations (e.g. swinging of crane boom close to the cut-off limit of the rated capacity limiter, increase of radius according to temperature changes in the luffing cylinder close to the cut-off limit of the rated capacity limiter) the set up button can be operated. This will allow increase in the capacity, while all speeds are reduced. Due to the speed reduction the effects of inertia are reduced accordingly without reduction of the overall safety margins..

b) Bridging device:

- 1) In case a component of the rated capacity limiter fails, an emergency operation is necessary to bring the crane and its load in a safe position or enable the crane driver to derig the crane. In this case a bridging device may be provided, which must be located outside the crane operator's cab, and the speed of all functions has to be reduced accordingly to make sure all movements are carried out slowly and smoothly.
- 2) The bridging device may also be used for testing the crane with overload, which is a legal requirement in several countries.
- 3) In case the load is transferred to the crane's hook without active movement of the crane, the crane could be inadvertently overloaded (e.g. flame cutting of loads supported by the crane). Provided lowering the load leads to a safer condition the load may be lowered to the ground by using the bridging device.

Anyhow, the bridging device is located outside the operators cab, to ensure this device cannot be used for normal crane operation.

c) Data recorder

- 1) On mobile cranes equipped with set-up button or bridging device all relevant data must be recorded by a data recorder, to enable investigation of loading conditions in case of an accident.
- 2) Size and frequency of overloadings may be recorded for evaluation of crane accidents, e.g. as result of fatigue.
- 3) The manufacturer develops the concept for the data to be recorded in order to reconstruct the load case depending of the crane concept.

EN 13000:2010 (E)

Annex W (informative)

Selection of a suitable set of crane standards for a given application

Is there a product standard in the following list that suits the application?	
EN 13000	<i>Cranes — Mobile cranes</i>
EN 14439	<i>Cranes — Tower cranes</i>
EN 14985	<i>Cranes — Slewing jib cranes</i>
prEN 15011	<i>Cranes — Bridge and gantry cranes</i>
EN 13852-1	<i>Cranes — Offshore cranes — Part 1: General purpose offshore cranes</i>
EN 13852-2	<i>Cranes — Offshore cranes — Part 2: Floating cranes</i>
EN 14492-1	<i>Cranes — Power driven winches and hoists — Part 1: Power driven winches</i>
EN 14492-2	<i>Cranes — Power driven winches and hoists — Part 2: Power driven hoists</i>
EN 12999	<i>Cranes — Loader cranes</i>
EN 13157	<i>Cranes — Safety - Hand powered lifting equipment</i>
EN 13155	<i>Cranes — Non-fixed load lifting attachments</i>
EN 14238	<i>Cranes — Manually controlled load manipulating devices</i>
EN 15056	<i>Cranes — Requirements for container handling spreaders</i>

YES

NO

Use it directly, plus the standards that are referred to

Use the following:	
EN 13001-1	<i>Cranes — General design — Part 1: General principles and requirements</i>
EN 13001-2	<i>Cranes — General design — Part 2: Load actions</i>
prEN 13001-3-1	<i>Cranes — General design — Part 3.1: Limit states and proof of competence of steel structures</i>
CEN/TS 13001-3-2	<i>Cranes — General design — Part 3.2: Limit states and proof of competence of wire ropes</i>
CEN/TS 13001-3-3	<i>Cranes — General design — Part 3.3: Limit states and proof of competence of wheel/rail contacts</i>
CEN/TS 13001-3-5	<i>Cranes — General design — Part 3.5: Hooks and hook blocks</i>
EN 13135-1	<i>Cranes — Equipment — Part 1: Electrotechnical equipment</i>
EN 13135-2	<i>Cranes — Equipment — Part 2: Non-electrotechnical equipment</i>
EN 13557	<i>Cranes — Controls and control stations</i>
EN 12077-2	<i>Cranes safety — Requirements for health and safety — Part 2: Limiting and indicating devices</i>
EN 13586	<i>Cranes — Access</i>
EN 14502-1	<i>Cranes — Equipment for the lifting of persons — Part 1: Suspended baskets</i>
EN 14502-2	<i>Cranes — Equipment for the lifting of persons — Part 2: Moveable cabins</i>
EN 12644-1	<i>Cranes — Information for use and testing — Part 1: Instructions</i>
EN 12644-2	<i>Cranes — Information for use and testing — Part 1: Marking</i>

Annex ZA (informative)

Relationship between this European Standard and the Essential Requirements of EU Directive 98/37EC

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association to provide one means of conforming to Essential Requirements of the New Approach Directive Machinery 98/37/EC, amended by 98/79/EC.

Once this standard is cited in the Official Journal of the European Union under that Directive and has been implemented as a national standard in at least one Member State, compliance with the normative clauses of this standard confers, within the limits of the scope of this standard, a presumption of conformity with the corresponding Essential Requirements of that Directive and associated EFTA regulations.

WARNING — Other requirements and other EU Directives may be applicable to the product(s) falling within the scope of this standard.

EN 13000:2010 (E)

Annex ZB
(informative)

Relation between this European Standard and the Essential Requirements of EU Directive 2006/42/EC

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association to provide a means of conforming to Essential Requirements of the New Approach Directive 2006/42/EC.

Once this standard is cited in the Official Journal of the European Union under that Directive and has been implemented as a national standard in at least one Member State, compliance with the normative clauses of this standard confers, within the limits of the scope of this standard, a presumption of conformity with the corresponding Essential Requirements of that Directive and associated EFTA regulations.

WARNING — Other requirements and other EU Directives may be applicable to the product(s) falling within the scope of this standard.

Bibliography

- [1] 70/311/EEC, *Steering equipment for motor vehicles and their trailers as amended by 92/62/EEC*
- [2] 71/320/EEC, *Braking devices of certain categories of motor vehicles and their trailers*
- [3] 73/361/EEC, *Certification and marking of wire-ropes, chains and hooks as amended by 76/434/EEC*
- [4] 79/113/EEC, *Determination of the noise emission of construction plant and equipment as amended by 81/1051/EEC*
- [5] 80/1269/EEC, *Engine power of motor vehicles*
- [6] 83/477/EEC, *Asbestos at work*
- [7] 86/188/EEC, *Protection of workers from the risks related to exposure to noise at work*
- [8] 87/404/EEC, *Single pressure vessels*
- [9] 89/392/EEC, *Machinery Directive 98:37:EC, amended by Directive 98:79:EG.*
- [10] 91/422/EEC, *Braking devices of certain categories of motor vehicles and their trailers*
- [11] 93/68/EEC; *Conformity marking*
- [12] ISO 11660-1:2008, *Cranes — Access, guards and restraints — Part 1: General*
- [13] ISO 12482-1:1995, *Cranes — Condition monitoring — Part 1: General*
- [14] ISO 10973:1995, *Cranes — Spare parts manual*
- [15] EN 547-2:1996, *Safety of machinery — Human body measurements — Part 2: Principles for determining the dimensions required for access openings*
- [16] EN 626-2:1996, *Safety of machinery — Reduction of risk to health from hazardous substances emitted by machinery — Part 2: Methodology leading to verification procedures*
- [17] EN ISO 11688-2:2000, *Acoustics — Recommended practice for the design of low-noise machinery and equipment — Part 2: Introduction to the physics of low-noise design (ISO/TR 11688-2:1998)*
- [18] EN 13001-2:2004, *Crane safety — General design — Part 2: Load effects*
- [19] EN 61672-1:2003, *Electroacoustics — Sound level meters — Part 1: Specifications (IEC 61672-1:2002)*
- [20] EN 61672-2:2003, *Electroacoustics — Sound level meters — Part 2: Pattern evaluation tests (IEC 61672-2:2003)*
- [21] DIN 15061-2:1977, *Cranes — Groove profiles for wire rope drums*
- [22] DIN 15400:1990, *Lifting hooks materials — Mechanical properties — Lifting capacity and stresses*
- [23] DIN 15401-1:1982, *Lifting hooks for lifting appliances — Single hooks — Unmachined parts*
- [24] DIN 15401-2:1983, *Lifting hooks for lifting appliances — Single hooks — Finished parts with threaded shank*
- [25] DIN 15403:1969, *Lifting Hooks for Hoists — Knuckle Threads*
- [26] ISO 8686-1:1989, *Cranes — Design principles for loads and load combinations — Part 1: General*

EN 13000:2010 (E)

- [27] EN 10025-1:2004, *Hot rolled products of structural steels — Part 1: General technical delivery conditions*
- [28] EN ISO 13849-1:2008, *Safety of machinery — Safety-related parts of control systems — Part 1: General principles for design (ISO 13849-1:2006)*
- [29] EN ISO 13849-2:2008, *Safety of machinery — Safety-related parts of control systems — Part 2: Validation (ISO 13849-2:2003)*
- [30] EN ISO 4014:2000, *Hexagon head bolts — Product grades A and B (ISO 4014:1999)*
- [31] EN ISO 11688-1:1998, *Acoustics — Recommended practice for the design of low-noise machinery and equipment — Part 1: Planning (ISO/TR 11688-1:1995)*
- [32] ISO 261:1998, *ISO general-purpose metric screw threads — General plan*
- [33] EN 12999:2002, *Cranes — Loader cranes*
- [34] EN ISO 13850:2006, *Safety of machinery — Emergency stop — Principles for design (ISO 13850:2006)*
- [35] ISO/DIS 11662-2:2005, *Mobile cranes — Experimental determination of crane performance — Part 2: Structural competence under static loading*
- [36] EN 1050:1996, *Safety of machinery — Principles for risk assessment*

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 13000:2010/AC

October 2010

ICS 53.020.20

English version

Cranes - Mobile cranes

Appareils de levage à charge suspendue -
Grues mobiles

Krane - Fahrzeugkrane

This corrigendum becomes effective on 6 October 2010 for incorporation in the three official language versions of the EN.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

© 2010 CEN All rights of exploitation in any form and by any means reserved worldwide for CEN national Members.

Ref. No.: EN 13000:2010/AC:2010 E

EN 13000:2004/AC:2010 (E)

1 Modification to the Foreword

Paragraph 7, replace:

"This standard applies to mobile cranes which are put on the market 12 months after the date of ratification by CEN of this standard or at the latest 2010-01-01."

with:

"This standard applies to mobile cranes which are put on the market 5 months after the date of ratification by CEN of this standard or at the latest 2010-05-19."