



(oxford)

beveled white body wall tile



negro

5" x 15" - Finishing Rail 5" x 15"

(oxford)




Oxford by Marazzi USA changes the focus to what can be accomplished with exceptional smaller formats that truly mesmerize. It's sophisticated, confident, aesthetically pure . . . and wide open to personal interpretation.



blanco - negro - grey

5"x15" - 10"x15" - Finishing Rail 5"x15" - 12"x12" Mosaic

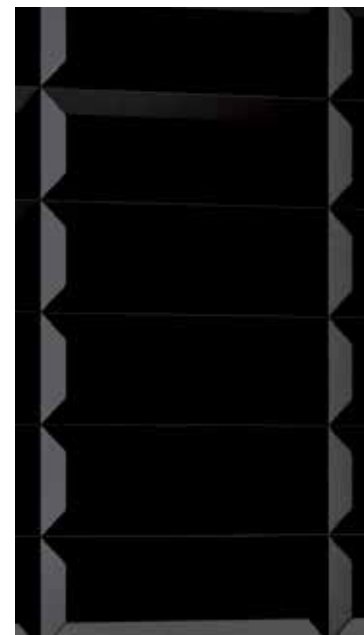

Oxford showcases the elegance reminiscent of classic padded walls reinvented for contemporary spaces. Sleek and refined, the mirror-glossy surface is framed by a wide beveled edge. When installed, the raised center section creates dramatic three-dimensional effects that are further enhanced with complementary 5"x15" finishing rails and 1"x5" corner angles.

Seven tone-on-tone colors – Blanco (white), Cacao (brown), Gris (grey), Marfil (ivory), Negro (black) and Perla (pearl)– offer an extensive palette for mixing and matching, moving vertically or horizontally. The diamond-like lustre and translucent finish make Oxford a sophisticated choice for today's distinctive personal and professional areas. Transform a home's bath, backsplash, fireplace or dining area. Revitalize a restaurant; uplift a lobby; energize a classroom; embolden a spa. Change reality by changing the wall.




DBZM Blanco
5"x15"

DBBJ Blanco
10"x15"



DBZS Cacao
5"x15"

DBBQ Cacao
10"x15"

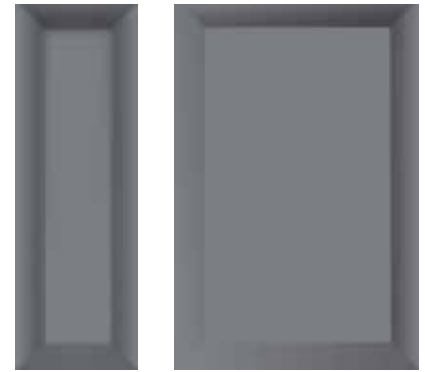

DBZP Gris
5"x15"

DBBL Gris
10"x15"

Trims



DBYM Blanco
Finishing Rail
5"x15"



DCCN Blanco
Corner Angle
5"x1"



DBYS Cacao
Finishing Rail
5"x15"



DCCT Cacao
Corner Angle
5"x1"



DBYP Gris
Finishing Rail
5"x15"



DCCQ Gris
Corner Angle
5"x1"

Decos



DBRX Brown*
Mosaic
12"x12"



DBRW Grey*
Mosaic
12"x12"

* Porcelain mosaics suitable for floors and walls.

technical

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	7.0% - 20.0%	7.0% - 20.0%	C373
Frost Resistance	As Reported	Non Resistant	C1026
Scratch Resistance	MOHS 1-10	5.5	MOHS Scale
Breaking Strength	≥ 125 lbf.	≥ 167 lbf.	C648
Facial Dimension	+/-2.0% From Nominal	Within Standard	C499
Thickness	≤ 0.031 in (0.79 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.40% or +/- 1.3 mm**	Within Standard	C502
Warpage (flatness)	-0.3% ≤ Any Edge ≤ 0.4% or - 1.0 mm/ 1.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class 0	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only) [†]	As Reported	N/A	DCOF AcuTest SM
SCOF-Static Coefficient of Friction (Dry)	As Reported	N/A	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	N/A	C1028
Chemical Resistance	Class A - Class E	Class B	C650
Stain Resistance	Class A - Class E	Class A	C1378

[†]Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.

^{**}DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less

- Wall Tile
- Decorative Tile
- Trim Available
- Uniform Appearance
- Abrasion Resistance
- 45% Minimum Pre-Consumer Recycled Content
- No VOC





DBZR Marfil
5"x15"



DBBN Marfil
10"x15"




DBZQ Negro
5"x15"



DBBM Negro
10"x15"



DBZN Perla
5"x15"

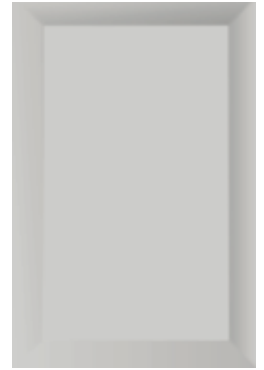

DBBK Perla
10"x15"

Trims



DBYR Marfil
Finishing Rail
5"x15"



DCCS Marfil
Corner Angle
5"x1"



DBYQ Negro
Finishing Rail
5"x15"



DCCR Negro
Corner Angle
5"x1"





DBYN Perla
Finishing Rail
5"x15"



DCCP Perla
Corner Angle
5"x1"

packaging

	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Wall Tile	5"x15"	24	12.17	42	0.276
Wall Tile	10"x15"	12	12.27	42	0.276
Mosaic	12"x12"	4		18	Compatible
Finishing Rail	5"x15"	4		7	Compatible
Corner Angle	5"x1"	4		1	Compatible

	Sizes	Ctn	Sq. Ft.	Weight (lbs.)
Wall Tile	5"x15"	54	657.18	2268
Wall Tile	10"x15"	54	662.58	2268



American Marazzi Tile, Inc.
Headquarters & Manufacturing Plant

359 Clay Road East
Sunnyvale, Texas 75182

T 972.226.0110
F 972.226.5629
www.marazzitile.com
contact@marazzitile.com



Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with American Marazzi Tile Customer Service for details.