

Pavo 2" - Wall

SIW12169 2 in

SPILIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

This sleek 2" cylindrical form is a pure expression of light and proof that great design is rooted in simplicity. Pavo 2" Wall is fully illuminated with no housing or metal accents to interrupt its minimalist form. It looks uniform from every angle. Its round diffuser emits a soft gradual display of light on the wall behind the fixture. This low-profile sconce is ADA-compliant and a great choice for hallways, elevator bays, vanities, or anywhere you want to add a simple yet sophisticated line of light. Available in 1' to 6' sizes.

FEATURES & BENEFITS

- The design element you've been missing
- Linearly-lit wall sconce provides even illumination along the entire length of the lens
- Meticulously designed ends have no visible shadowing
- Minimal bracketry and hardware for an exceptionally clean look
- An expression of light in its most basic form
- Provides functional light, up to 750 lumens per foot, with comfortable luminance levels
- Pairs well with the entire Pavo family of pendants
- Mount vertically or horizontally on walls or ceilings
- Compliant with Americans with Disabilities Act (ADA) requirements
- Handcrafted in USA




SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ (contact factory for 90+)
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **EFFICACY:** 107 lm/W delivered
- **CCT:** 3000K, 3500K, or 4000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Remote or integral Class 2 power supply. Max distance to the driver is: #18 AWG = 50', #16 AWG = 75', #14 AWG = 100'. For extended distances, contact factory.
- **DIMMING:** 0-10V controls standard to 1%
- **INTEGRATED SURGE PROTECTION:** LED components are

protected against minor surge events

- **DIFFUSER:** White matte acrylic
- **CONSTRUCTION:** Aluminum and stainless steel
- **FINISH:** Solid flat end plates and mounting components finished to match. To specify separately, contact factory. Choose from more than 30 thermoset polyester powder coat paint colors or various metal finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests; including different sizes
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

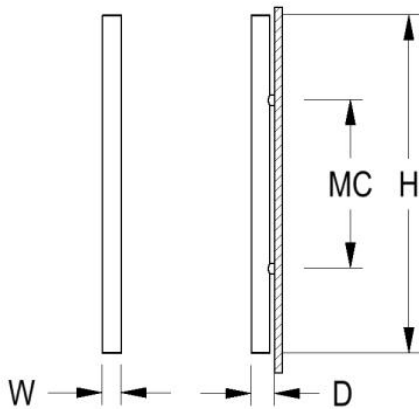

1FT	W	H	D	MC
	2 in 5.1 cm	12 in 30.5 cm	2.5 in 6.4 cm	6 in 15.2 cm

Mounting Weight: Approximate: 5 lb (3 kg)

2FT	W	H	D	MC
	2 in 5.1 cm	24 in 61 cm	2.5 in 6.4 cm	12 in 30.5 cm

Mounting Weight: Approximate: 5 lb (3 kg)

3FT	W	H	D	MC
	2 in 5.1 cm	36 in 91.4 cm	2.5 in 6.4 cm	18 in 45.7 cm

Mounting Weight: Approximate: 5 lb (3 kg)

4FT	W	H	D	MC
	2 in 5.1 cm	48 in 121.9 cm	2.5 in 6.4 cm	24 in 61 cm

Mounting Weight: Approximate: 5 lb (3 kg)

6FT	W	H	D	MC
	2 in 5.1 cm	72 in 182.9 cm	2.5 in 6.4 cm	36 in 91.4 cm

Mounting Weight: Approximate: 5 lb (3 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/SIW12169. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog SIW12169	Light Source*	Primary Finish*	Voltage*	Lamp Options*	Diffuser*	Mounting*
	A		B	C	D	E

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED

lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

1 FOOT NOMINAL FIXTURE

- 1FT-L5W** | White 5W LED Light Engine | Delivered Lumens: 537
- 1FT-L7W** | White 7W LED Light Engine | Delivered Lumens: 752

2 FOOT NOMINAL FIXTURE

- 2FT-L7W** | White 7W LED Light Engine | Delivered Lumens: 752
- 2FT-L14W** | White 14W LED Light Engine | Delivered Lumens: 1,504

3 FOOT NOMINAL FIXTURE

- 3FT-L10W** | White 10W LED Light Engine | Delivered Lumens: 1,074
- 3FT-L20W** | White 20W LED Light Engine | Delivered Lumens: 2,148

4 FOOT NOMINAL FIXTURE

- 4FT-L14W** | White 14W LED Light Engine | Delivered Lumens: 1,504
- 4FT-L28W** | White 28W LED Light Engine | Delivered Lumens: 3,007

6 FOOT NOMINAL FIXTURE

- 6FT-L21W** | White 21W LED Light Engine | Delivered Lumens: 2,255
- 6FT-L42W** | White 42W LED Light Engine | Delivered Lumens: 4,511

See last page for finish options

B - VOLTAGE *

- 120-277V** | Universal Voltage

C - LAMP OPTIONS *

Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT.

- 3000K**¹ | 3000K CCT
- 3500K**² | 3500K CCT
- 4000K** | 4000K CCT

¹ Apply .95 multiplier for delivered lumens

² Apply .97 multiplier for delivered lumens

D - DIFFUSER *

- DF_MA01** | Matte Acrylic Diffuser Lens (default)




MA01

E - MOUNTING *


MCS mounting supplied with 8' lead length and 2.25" round goof plates. REC mounting requires a cut-out for the recessed box that measures 1.75" wide by a height calculated as MC plus 3" and a minimum wall cavity depth of 3.5". Consider wall framing accordingly, as the application requires. The JBC mounting center is one-half the height (H) of the fixture.

- MCS** | Invisible Stems, Remote Power Supply
- REC** | Recessed, Integral Power Supply
- JBC01** ³ | 5" Round J-box Cover, Remote Power Supply
- JBC02** ³ | 4.3" Square J-box Cover, Remote Power Supply


³ Only available in 1', 2', or 3' sizes




MCS



REC



JBC01




JBC02

Available Finishes

Not all finishes are available in all configurations; consult factory for details.

Brushed Aluminum



Paint Colors

PT01 Super White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT03 Morning Light (Textured)	PT04 Warm White (Textured)
PT05 Putty (Textured)	PT06 Warm Beige (Textured)	PT07 Light Taupe (Textured)	PT08 Medium Taupe (Textured)	PT09 Medium Grey (Textured)
PT10 Dark Grey (Textured)	PT11 Black (Textured)	PT12 Dark Chocolate (Textured)	PT13 Warm Grey (Textured)	PT14 Light Grey (Textured)
PT15 Sage (Textured)	PT16 Spruce (Textured)	PT17 Red (Textured)	PT18 Deep Red (Textured)	PT19 Blue (Textured)
PT20 Dark Green (Textured)	PT21 Pearl White (Metallic Gloss)	PT22 Platinum (Metallic Gloss)	PT27 Deep Copper (Metallic Gloss)	PT28 Dark Stainless (Metallic Gloss)
PT29 Red Brass (Metallic Gloss)	PT31 Medium Bronze (Metallic Gloss)	PT32 Dark Bronze (Metallic Gloss)	PT33 Dark Blue (Textured)	PT40 Yellow (Textured)
PT41 Orange (Textured)	PT42 Sky Blue (Textured)	PT43 Teal (Textured)	PT44 Green (Textured)	PT45 Purple (Textured)
PT46 Aluminum (Metallic Textured)	PT47 Deep Red Brass (Metallic Textured)	PT48 Brass (Metallic Textured)	PT49 Bronze (Metallic Textured)	