

Linear and angular analogs

<u>Linear</u>	<u>Rotation</u>	
x	θ	position
Δx	$\Delta\theta$	displacement
v	ω	velocity
a_T	α	tangential acceleration

Vectors in rotational motion

Use the right hand rule to determine direction of the vector!

Don't forget centripetal acceleration!

$$a_R = a_c = v^2/r$$

Kinematic equations for angular and linear motion.Kinematic Equations 1

$$v = v_o + at$$

$$\omega = \omega_o + \alpha t$$

Kinematic Equations 2

$$x = x_o + v_o t + \frac{1}{2}at^2$$

$$\theta = \theta_o + \omega_o t + \frac{1}{2}\alpha t^2$$

Kinematic Equations 3

$$v^2 = v_o^2 + 2a(x - x_o)$$

$$\omega^2 = \omega_o^2 + 2\alpha(\theta - \theta_o)$$

Rotational Inertia

Rotational analog of mass

For point masses

$$I = \Sigma mr^2$$

I: rotational inertia (kg m²)

m: mass (kg)

r: radius of rotation (m)

For solid objects

$$I = \int r^2 dm$$

Parallel Axis Theorem

$$I = I_{cm} + M h^2$$

I: rotational inertia about center of mass

M: mass

h: distance between axis in question and axis through center of mass

Kinetic Energy

$$K_{trans} = \frac{1}{2} M v_{cm}^2$$

$$K_{rot} = \frac{1}{2} I \omega^2$$

$$K_{combined} = \frac{1}{2} M v_{cm}^2 + \frac{1}{2} I \omega^2$$

Rolling without slipping uses both kinds

$$K = \frac{1}{2} M v_{cm}^2 + \frac{1}{2} I \omega^2$$

$$v = \omega r$$

$$K = \frac{1}{2} M v_{cm}^2 + \frac{1}{2} I_{cm} v_{cm}^2 / R^2$$

or

$$K = \frac{1}{2} M \omega^2 R^2 + \frac{1}{2} I_{cm} \omega^2$$

Torque

Torque is the rotational analog of force.

A "twist" (whereas force is a push or pull).

Torque is a vector

$$\tau = \mathbf{r} \times \mathbf{F}$$

$$\tau = r F \sin\theta$$

R: moment arm length

F: force

θ : angle between moment arm and point of application of force.

$$\Sigma \tau = I \alpha \quad (\text{think } \Sigma \mathbf{F} = m\mathbf{a})$$

τ : torque

I: rotational inertia

α : angular acceleration

Work in rotating systems

$$W_{rot} = \tau \cdot \Delta \theta \quad (\text{think } W = \mathbf{F} \cdot \mathbf{d})$$

W_{rot} : work done in rotation

τ : torque

$\Delta\theta$: angular displacement

Power in rotating systems

$$P_{rot} = \tau \cdot \omega \quad (\text{think } P = \mathbf{F} \cdot \mathbf{v})$$

P_{rot} : power expended

τ : torque

ω : angular velocity

Static Equilibrium

$$\Sigma \tau = 0$$

$$\Sigma \mathbf{F} = 0$$

Angular momentum

For a particle

$$\mathbf{L} = \mathbf{r} \times \mathbf{p}$$

For a system of particles

$$\mathbf{L} = \Sigma \mathbf{L}_i$$

For a rigid body

$$\mathbf{L} = I \boldsymbol{\omega} \quad (\text{think } \mathbf{P} = m\mathbf{v})$$

Conservation of Angular Momentum

Angular momentum of a system will not change unless an external torque is applied to the system.

$$L_B = L_A$$

$$I\omega_B = I\omega_A \quad (\text{one body})$$

$$\Sigma l_b = \Sigma l_a \quad (\text{system of particles})$$

Angular momentum and torque

$$\tau = d\mathbf{L}/dt \quad (\text{think } \mathbf{F} = d\mathbf{P}/dt)$$

τ : torque

\mathbf{L} : angular momentum

t: time

Torque increases angular momentum when parallel.

Torque decreases angular momentum when antiparallel.

Torque changes the direction of the angular momentum vector in all other situations.

Precession

The rotating motion made by a spinning top or gyroscope.


Precession is caused by the interaction of torque and angular momentum vectors.

$$\tau = d\mathbf{L} / dt$$

$$\tau = \mathbf{r} \times \mathbf{F}$$

6. _____ How far from the left end of the rod should the force be placed to maintain equilibrium?
- A) 10 cm D) 40 cm
B) 20 cm E) 50 cm
C) 25 cm
7. _____ What force is applied to the rod by the pivot?
- A) 10 N D) 60 N
B) 20 N E) 100 N
C) 40 N

8. _____ A uniform wooden board of mass $10M$ is held up by a nail hammered into a wall. A block of mass M rests $L/2$ away from the pivot. Another block of a certain mass is hung a distance $L/3$. The system is in static equilibrium.

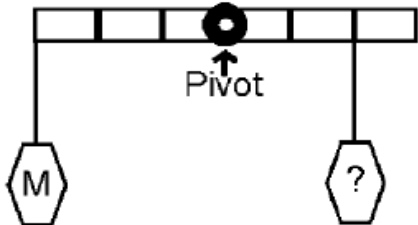

What is the measure of the mass labeled "?"?

- A) $\frac{M}{2}$ D) $\frac{3M}{2}$
 B) $\frac{M}{3}$ E) $2M$
 C) $\frac{M}{2}$
9. _____ The angular velocity of a rotating disk with a radius of 2 m decreases from 6 rads per second to 3 rads per second in 2 seconds. What is the linear acceleration of a point on the edge of the disk during this time interval?
 A) Zero D) $3/2 \text{ m/s}^2$
 B) -3 m/s^2 E) 3 m/s^2
 C) $-3/2 \text{ m/s}^2$
10. _____ A solid sphere of radius 0.2 m and mass 2 kg is at rest at a height 7 m at the top of an inclined plane making an angle 60° with the horizontal. Assuming no slipping, what is the speed of the cylinder at the bottom of the incline?
 A) Zero D) 6 m/s
 B) 2 m/s E) 10 m/s
 C) 4 m/s

11. _____ A spinning object with moment of inertia I increases in angular speed from $\omega = 0$ to ω_a in t seconds. What is the average power delivered to the object during this interval t ?
 A) $I\omega_a/2t^2$
 B) $I\omega_a^2/t$
 C) $I\omega_a^2/2t$
 D) $I\omega_a^2/t^2$
 E) $I\omega_a^2/2t^2$

12. _____ What is the moment of inertia of a spinning object of radius 0.5 m and mass 6 kg moving at 5 m/s, if it has a kinetic energy of 100 J?
 A) $1 \text{ kg}\cdot\text{m}^2$ D) $8 \text{ kg}\cdot\text{m}^2$
 B) $2 \text{ kg}\cdot\text{m}^2$ E) $20 \text{ kg}\cdot\text{m}^2$
 C) $4 \text{ kg}\cdot\text{m}^2$

13. _____ Which of the following objects has the least kinetic energy at the bottom of the incline if they all have the same mass and radius?
 A) cylinder D) all have the same
 B) sphere E) not enough information
 C) hoop


14. _____ Which of the following objects has the greatest rotational kinetic energy at the bottom of the incline if they all have the same mass & radius?
 A) cylinder D) all have the same
 B) sphere E) not enough information
 C) hoop

15. _____ A solid cylinder of radius .2 m and mass 2 kg is at rest at a height 1.2 m at the top of an inclined plane making an angle 60° with the horizontal. Assuming no slipping, what is the speed of the cylinder at the bottom of the incline?
 A) Zero D) 6 m/s
 B) 2 m/s E) 10 m/s
 C) 4 m/s

16. _____ What is the ratio of the moment of inertia of a cylinder of mass m and radius r to the moment of inertia of a hoop of the same mass and same radius?
 A) 1:1 D) 1:4
 B) 1:2 E) 4:1
 C) 2:1

17. _____ A 4 kg object moves in a circle of radius 8 m at a constant speed of 2 m/s. What is the angular momentum of the object with respect to an axis perpendicular to the circle and through its center?
 A) $2 \text{ N}\cdot\text{s}$ D) $24 \text{ m}^2/\text{s}$
 B) $6 \text{ N}\cdot\text{m}/\text{kg}$ E) $64 \text{ kg}\cdot\text{m}^2/\text{s}$
 C) $12 \text{ kg}\cdot\text{m}/\text{s}$

18. _____ A solid cylinder with diameter 20 cm has an angular velocity of 10 m/s and angular momentum of $2 \text{ kg}\cdot\text{m}^2/\text{s}$. What is its mass?
 A) 0.1 kg D) 5 kg
 B) 1 kg E) 10 kg
 C) 2 kg

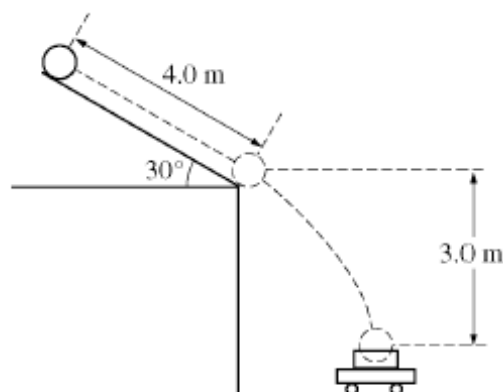FREE RESPONSE 1

Note: Figure not drawn to scale.


Mech. 2.

A bowling ball of mass 6.0 kg is released from rest from the top of a slanted roof that is 4.0 m long and angled at 30° , as shown above. The ball rolls along the roof without slipping. The rotational inertia of a sphere of mass M and radius R about its center of mass is $\frac{2}{5}MR^2$.


- (a) On the figure below, draw and label the forces (not components) acting on the ball at their points of application as it rolls along the roof.



- (b) Calculate the force due to friction acting on the ball as it rolls along the roof. If you need to draw anything other than what you have shown in part (a) to assist in your solution, use the space below. Do NOT add anything to the figure in part (a).
- (c) Calculate the linear speed of the center of mass of the ball when it reaches the bottom edge of the roof.
- (d) A wagon containing a box is at rest on the ground below the roof so that the ball falls a vertical distance of 3.0 m and lands and sticks in the center of the box. The total mass of the wagon and the box is 12 kg . Calculate the horizontal speed of the wagon immediately after the ball lands in it.

FREE RESPONSE 2

Before Collision




After Collision

TOP VIEWS

Mech. 3.


A system consists of a ball of mass M_2 and a uniform rod of mass M_1 and length d . The rod is attached to a horizontal frictionless table by a pivot at point P and initially rotates at an angular speed ω , as shown above left. The rotational inertia of the rod about point P is $\frac{1}{3}M_1d^2$. The rod strikes the ball, which is initially at rest. As a result of this collision, the rod is stopped and the ball moves in the direction shown above right. Express all answers in terms of M_1 , M_2 , ω , d , and fundamental constants.

- Derive an expression for the angular momentum of the rod about point P before the collision.
- Derive an expression for the speed v of the ball after the collision.
- Assuming that this collision is elastic, calculate the numerical value of the ratio M_1/M_2 .



Before Collision

- A new ball with the same mass M_1 as the rod is now placed a distance x from the pivot, as shown above. Again assuming the collision is elastic, for what value of x will the rod stop moving after hitting the ball?

FREE RESPONSE 3

Experiment A


Mech 3.

A light string that is attached to a large block of mass $4m$ passes over a pulley with negligible rotational inertia and is wrapped around a vertical pole of radius r , as shown in Experiment A above. The system is released from rest, and as the block descends the string unwinds and the vertical pole with its attached apparatus rotates. The apparatus consists of a horizontal rod of length $2L$, with a small block of mass m attached at each end. The rotational inertia of the pole and the rod are negligible.

- Determine the rotational inertia of the rod-and-block apparatus attached to the top of the pole.
- Determine the downward acceleration of the large block.
- When the large block has descended a distance D , how does the instantaneous total kinetic energy of the three blocks compare with the value $4mgD$? Check the appropriate space below.

____ Greater than $4mgD$ ____ Equal to $4mgD$ ____ Less than $4mgD$

Justify your answer.

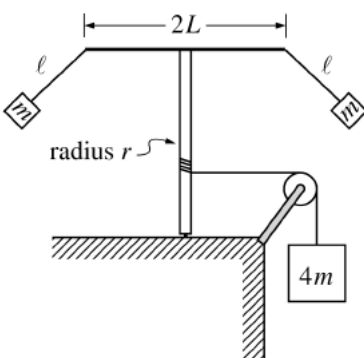

Experiment B

The system is now reset. The string is rewound around the pole to bring the large block back to its original location. The small blocks are detached from the rod and then suspended from each end of the rod, using strings of length ℓ . The system is again released from rest so that as the large block descends and the apparatus rotates, the small blocks swing outward, as shown in Experiment B above. This time the downward acceleration of the block decreases with time after the system is released.

- When the large block has descended a distance D , how does the instantaneous total kinetic energy of the three blocks compare to that in part (c)? Check the appropriate space below.

____ Greater ____ Equal ____ Less

Justify your answer.