


DEWALT®



POWER TOOLS BEST SELLERS 2015-16

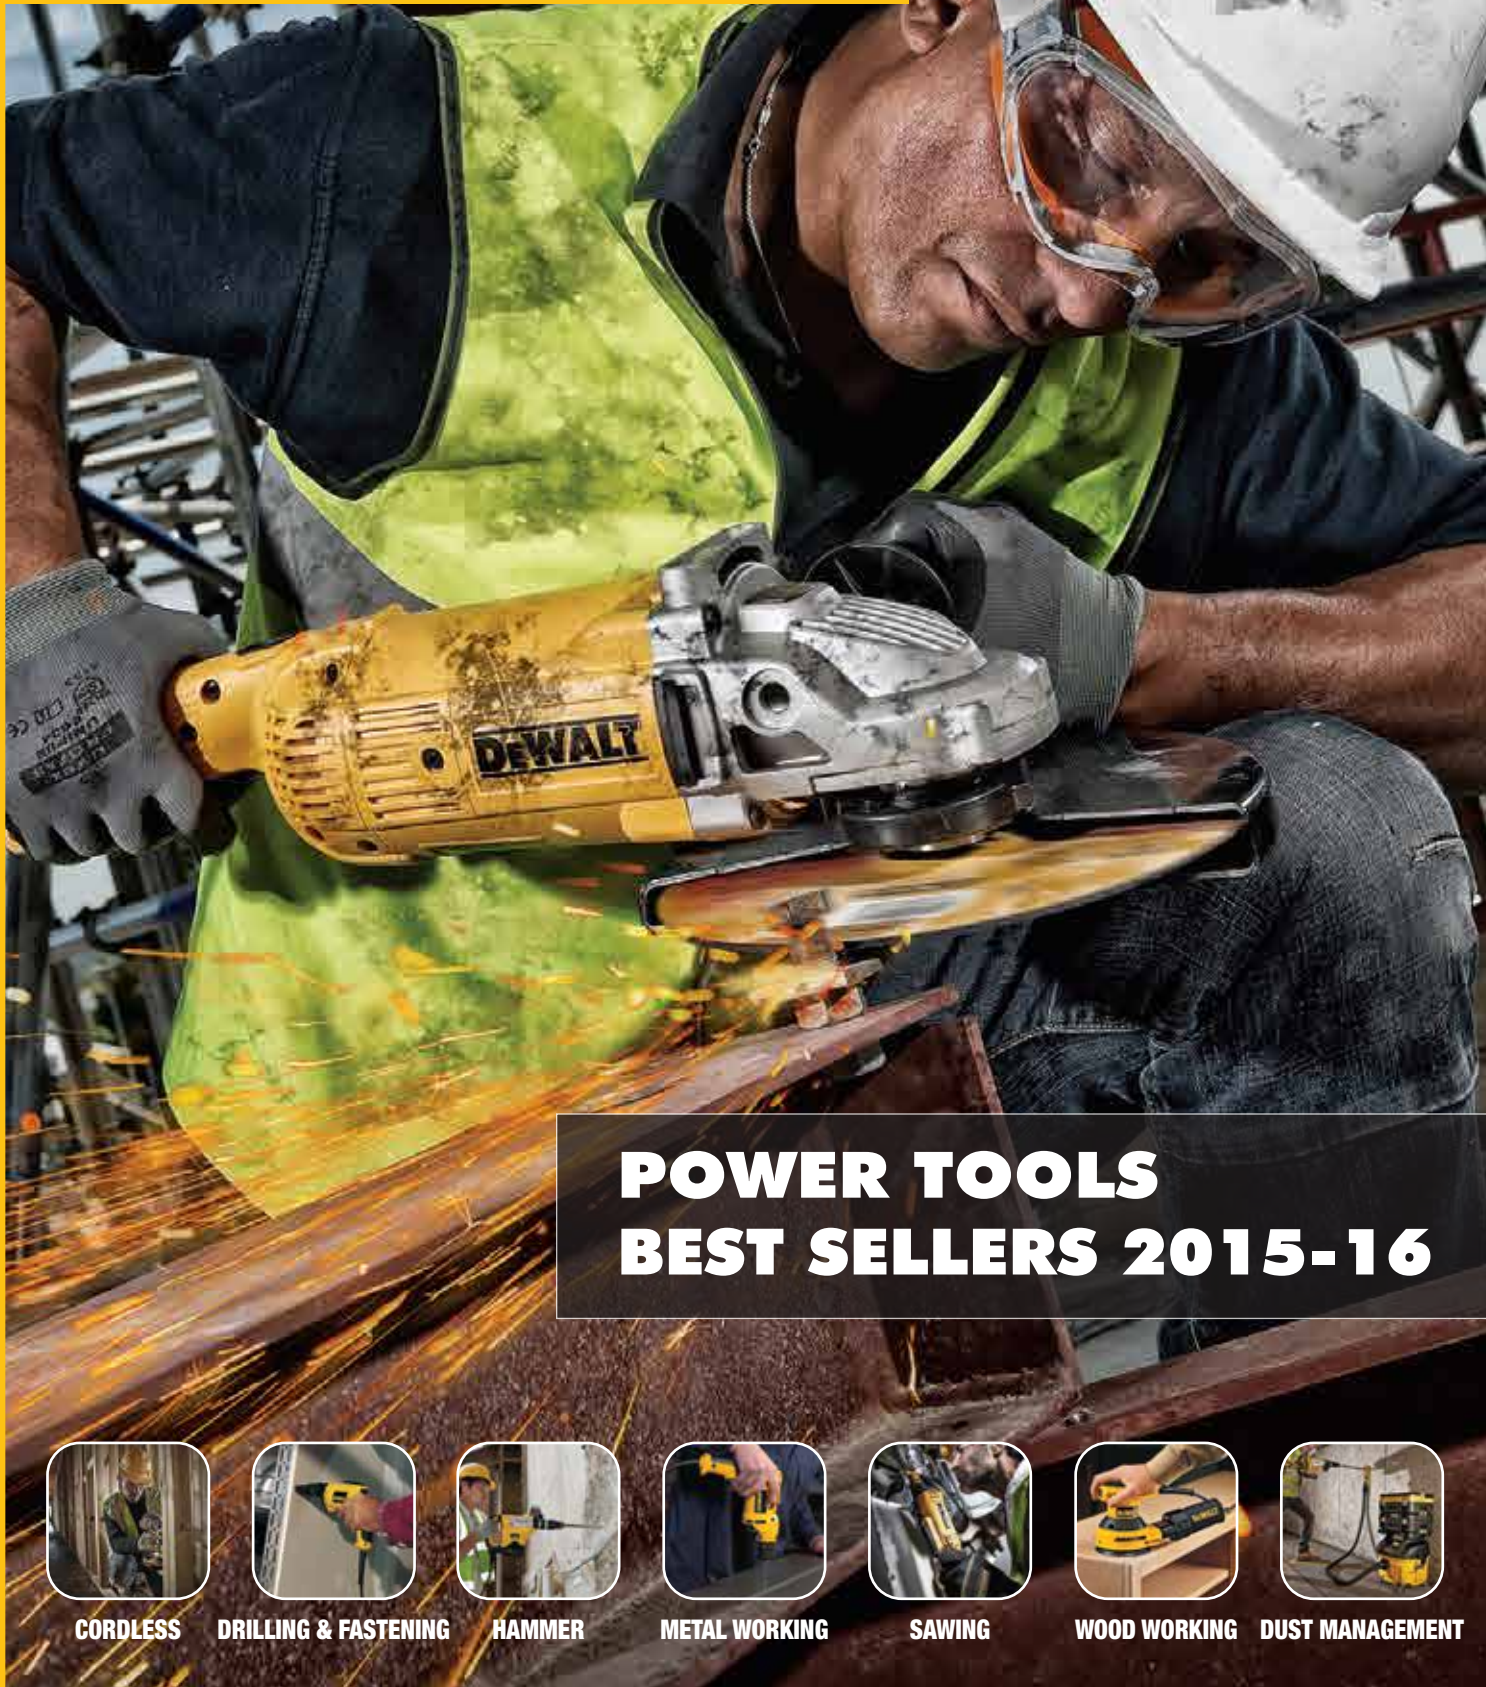

CORDLESS



DRILLING & FASTENING



HAMMER



METAL WORKING



SAWING



WOOD WORKING



DUST MANAGEMENT

www.DEWALT.AE

GUARANTEED TOUGH.™


DEWALT


MOTION ACTIVATED SCREWDRIVER

- The motion of your hand determines speed and drive direction for ultimate control
- ¼ inch drop in load chuck
- LED light ring for visibility in tight spaces
- State of Charge indicator

7.2V
LITHIUM ION

1.0
AH

DCF680G2
NEW

| | |
|----------------|-------------|
| Max Torque | 4 Nm |
| Torque Setting | 16 |
| No Load Speed | 0 - 430 rpm |
| Weight | 0.5 kg |



12V MAX XR LI-ION COMPACT DRILL DRIVER

- 12V MAX XR Li-Ion compact drill driver featuring XR 2.0Ah Li-Ion battery technology
- 15 Position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes
- Ergonomic handle and rubber overmould to provide ultimate end user comfort
- Parabolic switch profile allowing for greater control over speed of application



14.4V XR DRILL DRIVER

- 14.4V XR Li-Ion compact drill driver featuring XR 1.3Ah Li-Ion battery technology
- 13 mm single sleeve chuck and spindle lock for quick and easy bit change with one hand
- Two speed settings, variable speed and reverse switch for maximum control
- Intelligent trigger design allows for total control of application



14.4V XR LI-ION BRUSHLESS IMPACT DRIVER

- Latest generation 14.4V XR Li-Ion Brushless Impact Driver featuring XR 2.0Ah Li-Ion battery technology
- Brushless motor provides improved runtime and durability
- 2.0Ah XR Li-Ion slide pack batteries offers user eXtreme Runtime
- 3 LED 'Halo' ring provides maximum illumination of work piece



14.4V XR LI-ION COMPACT IMPACT WRENCH

- Latest generation 14.4V XR Li-Ion Compact Impact Wrench featuring XR 4.0Ah Li-Ion battery technology
- Ultra compact, light weight design allows for use in confined spaces
- Bright white LED ring with delay feature for improved visibility and flashlight functionality
- Intelligent trigger allowing total control over all applications

12VMAX
LITHIUM ION

2.0
AH

DCD710D2-B5

| | |
|----------------|----------------|
| Power Output | 180 Watt |
| No Load Speed | 0-400/1500 rpm |
| Chuck Capacity | 1.0-10 mm |
| Torque | 24 Nm |

14.4V
LITHIUM ION

1.3
AH

DCD734C2-B5

| | |
|----------------|----------------|
| Power Output | 250 Watt |
| No Load Speed | 0-400/1300 rpm |
| Chuck Capacity | 1.5-13 mm |
| Torque | 38 Nm |

14.4V
LITHIUM ION

2.0
AH

DCF836D2-GB

| | |
|-------------------|--------------|
| Power Output | 250 Watt |
| No Load Speed | 0 - 2800 rpm |
| Max Torque | 155 Nm |
| Max Bolt Diameter | M12 |

14.4V
LITHIUM ION

4.0
AH

DCF830M2-QW

| | |
|--------------------|--------------|
| Power Output | 245 Watt |
| No Load Speed | 0 - 2300 rpm |
| Max. Torque | 185 Nm |
| Max. Bolt Diameter | M16 |

18V XR LI-ION COMPACT DRILL DRIVER

- 18V XR Li-Ion compact drill driver featuring XR 1.3Ah Li-Ion battery technology
- Two speed settings, variable speed and reverse switch for maximum control
- Intelligent trigger design allows for total control of application
- 16 position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes



DCD771C2-B5 **NEW**

| | |
|----------------|----------------|
| Power Output | 300 Watt |
| No Load Speed | 0-450/1500 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 42 Nm |



18V XR LI-ION COMPACT HAMMER DRILL DRIVER

- 18V XR Li-Ion compact drill driver featuring XR 1.3Ah Li-Ion battery technology
- Two speed settings, variable speed and reverse switch for maximum control
- 15 position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes
- Drill driver and Hammer settings (13mm max drilling capacity in masonry) for multiple application



DCD776C2-B5

| | |
|----------------|----------------|
| Power Output | 300 Watt |
| No Load Speed | 0-450/1500 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 42 Nm |



18V XR LI-ION COMPACT IMPACT WRENCH

- 18V XR Li-Ion Compact Impact Wrench featuring XR 4.0Ah Li-Ion battery technology
- Ultra compact, light weight design allows for use in confined spaces
- Bright white LED ring with delay feature for improved visibility and flashlight functionality
- Intelligent trigger allowing total control over all applications



DCF880M2-GB

| | |
|-------------------|------------|
| Power Output | 250 Watt |
| No Load Speed | 0-2300 rpm |
| Max Bolt Diameter | M 16 |
| Max Torque | 203 Nm |



18V XR LI-ION GREASE GUN

- 18V XR Li-Ion Performs routine lubrication up to twice as fast as a manual grease gun
- Delivers high pressure to clear clogged fittings
- 1m hose for hard-to-reach fittings
- Purge valve allows user to bleed excess air that can become trapped in pump valves, affecting the pressure and speed of application
- Innovative pump filter screen on the unit helps to keep dirt from passing through the pump mechanism



DCGG571M1-GB **NEW**

| | |
|----------------------------------|----------------------|
| Output Pressure | 690 bar / 10,000 PSI |
| Feed Rate | 147 g/min |
| Grease Type | Upto NLGI #2 |
| Grease Capacity (Bulk/Cartridge) | 453g/450g |



18V XR BRUSHLESS OSCILLATING MULTI-TOOL

- 18V XR Li-Ion Brushless Motor delivers up to 57% more run time over brushed
- QUICK-CHANGE Accessory System allows blades and attachments to be changed quickly without the use of tools
- DUAL-GRIP Variable Speed Trigger provides the ultimate speed and application control



DCS355D2-GB

| | |
|--------------|--------------------|
| Power Output | 300 Watt |
| Speed | 0-20,000 opm |
| Switch Type | Variable Dual Grip |
| Weight | 1.5 Kg |



STORE MORE POWER, DELIVER LONGER RUNTIME



5 AH

NEW HIGH CAPACITY PACKS

are designed to store more power - providing XR tools with longer runtime without compromising size or weight

RUNTIME THAT CANNOT BE BEATEN



14.4V XR LI-ION BRUSHLESS COMPACT DRILL DRIVER

- 14.4V XR Li-Ion compact drill driver featuring 2.0Ah / 5.0Ah XR Li-Ion battery technology
- Brushless Motor Technology for excellent efficiency
- Ultra compact, lightweight design allows use in confined spaces
- Two speed all metal transmission for increased runtime and longer tool life



18V XR LI-ION BRUSHLESS PREMIUM HAMMER DRILL DRIVER

- 18V XR Li-Ion XRP hammer drill driver featuring XR 5.0Ah Li-Ion battery technology
- Tough 3 speed all metal transmission for increased runtime and longer tool life
- Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving
- 13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes
- 16mm max drilling capacity in masonry



18V XR LI-ION BRUSHLESS PREMIUM DRILL DRIVER

- 18V XR Li-Ion XRP hammer drill driver featuring XR 5.0Ah Li-Ion battery technology
- Tough 3 speed all metal transmission for increased runtime and longer tool life
- Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving
- 13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes



18V XR LI-ION BRUSHLESS COMPACT HAMMER DRILL DRIVER

- 18V XR Li-Ion Brushless compact hammer drill driver featuring XR 2.0Ah/5.0 Ah Li-Ion battery technology
- Two speed all metal transmission for increased runtime and longer tool life
- Intelligent trigger design allows for total control of application.
- Ultra compact, light weight design allows use in confined spaces
- 13mm max drilling capacity in masonry



18V XR BRUSHLESS COMPACT DRILL DRIVER

- 18V XR Li-Ion compact drill driver featuring 2.0Ah/5.0Ah XR Li-Ion battery technology
- Brushless Motor Technology for excellent efficiency
- Ultra compact, lightweight design allows use in confined spaces
- Two speed all metal transmission for increased runtime and longer tool life



DCD732D2/P2-GB

NEW

| | |
|----------------|----------------|
| Power Output | 310 Watt |
| No Load Speed | 0-550/2000 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 57 Nm |



DCD995P2-GB

NEW

| | |
|----------------|---------------------|
| Power Output | 650 Watt |
| No Load Speed | 0-450/1300/2000 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 80 Nm |



DCD990P2-GB

NEW

| | |
|----------------|---------------------|
| Power Output | 650 Watt |
| No Load Speed | 0-450/1300/2000 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 80 Nm |



DCD795D2/P2-GB

NEW

| | |
|----------------|----------------|
| Power Output | 360 Watt |
| No Load Speed | 0-600/2000 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 60 Nm |



DCD790D2/P2-GB

NEW

| | |
|----------------|----------------|
| Power Output | 360 Watt |
| No Load Speed | 0-600/2000 rpm |
| Chuck Capacity | 1.5-13 mm |
| Max Torque | 60 Nm |

18V XR LI-ION BRUSHLESS 3 MODE DEDICATED CORDLESS HAMMER

- Brushless motor with high capacity XR 5.0Ah 18V Lithium-ion battery platform for extreme runtime and reduced maintenance
- Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal
- Perform & Protect: best-in-class vibration at 6.6m/s², minimising user fatigue
- Ideal for drilling holes for fixing anchors in concrete from 4-24mm

| | | | |
|------------------------------|---------------------------------------|----------------|----------------------------|
| 18V LITHIUM ION | XR LITHIUM ION BRUSHLESS | 5 AH | PERFORM PROTECT |
| DCH273P2-GB | | | NEW |
| Power Output | | 400 Watts | |
| No Load Speed | | 0-1200 rpm | |
| Impact Energy (EPTA 05/2009) | | 2.1 J | |
| Blows per minute | | 0-4500 bpm | |



XR 18V BRUSHLESS 3 SPEED HIGH TORQUE WRENCH

- Latest generation 18V XR Li-ion High Torque Wrench featuring XR 5.0Ah Li-ion battery technology
- Powerful fan cooled motor delivers up to 950Nm of torque and up to 2400 impacts per minute for heavy duty fastening applications
- Up to 1625Nm of "breakaway" torque ensures removal of the tightest bolts
- 3 Speed and torque settings gives you the control to best suit your application

| | | | |
|---------------------------|---------------------------------------|---------------------|----------------------------|
| 18V LITHIUM ION | XR LITHIUM ION BRUSHLESS | 5 AH | PERFORM PROTECT |
| DCF899P2-GB | | | NEW |
| Power Output | | 610 Watts | |
| No Load Speed | | 0-400/1200/1500 rpm | |
| Max Torque | | 950 Nm | |
| Max Bolt Diameter | | M 20 | |



36V LI-ION HEAVY DUTY 3 MODE QUICK CHANGE CHUCK DEDICATED CORDLESS HAMMER


- 36V Li-ion cordless hammer Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 26mm
- Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal
- Best in class vibration, 8.5m/s² reduces user fatigue and maximises operating periods
- Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications

| | | | |
|------------------------------|---------------------------------------|------------------|----------------------------|
| 36v LITHIUM ION | XR LITHIUM ION BRUSHLESS | 4.0 AH | PERFORM PROTECT |
| DCH364M2-GB | | | NEW |
| Power Output | | 600 Watts | |
| No Load Speed | | 0-1100 rpm | |
| Impact Energy (EPTA 05/2009) | | 2.3 J | |
| Blows per minute | | 0-4500 bpm | |



10 MM ROTARY DRILL WITH KEYLESS CHUCK

- 10mm Rotary Drill with Keyed Chuck with
- Rubber grip gives maximum comfort to the user while drilling
- Ideal for use in a woodworking or light metal fabrication workshop to drill small holes into wood or sheet metal
- Size, balance and weight designed for one handed operation
- Variable speed switch control to suit different materials



DWD112S-B5

| | |
|----------------------------|------------|
| Power Input | 701 Watts |
| No Load Speed | 0-2500 rpm |
| Max Drill Capacity (Metal) | 10 mm |
| Max Torque | 10.9 Nm |

10 MM RIGHT ANGLE ROTARY DRILL

- 10mm Right Angle Rotary Drill ideal for working in tight or narrow spaces
- Compact and lightweight design for easy handling
- The full body paddle switch supports the natural shape of your hand and ensures less user fatigue for prolonged use
- High torque to enable larger diameter hole drilling



D21160-GB

| | |
|----------------------------|------------|
| Power Input | 350 Watts |
| No Load Speed | 0-1200 rpm |
| Max Drill Capacity (Metal) | 10 mm |
| Max Torque | 9.2 Nm |





13 MM MIXER AND ROTARY DRILL

- 13mm Mixer and Rotary Drill with Variable speed reversing switch offers greater control for a wider range of applications
- 550 RPM provides increased torque for heavy duty drilling and mixing Robust design and metal gear case for greater durability
- 2-position rear spade handle and 3-position side handle gives greater control

D21520-GB

| | |
|----------------|-----------|
| Power Input | 710 Watt |
| No Load Speed | 0-550 rpm |
| Drill Capacity | 2-13 mm |
| Max Torque | 50 Nm |



650W 13MM PERCUSSION DRILL

- 650W Percussion Drill Low weight ensures the drill is easy to use and it reduces user fatigue
- Compact design enables comfortable use and allows access to tight spaces
- An excellent power to size ratio results in a powerful, durable drill in a compact size
- Trigger sensitive variable speed switch allows a user to drill slowly for precision
- accuracy when starting to drill a hole

DWD024K-B5/LX

| | |
|------------------------------|------------|
| Power Input | 650 Watt |
| No Load Speed | 0-2800 rpm |
| Max Drill Capacity (Masonry) | 16 mm |
| Max Torque | 8.6 Nm |



770 W - 2 SPEED PERCUSSION DRILL

- 770W - Percussion Drill with Kit box, two speed gearbox for increased torque
- Improved drilling performance due to NEW motor
- Improved ergonomics with NEW polymer gear case
- NEW gear design to give improved life

D21805-B5/LX

| | |
|------------------------------|-------------------|
| Power Input | 770 Watt |
| No Load Speed | 0-1100/0-2700 rpm |
| Max Drill Capacity (Masonry) | 16 mm |
| Max Torque | 40/20 Nm |



1100 W - 2 SPEED PISTOL PERCUSSION DRILL

- 1100W - 2 Speed Pistol Percussion Drill Improved drilling performance from powerful
- NEW motor gives improved performance in heavy duty applications
- Innovative mode selection collar allows intuitive control for optimal performance
- Two speed gearbox for increased versatility
- Mechanical clutch increases user control and protection

DWD524KS-GB

| | |
|------------------------------|-------------------|
| Power Input | 1100 Watt |
| No Load Speed | 0-1250/0-3500 rpm |
| Max Drill Capacity (Masonry) | 22 mm |
| Max Torque | 40/20 Nm |



2 SPEED DRY DIAMOND DRILL WITH 16MM KEYED CHUCK

- Speed Dry Diamond Drill with 16mm Keyed Chuck with NEW motor gives improved performance in applications with dry core bits up to 127mm in bricks or soft masonry
- Electronics provide e-clutch, power-up and overload protection
- Electro-Mechanical clutch increases user control and protection
- Two speed gearbox for increased versatility when drilling in wood, metal and concrete with standard drill bits



D21570K-B5/LX

| | |
|------------------------------|-------------------|
| Power Input | 1300 Watt |
| No Load Speed | 0-1250/0-3500 rpm |
| Max Drill Capacity (Masonry) | 127 mm |
| Spindle Thread | 1/2" X 20 U.N.F |



2 SPEED MAGNETIC DRILL PRESS 50MM

- 2 Speed Magnetic Drill Press 50mm Delivers high level of performance for fast, clean and accurate drilling into steel
- Compact and light weight unit which is both easy to transport and easy to position for drilling.
- Overload protection with 3 stage LED indicator allows improved user control and prevents motor damage

DWE1622K-B5

| | |
|----------------|-------------|
| Power Input | 1200 Watt |
| No Load Speed | 350/450 rpm |
| Clamping Force | 3800 N |
| Weight | 14.55 Kg |

2500W, DIAMOND DRILLING FOR CONCRETE

- 2500W - Heavy Duty 3 Speed Wet tDiamond Drilling Motor Ideal tool for heavy duty electrical, plumbing, HVAC or general construction applications when drilling into concrete
- Integrated water swivel for core drilling into any material up to 250 mm
- High powered motor delivers best in class performance for frequent Heavy duty drilling
- 3 Mechanical speeds deliver optimum drilling speed



STAND FOR DRILLING MOTOR

- For heavy duty drilling into masonry and concrete with D21585 drilling motor
- Large base delivers higher stability and improved drilling accuracy
- Integrated vacuum base for an even quicker set up (vacuum pump required)
- Support brackets increase the rigidity of the column

D21585-QS

| | |
|----------------|-------------------|
| Power Input | 2500 Watt |
| No Load Speed | 500/1200/2000 rpm |
| Spindle Thread | 1 1/4" Male U.N.C |
| Weight | 11.2 Kg |



D215851

| | |
|--|--------|
| Column Length | 995 mm |
| Max Drilling Diameter with Water Collector | 250 mm |
| Inclinable | 45 ° |
| Weight | 22 kg |

VSR DEPTH SENSITIVE SCREWDRIVER

- Set and forget" nosepiece maintains depth adjustment and ensures consistent fastener depth
- One stage gear reduction delivers speed necessary for high productivity
- Variable speed with reversing allows for easy screw starting and fast removal of screws
- Fine depth adjustments ensure accurate depth setting
- Max torque upto 14.5 Nm

VSR TORQUE ADJUSTABLE SCREWDRIVER

- Ideal for screwdriving applications in wood, plastic and metal
- Versatile tool with torque control up to 26 Nm
- Unique Versa Clutch Torque Control System allows a torque level to be set whilst maintaining an override capability for driving screws into material of inconsistent density such as wood
- Lightweight and compact design to reduce user fatigue and increase productivity
- Soft grip surface on handle and switch to reduce vibration and enhance user comfort

HIGH TORQUE VERSACLUTCH SCREWDRIVER

- Ideal for screwdriving applications in wood, plastic and metal
- Versatile tool with torque control up to 42 Nm
- Unique Versa Clutch Torque Control System allows a torque level to be set
- Lightweight and compact design to reduce user fatigue and increase

DW266-B5

| | |
|---------------------|------------|
| Power Input | 540 Watts |
| No Load Speed | 0-2500 rpm |
| Max. Screw Diameter | 6.3 mm |
| Weight | 1.3 kg |



DW268-B5

| | |
|---------------------|------------|
| Power Input | 540 Watts |
| No Load Speed | 0-2500 rpm |
| Max. Screw Diameter | 6.3 mm |
| Weight | 1.3 kg |



DW269-B5

| | |
|---------------------|------------|
| Power Input | 540 Watts |
| No Load Speed | 0-1000 rpm |
| Max. Screw Diameter | 6.3 mm |
| Weight | 1.3 Kg |



DRYWALL SCREWDRIVER

- Removable depth sensitive "set and forget" nose-piece for consistent fastener depth
- Silent safety clutch system: 3rd intermediate clutch guarantees less vibration and higher efficiency
- Versatile tool with torque control up to 26 Nm
- High speed for increased productivity
- Soft grip surface on handle and switch to reduce vibration and enhance user comfort
- Ideal for fastening drywall and panels to wooden or metal studs

DW274KN-QS

| | |
|---------------------|------------|
| Power Input | 540 Watts |
| No Load Speed | 0-2500 rpm |
| Max. Screw Diameter | 6.3 mm |
| Weight | 1.3 Kg |



HEAVY DUTY IMPACT WRENCH 1/2"

- 440Nm of deliverable torque in forward and reverse
- Higher torque and faster speed increased productivity
- Soft grip handle to reduce vibrations and to enhance user comfort
- Robust design for increased durability



DW292-GB

| | |
|--------------------|-----------|
| Power Input | 710 Watts |
| No Load Speed | 2200 rpm |
| Max. Bolt Diameter | M 20 |
| Weight | 3.2 Kg |

HEAVY DUTY IMPACT WRENCH 3/4"

- 440 Nm of deliverable torque in forward and reverse
- Robust 3/4" anvil
- Compact and light weight to reduce user fatigue
- Soft grip handle to reduce vibrations and to enhance user comfort
- Robust design for increased durability



DW294-GB

| | |
|--------------------|-----------|
| Power Input | 710 Watts |
| No Load Speed | 2200 rpm |
| Max. Bolt Diameter | M 20 |
| Weight | 3.2 Kg |



22MM 2 MODE SDS PLUS HAMMER

- Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 22 mm in diameter
- Impact-stop for drilling in wood, steel, ceramic and screwdriving applications
- Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability
- Electronic variable speed for total control in any application
- Safety clutch eliminates sudden high-torque reaction should the bit jam
- Rounded ergonomic industrial design allows easy and comfortable handling in any application
- Improved sealing for maximum protection from dust ingress ensuring long tool life


D25032K-B5
NEW

| | |
|---------------------------------|------------|
| Power Input | 710 Watts |
| No Load Speed | 0-1550 rpm |
| Blows per Minute (EPTA 05/2009) | 0-5680 bpm |
| Impact energy | 2 J |


D25033C-B5/B4
NEW

| | |
|---------------------------------|------------|
| Power Input | 710 Watts |
| No Load Speed | 0-1550 rpm |
| Blows per Minute (EPTA 05/2009) | 0-5680 bpm |
| Impact energy | 2 J |

26MM 3 MODE SDS PLUS HAMMER

- Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter
- Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete
- Impact-stop for drilling in wood, steel, ceramic and screwdriving applications
- Electronic variable speed for total control in any application
- Safety clutch eliminates sudden high-torque reaction should the bit jam

26MM 3 MODE HAMMER WITH QCC

- Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter
- Quick Change Removable Chuck for drilling in wood, steel, ceramic and screwdriving applications
- Impact-stop for drilling in wood, steel, ceramic and screwdriving applications
- Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability
- Electronic variable speed for total control in any application

26MM 3 MODE D HANDLE HAMMER

- Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter
- Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete
- Active Vibration Control system with floating rear handle delivers low vibration and more comfort
- Impact-stop for drilling in wood, steel, ceramic and screwdriving applications
- Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability

28MM 3 MODE HAMMER WITH QCC

- Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 28 mm in diameter
- Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete
- Quick Change Removable Chuck for drilling in wood, steel, ceramic and screwdriving applications
- Impact-stop for drilling in wood, steel, ceramic and screwdriving applications
- Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability

20MM L-SHAPE SDS-PLUS ROTARY HAMMER

- Ideal for drill anchor and fixing holes into concrete and masonry from 4-20 mm in diameter
- Active vibration control with floating back handle delivers extremely low vibration and more comfort
- Optimised power to weight ratio good power in light weight package
- Electronic variable speed switch for total control


D25133K-B5/B4
NEW

| | |
|---------------------------------|------------|
| Power Input | 800 Watts |
| No Load Speed | 0-1500 rpm |
| Blows per Minute (EPTA 05/2009) | 0-5500 bpm |
| Impact energy | 2.6 J |


D25134K-B5
NEW

| | |
|---------------------------------|------------|
| Power Input | 800 Watts |
| No Load Speed | 0-1500 rpm |
| Blows per Minute (EPTA 05/2009) | 0-5540 bpm |
| Impact energy | 2.8 J |


D25262K-B5
NEW

| | |
|---------------------------------|------------|
| Power Input | 800 Watts |
| No Load Speed | 0-1500 rpm |
| Blows per Minute (EPTA 05/2009) | 0-5540 bpm |
| Impact energy | 2.8 J |


D25144K-B5
NEW

| | |
|---------------------------------|------------|
| Power Input | 900 Watts |
| No Load Speed | 0-1450 rpm |
| Blows per Minute (EPTA 05/2009) | 0-5350 bpm |
| Impact energy | 3.0 J |


D25052K-B5/LX

| | |
|---------------------------------|------------|
| Power Input | 650 Watts |
| No Load Speed | 0-2300 rpm |
| Blows per Minute (EPTA 05/2009) | 0-6200 bpm |
| Impact energy | 1.9 J |





26MM L-SHAPE SDS-PLUS COMBINATION HAMMER WITH 3 JAW QUICK CHANGE CHUCK LOW VIBRATION

- Ideal for drilling holes and fixing anchors into concrete and masonry from 4 to 26 mm in diameter
- Active Vibration Control system with floating handle delivers extremely low vibration and more comfort
- Rotation-stop for light chiselling applications in soft masonry and occasionally concrete
- Impact stop and Quick Change Removable Chuck for precise drilling in wood and steel and screwdriving applications



PERFORM
PROTECT

D25324K-GB

| | |
|---------------------------------|------------|
| Power Input | 800 Watts |
| No Load Speed | 0-1150 rpm |
| Blows per Minute (EPTA 05/2009) | 0-4300 bpm |
| Impact energy | 2.8 J |



32MM HEAVY DUTY SDS-PLUS COMBINATION HAMMER

- Active vibration control with floating back handle delivers extremely low vibration and more comfort
- Ideal for drilling large anchor, fixing and through holes in concrete and masonry from 6 to 32 mm in diameter
- Optimised power to weight ratio good power in light weight package
- Large hammer mechanism construction guarantees longer tool life and superior performance



PERFORM
PROTECT

D25413K-B5

| | |
|---------------------------------|------------|
| Power Input | 1000 Watts |
| No Load Speed | 0-820 rpm |
| Blows per Minute (EPTA 05/2009) | 0-4700 bpm |
| Impact energy | 4.2 J |



40 MM SDS-MAX COMBINATION HAMMER

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 40 mm in diameter. Core drilling up to 90 mm
- Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation
- Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces Excellent power to weight ratio: 8 Joules of impact energy delivered by a 6.1 kg hammer



D25501K-GB/LX

| | |
|---------------------------------|------------|
| Power Input | 1100 Watts |
| No Load Speed | 400 rpm |
| Blows per Minute (EPTA 05/2009) | 2740 bpm |
| Impact energy | 8.0 J |



45MM SDS-MAX COMBINATION HAMMER

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45 mm in diameter. Core drilling up to 100 mm
- Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation
- Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces
- Active Vibration Control system incorporating a floating rear handle and damped side handle to reduce vibration



PERFORM
PROTECT

D25601K-GB

| | |
|------------------------------|---------------|
| Power Input | 1250 Watts |
| No Load Speed | 210-415 rpm |
| Blows per Min (EPTA 05/2009) | 1430-2840 bpm |
| Impact energy | 8.0 J |



48MM SDS-MAX COMBINATION HAMMER

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48 mm in diameter. Core drilling up to 115 mm
- Active Vibration Control system incorporating a floating handle delivers extremely low vibration
- Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces
- Electronic variable speed and impact energy control



PERFORM
PROTECT

D25721K-B5

| | |
|------------------------------|-----------------|
| Power Input | 1350 Watts |
| No Load Speed | 132 - 265 rpm |
| Blows per Min (EPTA 05/2009) | 1225 - 2450 bpm |
| Impact energy | 11.0 J |

52 MM SDS-MAX COMBINATION HAMMER

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 52 mm in diameter. Core drilling up to 150 mm
- Active vibration control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- An anti rotation system detects a loss of tool control, and reacts by instantly cutting the power
- 2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications



PERFORM
PROTECT

D25763K-B5

| | |
|------------------------------|-----------------|
| Power Input | 1500 Watts |
| No Load Speed | 125 - 250 rpm |
| Blows per Min (EPTA 05/2009) | 1150 - 2300 bpm |
| Impact energy | 15.5 J |



5.8 KILO SDS-MAX DEDICATED CHIPPING

- Ideal for light demolition, surface preparation or chiseling grooves and channel openings in brick, masonry and light concrete
- Oil filled gearbox ensures total component lubrication and superior heat dissipation
- Excellent power to weight ratio: 8 Joules of impact energy delivered by a 5.8 kg hammer
- Variable chisel locking at 18 different positions to provide the perfect angles for any application

7 KILO SDS-MAX DEDICATED DEMOLITION

- Ideal for demolition and surface preparation in brick, masonry and concrete
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- Variable chisel locking at 24 positions to provide the perfect approach for all applications
- Electronic variable impact energy/speed for total control

10 KG DEMOLITION HAMMER

- Powerful and durable 1500 Watt motor delivers outstanding concrete breaking performance
- In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight
- Compact, streamlined design allows access in confined areas

10 KG DEMOLITION HAMMER LOW VIBRATION

- Powerful and durable 1500 Watt motor delivers outstanding concrete breaking performance
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight

14 KG DEMOLITION HAMMER LOW VIBRATION

- Powerful and durable 1600 Watt motor delivers outstanding concrete breaking performance
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight

28MM HEX DEMOLITION BREAKER

- Highest productivity due to an optimum balance of power, impact energy and vibration
- Lowest vibration in the 16kg class ensures the highest trigger time
- 50% longer service intervals than the nearest competitor for lower running costs and less down time
- Robust and proven design provides the longest lasting 16kg breaker



D25960K-GB

| | |
|------------------------------|------------|
| Power Input | 1600 Watts |
| Blows per Minute | 1450 bpm |
| Impact energy (EPTA 05/2009) | 35 J |
| Weight | 18.4 Kg |



D25820K-B5/LX

| | |
|------------------------------|------------|
| Power Input | 1150 Watts |
| Blows per Minute | 2740 bpm |
| Impact energy (EPTA 05/2009) | 8 J |
| Weight | 5.8 Kg |



D25871K-B5

| | |
|------------------------------|-----------------|
| Power Input | 1400 Watts |
| Blows per Minute | 1260 - 2520 bpm |
| Impact energy (EPTA 05/2009) | 11 J |
| Weight | 8 Kg |



D25899K-GB/LX

| | |
|------------------------------|------------|
| Power Input | 1500 Watts |
| Blows per Minute | 2040 bpm |
| Impact energy (EPTA 05/2009) | 17.9 J |
| Weight | 9.9 Kg |



D25901K-B5

| | |
|------------------------------|---------------|
| Power Input | 1500 Watts |
| Blows per Minute | 1020-2040 bpm |
| Impact energy (EPTA 05/2009) | 19 J |
| Weight | 10.5 Kg |



D25941K-QS/LX

| | |
|------------------------------|------------|
| Power Input | 1600 Watts |
| Blows per Minute | 1620 bpm |
| Impact energy (EPTA 05/2009) | 22.5 J |
| Weight | 13.8 Kg |



30 KG PAVEMENT BREAKER WITH TROLLEY

- Large oversize mechanism delivers extreme durability and excellent breaking performance
- 2100 Watt motor delivers outstanding efficiency and durability
- Active Vibration Control offers safer, more comfortable use and more productivity
- Suspended Handle System absorbs the rebound and, working with the AVC, delivers the lowest vibration on the market



D25980K-B5

| | |
|------------------------------|------------|
| Power Input | 2100 Watts |
| Blows per Minute | 900 bpm |
| Impact energy (EPTA 05/2009) | 52 J |
| Weight | 31 Kg |



100MM 800W SMALL ANGLE GRINDER

- Small girth allows comfortable gripping resulting in superior ergonomics
- The low profile gear case allows access in confined areas
- Abrasion protected motor for increased durability
- Independent box and spring brush holder design increases brush life
- Fully leaded stator windings for increased motordurability



DWE4001-B5

| | |
|----------------|-----------|
| Power Input | 800 Watts |
| No Load Speed | 12000 rpm |
| Spindle Thread | M10 |
| Weight | 1.72 Kg |

100MM PADDLE SWITCH SMALL ANGLE GRINDER

- Small girth allows comfortable gripping resulting in superior ergonomics
- The low profile gear case allows access in confined areas
- Abrasion protected motor for increased durability
- Independent box and spring brush holder design increases brush life
- Fully leaded stator windings for increased motor durability



DWE4002-B5/B4

| | |
|----------------|-----------|
| Power Input | 800 Watts |
| No Load Speed | 12000 rpm |
| Spindle Thread | M10 |
| Weight | 1.72 Kg |



115MM SMALL ANGLE GRINDER

- Slim Girth enables easy and comfortable Grip thereby providing superior Ergonomics in this category
- Lowest Temperature rise resulting in an increased motor life rendering the tool better durability
- Cut Off Brushes to prolong Motor Life
- Redesigned Gear Case enables easy access to confined areas during working.



DWE4010/DWE4010T-B5

| | |
|----------------|-----------|
| Power Input | 730 Watts |
| No Load Speed | 11000 rpm |
| Spindle Thread | M14 |
| Weight | 1.8 Kg |

900W - 115MM PADDLE SWITCH SMALL ANGLE GRINDER

- A non locking paddle switch ensures the grinder switches off automatically when the unit is released
- Independent box and spring brush holder design increases brush life
- Small girth allows user to maintain a comfortable grip, resulting in superior ergonomics
- The low profile gear case allows access to confined areas



DWE4120-B5/B4

| | |
|----------------|-----------|
| Power Input | 900 Watts |
| No Load Speed | 11800 rpm |
| Spindle Thread | M14 |
| Weight | 2.05 Kg |

900W - 125MM SLIDE SWITCH SMALL ANGLE GRINDER

- Small girth allows comfortable gripping resulting in superior ergonomics
- Independent box and spring brush holder design increases brush life
- The low profile gear case allows access in confined areas
- Fully leaded stator windings for increased motor durability



DWE4151-QS

| | |
|----------------|-----------|
| Power Input | 900 Watts |
| No Load Speed | 11800 rpm |
| Spindle Thread | M14 |
| Weight | 2.05 Kg |

1250 W - 125 MM SMALL ANGLE GRINDER

- Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking
- Ergonomic main handle with rubber grip allows for maximum comfort when grinding for long periods of time
- Abrasion protected motor for increased durability
- New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility



D28065-GB

| | |
|----------------|------------|
| Power Input | 1250 Watts |
| No Load Speed | 9000 rpm |
| Spindle Thread | M14 |
| Weight | 2.6 Kg |

1400 W - 125 MM SMALL ANGLE GRINDER

- Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking
- Anti lock flange prevents flanges from permanently locking up and locking the disc on
- Abrasion protected motor for increased durability
- New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility



D28135K-B5/LX

| | |
|----------------|------------|
| Power Input | 1400 Watts |
| No Load Speed | 10000 rpm |
| Spindle Thread | M14 |
| Weight | 2.5 Kg |



1200W 115MM PADDLE SWITCH SMALL ANGLE GRINDER

- Electro-mechanical clutch reduces the “kickback” transmitted to the operator if the cutting disc jams
- No volt release switch will prevent the unit starting when plugged in, even if the switch is in the on position. Switch must be consciously reset before power is delivered
- Overload protection will prevent the unit over heating by shutting the unit off until the unit has cooled down



DWE4212-B5/B4 **NEW**

| | |
|----------------|------------|
| Power Input | 1200 Watts |
| No Load Speed | 11000 rpm |
| Spindle Thread | M14 |
| Weight | 2.2 Kg |



115 MM / 125 MM HIGH PERFORMANCE PADDLE SWITCH GRINDER

- Powerful 11,000 rpm motor designed for faster material removal and higher overload protection
- Dust Ejection System™ provides durability by ejecting damaging dust and debris particles that enter the tool through the air intake vents
- Quick-Change™ Wheel Release allows tool free wheel removal
- E-Clutch® shuts the grinder off when a wheel pinch or wheel stall occurs, extending the life of the gears and motor



D28114-B5/B4

| | |
|----------------|-----------|
| Power | 1700 MWO |
| No Load Speed | 11000 rpm |
| Spindle Thread | M14 |
| Weight | 2.5 Kg |



2200 W - 180 MM / 230 MM ANGLE GRINDER

- Abrasion protected motor for increased durability
- Two position side handle allows the user to optimise handle position to give maximum comfort
- Spindle lock for quick wheel changes
- Brush window allows quick brush replacement



DWE492-B5/B4 (230mm) **NEW**

| | |
|----------------|------------|
| Power | 2200 Watts |
| No Load Speed | 6500 rpm |
| Spindle Thread | M14 |
| Weight | 5.1 Kg |

DWE493-B5/B4 (180mm) **NEW**

| | |
|----------------|------------|
| Power | 2200 Watts |
| No Load Speed | 8500 rpm |
| Spindle Thread | M14 |
| Weight | 5.1 Kg |



2400W - 180 MM / 230 MM HEAVY DUTY LARGE ANGLE GRINDER

- Dust Ejection System protects from abrasion damage increasing the life of the tool
- Anti vibration side handle
- Quick adjustment tool free guard
- Fully leaded stator windings for increased motor durability



DWE4559-B5 (230mm)

| | |
|----------------|------------|
| Power | 2400 Watts |
| No Load Speed | 6500 rpm |
| Spindle Thread | M14 |
| Weight | 5.7 Kg |



DWE4557-B5/B4 (180mm)

| | |
|----------------|------------|
| Power | 2400 Watts |
| No Load Speed | 8500 rpm |
| Spindle Thread | M14 |
| Weight | 5.5 Kg |



DWE4579-QS

| | |
|----------------|------------|
| Power | 2600 Watts |
| No Load Speed | 6500 rpm |
| Spindle Thread | M14 |
| Weight | 5.9 Kg |



2600W - 230 MM HEAVY DUTY LARGE ANGLE GRINDER

- Dust Ejection System protects from abrasion damage increasing the life of the tool
- Overload protection will prevent the motor overheating by shutting off the unit the motor cools down
- Soft start to limit start-up current and reduce kick back
- Torque limiting clutch reduces the maximum torque reaction transmitted to the operator if the disc jams



450 W 6 MM SLIDE SWITCH DIE GRINDER

- Long nose with rubber grip improves access, comfort and control
- Anti-Lock collect ensures that all attachment are easily removeable once the nut is loosened
- Powerful 450 W motor allows maximum performance in demanding application
- Slim, ergonomic design results in user comfort allowing strain free grinding
- Low operating temperature increases user comfort in prolonges application
- Ergonomic, Lock-on slide switch for maximum flexibility
- Easy service, 1 screw design



DWE4887N-B5/B4

| | |
|---------------|-----------|
| Power Input | 450 Watts |
| No Load Speed | 25000 rpm |
| Collet Size | 6 mm |
| Weight | 1.6 kg |



355MM ABRASIVE CHOP SAW WITH ADDITIONAL SAW DISK

- Horizontal handle for superior ergonomics and less user fatigue
- Quick release clamp results in less time in changing the work piece
- High power abrasion protected motor delivers high overload capabilities for greater durability
- Spindle lock for quick and easy wheel change
- Adjustable spark guard allows user to control the direction of the sparks coming from the machine



355MM HIGH PERFORMANCE CHOPSAW

- Keyless blade clamp allows quick, hassle free blade change
- Electronic soft start to limit start-up current and kick back reaction
- High power abrasion protected motor delivers high overload capabilities for greater durability
- Keyless mitre adjustments for quick and simple operations



150MM 373W BENCH GRINDER

- Powerful engine provides maximum power and torque for a variety of uses
- 152mm wheel with coarse and medium grain for any type of use in smoothing and polishing
- Metallic support and precision machinery allows parts worked on to be held for greater control
- Adjustable eye protection protects the user from sparks or fragments

D28720-B5

| | |
|--|------------|
| Power Input | 2300 Watts |
| No Load Speed | 3800 rpm |
| Max Cutting Capacity (Rounded Profile) | 130 mm |
| Weight | 17 Kg |

D28715-GB

| | |
|--|------------|
| Power Input | 2200 Watts |
| No Load Speed | 4000 rpm |
| Max Cutting Capacity (Rounded Profile) | 130 mm |
| Weight | 18 Kg |

DW752R-B5

| | |
|----------------|-----------|
| Power Input | 373 Watts |
| No Load Speed | 3450 rpm |
| Wheel Diameter | 152 mm |
| Weight | 13.8 Kg |

150MM /180MM VARIABLE SPEED POLISHER

- Rubber overmoulded gearcase allows the user to grip the gearcase for greater comfort
- Variable speed trigger allows the user to control the speed of the unit by adjusting the force applied to the switch
- Large variable speed dial allows the user to easily change their speed to suit specific applications
- Replaceable wool ingestion shields prevent wool from being sucked into the unit and blocking the tool
- No volt release switch will prevent the unit from starting when plugged in, even if the switch is in the on position. Switch must be consciously reset before power is delivered

DWP849X-B5

| | |
|----------------|----------------|
| Power Input | 1250 Watts |
| No Load Speed | 0-600/3500 rpm |
| Spindle Thread | M14 |
| Weight | 3.0 Kg |



65MM DEPTH OF CUT COMPACT CIRCULAR SAW

- Compact, Lightweight, Easy to use circular saw with 65mm depth of cut
- High power 1350W motor gives increased cutting performance
- Cutaway inner guard gives improved line of sight to cutting line
- Dust blower clears dust and debris from cut line
- Efficient dust extraction port to minimise airborne dust particles when connected to a dust extraction unit
- Direct compatibility with DEWALT AirLock system for easy, secure connection to extraction hose

DWE560-B5/LX

| | |
|---------------|------------|
| Power Input | 1350 Watts |
| No Load Speed | 5500 rpm |
| Depth of Cut | 65 mm |
| Weight | 3.7 Kg |



86 MM DEPTH OF CUT HEAVY DUTY SAW

- High power, durable motor delivers excellent power even at maximum depth of cut
- Optimum balance for safe, fatigue-free operation
- Additional handle for safe two-handed work
- Steel shoe for added durability
- Stable block construction for low vibration running and long service life
- Protection hood for sawdust extraction Spindle lock for ease of blade change
- Variable adjustment of the mitre angle to 45° for added versatility

D23700-B5/LX

| | |
|---------------|------------|
| Power Input | 1750 Watts |
| No Load Speed | 4700 rpm |
| Depth of Cut | 86 mm |
| Weight | 8.2 Kg |



55MM DEPTH OF CUT HEAVY DUTY PLUNGE SAW + 1.5M GUIDE RAIL

- Parallel plunge allows the user to maintain a smooth and constant hand position while cutting
- A 48 tooth blade gives a fine and accurate finish with very little breakout in laminates
- Rail adjustment allows the saw to be adjusted accurately to the rail
- The anti kickback function stops the saw from moving backwards along the rail and helps stop the saw from climbing out of the work piece when making plunge cuts
- Variable speed allows the correct speed to be set for different types of materials
- Full wave electronics maintains a constant speed under heavy load
- The enclosed guard gives a 90% dust extraction capability
- 55mm depth of cut allows the trimming and sizing of most common door sizes
- 1.5m Guide rail included in the kit



DWS520KR-QS

| | |
|---------------|----------------|
| Power Input | 1300 Watts |
| No Load Speed | 1750 -4000 rpm |
| Depth of Cut | 55 mm |
| Weight | 5.1 Kg |



550W JIGSAW

- Compact, ergonomic, design gives user comfort and versatility in use
- 500 Watt motor gives performance and durability with max cutting capacity wood 85mm, steel 10mm
- Keyed blade change for durability
- 3 pendulum action gives increased cutting performance and longer saw blade life
- Shoe bevels 45° to both left and right with presets at 0° and 45° for precise bevelled cuts
- Low profile dust extraction shield with bi-directional vacuum spout for clean, efficient cutting performance

DW349-B5

| | |
|---------------------|--------------|
| Power Input | 550 Watts |
| No Load Stroke Rate | 0 - 3100 spm |
| Stroke Length | 20 mm |
| Weight | 2.0 Kg |



HEAVY DUTY TOP HANDLE JIGSAW

- Powerful 701 watt motor with variable speed delivers fast cutting action up to 3100 strokes per minute with max cutting capacity wood 130mm, steel 12mm
- Quick and easy patented keyless blade change system accepts T- shank blades
- Tool free adjustable shoe with anti scratch cover bevels to 45 degrees in both directions
- 3-position orbital action controls the aggressiveness or smoothness of cuts
- Patented anti-vibration counterbalance mechanism and rubber grip provide smooth operation
- Dust blower keeps line of cut clear of chips

DW331K-GB/LX

| | |
|---------------------|--------------|
| Power Input | 701 Watts |
| No Load Stroke Rate | 0 - 3100 spm |
| Stroke Length | 26 mm |
| Weight | 2.8 Kg |



1100 WATT - RECIPROCATING SAW

- 1100 Watt motor designed for heavy duty applications with max cutting capacity wood 280mm, steel 100mm
- 4 position blade clamp allows for flush cutting and increased versatility
- With a 29 mm stroke length, the DWE305PK delivers excellent cutting performance
- Lever-action keyless blade clamp for quick and easy blade changing
- Ideal for plumbers, electricians, heating, HVAC, and builders

DWE305PK-GB

| | |
|---------------------|--------------|
| Power Input | 1100 Watts |
| No Load Stroke Rate | 0 - 2800 spm |
| Stroke Length | 29 mm |
| Weight | 3.5 Kg |



305MM COMPOUND SLIDE MITRE SAW WITH XPS

- Outstanding cutting performance in both small profiles and large construction timbers up to 110 x 303 mm
- XPS Shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity no adjustment required
- Heavy duty durability with the ability to fully adjust your machine to maintain accuracy over the life of the tool.



DWS780-GB

| | |
|------------------|---------------|
| Power Input | 1675 Watts |
| Blade Speed | 1900-3800 rpm |
| Max Depth of Cut | 170 mm |
| Weight | 24.8 Kg |

250 MM COMPOUND MITRE SAW

- Powerful universal motor delivers plenty of cutting power in high torque cutting applications
- Ultra smooth head actuation for safe precise cuts at any angle or compound angle
- Mitre scale features 11 positive stops for amazingly accurate mitre cuts
- Compact and lightweight with lock-down motor head effortless transportation
- Extremely tight unit weight with rugged construction for maximum jobsite versatility



DW713-B5

| | |
|------------------|------------|
| Power Input | 1600 Watts |
| Blade Speed | 5000 rpm |
| Max Depth of Cut | 89 mm |
| Weight | 13.6 Kg |



250 MM COMBINATION SAW

- The classic TGS flip-over bevelling saw
- Rapid tool free transformation from a saw bench to a mitre saw provides flexibility in a range of site and workshop applications
- Handle mechanism allows the guard to retract automatically in mitre mode allowing safe and easy use
- New high output heavy duty high torque induction motor provides years of maintenance free use, suitable for workshop applications where low noise characteristics are desirable

DW743N-GB

| | |
|------------------|------------|
| Power Input | 2000 Watts |
| Blade Speed | 2850 rpm |
| Max Depth of Cut | 0-70 mm |
| Weight | 37 Kg |

HEAVY DUTY LIGHTWEIGHT TABLE SAW

- 22 kg unit weight and optimized footprint make this the most portable saw in its class
- Steel roll cage protects saw against jobsite drops and impacts
- Rack and pinion fence system, front and rear fence lock and large, clear scales combine to give an extremely accurate and easy to use saw
- Powerful 1700 W motor for high performance in all applications
- Fence system provides 410 mm of rip capacity in a portable design for cutting large sheet materials to size

DW745-GB

| | |
|------------------------------|------------|
| Power Input | 1700 Watts |
| Blade Speed | 3800 rpm |
| Max Ripping Capacity (R & L) | 610x315 mm |
| Weight | 22 Kg |

200 MM 2-SPEED BANDSAW

- All steel welded construction provides extreme rigidity and accuracy even when cutting at the maximum depth
- Fitted with high quality precision Swedish blade, designed to stay sharp for up to 10 times as long as standard blade types
- 500 x 500mm aluminium extruded table provides a large support area built for flatness and accuracy.
- Easy to adjust blade tensioning with integrated tension indicator for different blade types and applications.
- 310mm throat and 200mm depth capacity for large workshop applications.

DW876-GB

| | |
|-------------------|---------------|
| Power Input | 1000 Watts |
| Cutting Speed | 380/880 m/min |
| Max Cutting (HxW) | 200x310 mm |
| Weight | 54 Kg |

1.5 MM PLANER

- Light weight and perfect balance make this planer ideal for single handed use in awkward applications
- 296mm machined aluminium shoe offers finer finish and less vibration
- Tall profile and large size depth adjustment knob offers easier and more precise depth adjustment 0.1mm per graduation
- Finger rest handle design offers better balance and less fatigue for long hour use



D26676-B5

| | |
|------------------|-----------|
| Power Input | 550 Watts |
| No Load Speed | 17000 rpm |
| Max Depth of Cut | 1.5 mm |
| Weight | 2.7 Kg |



1/4 SHEET ORBITAL PALM GRIP SANDER

- 230 Watt motor sands at 14,000 orbits per minute, providing a superior finish
- Hook & loop platen allows faster paper change, better dust extraction and increase sanding efficiency
- Textured anti-slip top and body grip provides ultimate comfort and control during prolonged use
- Dust sealed switch for increased durability
- Sealed 100% ball-bearing construction provides longer life

D26441-GB

| | |
|-------------------|-----------|
| Power Input | 230 Watts |
| Rotation speed | 14000 rpm |
| Orbits Per Minute | 28000 opm |
| Weight | 1.4 kg |



1/2 SHEET ORBITAL SANDER

- High performance motor with aluminium bearing seats for continuous use and a long life
- Small orbit size for a smooth finish
- Efficient dust collection using integrated dustbag or external dust extractor for a better sanding performance and sheet life
- Sturdy, easy action abrasive sheet clips that securely hold the sheet and are also inset to avoid contact with adjacent surfaces

D26421-GB

| | |
|-------------------|-----------|
| Power Input | 350 Watts |
| Rotation speed | 22000 rpm |
| Orbits Per Minute | 44000 opm |
| Weight | 2.8 kg |



125 MM RANDOM ORBIT PALM GRIP SANDER

- 280 Watt variable speed motor adjusts from 7,000-12,000 orbits per minute, providing ideal sanding speed for all materials
- Textured anti-slip top and body grip provides ultimate comfort and control during use
- Dual-plane counter-balance fan reduces vibration and user fatigue
- Controlled finishing system controls pad speed and minimises gouging during start up
- Sealed 100% ball-bearing construction provides longer life



D26453-GB

| | |
|-------------------|-----------------|
| Power Input | 280 Watts |
| Rotation speed | 7000-12000 rpm |
| Orbits Per Minute | 14000-24000 opm |
| Weight | 1.6 kg |

800 W 75MM BELT SANDER

- Powerful 800 watt motor gives fast, efficient removal of material in a variety of applications
- Three wheel design increases contact area of sanding belt giving improved sanding performance
- Efficient dust collection using integrated dustbag or external dust extractor for a better sanding performance and sheet life
- Automatic tracking, with manual override provides precise belt running to the users requirements

DW432-QS

| | |
|-------------|-------------|
| Power Input | 800 Watts |
| Belt Speed | 427 m/min |
| Belt Size | 75 x 533 mm |
| Weight | 5.6 kg |



1400W 1/2" (12MM) VARIABLE SPEED PLUNGE ROUTER

- Precision depth of cut micro-adjuster accurate to 0.1mm ensures precise results
- Soft start to eliminate any small initial movement that might misalign the cutter
- Two column precision guide with phosphor bronze bushing - the extra broad column provides superior rigidity for the greatest accuracy in this size of router
- Spindle lock mechanism for quick and easy cutter changes with a single spanner



DW622K-GB

| | |
|------------------------|----------------|
| Power Input | 1400 Watts |
| No Load Speed | 8000-24000 rpm |
| Plunge Stroke/Movement | 55 mm |
| Weight | 3.1 kg |



2000 W - 1/2" (12 MM) VARIABLE SPEED PLUNGE ROUTER

- Electronic speed control ensures that the same fine finish is achieved in all grades of timber, aluminium and plastics since the full wave electronic control ensures the selected speed is maintained under any load
- Soft start to eliminate small initial movements that might misalign the cutter, especially important with such powerful router
- Two column precision guide with large phosphor bronze bushes for plunging accuracy in a high quality die cast aluminium housing so that carefully controlled plunge cuts can be made
- 3 stage depth stop adjustment enables recesses of various depths to be machined in one operation without time consuming setting up



DW625E-QS

| | |
|------------------------|----------------|
| Power Input | 2000 Watts |
| No Load Speed | 8000-20000 rpm |
| Plunge Stroke/Movement | 80 mm |
| Weight | 5.1 kg |



590 W - (6-8 MM) LAMINATE TRIMMER

- Especially for small radius, chamfers and shaping edges
- Light weight makes it ideal for one hand use and accurate work
- Copy follower system with 10 mm ball bearing , comfort and precision
- Spindle lock mechanism for quick and easy cutter changes with a single spanner
- Variable speed control 16000 - 34000 rpm enables router bit to be optimised for application
- D-Base design to allow the user maximum support on the workpiece
- Max. Cutter Diameter 29 mm, Depth ring and clamping mechanism combine to give the user an accurate depth of cut adjustment



DWE6005-GB

| | |
|------------------------|-------------------|
| Power Input | 590 Watts |
| No Load Speed | 16000 - 34000 rpm |
| Plunge Stroke/Movement | 22 mm |
| Weight | 1.5 kg |



CORDED MULTI TOOL

- Quick accessory change & adjustment, no Hex Key required
- Superior Ergonomics
- 0 - 22,000 opm Variable Speed Trigger for ultimate control
- Oscillating Angel 1.6°
- Powerful 300w Motor, T-STAK Kitbox, 37pc Accessory Set, Dust Extraction Adaptor
- Depth Stop / Straight Cut Guide

DWE315KT-GB

| | |
|-----------------------------|------------|
| Power Output | 300 Watt |
| Oscillations per Minute | 0 - 22,000 |
| Tool free Accessory Fitment | Yes |
| Weight | 1.475 kg |



110 MM HAND HELD WET TILE SAW

- 1300 W motor delivers the cutting power to cut through granite, porcelain, concrete and other stone materials
- Premium 110 mm diameter continuous rim blade allows the user to cut a variety of different materials from ceramics to concrete up to 34 mm deep - wet or dry
- Water line and adjustable nozzle feeds water to the blade decreasing dust and increasing blade performance and life
- Bevels to 45 degrees for quick angled cuts

DWC410-QS

| | |
|---------------|------------|
| Power Input | 1300 Watts |
| No Load Speed | 13000 rpm |
| Depth of cut | 34 mm |
| Weight | 3.0 kg |



250MM SLIDE TABLE WET TILE SAW & LEG STAND

- Stainless steel rail system is intergrated into the tile saw frame, ensuring accurate cuts
- Cantilevering rail / cart system allows for 610 mm ripping capacity
- Low weight allows one person to transport and set up saw
- Plunge feature allows the user to make quick plunge cuts for electrical outlets together with an intergrated 45 / 22.5 degree feature for quick angle cuts
- Dual water nozzles can be adjusted for optimal water placement on the blade in order to minimise over-spray and mist

D24000S-QS

| | |
|---------------|------------|
| Power Input | 1600 Watts |
| No Load Speed | 4200 rpm |
| Depth of cut | 95 mm |
| Weight | 32 kg |



110 MM HAND HELD WET TILE SAW

- 1270 W Tile saw for cutting Marble Granite and other porcelain stones
- Target application are mainly for floor work, can be used with wet kit for wet operation to ensure longer life of the cutting blade
- No Bevel function
- Wet/Dry Lock ON switch
- No disc No wet kit

DW862-B5

| | |
|---------------|------------|
| Power Input | 1270 Watts |
| No Load Speed | 13500 rpm |
| Depth of cut | 34 mm |
| Weight | 3.0 kg |



800W-CORDED VARIABLE SPEED BLOWER

- 800W - Most Powerful Motor
- Variable Speed
- Highest Air Flow in this Category

DWB800-B5

| | |
|---------------|-------------|
| Power Input | 800W |
| No Load Speed | 0-16000 rpm |
| Flow | 4,5 m3/min |
| Suction* | 2,5 m3/min |

1800W STANDARD HEATGUN

- Durable design with added protection for the heating element
- Light weight ergonomics and compact design for increased comfort and application use
- Two air flows to maximise control in most applications
- Large stable support stand to ensure safety in stationary applications
- Two cone attachments as standard to increase the users versatility for specific applications

D26411-QS

| | |
|-----------------------|--------------------|
| Power Input | 1800 Watts |
| Operating Temperature | 50-400 / 50-600 °C |
| Air Flow | 250 / 450 l/min |
| Weight | 0.80 kg |



2000W DIGITAL LED HEATGUN

- Durable hot air gun for Professional applications
- Excellent temperature control and memory setting for consistent temperature requirements
- 2000 Watt power with optimised cooling
- Compact and lightweight for easy handling and use

D26414-GB

| | |
|-----------------------|------------|
| Power Input | 2000 Watts |
| Operating Temperature | 50-600 °C |
| Air Flow | 650 l/min |
| Weight | 0.85 kg |



38L CONSTRUCTION DUST EXTRACTOR M CLASS

- M Classified to meet EU legislation
- Innovative dual filter cleaning system maintains performance during tough construction applications
- Constant suction power even with the finest concrete and wood dust
- A filter is automatically cleaned every 30 seconds reducing filter clogging and delivering constant air flow



PERFORM
PROTECT

DWV902M-GB

| | |
|--------------|------------|
| Power Input | 1400 Watts |
| Max. Airflow | 4080 l/min |
| Weight | 15 kg |
| Height | 695 mm |

30L FEATURED DUST EXTRACTOR - L CLASS

- L Classified to meet EU legislation
- Innovative dual filter cleaning system maintains performance during tough construction applications dust
- Constant suction power even with the finest concrete and wood dust
- A filter is automatically cleaned every 30 seconds reducing filter clogging and delivering constant air flow
- Automatic start and stop control when the power tool is operated.



PERFORM
PROTECT

DWV901L-GB

| | |
|-------------|------------|
| Power Input | 1400 Watts |
| Capacity | 30 ltr |
| Weight | 9.5 kg |
| Height | 500 mm |

LASER DISTANCE METER - 50M

- Laser distance measurer (LDM) manufactured to withstand the inevitable drops and falls on the Job site
- It has a range of up to 50m and an accuracy of +/- 1.5mm
- Common end-user functions : linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.
- The user can select the unit to continually measure which allows layout applications.



DW03050

| | |
|-------------------------|----------------------------------|
| Levelling Accuracy | +/- 1.5mm/m |
| Indoor Visibility Range | 50m |
| Power Source | 2 x 1.5v dc (AAA-size) batteries |
| Weight | 150 g |

LASER DISTANCE METER - 100M

- Laser distance measurer (LDM) manufactured to withstand the inevitable drops and falls on the Job site
- It has a range of up to 100m and an accuracy of +/- 1mm
- Common end-user functions : linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.
- The user can select the unit to continually measure which allows layout applications.



DW03101

| | |
|-------------------------|----------------------------------|
| Levelling Accuracy | +/- 1mm/m |
| Indoor Visibility Range | 100m |
| Power Source | 2 x 1.5v dc (AAA-size) batteries |
| Weight | 130 g |



3 BEAM SELF-LEVELING LASER

- Self leveling 3 beam laser, accurate to +/-0.2mm/m
- Self leveling up to 4 degrees surface angle
- One button operation - fast and easy operation of laser
- Pendulum locks when in 'off' position



5 POINT SELF-LEVELING LASER

- Self leveling 5 beam laser, accurate to +/-0.2mm/m
- Self leveling up to 4 degrees surface angle
- One button operation - fast and easy operation of laser
- Pendulum locks when in 'off' position



5 SPOT & CROSS LINE LASER

- Projects 5 bright spot beams for accurate plumb and horizontal point transfer
- Range : 30M - Accuracy : +/- 3mm/15m
- Self Leveling Spot Beams and Horizontal Line - Rear projecting horizontal line aids in additional leveling applications
- Projects Down Beam with Raised Clearance - Provides dot visibility and alignment for wall track layout
- Integrated Magnetic Pivoting Base with 1/4" Thread - Front and rear mounted magnets allow flush attachment to metal track and steel



2 WAY SELF-LEVELLING LINE LASER (HORIZONTAL AND VERTICAL)

- Self-levelling cross line laser is accurate to ± 0.3 mm/m in levelling applications
- Self-Leveling up to 4 degrees surface angle with automatic out of level indication, marks a levelled line in seconds
- 2 button operation and low battery indication for ease of use
- Built in magnetic pivot bracket mounts easily on metal surfaces



2 WAY SELF-LEVELING LINE LASER+PLUMB

- Projects bright crossing horizontal and vertical lines
- Range : 15M-50M - Accuracy : +/- 3mm/15m
- Self Leveling Cross Line and Plumb Spots - 2 bright, self leveling beams provide accurate plumb point transfer
- Projects Down Beam with Raised Clearance - Provides dot visibility and alignment for wall track layout
- Integrated Magnetic Pivoting Base with 1/4" Thread - Front and rear mounted magnets allow flush attachment to metal track and steel
- Full-Time Pulse Mode Allows Use with Detector - Maintains full brightness for visibility



3 WAY SELF-LEVELLING MULTI LINE LASER (HORIZONTAL, VERTICAL AND SIDE LINES)

- Self-levelling multi line laser is accurate to ± 0.3 mm/m in levelling applications
- Self-Leveling up to 4 degrees surface angle with automatic out of level indication, marks a levelled line in seconds
- 3 button operation and low battery indication for ease of use
- An adjustment dial for fine line movement (vertical & side)



PLUMB SPOT & CROSS LINE LASER

- Durable design with added protection for the heating element
- Light weight ergonomics and compact design for increased comfort and application use
- Two air flows to maximise control in most applications
- Large stable support stand to ensure safety in stationary applications
- Two cone attachments as standard to increase the users versatility for specific applications



SELF-LEVELLING ROTARY LASER KIT

- Durable design with added protection for the heating element
- Light weight ergonomics and compact design for increased comfort and application use
- Two air flows to maximise control in most applications
- Large stable support stand to ensure safety in stationary applications
- Two cone attachments as standard to increase the users versatility for specific applications

DW083K

| | |
|-------------------------|--------------------------------|
| Levelling Accuracy | +/-0.2 mm/m |
| Indoor Visibility Range | 30 m |
| Direction of Beams | Up/Down/Level |
| Power Source | 6V - 4 x AA Alkaline batteries |
| Weight | 0.55 g |

DW085K

| | |
|-------------------------|--------------------------------|
| Levelling Accuracy | +/-0.2 mm/m |
| Indoor Visibility Range | 30m |
| Direction of Beams | Up/Down/Level/Square |
| Power Source | 6V - 4 x AA Alkaline batteries |
| Weight | 0.55 g |

DW0851-XJ

| | |
|-------------------------|---------|
| Levelling Accuracy | 3mm/15m |
| Indoor Visibility Range | 30m |
| Direction of Beams | 5 |
| Power Source | 1mw |
| Weight | 716 g |

DW088K

| | |
|-------------------------|------------------|
| Levelling Accuracy | +/-0.3 mm/m |
| Indoor Visibility Range | 10 m |
| Direction of Beams | Vertical / level |
| Power Source | 4.5V - 3x AA |
| Weight | 0.46 g |

DW0822-XJ

| | |
|-------------------------|-----------|
| Levelling Accuracy | 3mm/15m |
| Indoor Visibility Range | 50 m |
| Direction of Beams | Up / Down |
| Power Source | 3x AA |
| Weight | 786 g |

DW089K

| | |
|-------------------------|--------------------------|
| Levelling Accuracy | +/-0.3 mm/m |
| Indoor Visibility Range | 15 m |
| Direction of Beams | Vertical/Horizontal/Side |
| Power Source | 6.0V - 4 x AA |
| Weight | 0.8 g |

DW0811-XJ

| | |
|-------------------------|--------------------------|
| Levelling Accuracy | 4mm/10m |
| Indoor Visibility Range | 15 m (30m with Detector) |
| Direction of Beams | Up/Down/Level |
| Power Source | 3x AA |
| Weight | 652 g |

DW079KH / DW079PKH

| | |
|-------------------------|---|
| Levelling Accuracy | +/- 0.1 mm/m |
| Indoor Visibility Range | 30 m |
| Direction of Beams | Up/Down/Level |
| Power Source | 9.6V-18V, NiCd/NiMH/Li-ion DeWALT batteries |
| Weight | 2.0 g |



CONVENIENCE

At the heart of the DeWALT 5 star service promise are 5 star service agents which are conveniently located throughout the country, with specialists always available to answer any questions whether you are on or off the job site.

SPEED

Having your tools back in action in the fastest time possible is our prime objective. Subject to parts availability, most repairs should not take more than 48 hours in the workshop and for those smaller urgent repairs we provide a "while-u-wait" service.

QUALITY

Highest Quality is assured with DeWALT factory trained technicians carrying out all repairs with all work being backed by our 90 day warranty. Each DeWALT repair comes with our personal "satisfaction tag" listing all the work done and a DeWALT contact telephone number should you be less than 100% happy with the repair.

GENUINE PARTS

All parts used in repairs are original, ensuring both the highest quality and a perfect fit every time.

ONLINE SERVICE

www.2helpu.com provides information on the DeWALT After Sales Services, including DeWALT authorised repair agent locations, some frequently asked questions, technical information, spare part details, warranty policy and recycling of used tools. You can also contact us directly via the website

www.2helpu.com

Not all DeWALT service agents are 5 star rated. Those that are not may not be able to provide all services available above but will display in-store a detailed list of their selected services.



FIXED PRICE SERVICE PLAN

DeWALT Fixed Price Service Plan for hammers offer complete peace of mind with no unexpected costs

2 year extended service plans available

PLAN COVERAGE

| | |
|---|---|
| Wear and tear | ✓ |
| Manufacturing defects | ✓ |
| Brush change | ✓ |
| Genuine DeWALT parts & Retest | ✓ |
| Transportation of the hammer to and from site or dealer | ✓ |

- Guaranteed fixed costs
- Fast service turn around
- Convenience

For more details, please reach us at: dewalt.marketing@sbdinc.com

DeWALT Industrial Tools

MIDDLE EAST HEAD QUARTERS

P.O. Box: 17164, Jebel Ali, Dubai, U.A.E. Tel: +971 4 8863030, Fax: +971 4 8863333
Email: dewalt.marketing@sbdinc.com

www.DEWALT.ae

The yellow and black colour scheme is used on DeWALT Power Tools and Accessories as a trademark. DeWALT reserves the right to change any deal at any time without notice. Deals available while stocks last.

Be the first to see product news and special offers from DeWALT... Register at MyDeWALT simply go to www.DeWALT.ae/MyDeWALT



Your DeWALT Dealer:

Cat No: MP00999-AE