
# MODERN M 98 SERIES DANGEROUS GAME HUNTING RIFLE ACTIONS

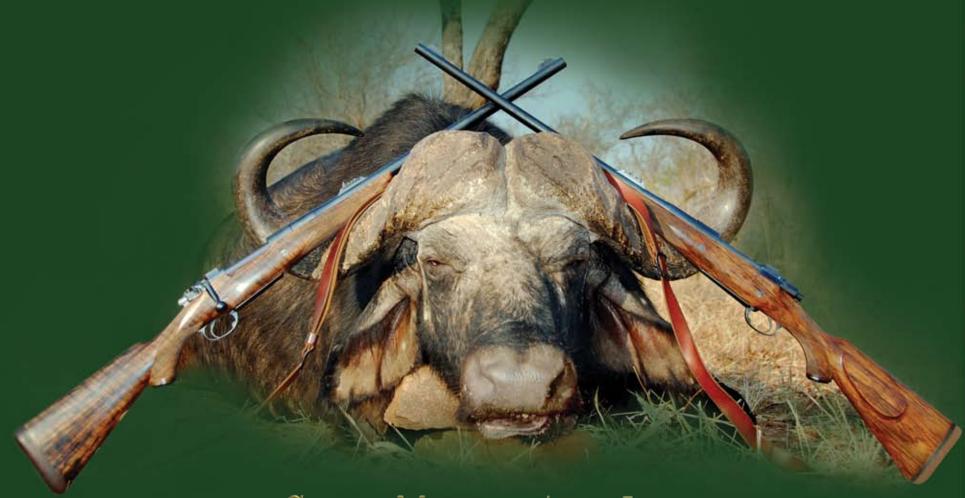

GRANITE MOUNTAIN ARMS, INC.

PRECISION RIFLE ACTIONS AND COMPONENTS

## MODERN M98 ACTIONS

### MADE WITH CERTIFIED ALLOY STEEL BILLETS



- CNC Machined
- Hand Finished
- Case Hardened
- Hand Lapped
- Hand Polished

Buffalo Range Safari, Matetsi Hunt 2007. Rifles by J. P. Smithson

### QUALITY AND PRECISION

Granite Mountain Arms produces the world's finest current production, double square bridge magnum action. Made in Arizona, the Granite Mountain Arms Magnum Action is the highest quality, tightest tolerance Mauser 98 style magnum action ever produced and is available in a right hand or left hand model.





### AFRICAN MAGNUM

#### Вогт

- 8620 steel, precision machined
- Case hardened
- Dual opposed locking lugs
- · Third safety lug
- Custom bolt face recess for each caliber
- Altered bolt handle for scope compatibility
- 3-position wing safety
- Length: 6.670 inches
- Travel: 4.890 inches
- Diameter: .750 inches

### RECEIVER

- Right hand and left hand models
- 8620 steel, precision machined
- Case hardened
- Integral "C" ring
- Solid left wall
- Blind receiver screw holes
- Extended rear tang
- Ring diameter: 1.50 inches
- Barrel shank threads: 1.140 inches, 60 degree, 12 per inch
- Guard screw spacing: 8.25 inches
- Action length: 9.695 inches
- Weight: 3 lbs., 15 ozs.



#### TRIGGER ASSEMBLY

- Adjustable sporting trigger standard
- Magnum trigger guard opening

#### MAGAZINE BOX

- Precision machined drop bottom magnum box and follower
- Hinged, straddle-style floorplate with push button trigger bow release
- Magazine sizes for: .416 Rigby, .505 Gibbs, .585 GMA

## EXPRESS MAGNUM

#### BOLT

- 8620 steel, precision machined
- Case hardened
- Dual opposed locking lugs
- Third safety lug

- Altered bolt handle for scope compatibility
- 3-position wing safety
- Length: 6.670 inches
- Travel: 4.890 inches



- Magnum trigger guard opening

#### RECEIVER

- Right hand and left hand models
- 8620 steel, precision machined
- Case hardened
- Integral "C" ring
- Solid left wall
- Blind receiver screw holes
- Extended rear tang
- Ring diameter: 1.420 inches
- Barrel shank threads: 1.100 inches, 60 degree, 12 per inch



#### MAGAZINE BOX

- Precision machined drop bottom magnum box and follower
- Hinged, straddle-style floorplate with push button trigger bow release
- Magazine sizes for:

.416 Rem Mag, .458 Lott

LEFT HAND

### EXPRESS MAGNUM

## STANDARD MAGNUM

#### **BOLT**

- 8620 steel, precision machined
- Case hardened
- Dual opposed locking lugs
- Third safety lug
- Custom bolt face recess for each caliber
- Altered bolt handle for scope compatibility
- 3-position wing safety



• Adjustable sporting trigger standard

Standard Oberndorf Guard Bow

#### RECEIVER

- Right hand and left hand models
- 8620 steel, precision machined
- Case hardened
- Integral "C" ring
- Solid left wall
- Blind receiver screw holes
- Extended rear tang










- Precision machined drop bottom magnum box and follower
- Hinged, straddle-style floorplate with push button trigger bow release
- Magazine sizes for:

.375 H&H, .338 Win Mag, .300 Win Mag, 30-06, .500 Jeffery, .404 Jeffery

### LEFT HAND STANDARD MAGNUM

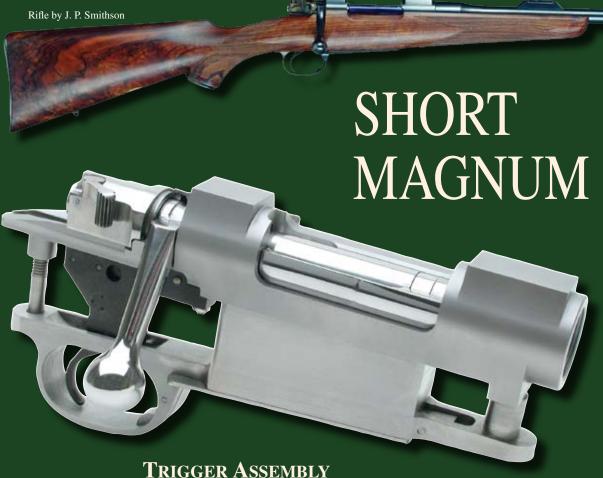


- Adjustable sporting trigger standard
- Standard Oberndorf Guard Bow

### MAGAZINE BOX

- Precision machined drop bottom magnum box and follower
- Hinged, straddle-style floorplate with push button trigger bow release
- Magazine sizes for:

7 x 57, .243, .308, .300 Win Short Mag



#### BOLT

- 8620 steel, precision machined
- Case hardened
- Dual opposed locking lugs
- Third safety lug
- Custom bolt face recess for each caliber
- Altered bolt handle for scope compatibility
- 3-position wing safety
- Length: 5.890 inches
- Travel: 4.110 inches
- Diameter: .700 inches

#### RECEIVER

- Right hand and left hand models
- 8620 steel, precision machined
- Case hardened
- Integral "C" ring
- Solid left wall
- Blind receiver screw holes
- Extended rear tang
- Ring diameter: 1.30 inches
- Barrel shank threads: 1.00 inches. 16 per inch
- Guard screw spacing: 7.43 inches
- Action Length: 8.780 inches
- Weight: 2 lbs., 15 ozs. Lbs.

#### **Granite Mountain Arms, Inc.**

2920 E. Mohawk Lane, Suite 112

Phoenix, AZ 85050 Tel: 602-996-9009

Cell: 602-885-4215

Fax: 602-996-9011

Email: jmbroden@earthlink.net www.granitemountainarms.com