

PRODUCT CATALOG DISTRIBUTION



BUILDING TRUST



SIKA AT A GLANCE



Sika Zurich

The success story of Sika began more than 100 years ago, when the visionary thinker Kaspar Winkler invented Sika-1, a quick setting waterproofing admixture for mortar, used to waterproof the Gotthard Tunnel. His invention enabled the Swiss railway company to electrify this important link between Northern and Southern Europe, laying the cornerstone to the firm.

Since then Sika has developed into a successful specialty chemicals company with a leading position in the development and production of innovative solutions for bonding, sealing, damping, reinforcing and protecting for the construction sector and the manufacturing industries (automotive, bus, truck, rail, solar and wind power plants, facades).

Sika product line has been designed to tackle variety of projects where high-quality roofing membranes, concrete admixtures, specialty mortars, sealants and adhesives, repair and strengthening materials, protective coatings, floor and waterproofing systems are needed. Successfully applied on numerous and often challenging jobsites, our products have earned the confidence of professionals across the world.

Today, with the presence in more than 90 countries, Sika continues to support engineers, architects, specifiers, contractors, manufacturers and other industry professionals, sustaining its well-earned reputation as a trustworthy and solid partner.

OVER

100 YEARS

OF PROVEN EXPERTISE

To give our customers a complete peace of mind

MORE THAN

300+ FACTORIES

WORLDWIDE

To better meet local requirements and deliver high quality products

A NETWORK OF

20 GLOBAL

TECHNOLOGY CENTERS

To provide intelligent solutions using the most advanced technologies

GLOBAL PRESENCE IN

100+ COUNTRIES

ON ALL CONTINENTS

To share global expertise and respond locally to the business needs

ABOUT

> 20 000 COMMITTED

EMPLOYEES

To support our customers everytime and everywhere

CONTENT

WATERPROOFING/ ROOFING

| | |
|------------------------------|----|
| SikaLastic® -590 | 4 |
| SikaLastic® -505 QA | 4 |
| Sika® Igasol® Emulsion QA | 5 |
| Sika® Igoflex -160 QA | 5 |
| Sika® Bitumen QA | 6 |
| Sika®-105 Seal | 6 |
| SikaTop®-107 Seal | 7 |
| Sikalastic -152 QA | 7 |
| Sikalastic® -1K | 8 |
| Sikadur-Combiflex® SG System | 8 |
| Sika® Waterbar | 9 |
| SikaSwell® A Profile | 9 |
| SikaSwell® S-2 | 10 |
| Sika® Seal Tape S | 10 |
| Sikadur®-52 | 11 |
| Sika® Injection-107 | 11 |
| Sika® Injection-101 /201 | 12 |

SEALING

| | |
|--------------------------------|----|
| Sikaflex®-11 FC+ | 13 |
| Sikaflex® Construction+ | 13 |
| Sikaflex®-428 Precast | 14 |
| Sikaflex® PRO-3 / PRO - 3 SL | 14 |
| SikaHyflex®-305 EU | 15 |
| Sikasil® WS 305 S | 15 |
| Sikasil® Universal | 16 |
| Sika® Sanisil | 16 |
| Sikacryl®-110 | 17 |
| Sika® MultiSeal | 17 |
| Sika Boom®-101 Flame Retardant | 18 |
| Sika Boom®-180 Fix / Fill | 18 |

BONDING

| | |
|----------------------------|----|
| Sikaflex®- 111 Stick&Seal | 19 |
| Sikaflex®112 Crystal Clear | 19 |
| SikaBond®-114 Grip Tight | 20 |
| SikaBond®-115 Strong Fix | 20 |
| Sikaflex®-118 Extreme Grab | 21 |

ANCHORING & GROUTING

| | |
|-----------------------------|----|
| Sika AnchorFix®- 3001 | 22 |
| Sika AnchorFix®-2 +Tropical | 22 |
| SikaGrout®-214 QA | 23 |
| SikaGrout®-114 QA | 23 |
| Sikadur®-42 MP Slow | 24 |
| SikaCeram®-502 QA | 24 |
| SikaCeram®-117 QA | 25 |
| SikaCeram®-118 QA | 25 |
| Sikagard®-700 S QA | 26 |
| Sikagard®-705 L QA | 26 |
| Sikagard®-706 QA | 27 |
| Sikagard®-550 QA | 27 |
| Lanko®-511 | 28 |
| Lanko®Epoxy Tile Grout | 28 |
| Lanko®-PCK | 29 |
| Lanko®-Stony Coating | 29 |

REPAIRING

| | |
|------------------------------|----|
| Sikadur®-31 CF Slow | 30 |
| SikaTop® Armatec® 110 EpoCem | 30 |
| Sika Monotop®612 QA | 31 |
| Sika Monotop®625 Fine QA | 31 |
| Sika® Latex 100 P | 32 |

ADMIXTURES AND ESSENTIALS

| | |
|-------------------|----|
| Sika®-1WT QA | 33 |
| Lanko® K11 CWA | 33 |
| Separol® FP-15 QA | 34 |
| Separol® 300 QA | 34 |
| Antisol®-200 QA | 35 |
| Sika Fibre®-12-34 | 35 |

FLOORING AND WALL FINISHING

| | |
|--------------------------|----|
| Sikafloor®-161 | 36 |
| Sikafloor®-264 | 36 |
| Sikafloor®-242 | 37 |
| Sikafloor® PS | 37 |
| Sikadur®-Aggregate | 38 |
| Sikafloor®-3240 | 38 |
| Sikafloor®-359 N | 39 |
| Sika® Marker | 39 |
| Sikafloor®- Level 100 QA | 40 |
| Sikafloor®-3 Quartz Top | 40 |
| Sikafloor®-24 cure Hard | 41 |
| Sikagard®-62 | 41 |

Sikalastic®-590

Economical liquid applied roof waterproofing with improved ponding water capability

USE

- For waterproofing solutions in both new construction and refurbishment projects
- For roofs with many details and complex geometry-when accessibility is limited
- For cost efficient life cycle extension of failing roofs
- For reflective coating to enhance energy efficiency by reducing cooling costs (Sikalastic®-590 White)

CHARACTERISTICS & ADVANTAGES

- Good behavior under limited water ponding
- UV resistant and resistant to yellowing and weathering
- Highly elastic and crack-bridging
- Non-toxic and VOC compliant water-based coating
- One component - ready to use
- Excellent adhesion on porous and non-porous substrates
- Seamless waterproofing membrane
- Water vapor permeable.



COLOR

Grey and White

PACKAGING

20 kg plastic pails drum

Sikalastic®-505 QA

Liquid elastomeric weathering resistant coating

USE

- Waterproofing and protective coating for roofs.
- Waterproofing and protective coating for most building substrates like brick, plastering, tiles, PU foam, and primed steel.

CHARACTERISTICS & ADVANTAGES

- UV stable and resistant. Waterproof.
- High bonding to almost all building substrates.
- Self-priming.
- Easy to apply; One component. Non-toxic and non-flammable. Stands for light foot traffic.
- Reflects sun light and heat. Good elastic properties

COLOR

White

PACKAGING

20 kg pail

Sika® Igasol® Emulsion QA

High build rubberized bituminous emulsion coating

USE

- Protecting and waterproofing of outside structures and concrete elements against dampness and rain.
- Waterproofs ducts, facades, etc.
- Coating for bituminous roofing repair work (if covered).
- Can be used as primer if diluted with water (1:2)

CHARACTERISTICS & ADVANTAGES

- Ready to use material
- Good adhesion to all dry or slightly damp substrates
- Not UV-resistant- do not expose uncovered to sunlight
- Solvent-free / low odor / non flammable



PACKAGING

Black

PACKAGING

200 l drum
15 l drum

Sika® Igoflex®-160 QA

Rubberized bituminous waterproofing emulsion

USE

- Tanking and waterproofing of substructures to provide an impervious membrane
- Vapour barrier of cladded walls
- Maintenance of many roof types including asphalt-felt roofs, concrete, cement, lightweight screeds, timber etc.
- As an adhesive for bonding insulation boards, expanded polystyrene, cork tiles etc.
- Damp proof membrane for roofs and floor slabs
- Efficient curing membrane to freshly laid concrete
- Basements, retaining walls

CHARACTERISTICS & ADVANTAGES

- Excellent adhesion to most building substrates
- Reduced chloride penetration
- Can be applied on damp substrates
- Non sagging
- Single component
- Water based
- Economical, easy to apply, reduces labour cost
- Can be applied on vertical and horizontal areas
- Impermeable to water
- Elastic, seamless, joint free
- Unaffected by high ambient temperature
- Resistant to aggressive soils and contaminated ground water
- Low odour, dries without generating strong vapour



COLOR

Dark Brown

PACKAGING

180 kg drum

Sika® Bitumen QA

Solvent-free, water-based bitumen primer

USE

As a primer, bonding agent and dust binder for SikaBit S (self-adhesive) bitumen membrane on concrete, mortar, bricks, etc.

CHARACTERISTICS & ADVANTAGES

- Solvent-free, non-flammable
- Good penetration and bonding ability
- Good dust-binding ability
- Ready to use by brush, roller or spray



COLOR

Brown Black

PACKAGING

15 l pail
200 l drum
140 kg drum



Sika® Seal®-105 QA

Waterproofing and damp-proofing cementitious slurry

USE

- Interior and exterior waterproofing and damp-proofing of concrete, cementitious rendering, brickwork and blockwork
- Protection of concrete structures against the effects of de-icing salts and freeze thaw attack
- Rigid waterproofing of basement walls in new construction and refurbishment
- Pore / blowhole filling
- Waterproofing basement and cellars
- Sealing fine "hairline" cracks in concrete structures (not subject to movement)
- Levelling mortar for concrete repair works

CHARACTERISTICS & ADVANTAGES

- Easy to apply by brush or in thin trowel applications
- No water required
- Pre-batched components
- Hand or spray applied
- Easy and fast mixing
- Very good adhesion
- Protects concrete against carbonation
- Protects against water penetration
- Non-corrosive to steel or iron
- Over-paintable
- Approved for potable water contact



COLOR

White, grey

PACKAGING

25 kg bag
A +B



SikaTop® Seal-107 QA

Waterproofing damp-proofing cementitious slurry

USE

- Interior and exterior waterproofing and damp proofing of concrete, cementitious rendering, brickwork and blockwork
- Protection of concrete structures against the effects of de-icing salts and freeze-thaw attack
- Rigid waterproofing of basement walls in new construction and refurbishment
- Pore / blowhole filling
- Waterproofing basement and cellars
- Sealing fine "hairline" cracks in concrete structures (not subject to movement)
- Levelling mortar for concrete repair works

CHARACTERISTICS & ADVANTAGES

- Easy to apply by brush or in thin trowel applications
- No water required
- Prebatched components
- Hand or spray applied
- Easy and fast mixing
- Very good adhesion
- Protects concrete against carbonation
- Protects against water penetration
- Non-corrosive to steel or iron
- Overpaintable
- Approved for potable water contact



COLOR

Cement, grey, off-white

PACKAGING

A: 5 kg pail (liquid)
B: 20 kg bag (powder)



Sikalastic® - 152 QA

CET water-based liquid waterproofing membrane

USE

- For roof waterproofing solutions in both new construction and refurbishment projects.
- For roofs with many details and complex geometry when accessibility is limited.
- For cost efficient life cycle extension of failing roofs.
- For reflective coating to enhance energy efficiency by reducing cooling costs.

CHARACTERISTICS & ADVANTAGES

- One component - ready-to-use
- Cold applied - requires no heat or flame
- Seamless waterproofing membrane
- UV resistant and resistant to yellowing and weathering
- Highly elastic and crack-bridging
- Easily recoated when needed - no stripping required
- Economic - provides a cost efficient life cycle extension for failing roofs
- Non-toxic and VOC compliant water-based coating
- Excellent adhesion on porous and non-porous substrates
- Water vapour permeable - allows the substrate to breathe
- 12 months shelf life



COLOR

White, grey, red, terra-cotta

PACKAGING

5 kg pail
10 kg pail
20 kg pail



Sikalastic®-1 KMY

One component fiber reinforced, flexible cementitious waterproofing compound

USE

- Waterproof protection of concrete structures including tanks, basins, pipes, swimming pools
- Waterproofing external wall surfaces to be back-filled in the ground
- Internal waterproofing of walls and floors, in basements
- Waterproofing of terraces and balconies over concrete or prepared existing tiles
- General waterproofing of concrete surfaces
- Compatible with SikaCeram® series, tiling system

CHARACTERISTICS & ADVANTAGES

- Easy to apply by brush, roller or trowel
- Can be applied on damp substrate
- Good sag resistance and easy to apply on vertical surfaces
- Flexible crack-bridging properties
- Very good adhesion to most common substrates (concrete, cementitious mortar, stone, bricks, ceramic and timber)
- Mixing ratio can be adjusted in order to obtain the consistency and workability




COLOR

Grey

PACKAGING

20 kg bag
2 pack x 6 kg in pail



Sikadur-Combiflex® SG System

High-performance joint sealing system

USE

USE

- Tunnels and culverts
- Hydro electric power plants
- Sewage treatment plants
- Basements
- Water retaining structures and drinking water reservoirs
- Around iron, steel and concrete pipes
- Swimming pools
- Sealing of:
 - Joints with extreme movement
 - Building sections where varying settlement is expected
 - Cracks

CHARACTERISTICS & ADVANTAGES

- Advanced adhesion between the tapes and the adhesives, no activation of the tapes is required on site
- Fast and easy to install
- Suitable for dry and damp concrete surfaces
- Extremely flexible
- Performs well within a wide range of temperatures
- Excellent adhesion to many different substrate materials
- Weather and water resistant
- UV-resistant
- Available with normal and rapid hardening
- Root penetration resistant
- Good resistance to many chemicals
- Suitable for contact with drinking water
- Versatile system suitable for many difficult situations




COLOR

Grey

PACKAGING

Tape: 6 m, 25 m
Adhesive: 1.2 kg, 6 kg

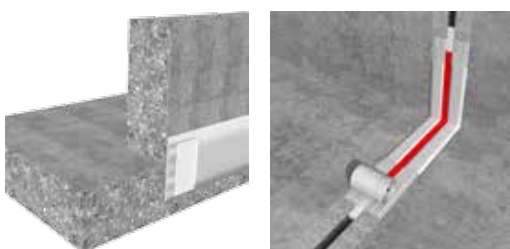

Sika® Waterbars

PVC profile Waterstops for Joint Sealing

USE

Sika® Waterstop G are used to waterproof construction and expansion joints in concrete structures such as those in water retaining structures including reservoirs, canals, sewage plants, dams, swimming pools etc. Plus those in the watertight construction of many buildings and structures including large basements, underground car parks, subways and sea walls etc.

CHARACTERISTICS & ADVANTAGES

- High quality PVC for long durability
- Suitable for high water pressure
- Easy to weld on site
- Many different sizes and types available, depending on their use




COLOR

Grey, Yellow

PACKAGING

15 m roll

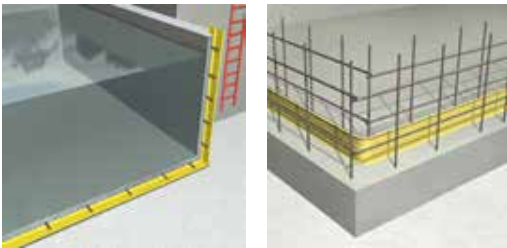

SikaSwell® A Profile

Acrylic swellable joint sealing profile

USE

- Construction joints
- Pipe and steel work penetrations through walls and floor slabs
- Construction joints in cable ducts, etc.
- Around all types of penetrations through concrete

CHARACTERISTICS & ADVANTAGES

- Easy to apply
- Can be applied on different substrates
- Highly economical
- Swells in contact with water
- Can swell into cracks and gaps
- Long-term reliability tested
- Resistant against water and various chemical substances
- No hardening time required
- No welding required
- Adaptable to fit many different detailing tasks



COLOR

Red, Yellow

PACKAGING

5 m, 7 m, 10 m and 20 m roll



SikaSwell® S-2

Polyurethane hydrophilic swellable sealant

USE

Sealing:

- Construction joints
- Pipe and steel work penetrations through walls and floor slabs
- Around all types of penetrations and construction joints
- Construction joints in cable ducts, etc.
- Fixing / Adhering swellable profiles:
 - SikaFuko® Swell 1 Injection hoses
 - SikaSwell®-A Profiles
 - SikaSwell®-P Profiles

CHARACTERISTICS & ADVANTAGES

- Easy to apply
- Good adhesion to various substrates
- Optimised expansion rate, therefore no damage to fresh concrete during curing
- Highly economical
- Swells in contact with water
- Permanently water resistant
- Adaptable to fit many different types of detailing



COLOR

Red

PACKAGING

300 ml cartridge
600 ml unipack

Sika® Seal Tape S

Elastic sealing tape for wet areas

USE

- System component for waterproofing tile/slab systems and pipes on balconies, in bathrooms, showers, kitchens, cellars, facades, etc.
- For internal and external, horizontal and vertical use
- For expansion and connection joints
- Range: Sika SealTape S roll, wall and floor flashings, inside and outside corners

CHARACTERISTICS & ADVANTAGES

- High elasticity
- Waterproof
- Easy to install
- Thermal resistance: -25 °C to +60 °C



COLOR

Yellow (tape) and white (fabric)

PACKAGING

Tape roll lengths:
10 m and 50 m

Sikadur®-52 CN

Low viscosity injection resins

USE

As an injection resin with good adhesion to concrete, mortar, stone, steel and wood. Sikadur®-52 CN is used to fill and seal voids and cracks in structures such as bridges and other civil engineering buildings, industrial and residential buildings, e.g. columns, beams, foundations, walls, floors and water retaining structures. It not only forms an effective barrier against water infiltration and corrosion promoting media, but it also structurally bonds the concrete sections together.

CHARACTERISTICS & ADVANTAGES

- Solvent-free
- Suitable for both, dry and damp conditions
- Usable at low temperatures
- Shrinkage free hardening
- High mechanical and adhesive strengths
- Hard but not brittle
- Low viscosity
- Injectable with single component pumps



PACKAGING

Part A+B: 10 x 1 kg units

Sika® Injection-107

1-component, polyurethane-based, slightly flexible, foaming injection resin for the permanent watertight sealing of cracks

USE

Sika® Injection-107 may only be used by experienced professionals.

Sika® Injection-107 is used for permanent watertight sealing with some flexibility to absorb limited movement in water bearing cracks and joints in concrete, brickwork and natural stone structures.

CHARACTERISTICS & ADVANTAGES

- Permanently elastic, can absorb limited movements
- Durable sealing of water-bearing cracks and voids of > 0.3 mm
- Moisture-reactive, one-component polyurethane resin - water contact is required for the foaming reaction and curing to a permanently flexible sealing compound

PACKAGING

10.6 kg container
5.3 kg tins

Sika® Injection-101

Fast foaming PUR-injection resin for temporary water stopping

USE

- Sika® Injection-101 RC may only be used by experienced professionals.
- Sika® Injection-101 RC is used for the temporary water stopping of high-water intrusions in cracks, joints and cavities in concrete, brickwork and natural stonework.
- To achieve permanent watertight crack sealing, Sika® Injection-201 CE should be injected subsequently.

CHARACTERISTICS & ADVANTAGES

- No reaction takes place unless it is in direct contact with water.
- Sika® Injection-101 RC can be injected as a single component system.
- The free foaming expansion in contact with water is up to 40 times.
- The reaction speed (foam formation) is influenced by the temperatures of the mixed material, the structure and the contact water, plus the hydrodynamic conditions.



COLOR

Part A Colourless
Part B Brown

PACKAGING

Part A 10 or 20 Kg
Part B 12.5 or 25 Kg

Sika® Injection-201

Elastic PUR-injection resin for permanent watertight sealing

USE

- Sika® Injection-201 CE may only be used by experienced professionals.
- Sika® Injection-201 CE is used for permanent watertight sealing with some flexibility to absorb limited movement, in dry, damp or water-bearing cracks and joints in concrete, brickwork and natural stone
- Sika® Injection-201 CE can be used for the injection of the SikaFuko®-System (non re-injectable!)
- For use in water-bearing cracks under hydrostatic pressure, preliminary injection shall be made with Sika® Injection-101 RC

CHARACTERISTICS & ADVANTAGES

- Permanently elastic, can absorb limited movements
- No shrinkage in subsequent dry conditions
- Due to its low viscosity it can penetrate into cracks >0.2 mm in width
- Cured Sika® Injection-201 CE is inert and chemically resistant
- Solvent-free
- Can be injected as a one component system



COLOR

Part A Colourless
Part B Brown

PACKAGING

Part A 10
Part B 10.6 kg

Sikaflex®-11 FC+

Elastic joint sealant and multi-purpose adhesive for indoor & outdoor application

USE

Sikaflex®-11 FC+ is designed as a multipurpose adhesive for indoor and outdoor bonding of window sills, thresholds, stair steps, skirting boards, base boards, crash protection boards, covering boards and prefabricated elements. Sikaflex®-11 FC+ is also suitable for soundproofing of pipes between concrete and sheathing, caulking between partitions, seam sealing, sealing in metal and wood construction and for ventilation construction.

CHARACTERISTICS & ADVANTAGES

- Silicone-free
- Very good adhesion to most construction materials
- Over paintable
- No need to grout the bonded areas
- Good mechanical resistance
- Good resistance to weathering
- Impact and vibration absorbing
- Very low emissions



COLOR

Concrete grey,

PACKAGING

600 ml unipack



Sikaflex® Construction+

1-part flexible sealant for concrete and precast joints

USE

Sikaflex® Construction+ is designed as a general-purpose sealant for sealing joints in building construction such as movement, expansion and construction/isolation joints around windows and doors, facades, claddings etc. in concrete, brick, wood, metal and PVC sections and structures etc.

CHARACTERISTICS & ADVANTAGES

- Very good resistance to weathering
- Movement capability of ± 35 (ASTM C 719)
- Over paintable
- Bubble-free curing
- Good workability
- Good adhesion to many substrates
- Solvent-free
- Very low emissions



COLOR

White, concrete grey, beige

PACKAGING

600 ml unipack



Sikaflex®-428 Precast

1-part flexible sealant for concrete precast

USE

- Sikaflex®-428 Precast is designed for movement and connection joints between concrete precast elements, GRC and GRP parts. It is also suitable for masonry, concrete and block work joints, roof joints and terminations.

CHARACTERISTICS & ADVANTAGES

- Good resistance to weathering
- Movement capability of $\pm 25\%$ (ASTM C 719)
- Over paintable
- Good adhesion to concrete
- Good application



COLOR

White, grey and beige

PACKAGING

600 ml unipack

Sikaflex® PRO-3 / PRO-3 SL

Elastic polyurethane based trafficable, chemical & mechanical resistant sealant

USE

Multi-purpose floor joint sealant for:

- Movement and connection joints in floors
- Indoor and outdoor applications for pedestrian and traffic areas (e.g. parking decks, car parks)
- Warehouses and production areas
- Surfaces in the food industry
- Joints in waste water and sewage treatment plants
- Joints in clean rooms

CHARACTERISTICS & ADVANTAGES

- Movement capability $\pm 25\%$
- High mechanical and chemical resistance
- Elastic, high modulus
- Excellent application properties
- Bubble-free
- Odorless
- Solvent-free
- Very low emissions
- EC 1^{PLUS} R



COLOR

Concrete grey

PACKAGING

600 ml unipack

SikaHyflex®-305 EU

Weather sealant for curtain wall, glass and metal cladding facades

USE

SikaHyflex®-305 EU is designed for weather proofing and sealing applications where durability under severe conditions is required. SikaHyflex®-305 EU is particularly suited for use as a weather sealant for curtain wall and metal cladding facades.

CHARACTERISTICS & ADVANTAGES

- Very good weathering resistance
- Movement capability of $\pm 50\%$ (ASTM C 719)
- Very good workability
- Good adhesion to a wide range of substrates
- Solvent-free
- Neutral cure



COLOR

Black, white, grey
S1, grey S3, grey
S4, grey S6, beige

PACKAGING

600 ml unipack

Sikasil® WS-305 S

Weatherproofing sealant

USE

- Weatherproofing and sealing applications where durability under severe conditions is required.
- Sikasil® WS-305 S is particularly suited as a weather seal for curtain walling and windows.
- This product is suitable for professional experienced users only. Tests with actual substrates and conditions have to be performed to ensure adhesion and material compatibility

CHARACTERISTICS & ADVANTAGES

- Meets requirements of GB/T14683-2017
- Outstanding UV and weathering resistance
- Adheres well to many substrates including glass, metals, coated and painted metals, plastics and wood



COLOR

White, grey
Transparent

PACKAGING

300 ml unipack

Sikasil® Universal

General purpose acetoxy cure silicone sealant

USE

Sikasil® Universal is designed for glazing and weatherproofing applications on non-porous substrates such as glass or glazed ceramic tiles.

CHARACTERISTICS & ADVANTAGES

- Low-modulus
- High elasticity and flexibility
- Very good resistance to shrinkage, cracking and discoloration
- Very good adhesion to a variety of non-porous substrates



COLOR

White, clear, black

PACKAGING

280 ml cartridge

Sika® Sanisil®

Acetoxy curing silicone sealant, containing fungicide, for sanitary applications

USE

Sika® Sanisil® is designed for sanitary or other sealing applications where mildew resistance is required.

CHARACTERISTICS & ADVANTAGES

- High elasticity and flexibility
- Long term fungus and mildew resistance
- Very good UV and weathering resistance



COLOR

Clear, white, black

PACKAGING

300 ml cartridge

Sikacryl® -110

Universal acrylic sealant for interior use

USE

Designed for interior crack and joint filling with low movement. Sikacryl®-110 is also suitable for duct sealing in HVAC applications.

Suitable for use in hot and tropical climatic conditions.

CHARACTERISTICS & ADVANTAGES

- Good application properties
- Movement capability of $\pm 7.5\%$
- Mildew and fungus resistant
- Over-paintable
- Good adhesion on various substrates for interior use




COLOR

White

PACKAGING

280 ml cartridge

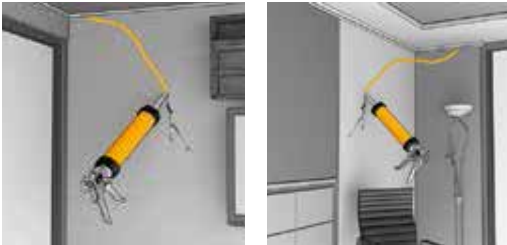

Sika® MultiSeal

Self-adhesive bituminous sealing tape

USE

- Quick repairs to stop leaks and draught etc
- General purpose sealing tape for roofing, metal work, ductwork etc
- Plastic sewage pipe repair
- Sealing cracks and holes in bituminous felts and other roofing sheets
- Sealing over cracks or joints in general building works

CHARACTERISTICS & ADVANTAGES

- Very easy to apply
- Good adhesion to many substrates
- Weatherproof
- Self-adhesive
- UV resistant
- Bitumen resistant
- Can be over painted
- Can be applied at low temperature



PACKAGING

3m & 10 m long rolls
50, 100 & 150 mm width

Sika Boom®-101 Flame Retardant

Low Flammability Polyurethane Expanding Foam

USE

Sika Boom®-101 Flame Retardant is designed for linear joints in brickwork and concrete where fire protection is required.

CHARACTERISTICS & ADVANTAGES

- 1-Component
- Easy application with nozzle
- Flame retardant



COLOR
White

PACKAGING
600 ml unipack

Sika Boom®-180 Fix / Fill



Polyurethane self-expanding nozzle applied foam

USE

- Insulating and filling cavities and voids
- Filling joints around window and door frames
- Insulating against noise, cold and draughts
- Filling around pipes / conduit penetrations

CHARACTERISTICS & ADVANTAGES

- Easy application with nozzle
- Good thermal insulation
- Effective sound dampening
- Good adhesion to various construction materials
- Good filling capabilities
- 1-Part ready to use



PACKAGING
750 Or 500 ML
pressurized
canister with
rubber valve

Sikaflex®- 111 Stick & Seal

Flexible adhesive and sealant

USE

An adhesive to bond most construction components and materials such as:

- Concrete
- Masonry
- Most stones
- Ceramic
- Wood
- Metal
- Glass
- Plastics such as PVC, PA, PET and EPS/XPS
- A sealant to seal vertical and horizontal joints

CHARACTERISTICS & ADVANTAGES

- Bonds well to a wide variety of substrates without surface pre-treatment
- Bonds to damp concrete
- Compatible with with most substrates, EPS/XPS, building wraps and bitumen
- Good mechanical resistance and weathering resistance
- Adhesive-sealant with CE marking



COLOR

White, concrete grey, brown, black

PACKAGING

290 ml cartridge



Sikaflex®-112 Crystal Clear

Transparent adhesive and sealant

USE

An adhesive to bond most construction components and materials such as:

- Concrete
- Masonry
- Most stones
- Ceramic
- Wood
- Metals
- Glass
- PVC

A sealant to seal around bonded components.

CHARACTERISTICS & ADVANTAGES

- Bonds well to a wide variety of substrates without surface pre-treatment
- Bonds to damp concrete
- Compatible with with most substrates, EPS/XPS, building wraps and bitumen
- Good mechanical resistance and weathering resistance
- Adhesive-sealant with CE marking



COLOR

Clear

PACKAGING

290 ml cartridge



SikaBond®-114 Grip Tight

Cementitious, shrinkage compensated, general purpose grout

USE

Bonding of various construction components:

- Skirting boards
- Wooden frames
- Battens
- Panels
- Mouldings
- Hard PVC profiles
- Sheet boards
- Metal protection angles

Bonding substrates:

- Concrete, mortar, fibre cement, wood and paint
- Other various porous and non-porous construction



CHARACTERISTICS & ADVANTAGES

- Easy to apply
- Rapid initial grab
- Rapid strength gain
- Wide adhesion range



COLOR

Beige

PACKAGING

290 mL cartridge

SikaBond®-115 Strong Fix

Interior grab adhesive

USE

Bonding of various construction components:

- Skirting boards
- Wooden frames
- Battens
- Panels
- Mouldings
- Terracotta tiles
- Anodised aluminium,
- Hard PVC profiles
- Polystyrene mouldings and ceiling tiles.

Bonding substrates:

- Concrete, mortar, fibre cement, wood and paint

CHARACTERISTICS & ADVANTAGES

- Easy to apply
- Easy to clean
- Rapid build-up of strength
- High final strength
- Wide adhesion range



COLOR

White

PACKAGING

290 mL cartridge



Sikaflex®-118 Extreme Grab

Construction Adhesive

USE

Sikaflex®-118 Extreme Grab is designed for indoor and outdoor bonding of various objects such as stones, bricks, window and door sills, mirrors, wood beams and heavy mouldings.

Sikaflex®-118 Extreme Grab is designed for bonding concrete, mortar, natural stones, clinker, fibre cement, ceramic, wood and metals.

CHARACTERISTICS & ADVANTAGES

- Very high initial grab
- Fixing of heavy objects without temporary fixation
- Mirror bonding adhesive
- Good workability
- Very low emissions
- Strong and elastic bond



PACKAGING

290 mL cartridge

COLOR

Beige



Sika AnchorFix®-3001

High performance, professional epoxy anchoring adhesive

USE

Structural work:

- Rebar / steel reinforcement anchoring in new and refurbishment works
- Threaded rods
- Bolts and special fastening / fixing systems

Metal work, carpentry:

- Fixing of handrails, balustrades and supports
- Fixing of railings
- Fixing of window and door frames

In the following substrates:

- Concrete (cracked and un-cracked)
- Hollow and solid masonry
- Wood
- Hard natural and reconstituted stone*
- Solid rock*



CHARACTERISTICS & ADVANTAGES

- Fast-curing
- Non-sag, even overhead
- Low to medium load capacity
- Low wastage



COLOR

Grey

PACKAGING

250 mL

Sika AnchorFix®-2+ Tropical

Anchoring adhesive for medium to high loads

USE

As a fast curing anchoring adhesive for all grades of:

- Rebars/reinforcing steel
- Threaded rods
- Bolts and special fastening systems
- Concrete
- Solid masonry
- Steel

CHARACTERISTICS & ADVANTAGES

- Fast-curing
- Standard guns can be used
- Medium to high load capacity
- ETA Approval available
- Suitable for cracked concrete
- Drinking Water certified
- LEED Attestation available
- Non-sag, even overhead
- Styrene-free
- Low odour
- Low wastage




COLOR

Light grey

PACKAGING

300 ml cartridge



SikaGrout®-214 QA

Cementitious, high early strength, non-shrink, precision grout

USE

General purpose grouting for:

- Machine Foundations
- Columns in pre-cast construction
- Base plates
- General concrete repairs
- Joint nosing
- Bridges bearing pads

CHARACTERISTICS & ADVANTAGES

- Easy to mix
- Good flow characteristics
- Dual expansion system
- Adjustable consistency
- High early and final strengths
- Non-corrosive and iron-free




COLOR

Grey

PACKAGING

25 kg bag



SikaGrout®-114 QA

Cementitious, shrinkage compensated, general purpose grout

USE

SikaGrout®-114 QA is used for grouting in the following:

- Machine foundations
- Columns in pre-cast construction
- Concrete anchors, cavities, gaps and recesses
- Base plates
- General concrete repairs
- Bridge bearings pads

CHARACTERISTICS & ADVANTAGES

SikaGrout®-114 QA is an economical and easy to use grout requiring only the addition of water. It offers the following beneficial properties:

- Easy to mix
- Good flow characteristics
- Dual expansion system
- Adjustable consistency
- High final strengths
- Non-corrosive and iron-free





COLOR

Grey

PACKAGING

25 kg bag



Sikadur®-42 MP Slow QA

3-part, multipurpose epoxy grouting system

USE

High-strength grouting and fixing of:

- Starter bars
- Anchors
- Fasteners
- Tie rods
- Crash barrier posts
- Fence and railing posts

CHARACTERISTICS & ADVANTAGES

- High early strength
- Ready-to-mix, pre-batched units
- Moisture tolerant
- Non-shrink
- Corrosion and chemically resistant
- Stress and impact resistant
- High compressive strength
- High vibration resistance
- Low coefficient of thermal expansion



COLOR

Sanded brown

PACKAGING

1.5 kg tin (A + B + C)
A: 0.2 kg
B: 0.1 kg
C: 1.2 kg



SikaCeram®-502 TG QA

Water resistant, polymer modified, cementitious tile grout

USE

Suitable for filling tile joints in

- Ceramic Tiles
- Indoor application
- Marble
- Stone
- Brick
- Terrazzo

CHARACTERISTICS & ADVANTAGES

- Easy to use, requires only the addition of water
- Rapid strength gain and high final strength
- Long open time (enough time to clean residues from the tiles after application)
- Hardens without cracking or shrinkage
- Water-repellent and impermeable to many liquids
- Good abrasion resistance
- Very good adhesion to unglazed surfaces
- Available in various colours
- Mould-inhibiting and fungicide
- UV resistant



COLOR

Grey, white, off white

PACKAGING

10 kg bag



SikaCeram®-117 QA

General purpose, cementitious tile adhesive for ceramic tiles

USE

- Suitable for bonding high absorption ceramic tiles
- Indoor application without primer over concrete, cement mortars, bricks
- Suitable for floors and walls application

CHARACTERISTICS & ADVANTAGES

- Single component system
- Easy to mix and use
- Good workability
- Excellent bond strength



COLOR

White, grey Powder

PACKAGING

25 kg bag

SikaCeram®-118 QA

High performance, polymers containing, water resistant, cementitious tile adhesive for thin bed application

USE

- Laying all kind of ceramic tiles
- Laying marbles and natural stone, provided not sensitive to water
- Application indoor for walls and floors
- Application outdoor for floors
- Suitable for wet areas

CHARACTERISTICS & ADVANTAGES

- Easy to use
- Good adhesion to most substrates (concrete, cementitious mortar, stone, bricks)
- Good workability and thixotropic consistency
- Water and weather resistant
- Extended open time



COLOR

White, grey

PACKAGING

25 kg bag



Sikagard®-700 S QA

Siloxane based water repellent impregnation

USE

- Sikagard®-700 S QA is used as a water repellent and colourless protective surface treatment absorbent exposed materials such as concrete, Cementitious rendering, concrete tiles, fibre cement, brickwork (clay and lime sand, non-vitrified), natural stone etc.
- Sikagard®-700 S QA can also be used as hydrophobic primer under solvent based or emulsion based protective coatings.
- Sikagard®-700 S QA is used as water-repellent impregnation (hydrophobic treatment) for absorbent substrates such as concrete in civil engineering or building concrete structures



CHARACTERISTICS & ADVANTAGES

- Reduction of capillary water absorption
- Reduces efflorescence
- Reduces dirt penetration into the pores
- Improves thermal insulation
- Can be over coated with solvent based and dispersion coatings
- Higher durability and resistance than conventional silicone-based treatments
- Does not usually change the appearance of the substrate
- Does not act as a vapour barrier



COLOR

Colorless liquid

PACKAGING

25 L cans

Sikagard®-705 L

Silane based reactive water repellent impregnation

USE

Used as water-repellent impregnation (hydrophobic treatment) for absorbent substrates such as concrete in civil engineering or building concrete structures subjected to heavy stress due to freeze and thaw cycles and de-icing salts and chloride attack in marine environment.

Suitable for protection against ingress

CHARACTERISTICS & ADVANTAGES

- Excellent penetration
- Fast uptake even on dense concrete Economic and easy to use
- Reduces capillary water absorption, protection against driving rain and splashing on vertical areas
- Reduction of absorption of aggressive or deleterious agents dissolved in water (i.e. de-icing salts or chloride from marine environment)
- No change in water vapour permeability
- Long term efficiency, deep penetration



PACKAGING

25 L pail

200 L drum



Sikagard®-706 QA

Silane based water repellent impregnation cream

USE

Used as water-repellent impregnation (hydrophobic treatment) for absorbent substrates such as concrete in civil engineering or building concrete structures subjected to heavy stress due to freeze and thaw cycles and de-icing salts or chloride attack in marine environment.


CHARACTERISTICS & ADVANTAGES

- Non-sag (thixotropic) consistency, allowing wastage free application of sufficient quantities and assuring deep penetration
- Reduction of water absorption.



PACKAGING

18 kg set

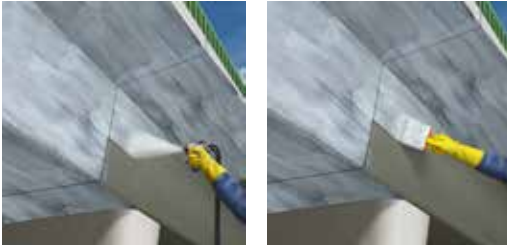

Sikagard®-550 W Elastic QA

Anti-carbonation protective coating for concrete

USE

Protection and enhancement of concrete structures (normal and lightweight concrete), especially exposed outdoor concrete surfaces.

Concrete repair works as an elastic protective coating on Sika® smoothing mortars (e.g. SikaRep® and Sika MonoTop® ranges) fibre cement and overcoating of existing soundly adhering coatings.

CHARACTERISTICS & ADVANTAGES

- High diffusion resistance against CO₂ reducing the rate of carbonation
- Water resistive, and vapour permeable
- Very good resistance against chlorides, weathering and ageing
- Environmentally friendly (solvent free)
- Reduced tendency to dirt pick up and contamination
- Algae and fungus resistance
- Smooth and flat finish




COLOR

White, grey and off white

PACKAGING

20 kg pails

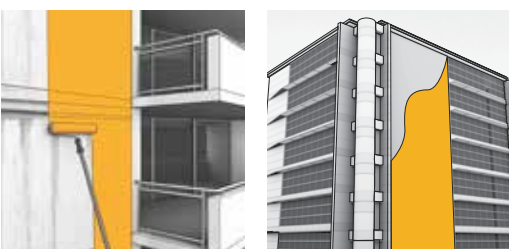

Lanko®-511

General purpose cement based tile adhesive

USE

- For the installation of absorptive and non-absorptive wall and floor tiles for interior surfaces.
- Suitable for tiling on concrete, rendered brickwork and blockwork.

CHARACTERISTICS & ADVANTAGES

- Fast-curing
- Non-sag, even overhead
- Low to medium load capacity
- Low wastage



PACKAGING

25 kg bag

Lanko®Epoxy Tile Grout

Two component epoxy tile grout in cartage

USE

- Highly sanitized/Hygienic environment Threaded rods (Hospitals, kitchens, and food industry)
- Wet and humid areas (swimming pools and spas) Concrete
- Public areas requesting higher standard (Interior hallways, and others public access or facility)

CHARACTERISTICS & ADVANTAGES

- Wide range of Colours
- Colourful glaze effect
- Easy application
- Lower shrinkage
- Water / Stain and Oil resistant



COLOR

White, Grey,
Golden
And Beige Colors

PACKAGING

400 mL/ Kit

Lanko® PCK

General performance engineering grout

USE

Cement mortar, concrete, PC slab wooden, metal and various other surfaces are suitable for Lanko PCK application so long as the surface is levelled, free from dust and applicators follow our substrate preparation guidance. If you have any doubt, please contact our technical department.

CHARACTERISTICS & ADVANTAGES

- Outstanding texture granite
- Easy and fast application
- Time resistant



COLOR
Grey

PACKAGING
18 kg bag



Lanko® Stony Coating

Non-shrinkage, pourable grouts mortar

USE

Cement mortar, concrete, PC slab wooden, metal and various other surfaces are suitable for Lanko PCK application so long as the surface is levelled, free from dust and applicators follow our substrate preparation guidance. If you have any doubt, please contact our technical department.

CHARACTERISTICS & ADVANTAGES

- Outstanding texture granite
- Easy and fast application
- Time resistant



COLOR
Grey

PACKAGING
27 kg bag



Sikadur®-31 CF Slow

2-component thixotropic epoxy adhesive

USE

As a structural adhesive and mortar for:

- Concrete elements
- Hard natural stone
- Ceramics, fibre cement
- Mortar, bricks, masonry
- Steel, iron, aluminium
- Wood
- Polyester, epoxy
- Glass

As a fast setting rapid repair adhesive and mortar:


- Corners and edges
- Holes and void filling
- For vertical and overhead use

As a joint filling and crack sealing:

- Joint arris repair and crack sealing

CHARACTERISTICS & ADVANTAGES

- Easy to mix and apply
- Very good adhesion to most construction materials
- High strength adhesive
- Thixotropic: non-sag in vertical and overhead applications
- Hardens without shrinkage
- Different coloured components (for mixing control)
- No primer needed
- High initial and ultimate mechanical strength
- Good abrasion resistance
- Impermeable to liquids and water vapour
- Good chemical resistance

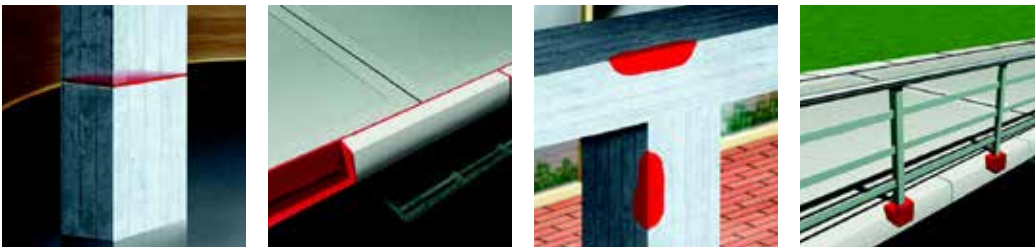

PACKAGING

A+B = 6 kg set

SikaTop® Armatec® 110 EpoCem®

Bonding primer and reinforcement corrosion protection

USE


Suitable for control of anodic areas (Principle 11, method 11.1 EN 1504-9)

Suitable in concrete repair as corrosion protection for reinforcement.

Suitable as a bonding primer on concrete and mortar

CHARACTERISTICS & ADVANTAGES

- Contains EpoCem® technology - improved bonding agent
- Extended open times for repair mortars
- Compatible with most Sika® repair mortars
- Excellent adhesion to concrete and steel
- Contains corrosion inhibitor
- Certified for application under dynamic load conditions
- Good resistance to water and chloride penetration
- High shear strength
- Long pot life
- Easy to mix
- Can be brushed on or applied using spray gun

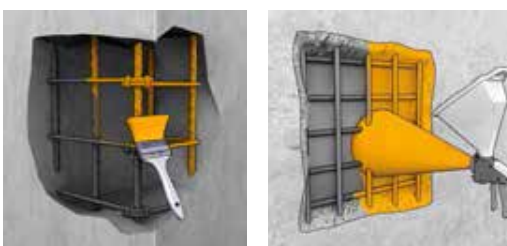

COLOR

Grey

PACKAGING

A: 1.14 kg
B: 2.86 kg
C: 16 kg

Sika® MonoTop®-612 QA

Fibre Reinforced, polymer modified repair mortars

USE


Sika MonoTop®-612 QA is used for structural repair work and suitable for:

- Restoration works, repair of spalling and damaged concrete in buildings, bridges, infrastructure and superstructure works
- Structural strengthening by increasing the bearing capacity of the concrete structure by adding mortar (section enlargement)
- Preserving or restoring passivity by increasing cover with additional mortar and replacing contaminated or carbonated concrete.

CHARACTERISTICS & ADVANTAGES

Sika MonoTop®-612 QA provides the following beneficial properties:

- Structural repair
- Rapid strength gain and high final strength
- Good water and oil resistance
- Low shrinkage behavior
- High abrasion resistance
- Good adhesion
- Easy to apply
- Application up to 60 mm in 1-layer
- Low permeability



COLOR
Grey

PACKAGING
25 kg per bag

Sika MonoTop®-625 QA

Cementitious fairing coat

USE

Sika® MonoTop®-625 Fine QA can be used as a:

- Pore sealer / finishing coat on cementitious substrates
- Thin layer render coat on horizontal and vertical areas in building and civil engineering construction, for external and internal finishing etc
- Levelling mortar on uneven substrates, and profiled concrete surfaces.
- Fine repair mortar to fill honeycombs, pores etc.
- Repair mortar for repair of small defects on edges and joint sides; to form and finish joints and covings

CHARACTERISTICS & ADVANTAGES

- Easy to use; mix with water only
- User friendly application; excellent workability
- Good mechanical strengths
- Sprayable by the wet-spray method
- Non-corrosive, non-toxic
- Adjustable consistency
- High bond strength



PACKAGING
25 kg per bag

SikaLatex®-100 QA

Economical water resistant bonding agent for mortar


USE

Sika Bond DV is a high quality emulsion that substantially increases the qualities of cement mortars in application such as:

- Thin layer patching mortars
- Renders
- Floor screeds
- Concrete repair mortars
- Tile fixing mortars
- Masonry mortars

CHARACTERISTICS & ADVANTAGES

- Sika Bond DV is simply added to the mixing water to provide the following properties:
- Good adhesion
- Reduced shrinkage
- Good water resistance
- Increased abrasion resistance
- Ready to use
- Sika Bond DV does re-emulsify, even under highly alkaline conditions.



COLOR

Light Grey
(Powder)

PACKAGING

20 l per pails

Sika®-1 WT QA

Pore blocking waterproofing admixture for concrete

USE

- Water retaining structures
- Concrete slabs and foundations.
- Concrete swimming pools
- Concrete water tanks
- Reservoirs
- Lift pits
- Concrete basements and car parking partially or fully underground.
- Below ground concrete structures

CHARACTERISTICS & ADVANTAGES

- Sika®-1 WT QA waterproof admixture in concrete has the following advantages:
- Improves concrete water impermeability
Improvement in concrete durability Prevents ingress of sulphate and carbonation
- Reduces efflorescence on hardened concrete surfaces
- Reduces leaching
- Improves watertight concrete structures that are exposed to positive or negative water pressure



COLOR

Yellow

PACKAGING

5 and 25 L jerrycan



Lanko K11®-CWA

Crystalline waterproofing admixture

USE

- Foundations
- Sewage Treatment plants
- Tunnels and subway systems Underground structures
- Dams
- Pre-cast structures
- Swimming pools and reservoirs

CHARACTERISTICS & ADVANTAGES

Long lasting integral waterproofing system Self healing, crack sealing characteristics
Resists extreme hydrostatic pressure
Protects concrete from harsh conditions
Cost effective and process friendly system
Non-toxic and resistant to waterborne chemicals
No detrimental effect to the performance of the concrete when recommended conditions are met



PACKAGING

20 kg bag

Sika® Separol FP-15 QA

Oil Based, Anti-Corrosive Shutter Release Agent

USE

- Steel shuttering
- Plywood shutters
- High density plastic shutters

CHARACTERISTICS & ADVANTAGES

- Allows clean, easy striking
- Extends the life of formwork.
- Improved finish for fair faced concrete.
- Reduces concrete contamination.
- Economical to use
- Reduces blow hole formation



COLOR

Brownish yellow liquid

PACKAGING

20 l
200 l drums

Sika® Separol® 300 QA

Water based formwork, mould and shutter release agent

USE

Sika® Separol® 300QA is suitable for use on all types of formwork materials such as:

- Steel
- Plywood
- Timber
- Textured rubber moulds

CHARACTERISTICS & ADVANTAGES

- Reduces blow holes
- Easy to apply
- Provides a stain free fair faced concrete surface
- Protects steel formwork from corrosion
- Effective with steam curing conditions



PACKAGING

200 L and 20 L

Sika® Antisol-200 QA

Water based concrete curing and sealing compound for concrete

USE

Sika® Antisol®-200 QA is particularly suitable for:

- Interior and exterior applications
- Suitable for all kinds of concrete
- Horizontal and vertical applications

CHARACTERISTICS & ADVANTAGES

- Reduces incidence of plastic cracking
- Helps in achievement of desired concrete strengths
- Minimizes shrinkage
- Reduces dusting
- Alleviates other costly curing methods such as Hessian – watering of the cement-based composition
- Easy to apply single component system Non-staining



COLOR

Milky White

PACKAGING

20 L pails
200 L drums



Sika Fibre® -12-34

Special Fibre for Concrete and Guniting

USE

SikaFiber®-12 -34 is used to prevent concrete spalling (breaking off of layers or pieces of concrete from the surface of a structural element when exposed to the high and rapidly increasing temperatures experienced in fires), mainly in underground structures. In the event of a fire, as the temperature of the concrete increases, the moisture in the concrete becomes steam.

Concrete, mainly when HPC and low permeability concrete is specified because of the greater pore pressures that build up during heating

- Precast concrete tunnel segments
- Concrete submitted to very high temperatures

CHARACTERISTICS & ADVANTAGES

- Helps maintain the integrity of the whole structure in the event of fire
- Reduces future repair costs
- Provides passive fire protection to both Shotcrete and cast concrete and an extremely cost-effective solution when compared to alternatives such as sprayed coatings or barrier methods Beyond enhancing spalling resistance, addition of polypropylene fibres to wet shotcrete improves the ability to apply greater thicknesses in a single pass, reduces rebound, enhances early age crack control, reduces line pressure in spray pumps and may reduce the dosage of set accelerator



COLOR

White fibres

PACKAGING

1 kg water soluble bag supplied in boxes of 20 bags

Sikafloor®-161

2- part epoxy primer, Leveling mortar, intermediate layer and mortar screed

USE

- For priming concrete substrates, cement screeds and epoxy mortars
- For low to medium absorbent substrates
- Primer for the Sikafloor®-263 SL and Sikafloor®-264 economic flooring systems
- Binder for levelling mortars and mortar screeds
- Intermediate layer underneath Sikafloor®-263 SL and Sikafloor®-264

CHARACTERISTICS & ADVANTAGES

- Low viscosity
- Good penetration
- Excellent bond strength even on water saturated concrete
- Easy application
- Short waiting times
- Multi-purpose



COLOR

Resin - Part A: Brownish-transparent
Hardener - Part B: Transparent

PACKAGING

Part A+B: 20 kg
Part A+B: 24 kg
Part A+B: 28 kg ready to mix unit

Sikafloor®-264 SG

2-part epoxy roller and seal coat

USE

Sikafloor®-264 HC may only be used by experienced professionals. Sikafloor®-264 HC is used as:

- Roller coat for concrete and cement screeds with normal up to medium heavy wear e.g. storage and assembly halls, maintenance workshops, garages and loading ramps.
- Seal coat for broadcast systems, such as multi-storey and underground car parks, maintenance hangars and for wet process areas, e.g. beverage and food industry

CHARACTERISTICS & ADVANTAGES

- Good chemical and mechanical resistance
- Easy application
- Liquid proof
- Gloss finish
- Slip resistant surface possible



PACKAGING

A + B = 28 kg

Sikafloor®-242 LC

Epoxy resin pore sealing and smoothing putty

USE

Sikafloor®-242 may only be used by experienced professionals.

Roller, textured coat, broadcast and thin self-smoothing coating for concrete and cement screeds with normal up to medium heavy traffic area. Such as warehouse, hallways, maintenance, workshops, etc.

CHARACTERISTICS & ADVANTAGES

- Good mechanical resistance
- Easy to apply
- High performance and cost effective
- Solvent-free
- Durable, impermeable and seamless



PACKAGING

A + B = 27 kg set
ready to mix unit

Sikafloor® PS

Epoxy resin pore sealing and smoothing putty

USE

Sikafloor® PS-ID may only be used by experienced professionals. Sikafloor® PS-ID can be used in following situations:

- Concrete minor repairs such as honeycombing, blow-holes, pin holes, etc.
- General smoothing / re-profiling over large areas
- Suitable for feather edge
- Filling pinholes prior to over coating with Sikafloor®, Sikadur® and Sikagard® product range
- Filling cracks and surface sealing

CHARACTERISTICS & ADVANTAGES

Sikafloor® PS is an extremely versatile product that offers many advantages to the user:

- Easy to apply
- Suitable for both dry and damp surfaces
- Non-sag product even at high temperatures
- Hardens without shrinkage
- Excellent mechanical strengths
- High early strength
- High abrasion and impact resistance
- Solvent free



PACKAGING

A + B = 22.5 kg set
ready to mix unit



Sikadur® Aggregates QA

Selected quartz sand for broadcasting

USE

- Broadcasting – Rough Surface.
- Non-Skid Surface.

CHARACTERISTICS & ADVANTAGES

- Easy application



PACKAGING

25 kg bag

Sikafloor®-3240

2-PART solvent free PUR tough-elastic, low-VOC, self-smoothing floor

USE

- Smooth wearing course with crack-bridging properties for industrial floors in production and storage facilities.
- Broadcast wearing course with crack-bridging properties for wet working areas (food and beverage Industry etc.), car park decks and loading ramps etc.
- Applicable on asphalt surfaces, indoor, as in shopping centres, exhibition and storage areas.

CHARACTERISTICS & ADVANTAGES

- Flexible and tough-elastic
- Crack-bridging
- Application on asphalt substrates possible
- Good chemical and mechanical resistance.
- Waterproofing.
- Solvent-free and low VOC emissions
- Possible slip resistant surface
- Easy to apply and to keep clean
- Economical
- Not sensitive to moisture



COLOR

Blue

PACKAGING

10 kg plastic can



Sikafloor®-359 N

2-part Epoxy Primer, Levelling Mortar, Intermediate Layer and Mortar Screed

USE

- Abrasion resistant seal coat with high mechanical resistance for broadcast systems with crack-bridging properties in industrial flooring.
- Particularly suitable for car park decks, ramps and warehouses etc.

CHARACTERISTICS & ADVANTAGES

- Tough-elastic
- Watertight
- Good mechanical and chemical resistance
- Non-yellowing
- Matt finish
- Easy application
- Slip resistant surface possible



COLOR

Almost unlimited choice of colors shades

PACKAGING

32.5 kg pail



Sika® Marker

Aerial curing paint for carpark and road lining and signing

USE

- Abrasion resistant seal coat with high mechanical resistance for broadcast systems with crack-bridging properties in industrial flooring.
- Particularly suitable for car park decks ramps and warehouses etc.

CHARACTERISTICS & ADVANTAGES

- Tough-elastic
- Good mechanical and chemical resistance
- Watertight
- Good opacity
- Non-yellowing
- Matt finish
- Easy application
- Slip resistant surface possible



COLOR

Traffic yellow, white

PACKAGING

25 kg per pail



Sikafloor®-100 Level AE

Polymer modified cementitious floor levelling compound for 2 – 10 mm

USE

Suitable for filling, smoothing and levelling of suitable substrates before applying ceramic tiles, textile and elastic (vinyl, linoleum) floor coverings for interior areas.

CHARACTERISTICS & ADVANTAGES

- For interior use
- Waterproof against dispersion adhesives
- Smooth application, self levelling
- Suitable for application on subfloor heating systems
- Pumpable
- Suitable for castor wheels loading with layer thickness more than 2 mm according to EN 12 529
- EN 13813 CT-C25-F6
- EC 1^{PLUS} certified



COLOR

Grey

PACKAGING

25 kg

Sikafloor®-3 QuartzTop

Coloured mineral dry shake floor hardener

USE

Sikafloor®-3 QuartzTop is suitable for surfacehardening of floor slabs and screeds where good abrasion resistance and reduced dusting is required. It is suitable for floors subjected to severe mechanical wear, for example:

- Warehouses, loading bays
- Shopping malls, public areas
- Restaurants, museums
- Quays
- Engineering workshops
- Parking lots
- Service stations and factories
- Ports
- Garages, etc.

CHARACTERISTICS & ADVANTAGES

- Intrinsic colouring
- High resistance to abrasion
- Reduces dusting
- Improves resistance to impact
- Improves resistance to oils and greases
- Fast application
- Sikafloor®-3 QuartzTop is broadcast over the fresh slab, saves time and labour costs by eliminating the need for a granolithic screed
- Suppress superficial fibres in concrete



COLOR

Light grey, other on request

PACKAGING

25 Kg bag

Sikafloor®-24 cure Hard

Transparent surface hardener, dust proofer, sealing and curing compound for concrete

USE

- Horizontal old or new concrete surfaces, where a hard surface with light to moderate abrasion resistance is required e.g. warehouses, industrial plants, stores, shopping malls, parking structures, service stations, hangars etc.
- On concrete slabs where no specific curing efficiency or standards are required. Suitable for interior or exterior applications
- Dust-proofing of prefabricated concrete elements.

CHARACTERISTICS & ADVANTAGES

- Ready to use
- Easy application
- Improved chemical and abrasion resistance compared to untreated concrete
- Reduced dusting of concrete floors
- Reduced loss of water of new concrete while setting
- Non-yellowing
- Good penetration
- Solvent free



COLOR

Grey

PACKAGING

25 kg bag



Sikagard®-62

2- Part epoxy protective coating part epoxy primer, levelling mortar, intermediate layer and mortar screed

USE

Sikagard®-62 may only be used by experienced professionals.

- Chemical resistant protective layer on concrete, stone, cementitious mortars and renderings, epoxy cement, epoxy resin-based products and steel
- Lining in storage tanks and silos
- Anti-corrosion coating on steel in food processing plants, sewage works, farms, agricultural enterprises, chemical and pharmaceutical facilities and beverage industry

CHARACTERISTICS & ADVANTAGES

- Solvent free
- Good mechanical and chemical resistance
- High build
- Impervious to liquids
- Easy to mix and to apply



COLOR

Light grey, other on request

PACKAGING

Part A: 7.5 kg
Part B: 2.5 kg



Open



SIKA QATAR SHOWROOM

Come explore the newly open Innovation & Training centre where you can enjoy direct cash sales, training & consult with our specialists and learn about the products we have to offer in the construction world

LOCATION



FOLLOW US




P.O.Box 201847, Doha, State of Qatar
Bldg 144, Street 2, New Industrial Area
Phone: +974 40163366
Fax: +974 40163370

BUILDING TRUST



SIKA FULL RANGE SOLUTIONS FOR CONSTRUCTION:



FOR SIKA GCC INFORMATION:



gcc.sika.com

WHO WE ARE

Sika is a globally active specialty chemicals company supplying the building and construction industry, as well as manufacturing industries. Sika is a leader in processing materials used in sealing, bonding, damping, reinforcing and protecting loadbearing structures. Sika's product lines feature high quality concrete admixtures, specialty mortars, sealants and adhesives, damping and reinforcing materials, structural strengthening systems, industrial flooring as well as roofing and waterproofing systems.

Our most current General Sales Conditions shall apply.
Please consult the Data Sheet prior to any use and processing.



Sika Qatar LLC
P.O.Box 201847
Doha, Qatar
T: +974 40 163 366
F: +974 40 163 370
sika.qatar@qa.sika.com

BUILDING TRUST

